

Data sheet | Item number: 870-402

Push-in type jumper bar; insulated; 2-way; Nominal current 18 A; light gray

www.wago.com/870-402



Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current

18 A

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Geometrical Data

Width	9 mm / 0.354 inch
Depth	2.5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0.011 MJ
Weight	0.8 g

Commercial data

Product Group	16 (Rail Mounted Terminal Block with CCC)
Packaging type	BOX
Country of origin	DE
GTIN	4044918506458
Customs Tariff No.	85366990990

Downloads

Documentation

Bid Text

870-402	Jan 4, 2018	doc	Download
doc - Datei		24.1 kB	

870-402	Feb 19, 2019	xml	Download
X81 - Datei		2.6 kB	

Additional Information

Technical explanations	Apr 3, 2019	pdf	Download
		2.1 MB	

CAD/CAE-Data

CAD data

2D/3D Models 870-402

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.


CAE data

WSCAD Universe 870-402

[Download](#)

Installation Notes

Jumpered

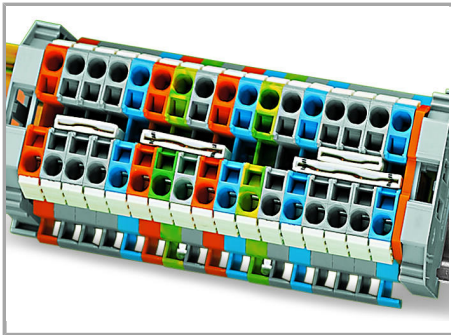

Commoning with push-in type jumper bars:

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Two parallel jumper slots are accommodated in one terminal block.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes.