


## OMNIMATE Signal - series BL/SL 5.08 BLF 5.08HC/02/180 SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Product image

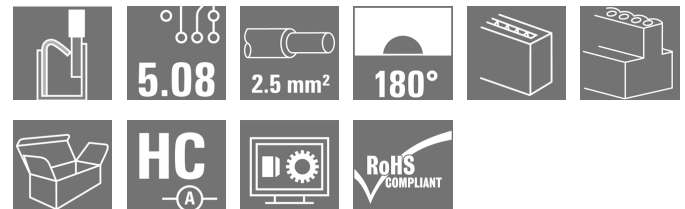

Similar to illustration

Just as reliable as the millionfold proven original and featuring innovative details:

The BLF 5.08HC PUSH IN version of the BLZP 5.08HC female connector is not only different in terms of connection system; it also has a more compact design. Weidmüller's innovative PUSH IN spring connection system stands for the future of easy and tool-free wire connection. HC = High Current.

In terms of versatility, the BLF 5.08HC offers just as much as the version which served as a model:

- 3 tested-and-proven wire outlet directions provide the usual flexibility for application-specific design
- 4 flange variations and the patented release latch allow the locking concept to be based on the requirements of the user
- Use the BLF 5.08HC and SL 5.08HC plug combination to reach the max. rated specifications

### General ordering data

|              |                                                                                                                                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Type         | BLF 5.08HC/02/180 SN BK BX                                                                                                              |
| Order No.    | <a href="#">1013430000</a>                                                                                                              |
| Version      | PCB plug-in connector, female plug, 5.08 mm, Number of poles: 2, 180°, PUSH IN, Spring connection, Clamping range, max. : 3.31 mm², Box |
| GTIN (EAN)   | 4032248721580                                                                                                                           |
| Qty.         | 180 pc(s).                                                                                                                              |
| Product data | IEC: 400 V / 24 A / 0.2 - 2.5 mm²<br>UL: 300 V / 18.5 A / AWG 26 - AWG 12                                                               |
| Packaging    | Box                                                                                                                                     |

# OMNIMATE Signal - series BL/SL 5.08

## BLF 5.08HC/02/180 SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Width      | 10.16 mm | Width (inches)  | 0.4 inch   |
| Height     | 14.2 mm  | Height (inches) | 0.559 inch |
| Depth      | 27.7 mm  | Depth (inches)  | 1.091 inch |
| Net weight | 3.602 g  |                 |            |

### System Parameters

|                                              |                                     |                                            |                     |
|----------------------------------------------|-------------------------------------|--------------------------------------------|---------------------|
| Product family                               | OMNIMATE Signal - series BL/SL 5.08 | Type of connection                         | Field connection    |
| Wire connection method                       | PUSH IN, Spring connection          | Pitch in mm (P)                            | 5.08 mm             |
| Pitch in inches (P)                          | 0.2 inch                            | Conductor outlet direction                 | 180°                |
| Number of poles                              | 2                                   | L1 in mm                                   | 5.08 mm             |
| L1 in inches                                 | 0.2 inch                            | Number of rows                             | 1                   |
| Pin series quantity                          | 1                                   | Rated cross-section                        | 2.5 mm <sup>2</sup> |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch              | Touch-safe protection acc. to DIN VDE 0470 | IP 20               |
| Volume resistance                            | ≤ 5mΩ                               | Can be coded                               | Yes                 |
| Stripping length                             | 10 mm                               | Screwdriver blade                          | 0.6 x 3.5           |
| Screwdriver blade standard                   | DIN 5264                            | Plugging cycles                            | 25                  |
| Plugging force/pole, max.                    | 7 N                                 | Pulling force/pole, max.                   | 5.5 N               |

### Material data

|                                       |                          |                                       |                     |
|---------------------------------------|--------------------------|---------------------------------------|---------------------|
| Insulating material                   | PBT                      | Colour                                | black               |
| Colour of operational elements        | orange                   | Material of operational elements      | PBT                 |
| Colour chart (similar)                | RAL 9011                 | Insulating material group             | IIIa                |
| Comparative Tracking Index (CTI)      | ≥ 200                    | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| UL 94 flammability rating             | V-0                      | GWFI                                  | 960 °C              |
| Contact material                      | CuSn                     | Contact surface                       | tinned              |
| Layer structure of plug contact       | 4-8 µm Sn hot-dip tinned | Storage temperature, min.             | -25 °C              |
| Storage temperature, max.             | 50 °C                    | Max. relative humidity during storage | 70 %                |
| Operating temperature, min.           | -50 °C                   | Operating temperature, max.           | 100 °C              |
| Temperature range, installation, min. | -30 °C                   | Temperature range, installation, max. | 100 °C              |

### Conductors suitable for connection

|                                                                      |                      |
|----------------------------------------------------------------------|----------------------|
| Clamping range, min.                                                 | 0.13 mm <sup>2</sup> |
| Clamping range, max.                                                 | 3.31 mm <sup>2</sup> |
| Wire connection cross section AWG, min.                              | AWG 26               |
| Wire connection cross section AWG, max.                              | AWG 12               |
| Solid, min. H05(07) V-U                                              | 0.2 mm <sup>2</sup>  |
| Solid, max. H05(07) V-U                                              | 2.5 mm <sup>2</sup>  |
| Flexible, min. H05(07) V-K                                           | 0.2 mm <sup>2</sup>  |
| Flexible, max. H05(07) V-K                                           | 2.5 mm <sup>2</sup>  |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.25 mm <sup>2</sup> min. |                      |
| w. plastic collar ferrule, DIN 46228 pt 4, 2.5 mm <sup>2</sup> max.  |                      |
| w. wire end ferrule, DIN 46228 pt 1, 0.25 mm <sup>2</sup> min.       |                      |
| w. wire end ferrule, DIN 46228 pt 1, 2.5 mm <sup>2</sup> max.        |                      |

**OMNIMATE Signal - series BL/SL 5.08**  
**BLF 5.08HC/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

Plug gauge in accordance with EN 60999 a x b; ø 2.8 mm x 2.0 mm

|                     |                                        |                              |                              |       |
|---------------------|----------------------------------------|------------------------------|------------------------------|-------|
| Clampable conductor | Cross-section for conductor connection | Type                         | fine-wired                   |       |
|                     |                                        | nominal                      | 0.5 mm <sup>2</sup>          |       |
|                     | wire end ferrule                       | Stripping length             | nominal                      | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/16 OR</a>   |       |
|                     |                                        | Stripping length             | nominal                      | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/10</a>      |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                   |       |
|                     |                                        | nominal                      | 0.75 mm <sup>2</sup>         |       |
|                     | wire end ferrule                       | Stripping length             | nominal                      | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.75/16 W</a>   |       |
|                     |                                        | Stripping length             | nominal                      | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H0.75/10</a>     |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                   |       |
|                     |                                        | nominal                      | 1 mm <sup>2</sup>            |       |
|                     | wire end ferrule                       | Stripping length             | nominal                      | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/16D R</a>   |       |
|                     |                                        | Stripping length             | nominal                      | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/10</a>      |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                   |       |
|                     |                                        | nominal                      | 1.5 mm <sup>2</sup>          |       |
|                     | wire end ferrule                       | Stripping length             | nominal                      | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.5/10</a>      |       |
|                     |                                        | Stripping length             | nominal                      | 12 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H1.5/16 R</a>    |       |
|                     | Cross-section for conductor connection | Type                         | fine-wired                   |       |
|                     |                                        | nominal                      | 2.5 mm <sup>2</sup>          |       |
|                     | wire end ferrule                       | Stripping length             | nominal                      | 10 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H2.5/10</a>      |       |
|                     |                                        | Stripping length             | nominal                      | 13 mm |
|                     |                                        | Recommended wire-end ferrule | <a href="#">H2.5/16DS BL</a> |       |

Reference text The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

Max. clamping range 3.31 mm<sup>2</sup>

**Rated data acc. to IEC**

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 24 A              |
| Rated current, max. number of poles (Tu=20°C)                             | 19 A                   | Rated current, min. number of poles (Tu=40°C)                         | 21 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 16.5 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 400 V             |
| Rated voltage for surge voltage class / pollution degree III/2            | 320 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 250 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 4 kV                   | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 4 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 4 kV                   | Short-time withstand current resistance                               | 3 x 1s with 120 A |

Creation date April 13, 2020 6:48:19 AM CEST

**OMNIMATE Signal - series BL/SL 5.08  
BLF 5.08HC/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Rated data acc. to CSA**

Institute (CSA)



Certificate No. (CSA)

200039-1121690

Rated voltage (Use group B / CSA) 300 V

Rated voltage (Use group D / CSA) 300 V

Rated current (Use group D / CSA) 10 A

Wire cross-section, AWG, min. AWG 26

Wire cross-section, AWG, max.

Reference to approval values

Specifications are maximum values, details - see approval certificate.

AWG 12

**Rated data acc. to UL 1059**

Institute (cURus)



Certificate No. (cURus)

E60693

Rated voltage (Use group B / UL 1059) 300 V

Rated voltage (Use group D / UL 1059) 300 V

Rated current (Use group B / UL 1059) 18.5 A

Rated current (Use group D / UL 1059) 10 A

Wire cross-section, AWG, min. AWG 26

Wire cross-section, AWG, max. AWG 12

Reference to approval values Specifications are maximum values, details - see approval certificate.

**Packing**

Packaging Box

VPE length 35 mm

VPE width 135 mm

VPE height 350 mm

**Classifications**

ETIM 6.0 EC002638

ETIM 7.0 EC002638

eClass 9.0 27-44-03-09

eClass 9.1 27-44-03-09

eClass 10.0 27-44-03-09

**Notes**

Notes

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Crimping shape "A" for wire end ferrules with PZ 6/5 crimping tool recommended.
- The test point can only be used as potential-pickup point.

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

**OMNIMATE Signal - series BL/SL 5.08  
BLF 5.08HC/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**Approval/Certificate/Document of  
Conformity[Declaration of the Manufacturer](#)

Brochure/Catalogue

[FL DRIVES EN](#)  
[MB DEVICE MANUF. EN](#)  
[FL DRIVES DE](#)  
[CAT 2 PORTFOLIOGUIDE EN](#)  
[FL BUILDING SAFETY EN](#)  
[FL APPL LED LIGHTING EN](#)  
[FL INDUSTR.CONTROLS EN](#)  
[FL MACHINE SAFETY EN](#)  
[FL HEATING ELECTR EN](#)  
[FL APPL INVERTER EN](#)  
[FL\\_BASE\\_STATION\\_EN](#)  
[FL ELEVATOR EN](#)  
[FL POWER SUPPLY EN](#)  
[FL 72H SAMPLE SER EN](#)  
[PO OMNIMATE EN](#)

Engineering Data

[EPLAN, WSCAD](#)

Engineering Data

[STEP](#)

White paper PUSH IN wire connection


[Download Whitepaper](#)

## OMNIMATE Signal - series BL/SL 5.08 BLF 5.08HC/02/180 SN BK BX


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Drawings


### Dimensional drawing

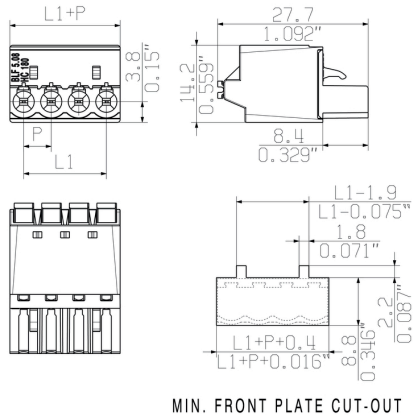

### Graph

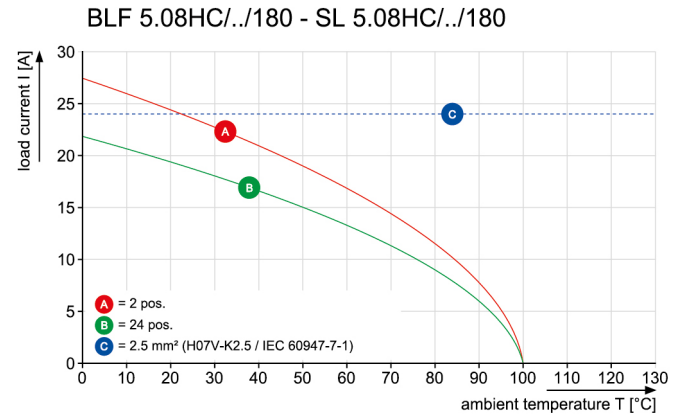

### Graph

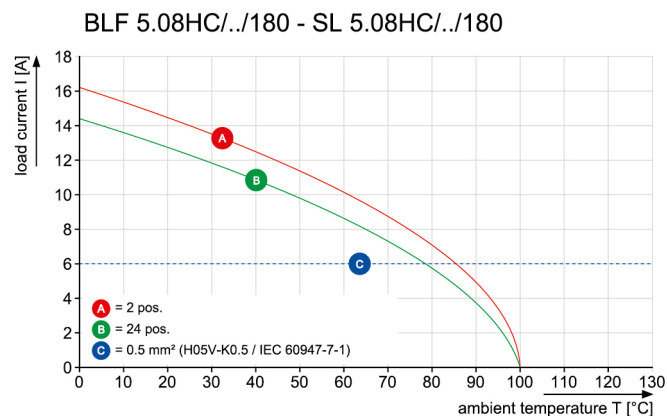


### Product benefits




Uncompromising functionality  
High vibration resistance

### Product benefits

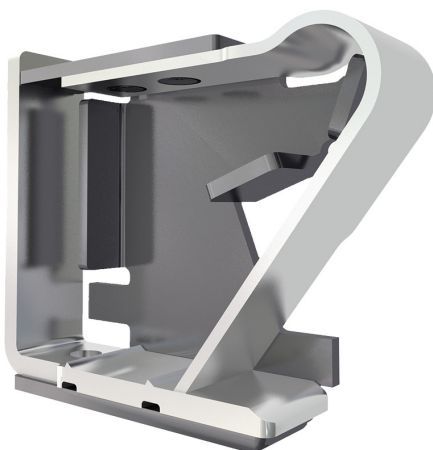

Solid PUSH IN contact  
Safe and durable

### Product benefits

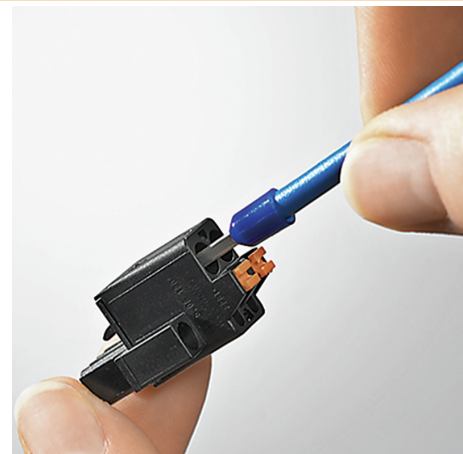

Cost-effective wiring  
Quick and intuitive operation

### **OMNIMATE Signal - series BL/SL 5.08** **BLF 5.08HC/02/180 SN BK BX**

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany


Fon: +49 5231 14-0

Fax: +49 5231 14-292083

[www.weidmueller.com](http://www.weidmueller.com)


## Drawings

### Product benefits


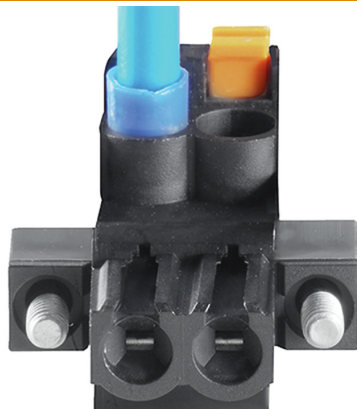


Wide clamping range  
Tool-free wire connection




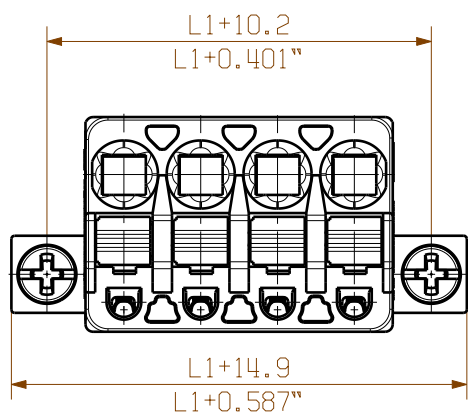

SHOWN: BLF 5.08HC/04/180F

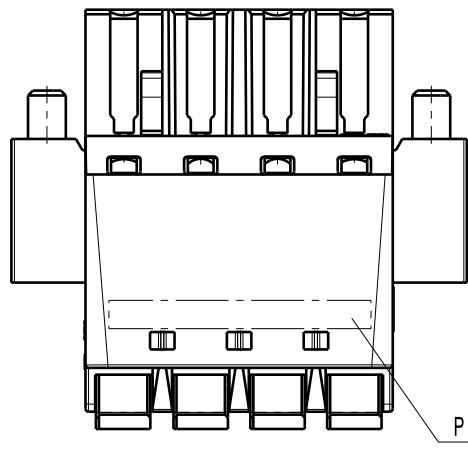
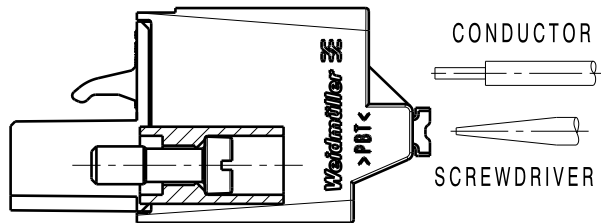


PRINTING AREA TOP


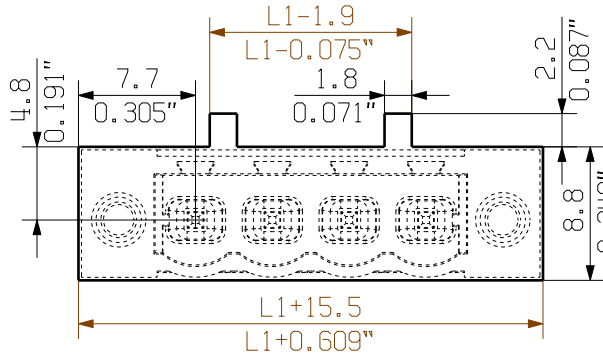


FRONT PLATE CUT-OUT


M 1/1

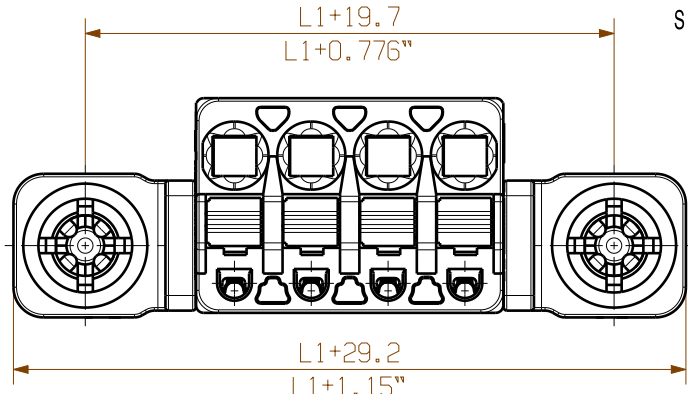

SHOWN: BLF 5.08HC/04/180DF

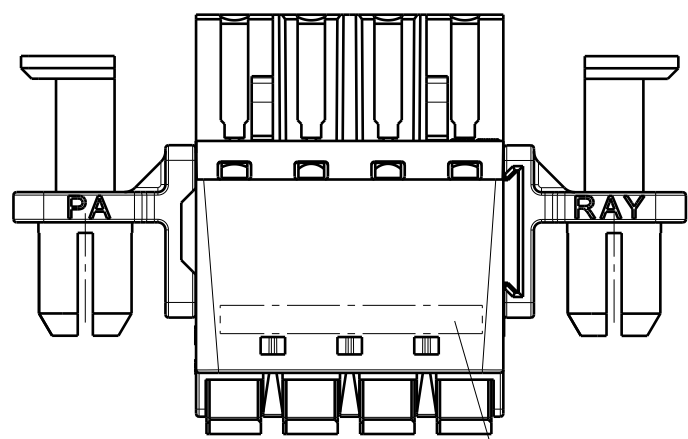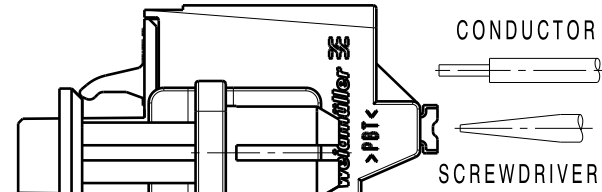


PRINTING AREA TOP

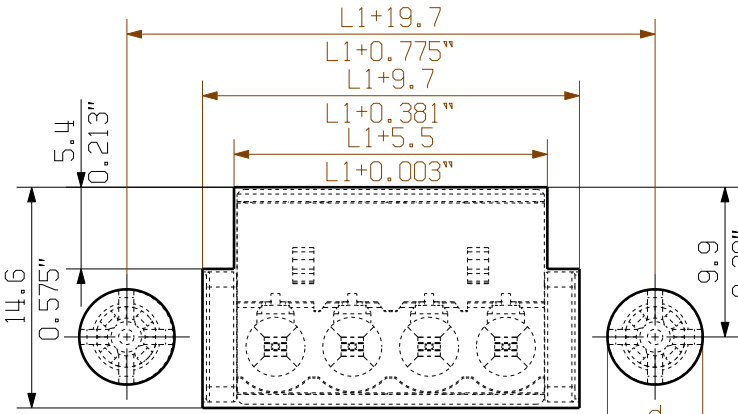



FRONT PLATE CUT-OUT

|                                  |                                    |        |          |
|----------------------------------|------------------------------------|--------|----------|
| 0.5-0.8                          | 0.019-0.031                        | 6.3    | 0.248    |
| 1.00                             | 0.039                              | 6.4    | 0.252    |
| 1.5                              | 0.059                              | 6.5    | 0.256    |
| 2.00                             | 0.079                              | 6.7    | 0.264    |
| WANDDICKE<br>WALL THICKNESS [mm] | WANDDICKE<br>WALL THICKNESS [inch] | d [mm] | d [inch] |


ALLGEMEINGÜLTIGE KUNDENZEICHNUNG, AKTUELLER STAND NUR AUF ANFRAGE  
GENERAL CUSTOMER DRAWING, TOPICAL VERSION ONLY IF REQUIRED

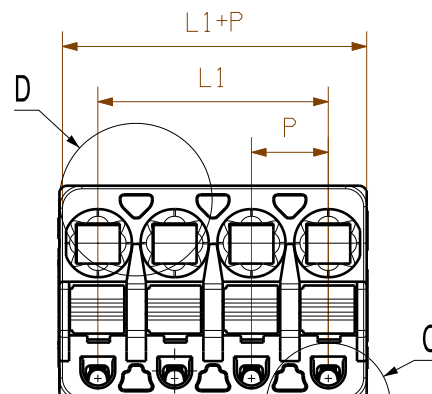

SHOWN: BLF 5.08HC/04/180G

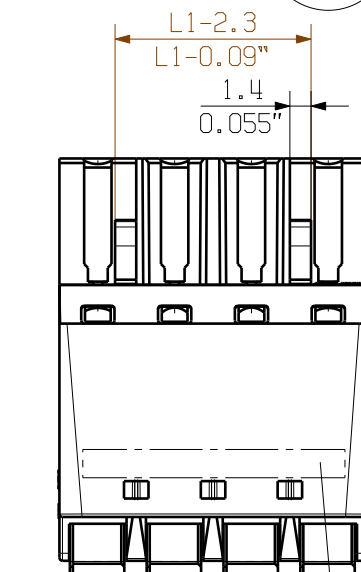
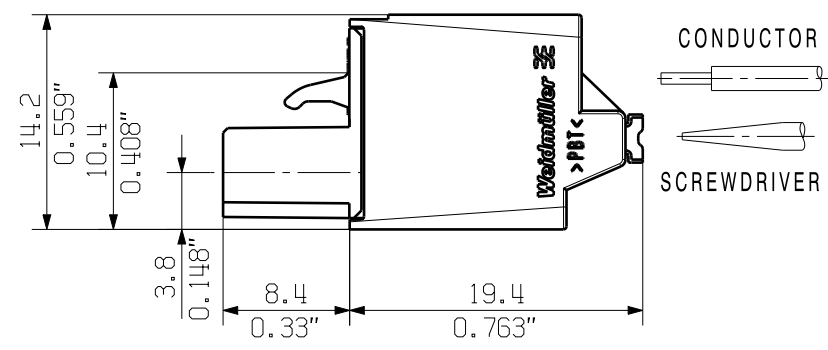


PRINTING AREA TOP


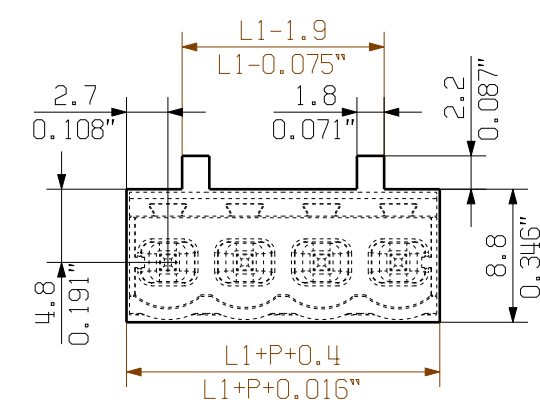


MIN. FRONT PLATE CUT-OUT


M 1/1

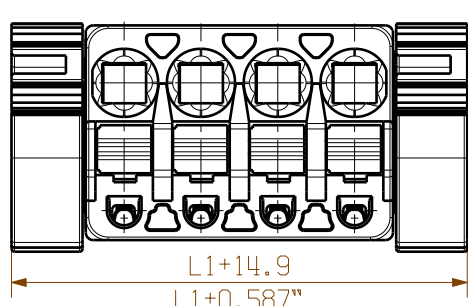

SHOWN: BLF 5.08HC/04/180LR

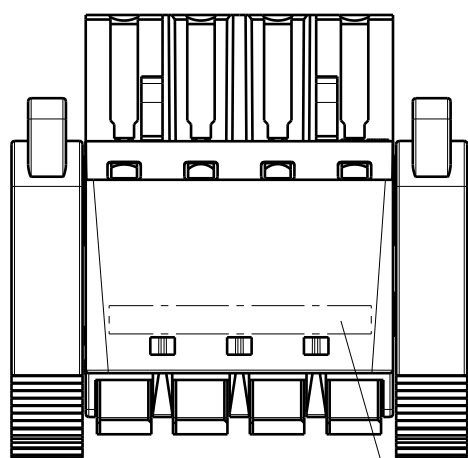
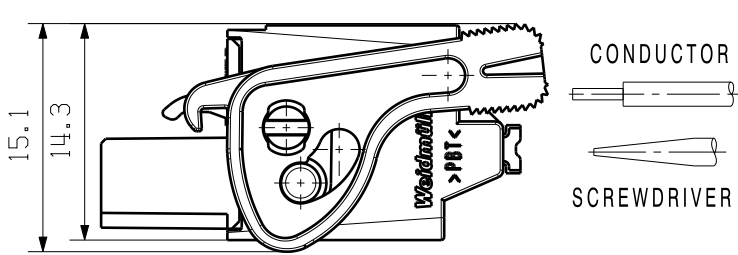


PRINTING AREA TOP


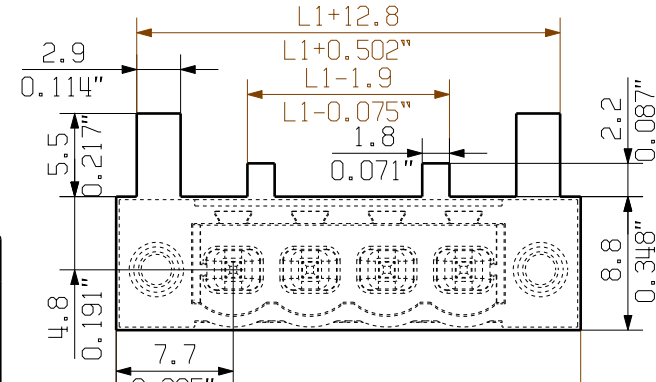


FRONT PLATE CUT-OUT


M 1/1

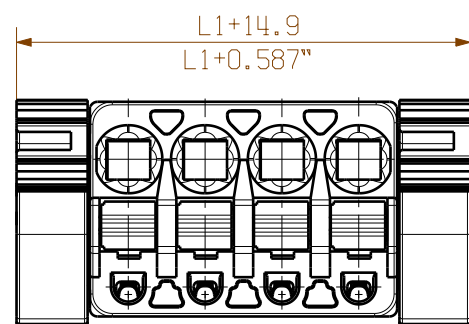

SHOWN: BLF 5.08HC/04/180LH

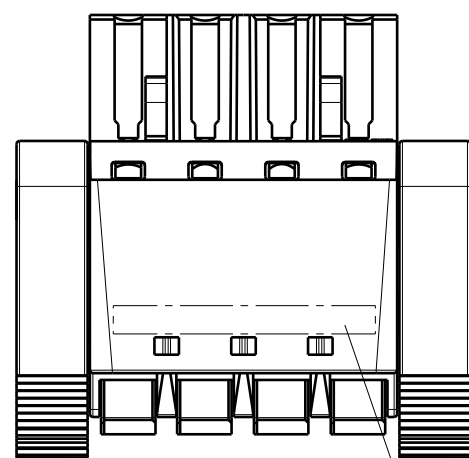
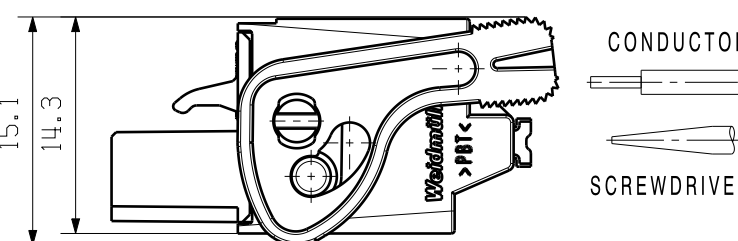


PRINTING AREA TOP

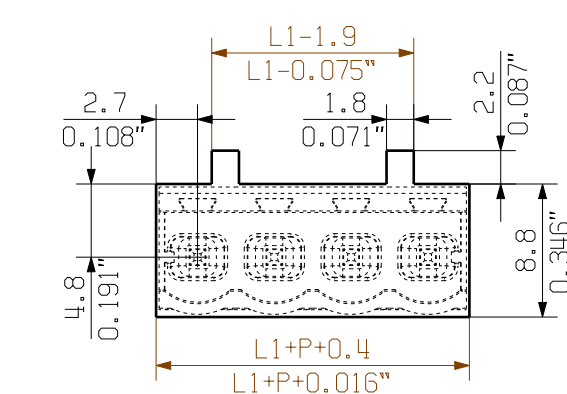


MIN. FRONT PLATE CUT-OUT

M 1/1




TEST POINT

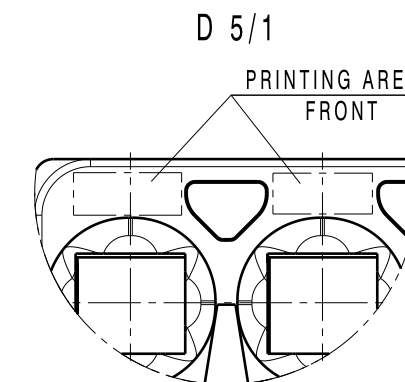

D 5/1

PRINTING AREA FRONT

M 1:1



BLF 5.08/02/180 (Standard)

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone.  
The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.  
The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application. Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

GENERAL TOLERANCE:  
DIN ISO 2768-m

P=5.08 RASTER  
PITCH

|                                 |            |                                                      |                               |
|---------------------------------|------------|------------------------------------------------------|-------------------------------|
| EC00001173                      | 07         | Prim PLM Part No.: 003310                            | Prim ERP Part No.: 1013710000 |
| First Issue Date<br>28.04.2009  | Max. nos.  | <b>Weidmüller</b>                                    |                               |
| Modification                    | Date       | Name                                                 | <b>43921</b>                  |
| Drawn                           | 01.03.2019 | Hertel, Suzann                                       | Issue no.                     |
| Responsible                     | 05.03.2019 | Hertel, Suzann                                       | Sheet 02 of 02 sheets         |
| Approved                        | 05.03.2019 | Lang, Thomas                                         |                               |
| Scale: 2:1                      | Size: A2   | BLF 5.08HC/./180...<br>BUCHSENSTECKER<br>FEMALE PLUG |                               |
| Drawings Assembly               |            |                                                      |                               |
| Product file: 7379 BLF 5.08 180 |            |                                                      |                               |

|    |                  |                      |
|----|------------------|----------------------|
| 24 | 116.84           | 4.600                |
| 23 | 111.76           | 4.400                |
| 22 | 106.68           | 4.200                |
| 21 | 101.60           | 4.000                |
| 20 | 96.52            | 3.800                |
| 19 | 91.44            | 3.600                |
| 18 | 86.36            | 3.400                |
| 17 | 81.28            | 3.200                |
| 16 | 76.20            | 3.000                |
| 15 | 71.12            | 2.800                |
| 14 | 66.04            | 2.600                |
| 13 | 60.96            | 2.400                |
| 12 | 55.88            | 2.200                |
| 11 | 50.80            | 2.000                |
| 10 | 45.72            | 1.800                |
| 9  | 40.64            | 1.600                |
| 8  | 35.56            | 1.400                |
| 7  | 30.48            | 1.200                |
| 6  | 25.40            | 1.000                |
| 5  | 20.32            | 0.800                |
| 4  | 15.24            | 0.600                |
| 3  | 10.16            | 0.400                |
| 2  | 5.08             | 0.200                |
| n  | POLZAHL<br>POLES | L1 [mm]<br>L1 [inch] |