

VSSC
VSSC6 MOV 24VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Overvoltage protection with individual components with varistors in terminal design
The metal-oxide varistors can be used in terminal design. They are approved for a maximum sine-wave-form power-frequency operating voltage, which is printed on the component. Any voltages greater than the permitted maximum are discharged safely within 25 ns. Varistors are used for medium to high power.

General ordering data

Type	VSSC6 MOV 24VAC/DC
Order No.	1064540000
Version	Surge protection for instrumentation and control, 24 V, 34 V, 12 A, According to IEC61643-21
GTIN (EAN)	4032248829873
Qty.	8 pc(s).

VSSC

VSSC6 MOV 24VAC/DC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	6.2 mm	Width (inches)	0.244 inch
Height	88.5 mm	Height (inches)	3.484 inch
Depth	81 mm	Depth (inches)	3.189 inch
Net weight	50.75 g		

Temperatures

Humidity	5...96 %	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	80 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...80 °C		

Probability of failure

λ _{ges}	26	MTTF	4,391 Jahre
PFH in 1*10 ⁻⁹ per hour	0	SFF	100 %
SIL in compliance with IEC 61508	3		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL Zertifikat
----------------------	---------	----------------	---------------

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I _i	12 A
Input voltage, max. U _i	42 V	Internal capacity, max. C _i	10 nF
Internal inductance, max. L _i	0 μH		

General data

Colour	black	Design	Terminal
Isolating function	No	Optical function display	No
Protection degree	IP20	Rail	TS 35
Segment	Measurement - Monitoring - Setting	UL 94 flammability rating	V-0
Version	Surge protection for measurement and control		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

VSSC
VSSC6 MOV 24VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Rated data IEC / EN**

Rated voltage (AC)	24 V
Voltage type	AC/DC
Max. continuous voltage, U_c (DC)	42 V
Discharge current I_n (8/20 μ s) wire-PE	0.5 kA
Standards	According to IEC61643-21
Capacitance	4.6 nF
Overload - failure mode	Mode 1
Requirements category acc. to IEC 61643-21	C1
Volume resistance	< 0.1 Ω

Rated voltage (DC)	34 V
Max. continuous voltage, U_c (AC)	30 V
Discharge current, max. (8/20 μ s)	2 kA
Discharge current I_{max} (8/20 μ s) wire-PE	1 kA
Protection level U_p (typ.)	150 V
Number of poles	1
Rated current I_N	12 A
Surge current-carrying capacity C1	0.25 kA 8/20 μ s 0.5 kV 1.2/50 μ s

Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

Connection data

Type of connection	Screw connection
Tightening torque, max.	0.8 Nm
Clamping range, max.	4 mm ²
Wire cross-section, solid, max.	6 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	4 mm ²
Connection cross-section, stranded, max.	4 mm ²

Tightening torque, min.	0.5 Nm
Clamping range, min.	0.5 mm ²
Wire cross-section, solid, min.	0.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²
Connection cross-section, stranded, min.	0.5 mm ²

Classifications

ETIM 6.0	EC000943	ETIM 7.0	EC000943
eClass 9.0	27-13-08-07	eClass 9.1	27-13-08-07
eClass 10.0	27-13-08-07	UNSPSC	30-21-18-11

Approvals

Approvals



ROHS	Conform
------	---------


Downloads

Approval/Certificate/Document of Conformity	SIL Paper CE PAPER Declaration of Conformity
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	Instruction sheet VSSC

VSSC VSSC6 MOV 24VAC/DC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

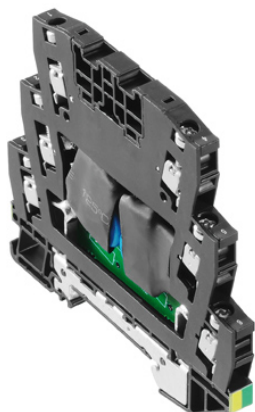

Similar to illustration

