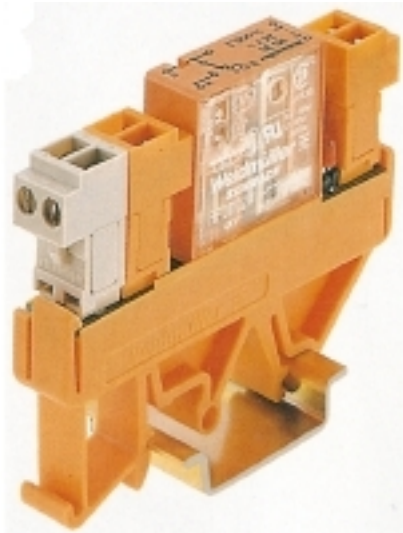


RS-SERIES
RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

Similar to illustration

Clip-on RS 30. 31. 32 relay bases are available in widths from 11.2 to 25 mm, depending on the type.
The RSM relay multiplexers are available as 4, 8 and 16-way modules. To reduce the wiring work, the DC variants are fitted with a common plus or minus potential.
The optional IEC603-1 plug-in connector enables the connection of pre-assembled lines.
The screw connection system is used to connect the conductor with a rated cross-section of 2.5 mm².

General ordering data

Delivery status	Discontinued
Available until	2017-12-15
Type	RS 30 24VDC LD BL/SL 1U
Order No.	1100220000
Version	RS-SERIES, Relay module, Number of contacts: 1 CO contact AgNi 0.15 gold flashed, Rated control voltage: 24 V DC $\pm 10\%$, Continuous current: 6 A, Screw connection
GTIN (EAN)	4008190065058
Qty.	10 pc(s).
Alternative product	1122770000

Creation date May 30, 2020 8:12:41 PM CEST

RS-SERIES
RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	11.2 mm	Width (inches)	0.441 inch
Height	74 mm	Height (inches)	2.913 inch
Depth	56 mm	Depth (inches)	2.205 inch
Net weight	31.47 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature, max.	40 °C
Operating temperature, min.	-25 °C	Storage temperature, max.	60 °C
Storage temperature, min.	-40 °C	Operating temperature	-25 °C...40 °C
Storage temperature	-40 °C...60 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Rated control voltage	24 V DC $\pm$ 10 %	Rated current DC	10 mA
Power rating	0.45 W	Pull-in/drop-out voltage, typ.	21.5 V DC
Pull-in/drop-out current, typ.	12 mA / 3 mA DC	Status indicator	red LED
Protective circuit	Free-wheeling diode, Reverse polarity protection		

Output

Rated switching voltage	250 V AC	Max. switching voltage, AC	250 V
Continuous current	6 A	Inrush current	8 A
AC switching capacity (resistive), max.	2000 VA	Switch-on delay	$\leq$ 8 ms
Switch-off delay	$\leq$ 7 ms	Duration of Bounce	$\leq$ 3 ms
Min. switching power	250 mW	Max. switching frequency at rated load	0.1 Hz

Contact data

Contact type	1 CO contact (AgNi 0.15 gold flashed)	Electrical service life of AC coil	$> 7 \times 10^5$ Switching cycles
Electrical service life, DC coil	$> 5 \times 10^5$ switching cycles	Mechanical service life	20×10^6 switching cycles

General data

Version	soldered relay	Rail	TS 32, TS 35
Test button	No	Mechanical switch position indicator	No
Colour	orange		

Insulation coordination

Rated voltage	250 V	Surge voltage category	III
Pollution severity	2	Protection degree	IP20
Creepage and clearance distance input – output	> 3 mm	Impulse withstand voltage	4 kV

Further details of approvals / standards

Standards	DIN EN 50178	Certificate No. (CSA)	082859-C-000
-----------	--------------	-----------------------	--------------

Creation date May 30, 2020 8:12:41 PM CEST

RS-SERIES

RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Connection data

Wire connection method	Screw connection	Stripping length, rated connection	8 mm
Clamping range, rated connection	2.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	4 mm ²		

Classifications

ETIM 6.0	EC001437	ETIM 7.0	EC001437
eClass 9.0	27-37-16-01	eClass 9.1	27-37-16-01
eClass 10.0	27-37-16-01	UNSPSC	30-21-19-17

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PA_5600_160311_001.pdf
Engineering Data	EPLAN, WSCAD