

Field bus components

FBCON PA CG/M12 1WAY

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

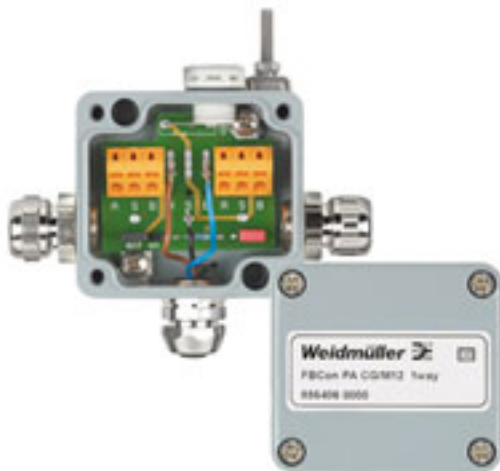

For standard industrial applications (non-hazardous areas), PROFIBUS PA junction boxes and limiters are available as 1-way, 2-way, 4-way, and 8-way distributors. FBCon limiters are designed to protect connected field devices from over voltages and short circuits. As voltage-limiting protective elements, suppressor diodes are used. Due to the integrated current limitation, the segment is also protected against short circuit on a spur line. EMC cable glands, protection class IP66 and a wide operating temperature range safely protect your connections in harsh environments.

Functionality

- EMC cable glands for trunk and spurs
- M12 connector for spurs
- External earthing stud
- Pressure equalizing element
- Protection class IP66
- Aluminium and stainless-steel versions
- Profibus PA / Foundation Fieldbus compatible

Note: The use of FBCon products with aluminum enclosures and / or M12 connectors is not recommended in strongly saline environments.

General ordering data

Type	FBCON PA CG/M12 1WAY
Order No.	8564060000
Version	Standard distributor, 1-way distributor, IP66
GTIN (EAN)	4032248236596
Qty.	1 pc(s).

Field bus components

FBCON PA CG/M12 1WAY

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Length	64 mm	Length (inches)	2.52 inch
Width	58 mm	Width (inches)	2.283 inch
Height	37 mm	Height (inches)	1.457 inch
Net weight	258 g		

Temperatures

Operating temperature, max.	80 °C	Operating temperature, min.	-40 °C
Storage temperature, max.	80 °C	Storage temperature, min.	-40 °C
Operating temperature	-40 °C...80 °C	Ambient temperature	-40 °C...80 °C
Storage temperature	-40 °C...80 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical properties

Protection degree	IP66
-------------------	------

Classifications

ETIM 6.0	EC001604	ETIM 7.0	EC001604
eClass 9.0	27-24-26-08	eClass 9.1	27-24-26-08
eClass 10.0	27-24-26-08	UNSPSC	26-12-16-03

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	Certification EAC Certification UL
Brochure/Catalogue	CAT 8 SAI 15/16 EN
Software	WI-Segment-Calculator
User Documentation	assembly instruction german / english Application-Guide-Planning and installing Fieldbus networks-using-FBCon_english_deutsch FBCon Segment Calculator_english

Field bus components FBCON PA CG/M12 1WAY

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

