

**WAVESERIES
WAVEFILTER 10A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Simple radio noise suppression in the cabinet
thanks to WAVEFILTER**

The WAVEFILTER series eliminates the need for time-consuming bolting processes of mains filters. The filters are snapped onto TS 35 and connected to the device whose noise is to be suppressed. The two-stage, 22.5 mm wide WAVEFILTER, in 1 A, 3 A, 6 A and 10 A versions, offers high attenuation at all voltage levels from 5 V, 12 V, 24 V, 48 V, 60 V, 120 V up to 250 V.

General ordering data

Type	WAVEFILTER 10A
Order No.	8614770000
Version	WAVESERIES, Surge protection, Surge protection, Attenuation at 100 MHz: 40 dB
GTIN (EAN)	4032248277032
Qty.	1 pc(s).

WAVESERIES WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	22.5 mm	Width (inches)	0.886 inch
Height	73.4 mm	Height (inches)	2.89 inch
Depth	73.4 mm	Depth (inches)	2.89 inch
Net weight	142.12 g		

Temperatures

Operating temperature, max.	40 °C	Operating temperature, min.	-20 °C
Storage temperature, max.	55 °C	Storage temperature, min.	-25 °C
Operating temperature	-20 °C...40 °C	Storage temperature	-25 °C...55 °C

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (cURus)	E64388
-------------------------	--------

General data

Colour	beige	Design	Wave 22.5 L
Height with TS 35	112.4 mm	Protection degree	IP20
Rail	TS 35	Segment	Power distribution
Version	Surge protection		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Rated voltage (AC)	250 V	Rated voltage (DC)	250 V
Voltage type	AC/DC	Fuse	10A
Leakage current at U_n	190 μ A	Attenuation at 0.15 MHz	< 0.5 dB
Attenuation at 1 MHz	70 dB	Attenuation at 10 MHz	52 dB
Attenuation at 100 MHz	40 dB	Capacitance	C_x : 470 nF / C_{and} : 4.7 nF
Inductance L and L1	0.8 mH	Rated current I_N	10 A
Test voltage P-N	1700 V DC	Test voltage P/N-PE	2000 V AC

Connection data

Cross-section	2.5 mm ²	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross-section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	1.5 mm ²

**WAVESERIES
WAVEFILTER 10A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Classifications**

ETIM 6.0	EC002623	ETIM 7.0	EC002623
eClass 9.0	27-18-28-14	eClass 9.1	27-42-02-08
eClass 10.0	27-18-28-14	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS	Conform
------	---------

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
User Documentation	Operating instructions

WAVESERIES WAVEFILTER 10A

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

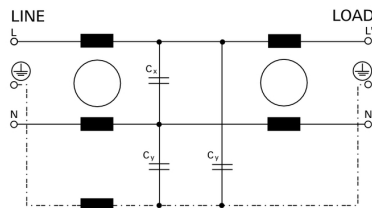

Circuit diagram

