

**Power Solid-State Relais
PSSR 24VDC/3PH AC 20A****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Product image

- Load circuit: 3-phase 24...520 VAC / 20 A
- Ready-to-use: snap on - connect - ready
- Wear-free and silent switching
- High capacity for handling surge currents $I^2t = 1500$ A²s (10 ms)

General ordering data

Type	PSSR 24VDC/3PH AC 20A
Order No.	8952130000
Version	Power Solid-State Relais, Solid state contactor, 3 NO contact (Triac (zero-cross switch)), Rated control voltage: 8...30 V DC / 10...30 V AC, Rated switching voltage: 24...520 V AC, Continuous current: 20 A @ 55 °C, 12 A (AC 53), Screw connection
GTIN (EAN)	4032248743254
Qty.	1 pc(s).

Creation date April 22, 2020 3:52:50 PM CEST

**Power Solid-State Relais
PSSR 24VDC/3PH AC 20A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data
Dimensions and weights

Width	89.6 mm	Width (inches)	3.528 inch
Height	98 mm	Height (inches)	3.858 inch
Depth	126.2 mm	Depth (inches)	4.968 inch
Net weight	953 g		

Temperatures

Humidity	40...85 % (indoor) no condensation	Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	100 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...80 °C
Storage temperature	-40 °C...100 °C		

Probability of failure

MTTF	228 Years
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (cURus)	E223474
-------------------------	---------

Control side

Rated control voltage	8...30 V DC / 10...30 V AC	Nominal control current	15 mA at 8.5 V DC, 18 mA at 10 V AC/DC, 50 mA at 24 V AC/DC, 65 mA at 30 V AC/DC
Power rating	0.1...2 W	Cut-in / dropout voltage	10 V / 4 V AC 8 V / 4 V DC
Status indicator	Green LED	Protective circuit	RC element, Varistor

Load side

Rated switching voltage	24...520 V AC	Continuous current	20 A @ 55 °C, 12 A (AC 53)
Load category	AC 53: 3 x 12 A	Inrush current	550 A
Pulse load, max. current	300 A (10 ms), non-recurrent	Load limit integral (I^2t) <10 ms	1,500 A ² s
Switch-on delay	30 ms	Switch-off delay	30 ms
Voltage drop at max. load	1.4 V	Leakage current	< 1 mA
Min. switching current	5 mA	Short-circuit-proof	No
Protective circuit, load side	Varistor, RC element	Output voltage frequency range	50 / 60 Hz
max. switching frequency (AC control voltage)	10 Hz	max. switching frequency (DC control voltage)	10 Hz

Contact data

Contact type	3 NO contact (Triac (zero-cross switch))
--------------	--

**Power Solid-State Relais
PSSR 24VDC/3PH AC 20A**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data
General data

Version	3-phase with heat sink mounted	Rail	TS 35
Colour	black		

Insulation coordination

Pollution severity	2	Surge voltage category	III
Clearance and creepage distances for control side - load side	≥ 6.4 mm	Dielectric strength for control side - load side	4 kV _{eff}
Dielectric strength of load side - housing	3.3 kV _{eff}	Impulse withstand voltage	4 kV (1.2/50 µs)
Protection degree	IP20		

Further details of approvals / standards

Standards	DIN EN 60950, IEC 60947-4-3	Certificate No. (cURus)	E223474
-----------	-----------------------------	-------------------------	---------

Connection data (control side)

Nom. rated connection clamping range (control side)	1.5 mm ²	Min. rated connection clamping range (control side)	0.75 mm ²
Max. rated connection clamping range (control side)	2.5 mm ²	Min. tightening torque (control side)	1.2 Nm
Max. tightening torque (control side)	2 Nm	Blade size (control side)	Gr. PZ2

Connection data (load side)

Nom. rated connection clamping range (load side)	10 mm ²	Min. rated connection clamping range (load side)	1.5 mm ²
Max. rated connection clamping range (load side)	10 mm ²	Min. tightening torque (load side)	2 Nm
Max. tightening torque (load side)	3 Nm	Blade size (load side)	Gr. PZ2

Connection data

Wire connection method	Screw connection
------------------------	------------------

Classifications

ETIM 6.0	EC002055	ETIM 7.0	EC002055
eClass 9.0	27-37-10-14	eClass 9.1	27-37-10-14
eClass 10.0	27-37-10-14	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS	Conform
------	---------

Power Solid-State Relais PSSR 24VDC/3PH AC 20A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Downloads


Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Brochure/Catalogue	CAT 4.2 ELECTR 18/19 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	Beipackzettel / Package Insert – multilingual

Power Solid-State Relais PSSR 24VDC/3PH AC 20A


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings


Wiring diagram



Graph

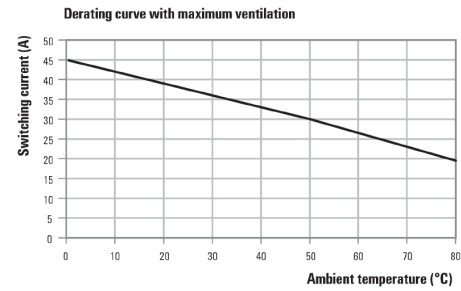


Graph

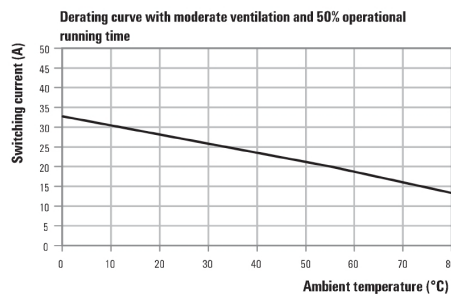

DC load limit curve

Graph

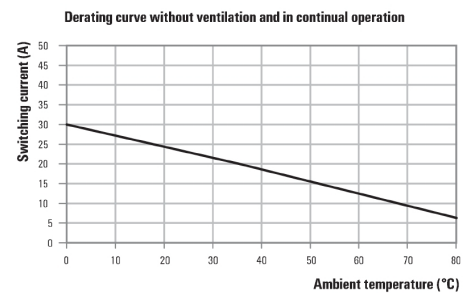

DC load limit curve

Dimensional drawing

