

**Connecting elements  
H0,5/14 ZH OR SV****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

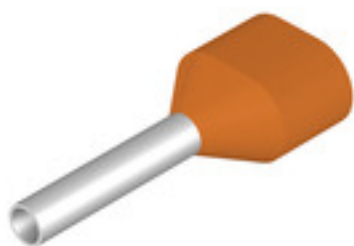

- in multipack bag (5 x 100 pcs.)
- Weidmüller colour code
- DIN colour code

**General ordering data**

|            |                                                              |
|------------|--------------------------------------------------------------|
| Type       | H0,5/14 ZH OR SV                                             |
| Order No.  | <a href="#">9004440000</a>                                   |
| Version    | Wire-end ferrule, Twin wire-end ferrule, 11 mm, 8 mm, orange |
| GTIN (EAN) | 4008 190198473                                               |
| Qty.       | 500 pc(s).                                                   |
| Packaging  | Multipack bag                                                |

## Connecting elements

### H0,5/14 ZH OR SV

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Dimensions and weights

|            |         |                |            |
|------------|---------|----------------|------------|
| Width      | 14 mm   | Width (inches) | 0.551 inch |
| Net weight | 0.124 g |                |            |

### Technical data

|         |                       |
|---------|-----------------------|
| Version | Twin wire-end ferrule |
|---------|-----------------------|

### Wire-end ferrules

|                                         |            |                             |                     |
|-----------------------------------------|------------|-----------------------------|---------------------|
| Collar height (A)                       | 5 mm       | Collar width (B)            | 3 mm                |
| Colour code                             | Weidmüller | Conductor cross-section     | 0.5 mm <sup>2</sup> |
| Contact surface diameter (D1)           | 1.4 mm     | Contact surface length (L2) | 8 mm                |
| L1 in mm                                | 14 mm      | Metal sleeve thickness (S1) | 0.15 mm             |
| Plastic collar thickness (S2)           | 0.3 mm     | Stripping length            | 11 mm               |
| Wire connection cross section AWG, max. | AWG 20     |                             |                     |

### Classifications

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0   | EC000005    |
| eClass 9.0  | 27-40-02-01 | eClass 9.1 | 27-40-02-01 |
| eClass 10.0 | 27-40-02-01 | UNSPSC     | 31-16-31-02 |

### Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Downloads

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Brochure/Catalogue | <a href="#">CAT 6 TOOLS 15/16 EN</a>                                                     |
| Engineering Data   | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                                 |
| Engineering Data   | <a href="#">STEP</a>                                                                     |
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |

## Connecting elements H0,5/14 ZH OR SV

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Drawing

