

Connecting elements
H10,0/24S ZH EB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

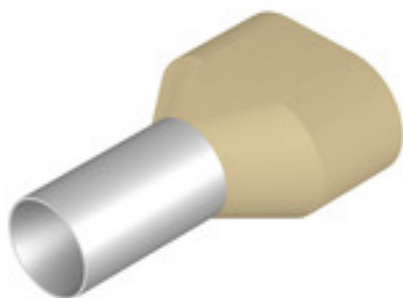

- Polypropylene conical cable entry funnel
 - Heat-resistant up to 105°C
- For conductors from 0.5 – 10.0 mm² (AWG 20-7)
Material: E-Cu, tin galvanised
Dimensional tolerance acc. to DIN 46228 sect. 4

General ordering data

Type	H10,0/24S ZH EB
Order No.	9018860000
Version	Wire-end ferrule, Twin wire-end ferrule, 17 mm, 12 mm, Ivory
GTIN (EAN)	4032248105816
Qty.	100 pc(s).
Packaging	loose

Creation date August 18, 2020 2:20:52 AM CEST

Connecting elements

H10,0/24S ZH EB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Net weight 0.86 g

Technical data

Version Twin wire-end ferrule

Wire-end ferrules

Collar height (A)	13.4 mm	Collar width (B)	7.6 mm
Colour code	Weidmüller	Conductor cross-section	10 mm ²
Contact surface diameter (D1)	6.5 mm	Contact surface length (L2)	12 mm
L1 in mm	24 mm	Metal sleeve thickness (S1)	0.2 mm
Plastic collar thickness (S2)	0.5 mm	Stripping length	17 mm
Wire connection cross section AWG, max.	AWG 8		

Classifications

ETIM 6.0	EC000005	ETIM 7.0	EC000005
eClass 9.0	27-40-02-01	eClass 9.1	27-40-02-01
eClass 10.0	27-40-02-01	UNSPSC	31-16-31-02

Approvals

Approvals



ROHS Conform

Downloads

Brochure/Catalogue	CAT 6 TOOLS 15/16 EN
Engineering Data	WSCAD, EPLAN
Engineering Data	STEP
User Documentation	Technical information - EN Technical information - DE

**Connecting elements
H10,0/24S ZH EB**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings**Drawing**