

Connecting elements
H10,0/22S EB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

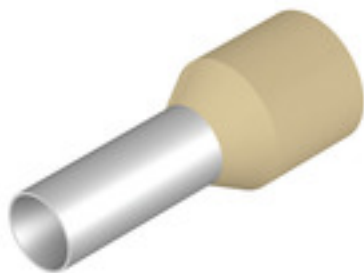

- Polypropylene conical cable entry funnel
 - Heat-resistant up to 105°C
- For conductors from 0.5 – 10.0 mm² (AWG 20-7)
Material: E-Cu, tin galvanised
Dimensional tolerance acc. to DIN 46228 sect. 4

General ordering data

Type	H10,0/22S EB
Order No.	9203620000
Version	Wire-end ferrule, insulated, 15 mm, 12 mm, Ivory
GTIN (EAN)	403224856506 1
Qty.	100 pc(s).
Packaging	loose

Connecting elements

H10,0/22S EB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Net weight	0.51 g
------------	--------

Technical data

Version	insulated
---------	-----------

Wire-end ferrules

Collar diameter (D2)	7.1 mm	Colour code	Miscellaneous
Conductor cross-section	10 mm ²	Contact surface diameter (D1)	4.6 mm
Contact surface length (L2)	12 mm	L1 in mm	22 mm
Metal sleeve thickness (S1)	0.2 mm	Plastic collar thickness (S2)	0.6 mm
Stripping length	15 mm	Wire connection cross section AWG, max.	AWG 8

Classifications

ETIM 6.0	EC000005	ETIM 7.0	EC000005
eClass 9.0	27-40-02-01	eClass 9.1	27-40-02-01
eClass 10.0	27-40-02-01	UNSPSC	31-16-31-02

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Brochure/Catalogue	CAT 6 TOOLS 15/16 EN
Engineering Data	WSCAD, EPLAN
Engineering Data	STEP
User Documentation	Technical information - EN Technical information - DE

Connecting elements H10,0/22S EB

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Drawing

