

RSM
RSM16 1T/CDE-EV 24V-H/V**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

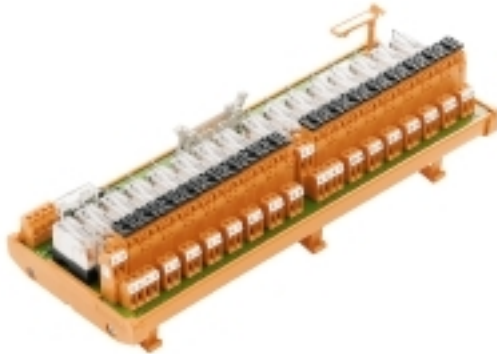

Digital output interface per-relay for electrical signal transmission between the PLC and the field.

- Electrical isolation by pluggable relays.
- Integrated LED status display.
- Screw or tension clamp-connection.
- Additional functions: in-series fuse or isolator
- 2 versions available: compact (RSS relay) or standard (RCL relay).

General ordering data

Type	RSM16 1T/CDE-EV 24V-H/V
Order No.	9445 180000
Version	Interface, RSM, 16 with fuse, RCL, Screw connection
GTIN (EAN)	4032248252862
Qty.	1 pc(s).

RSM

RSM16 1T/CDE-EV 24V-H/V

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	290 mm	Length (inches)	11.417 inch
Width	109 mm	Width (inches)	4.291 inch
Height	75 mm	Height (inches)	2.953 inch
Net weight	968 g		

Temperatures

Operating temperature, max.	40 °C	Operating temperature, min.	-25 °C
Storage temperature, max.	60 °C	Storage temperature, min.	-40 °C
Operating temperature	-25...40 °C	Storage temperature	-40...60 °C

General data

LED status display per relay	green	Fuse per relay	Yes
Switch	Yes (contacts side)	LED status of the supply voltage	yellow
Power supply fuse	3.15 A		

Connection data

Connection to PLC	HE 10 connector - 20 pole	Connection on control side	Plug-in connector in acc. with IEC60603-13 / DIN41651
Number of poles (control side)	20-pole plug	Connection (field side)	LP 5.08mm
Connection supply	LP 5.08mm		

Rating data

Mechanical service life	3 x 10 ⁷ switching cycles
-------------------------	--------------------------------------

Ratings data input

Input voltage	24 V DC ± 10%	Input current	17 mA
Power rating	0.4 VA		

Ratings data output

Relay type	RCL	Type of output	Potential-free contact
Contact material	AgNi 90/10	Rated voltage (text)	≤ 250 Vdc ≤ 250 Vac
Max. AC continuous current	5 A	AC peak current	16 A

Insulation coordinates (EN50178)

According to	DIN EN 50178	Rated input insulation voltage	< 50 V AC
Rated output insulation voltage	< 250 V AC	Overvoltage category input/output	III
Overvoltage category input/input	III	Overvoltage category output/output	II
Pollution severity level	2	Pulse voltage test (1,2/50µs)	6 kV
Insulation test voltage	1.2 kVAC	Clearance input/output	≥ 5.5 mm
Clearance input/input	≥ 0.2 mm	Clearance output/output	≥ 1.17 mm

RSM

RSM16 1T/CDE-EV 24V-H/V

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Connection field

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.5 mm ²	Sleeve with plastic collar, max.	2.5 mm ²
Min. wire cross-section, AWG	AWG 26	Max. wire cross-section, AWG	AWG 12
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Supply connection

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.5 mm ²	Ferrule with plastic collar, max.	2.5 mm ²
Wire cross-section, min. AWG	AWG 26	Wire cross-section, max. AWG	AWG 12
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
eClass 9.0	27-14-11-52	eClass 9.1	27-24-22-16
eClass 10.0	27-14-11-52	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of
Conformity

[Declaration of Conformity](#)

Engineering Data

[WSCAD](#)

RSM RSM16 1T/CDE-EV 24V-H/V

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

