
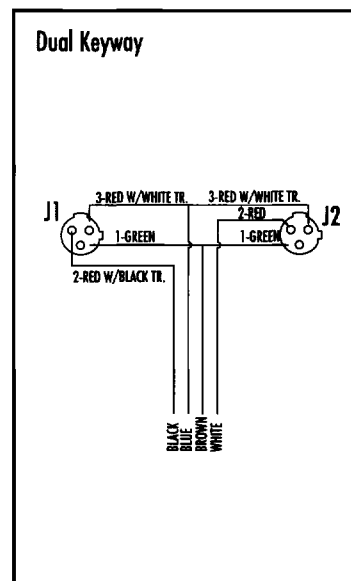
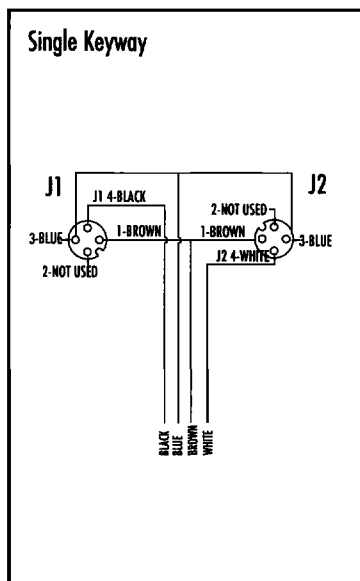


Micro-Change® Splitters

Product Specifications

MECHANICAL INSERT MATERIAL: NYLON 6/6 MOLDED BODY MATERIAL: PVC CONTACT MATERIAL: COPPER ALLOY CONTACT PLATING: GOLD - 5 μ IN. (MIN) PALLADIUM/NICKEL - 20 μ IN. (MIN) COUPLING NUT MATERIAL: ZINC DIECAST EPOXY-COAT (ALSO AVAILABLE IN STAINLESS STEEL OR NON-METALLIC) O-RING: NITRILE RUBBER CABLE TYPE(S): 22 AWG: PVC INSULATED, METALLIC BRAID, STRANDED COPPER CONDUCTORS, YELLOW PVC JACKETED, 300V, 105°C, UL RECOGNIZED, CSA CERTIFIED CABLE STRANDING: 22 AWG: 26 X #36 CABLE DIAMETER: 22 AWG: 4/C - .25" CABLE STRAIN RELIEF: 35 POUNDS MIN. - PER UL STD. 514		ELECTRICAL VOLTAGE RATING: 300VAC CURRENT RATING: 4A CONTACT RESISTANCE: $\leq 5m\Omega$, AFTER 500 MATE/UNMATE CYCLES - PER MIL STD. 1344, 3004.1 ISOLATION RESISTANCE: $\geq 1000M\Omega$ ENVIRONMENTAL PROTECTION: IP 68, NEMA 6P - PER NEMA STD. 250 AMBIENT OPERATING TEMP: -20° TO +105°C CORROSION RESISTANCE: 500 HOUR SALT SPRAY - PER MIL STD. 202F VIBRATION RESISTANCE: 10 - 500 HZ @ 10g - PER MIL STD. 202F, 2040, CONDITION A 1000 PSI HIGH PRESSURE WATER SPRAY: CERTIFICATIONS UL: UL LISTED, FILE NO. E152210 CSA: CSA CERTIFIED, FILE NO. LR6837 VDE: SPACINGS TO VDE 0110 GROUP C (250VAC/300VDC)	
---	--	---	--

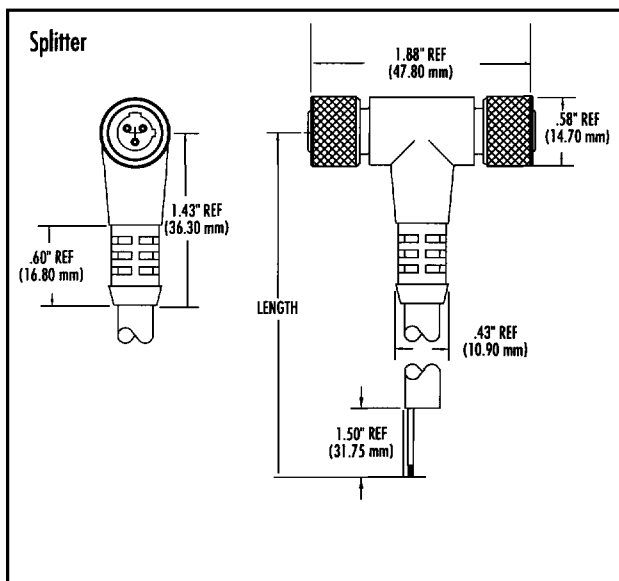

POLES	FACE VIEW FEMALE	WIRING CODE	CABLE LENGTH ft/meters (m)	CATALOG NUMBERS
3		1-BROWN	3.28ft/1m	80350-001
		2-NOT USED	6.56ft/2m	80350-002
		3-BLUE	13.12ft/4m	80350-003
		4-(J1)-BLACK	16.40ft/5m	80350-004
		4-(J2)-WHITE	32.81ft/10m	80350-005
3		1-GREEN	3ft/.91m	70355-001
		3-RED W/WHT. TR.	6ft/1.83m	70355-002
		2-(J1)-RED W/BLACK TR.	12ft/3.66m	70355-003
		2-(J2)-RED	20ft/6.10m	70355-004