

SEND ALL THE RIGHT SIGNALS




BELDEN

SENDING ALL THE RIGHT SIGNALS

When your customers demand unsurpassed performance and durability, count on Belden. For more than 100 years, Belden cable solutions have assured signal transmissions more reliably than any other manufacturer.

Transmit data, sound or video. Install on-machine, underground, in cable trays or routed through the most rugged of environments. Expose it to temperatures, vibration, moisture, chemicals or motion. Whatever your application, you can trust Belden to keep information flowing with infrastructure solutions that fit any need, any industry.

- Proven excellence in design, engineering & manufacturing
- Incomparable reputation for reliability
- Compliant with the most demanding industry standards
- Broadest, most versatile portfolio available
- 10-year warranty comes standard – no additional costs or contracts

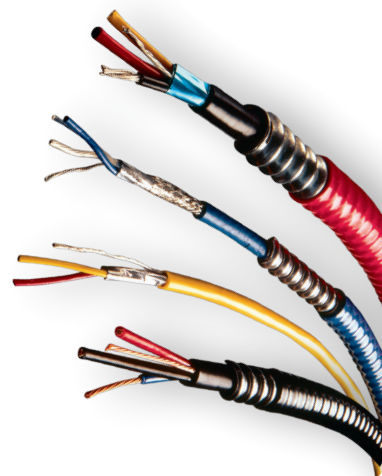

VISIT US AT
WWW.BELDEN.COM

PRODUCT LINE/DESCRIPTION

PART NO./DESCRIPTION

BELDEN LEAD WIRE

For quality assurance, Belden controls all manufacturing processes for its lead wire products. As a result, you get consistent, reliable performance.




- Quality assurance through ISO-certified manufacturing facilities
- Meets or exceeds UL and CSA standards
- Variety of colors & constructions available
- Off-the-shelf & custom design options

- 8521** - One 16 AWG stranded (26x30) tinned copper, PVC insulation
- 8522** - One 18 AWG stranded (16x30) tinned copper, PVC insulation
- 37106** - One 6 AWG stranded (84x25) tinned copper conductor, EPDM insulation
- 37108** - One 8 AWG stranded (84x27) tinned copper conductor, EPDM insulation
- 37112** - One 12 AWG stranded (65x30) tinned copper conductor, EPDM insulation
- 8500** - One 16 AWG stranded (19x29) tinned copper conductor, PVC insulation
- 8504** - One 24 AWG stranded (7x32) tinned copper conductor, PVC insulation

UL INSTRUMENTATION CABLE

Reliability – even in the harshest of environments – is the hallmark of Belden instrumentation cables.

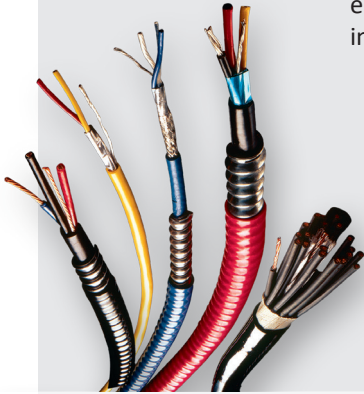


- Save on material, labor and maintenance with cables rated for exposed runs – no need for conduit
- Get superior electrical performance and longer runs in dozens of different environments
- Rest assured – flexible installation connections have all the necessary ratings for industrial sites

- 9318** - One 18 AWG pair stranded (19x30) tinned copper conductors, PVC insulation, overall Beldfoil® shield (100% coverage), PVC jacket
- 9322** - One 22 AWG pair stranded (7x30) tinned copper conductors, flame retardant PVC insulation, overall Beldfoil® shield (100% coverage), flame retardant PVC jacket
- 9409** - One 18 AWG pair stranded (19x30) tinned copper conductors, PVC insulation, PVC jacket
- 9554** - Four 18 AWG pairs stranded (19x30) tinned copper conductors, PVC insulation, overall Beldfoil® shield (100% coverage), PVC jacket

SPACEMAKER ELECTRONIC WIRE & CABLE

Connect machines and devices in space-constrained settings with these multi-use cables tailor-made for machine builders and device manufacturers.

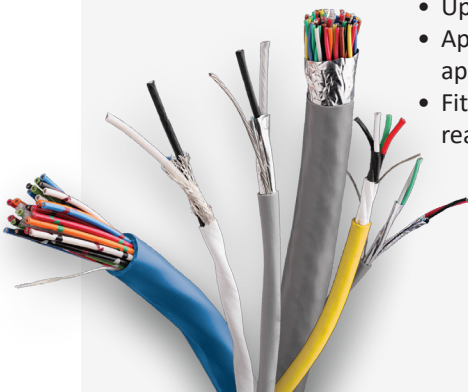

- Up to 52% reduced cable area
- Up to 74% tighter bend radius
- Appropriate for use in NFPA 79 applications
- Fits around tight corners & hard-to-reach spaces

- 8465MN** - Five 18 AWG pair stranded (41x34) tinned copper conductors, polypropylene insulation, PVC jacket
- 8760MN** - One 18 AWG pair stranded (41x34) tinned copper conductors, polypropylene insulation, overall Beldfoil® shield (100% coverage), PVC jacket
- 8761MN** - One 22 AWG pair stranded (19x34) tinned copper conductors, polypropylene insulation, overall Beldfoil® shield (100% coverage), PVC jacket
- 8762MN** - One 20 AWG pair stranded (26x34) TC conductors, polypropylene insulation, overall Beldfoil® shield (100% coverage), PVC jacket
- 8770MN** - Three 18 AWG stranded (41x34) tinned copper conductors, conductors cabled, polypropylene insulation, overall Beldfoil® shield (100% coverage), PVC jacket
- 8877MN** - Seven 20 AWG stranded (26x34) tinned copper conductors, conductors cabled, polypropylene insulation, overall Beldfoil® shield (100% coverage), PVC jacket