

Fiber Sensor Guide Book



Fiber Selection Guide

Choose by model

Thru-beam type

Model No.	Page	
	Sensing range Specifications	Dimensions
FT-140	P.12	P.48
FT-30	P.11	
FT-31	P.12	
FT-31S	P.19	
FT-31W	P.12	
FT-40	P.11	
FT-42	P.12	
FT-42S	P.19	
FT-42W	P.12	
FT-43		
FT-45X		
FT-A11	P.25	P.49
FT-A11W		
FT-A32		
FT-A32W		
FT-AL05		
FT-E13	P.16/P.19	
FT-E23		
FT-F93	P.35	
FT-H13-FM2	P.30	P.50
FT-H20-J20-S		
FT-H20-J30-S		
FT-H20-J50-S		
FT-H20-M1		
FT-H20-VJ50-S		
FT-H20-VJ80-S		
FT-H20W-M1		
FT-H30-M1V-S	P.32	
FT-H35-M2	P.30	
FT-H35-M2S6		
FT-HL80Y	P.29	
FT-KS40	P.24	P.51
FT-KV26		
FT-KV40		
FT-KV40W		
FT-L80Y	P.29	
FT-R31	P.15	
FT-R40	P.12	
FT-R41W	P.15	
FT-R42W		
FT-R43		
FT-R44Y	P.15/P.29	P.52
FT-R60Y		
FT-S11	P.16	
FT-S20	P.11	
FT-S21	P.16	
FT-S21W		
FT-S30		
FT-S31W	P.16	
FT-S32		
FT-V23	P.19	P.53
FT-V24W		
FT-V25		
FT-V30		
FT-V40	P.16	
FT-V80Y	P.29	
FT-Z20HBW	P.20	
FT-Z20W		

Retroreflective type

Model No.	Page	
	Sensing range Specifications	Dimensions
FR-KZ22E	P.24/P.27	P.55
FR-KZ50E		
FR-KZ50H		
FR-Z50HW		

Model No.	Page	
	Sensing range Specifications	Dimensions
FT-Z30	P.20	P.53
FT-Z30E		P.54
FT-Z30EW		
FT-Z30H		
FT-Z30HW		
FT-Z30W		
FT-Z40HBW		
FT-Z40W		
FT-Z802Y		P.29

Reflective type

Model No.	Page	
	Sensing range Specifications	Dimensions
FD-30	P.11	P.56
FD-31	P.13	
FD-31W		
FD-32G	P.13/P.23	
FD-32GX		
FD-40	P.11	
FD-41	P.13	
FD-41S	P.19	
FD-41SW		
FD-41W	P.13	
FD-42G	P.13/P.23	P.57
FD-42GW		
FD-60	P.11	
FD-61	P.13	
FD-61G		
FD-61S	P.19	
FD-61W	P.13	
FD-62		
FD-64X	P.25	
FD-A16		
FD-AL11	P.17/P.19	
FD-E13		
FD-E23	P.13/P.23	
FD-EG30		
FD-EG30S	P.19	P.59
FD-EG31	P.13/P.23	
FD-F4	P.35	
FD-F41		
FD-F41Y		
FD-F71		
FD-F8Y		
FD-FA93		
FD-H13-FM2	P.31	
FD-H18-L31		
FD-H20-21		
FD-H20-M1		
FD-H25-L43		
FD-H25-L45		

Model No.	Page		
	Sensing range Specifications	Dimensions	
FD-H30-KZ1V-S	P.32	P.61	
FD-H30-L32	P.31		
FD-H30-L32V-S	P.32		
FD-H35-20S	P.31		
FD-H35-M2			
FD-H35-M2S6			
FD-HF40Y	P.35		
FD-L10	P.26	P.62	
FD-L11			
FD-L12W			
FD-L20H			
FD-L21			
FD-L21W			
FD-L22A			
FD-L23			
FD-L30A			
FD-L31A			
FD-L32H			
FD-R31G	P.15/P.23	P.63	
FD-R32EG			
FD-R33EG			
FD-R34EG			
FD-R41	P.15		
FD-R60	P.13		
FD-R61Y	P.15/P.29		
FD-S21	P.17		
FD-S30	P.11		
FD-S31	P.17	P.64	
FD-S32			
FD-S32W			
FD-S33GW			
FD-S60Y	P.29		
FD-V30	P.19		
FD-V30W			
FD-V50			
FD-Z20HBW	P.21	P.65	
FD-Z20W			
FD-Z40HBW			
FD-Z40W			
FD-Z50HW	P.24		

Fiber Selection Guide

Earlier Models Comparison Table (The specification of new fiber may be changed from that of old one. Please confirm the specification before use.)

Thru-beam type

Old fiber Model No.	New fiber Model No.	Page	
		Sensing range Specifications	Dimensions
FT-A30	FT-A32	P.25	P.49
FT-A8	FT-A11		
FT-AFM2	FT-AL05		
FT-AFM2E			
FT-B8	FT-43	P.12	P.48
FT-E12	FT-E13	P.16/P.19	P.49
FT-E22	FT-E23		
FT-F902	FT-F93	P.35	P.48
FT-FM10L	FT-140	P.12	
FT-FM2	FT-42		
FT-FM2S	FT-42S	P.19	
FT-FM2S4			
FT-K8	FT-KS40	P.24	P.51
FT-KV1	FT-KV26		
FT-KV8	FT-KV40		
FT-NFM2	FT-31	P.12	P.48
FT-NFM2S	FT-31S	P.19	
FT-NFM2S4			
FT-P2	FT-S21	P.16	P.52
FT-P40	FT-31	P.12	P.48
FT-P60	FT-42		
FT-P80			
FT-P81X	FT-45X		
FT-PS1	FT-S11	P.16	P.52
FT-R80	FT-R40	P.12	P.51
FT-SFM2	FT-S32	P.16	P.52
FT-SFM2L			
FT-SFM2SV2	FT-V30	P.19	P.53
FT-SNFM2	FT-S21	P.16	P.52
FT-T80	FT-42	P.12	P.48
FT-V10	FT-V40	P.16	P.53
FT-V22	FT-V23	P.19	P.52
FT-V41	FT-V25		P.53
FT-W4	FT-31	P.12	P.48
	FT-31W		
FT-W8	FT-42		
	FT-42W		
FT-WA30	FT-A32	P.25	P.49
	FT-A32W		
FT-WA8	FT-A11		
	FT-A11W		


Old fiber Model No.	New fiber Model No.	Page	
		Sensing range Specifications	Dimensions
FT-WKV8	FT-KV40	P.24	P.51
	FT-KV40W		
FT-WR80	FT-R41W	P.15	
FT-WR80L	FT-R42W		
FT-WS3	FT-S31W	P.16	P.52
FT-WS4	FT-S21		
	FT-S21W		
FT-WS8	FT-S31W		
FT-WS8L	FT-S32	P.19	P.53
FT-WV42	FT-V25		
	FT-V24W	P.20	P.54
FT-WZ4	FT-Z20W		
FT-WZ4HB	FT-Z20HBW		
FT-WZ7	FT-Z40W		
FT-WZ7HB	FT-Z40HBW		
FT-WZ8	FT-Z30		
	FT-Z30W		
FT-WZ8E	FT-Z30E		
	FT-Z30EW		
FT-WZ8H	FT-Z30H		
	FT-Z30HW		
FT-Z8	FT-Z30		P.53
FT-Z8E	FT-Z30E		P.54
FT-Z8H	FT-Z30H	P.11	P.48
————	FT-30		P.52
————	FT-40		
————	FT-S20	P.15	P.51
————	FT-S30		
————	FT-R31		
————	FT-R43		

Retroreflective type

Old fiber Model No.	New fiber Model No.	Page	
		Sensing range Specifications	Dimensions
FR-KV1	FR-KZ22E	P.24/P.27	P.55
FR-KZ21	FR-KZ50H		
FR-KZ21E	FR-KZ50E		
FR-WKZ11	FR-Z50HW		

Wide Beam

■ Senses a workpiece with indefinite shape or position in the wide beam without missing. It can also be used to discriminate shape.






Applications

Sensing tiny moving objects

Inspecting screw height





Control the amount of meandering

Confirming presence of slit mask





LIST OF FIBERS

Thru-beam type (one pair set)

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length 3m Free-cut	Sensing range (mm in) (Note 1)			Beam axis dia. (mm)	Protection	Ambient temp.	Dimension
					FX-500 series	U-LG LONG FAST H-SP	FX-101 (Upper value) FX-102 (Lower value)				
Wide beam	 Sensing width 32mm W5 × H69 × D20	Tough FT-A32	R2 Bending durability	 2 m	STD (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3.2 × 32	IP40	-40 to +60 °C	P.49
	Allows flexible wiring  Sensing width 32mm W5 × H69 × D20	FT-A32W	R1		HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 2,100 82.677				3,600 141.732 (Note 2)	
	 Sensing width 11mm W4.2 × H31 × D13.5	Tough FT-A11	R2 Bending durability		STD (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,600 141.732 (Note 2)	1,900 74.803 3,600 141.732 (Note 2)	2.2 × 11		-40 to +70 °C	
	Allows flexible wiring Sensing width 11mm W4.2 × H31 × D13.5	FT-A11W	R1		HYPR (Note 2) 3,600 141.732	3,600 141.732 (Note 2) 3,000 118.110				3,600 141.732 (Note 2)	
Array	 Sensing width 5.5mm W5 × H15 × D15	Tough FT-AL05	R2 Bending durability		STD 860 33.858	1,550 61.024 1,500 59.055 500 19.685 170 6.693	250 9.843 660 25.984	0.25 × 5.5		-55 to +80 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Reflective type

Type	Shape of fiber head (mm)	Model No.	Bending radius (mm)	Fiber cable length (m)	Sensing range (mm in) (Note 1, 2)			Protection	Ambient temp.	Dimensions
					FX-500 series	U-LG LONG FAST H-SP	FX-101 (Upper value) FX-102 (Lower value)			
Wide beam	 W7 × H15 × D30	Tough FD-A16	R4 Bending durability	2 m	STD 200 7.874 HYPR Cannot use	200 7.874 200 7.874 140 5.512 75 2.953	120 4.724 240 9.449	IP40	-40 to +60 °C	P.58
Array	 W5 × H20 × D20	Tough FD-AL11	R2 Bending durability		STD 320 12.598 HYPR 670 26.378	530 20.866 510 20.079 180 7.087 50 1.969	100 3.937 285 11.220		-55 to +80 °C	

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers


FX-500 series

FX-100 series

INDEX

SENSING RANGE

Fibers are listed in alphabetic order.
Refer to p. 2~ for details of each fiber.

Thru-beam type (one pair set)

Model No.	Sensing range (mm in) (Note 1)								Dimensions
	FX-500 series						FX-100 series		
	HYPR	U-LG	LONG	STD	FAST	H-SP	FX-101	FX-102	
FT-140	19,600 771.652 (Note 2)	19,600 771.652 (Note 2)	19,600 771.652 (Note 2)	19,600 771.652 (Note 2)	16,000 629.920	6,300 248.031	14,000 551.180	19,600 771.652 (Note 2)	P.48
FT-30	1,350 53.150	810 31.890	650 25.591	400 15.748	210 8.268	75 2.953	135 5.315	400 15.748	P.48
FT-31	1,350 53.150	770 30.315	550 21.654	315 12.402	210 8.268	70 2.756	130 5.118	340 13.386	P.48
FT-31S	1,220 48.031	740 29.134	550 21.654	315 12.402	195 7.677	63 2.480	130 5.118	340 13.386	P.48
FT-31W	990 38.976	590 23.228	440 17.323	260 10.236	150 5.906	53 2.087	80 3.150	240 9.449	P.48
FT-40	3,600 141.732 (Note 2)	2,200 86.614	1,700 66.929	1,200 47.244	530 20.866	190 7.480	320 12.598	870 34.252	P.48
FT-42	3,600 141.732 (Note 2)	2,050 80.709	1,600 62.992	1,130 44.488	530 20.866	190 7.480	300 11.811	800 31.496	P.48
FT-42S	3,600 141.732 (Note 2)	2,050 80.709	1,600 62.992	1,130 44.488	530 20.866	190 7.480	300 11.811	800 31.496	P.48
FT-42W	3,300 129.921	1,900 74.803	1,400 55.118	800 31.496	490 19.291	160 6.299	260 10.236	720 28.346	P.48
FT-43	3,600 141.732 (Note 2)	2,800 110.236	2,100 82.677	1,400 55.118	770 30.315	240 9.449	350 13.780	970 38.189	P.48
FT-45X	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,600 62.992 (Note 2)	1,200 47.244	630 24.803	200 7.874	340 13.386	920 36.220	P.49
FT-A11	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,100 43.307	1,900 74.803	3,600 141.732 (Note 2)	P.49
FT-A11W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,300 51.181	1,700 66.929	3,400 133.858	P.49
FT-A32	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,100 82.677	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	P.49
FT-A32W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,000 118.110	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	P.49
FT-AL05	2,300 90.551	1,550 61.024	1,500 59.055	860 33.858	500 19.685	170 6.693	250 9.843	660 25.984	P.49
FT-E13	52 2.047	30 1.181	24 0.945	15 0.591	8 0.315	2 0.079	6 0.236	19 0.748	P.49
FT-E23	270 10.630	160 6.299	125 4.921	75 2.953	42 1.654	13 0.512	22 0.866	80 3.150	P.49
FT-F93	Applicable pipe diameter: Outer dia. ø3 to ø10 mm ø0.118 to ø0.394 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 0.3 to 1 mm 0.012 to 0.039 in] Liquid absent: Beam interrupted, Liquid present: Beam received Compatible amplifier: FX-500 series only								P.49
FT-H13-FM2	3,300 129.921	1,900 74.803	1,300 51.181	700 27.559	410 16.142	140 5.512	250 9.843	700 27.559	P.49
FT-H20-J20-S (Note 3)	1,600 62.992	1,000 39.370	790 31.102	470 18.504	300 11.811	90 3.543	135 5.315	420 16.535	P.50
FT-H20-J30-S (Note 3)	1,600 62.992	1,000 39.370	790 31.102	470 18.504	300 11.811	90 3.543	135 5.315	420 16.535	P.50
FT-H20-J50-S (Note 3)	1,600 62.992	1,000 39.370	790 31.102	470 18.504	300 11.811	90 3.543	135 5.315	420 16.535	P.50
FT-H20-M1	1,600 62.992 (Note 2)	1,300 51.181	960 37.795	540 21.260	330 12.992	110 4.331	210 8.268	540 21.260	P.50
FT-H20-VJ50-S (Note 3)	2,100 82.677	1,300 51.181	980 38.583	600 23.622	390 15.354	120 4.724	150 5.906	500 19.685	P.50
FT-H20-VJ80-S (Note 3)	2,100 82.677	1,300 51.181	980 38.583	600 23.622	390 15.354	120 4.724	150 5.906	500 19.685	P.50
FT-H20W-M1	1,600 62.992 (Note 2)	1,000 39.370	840 33.071	470 18.504	300 11.811	90 3.543	100 3.937	300 11.811	P.50
FT-H30-M1V-S (Note 4)	1,000 39.370	590 23.228	470 18.504	270 10.630	160 6.299	55 2.165	110 4.331	280 11.024	P.50
FT-H35-M2	1,200 47.244	880 34.646	670 26.378	430 16.929	250 9.843	80 3.150	170 6.693	490 19.291	P.50
FT-H35-M2S6	1,200 47.244	880 34.646	670 26.378	430 16.929	250 9.843	80 3.150	170 6.693	490 19.291	P.50
FT-HL80Y	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,300 90.551	740 29.134	990 38.976	2,340 92.126	P.50
FT-KS40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,200 47.244	2,200 86.614	3,600 141.732 (Note 2)	P.51
FT-KV26	2,500 98.425	1,600 62.992	1,200 47.244	710 27.953	440 17.323	160 6.299	135 5.315	560 22.047	P.51
FT-KV40	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	1,200 47.244	2,200 86.614	3,600 141.732 (Note 2)	P.51
FT-KV40W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,100 122.047	940 37.008	2,200 86.614	3,600 141.732 (Note 2)	P.51
FT-L80Y	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	2,800 110.236	920 36.220	1,100 43.307	2,600 102.362	P.51
FT-R31	1,000 39.370	580 22.835	440 17.323	270 10.630	160 6.299	55 2.165	100 3.937	340 13.386	P.51
FT-R40	3,600 141.732 (Note 2)	1,750 68.898	1,500 59.055	930 36.614	500 19.685	160 6.299	270 10.630	740 29.134	P.51
FT-R41W	3,200 125.984	1,800 70.866	1,400 55.118	800 31.496	460 18.110	150 5.906	250 9.843	710 27.953	P.51
FT-R42W	3,600 141.732 (Note 2)	3,600 141.732 (Note 2)	3,500 137.795	2,200 86.614	1,300 51.181	460 18.110	510 20.079	2,000 78.740	P.51

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) Heat-resistant joint fibers and ordinary-temperature fibers (FT-42) are sold as a set.
 4) Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).

Applicable models

■ Thru-beam type

Basic specifications						Applicable fiber length	
Model No.	Fiber cable length ☒ : Free-cut	Protective tube extension length	Sleeve length (mm)	Sensing range (mm) FX-500 series (STD)(Note 1)	Max. (m)	Unit (m)	
FT-140	10 m ☒	—	—	19,600 (Note 2)	30	1	
FT-31	2 m ☒	—	—	315	30	1	
▲ FT-31S	2 m ☒	—	40 (Note 3)	315	30	1	
FT-31W	2 m ☒	—	—	260	20	1	
FT-42	2 m ☒	—	—	1,130	30	1	
▲ FT-42S	2 m ☒	—	40 (Note 3)	1,130	30	1	
FT-42W	2 m ☒	—	—	800	30	1	
FT-43	2 m ☒	—	—	1,400	30	1	
FT-45X	1 m	—	—	1,200	10	0.5	
FT-A11	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-A11W	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-A32	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-A32W	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-AL05	2 m ☒	—	—	860	20	1	
FT-E13	1 m ☒	—	5	15	10	0.5	
FT-E23	1 m ☒	—	5	75	10	0.5	
★ FT-F93	2 m ☒	1 m (Note 4)	—	—	30	1	
FT-H13-FM2	2 m ☒	—	—	700	30	1	
FT-H20-J50-S	500 mm ☒ (Note 5)	—	—	470	6.5	0.1	
FT-H20-M1	1 m	—	—	540	6.5	0.1	
FT-H20-VJ80-S	800 mm ☒ (Note 5)	—	—	600	6.5	0.1	
FT-H20W-M1	1 m	—	—	470	6.5	0.1	
FT-H30-M1V-S	1 m	—	—	270	6.5	0.1	
FT-H35-M2	2 m	—	—	430	6.5	0.1	
FT-H35-M2S6	2 m	—	—	430	6.5	0.1	
★ FT-HL80Y	2 m ☒ (Note 6)	1.5 m (Note 4)	—	3,600 (Note 2)	30	1	
FT-KS40	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-KV26	2 m ☒	—	—	710	10	1	
FT-KV40	2 m ☒	—	—	3,600 (Note 2)	10	1	
FT-KV40W	2 m ☒	—	—	3,600 (Note 2)	10	1	
★ FT-L80Y	2 m ☒ (Note 6)	1.5 m (Note 4)	—	3,600 (Note 2)	30	1	
FT-R31	2 m ☒	—	—	270	30	1	
FT-R43	2 m ☒	—	—	720	30	1	
FT-R40	2 m ☒	—	—	930	30	1	
FT-R41W	2 m ☒	—	—	800	30	1	
FT-R42W	2 m ☒	—	—	2,200	30	1	
FT-R44Y	2 m ☒	—	—	720	30	1	
FT-R60Y	2 m ☒	—	—	2,100	30	1	
FT-S11	500 mm	—	—	90	30	1	
FT-S21	2 m ☒	—	—	315	30	1	
FT-S21W	2 m ☒	—	—	260	20	1	
FT-S31W	2 m ☒	—	—	800	30	1	
FT-S32	2 m ☒	—	—	3,100	30	1	
FT-V23	2 m ☒	—	20	450	30	1	
FT-V24W	2 m ☒	—	15	110	10	1	
FT-V25	2 m ☒	—	15	240	30	1	
FT-V30	2 m ☒	—	20	680	30	1	
FT-V40	2 m ☒	—	—	3,500	30	1	
★ FT-V80Y	2 m ☒ (Note 6)	1.5 m (Note 4)	—	3,600 (Note 2)	30	1	
FT-Z20HBW	1 m ☒	—	—	260	20	1	
FT-Z20W	1 m ☒	—	—	620	20	1	
FT-Z30	2 m ☒	—	—	2,100	30	1	
FT-Z30E	2 m ☒	—	—	3,500	30	1	
FT-Z30EW	2 m ☒	—	—	3,400	20	1	
FT-Z30H	2 m ☒	—	—	3,500	30	1	
FT-Z30HW	2 m ☒	—	—	3,500	20	1	
FT-Z30W	2 m ☒	—	—	1,500	20	1	
FT-Z40HBW	2 m ☒	—	—	800	20	1	
FT-Z40W	2 m ☒	—	—	1,500	20	1	
FT-Z802Y	2 m ☒	—	—	3,100	30	1	

■ Retroreflective type

Basic specifications						Applicable fiber length	
Model No.	Fiber cable length ☒ : Free-cut	Protective tube extension length	Sleeve length (mm)	Sensing range (mm) FX-500 series (STD)(Note 1)	Max. (m)	Unit (m)	
FR-KZ22E	2 m ☒	—	—	15 to 310	10	1	
FR-KZ50E	2 m ☒	—	—	20 to 300	10	1	
FR-KZ50H	2 m ☒	—	—	20 to 300	10	1	
FR-Z50HW	2 m ☒	—	—	100 to 990	30	1	

▲: Models which can have extended sleeve

★: Models which can have extended protective tube (fluorine resin)

☆: Models which can have extended stainless jacket sheath

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20% max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) Applicable sleeve length is from 10 to 120 mm 0.394 to 4.724 in and in units of 10 mm 0.394 in.


4) Applicable protective length is up to 10 m 32.808 ft and in units of 0.5 m 1.640 ft. (however, FD-32GX is in units of 0.1 m 0.328 ft.)

5) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m 6.562 ft (free-cut).

6) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.

■ Reflective type


Basic specifications						Applicable fiber length	
Model No.	Fiber cable length ☒ : Free-cut	Protective tube extension length	Sleeve length (mm)	Sensing range (mm) FX-500 series (STD)(Note 1)	Max. (m)	Unit (m)	
FD-31	2 m ☒	—	—	125	30	1	
FD-31W	2 m ☒	—	—	80	20	1	
FD-32G	2 m ☒	—	—	200	30	1	
☆ FD-32GX	1 m ☒	300 mm (Note 4)	—	200	30	1	
FD-41	2 m ☒	—	—	125	30	1	
▲ FD-41S	2 m ☒	—	40 (Note 3)	125	30	1	
▲ FD-41SW	2 m ☒	—	40 (Note 3)	80	20	1	
FD-41W	2 m ☒	—	—	270	20	1	
FD-42G	2 m ☒	—	—	200	30	1	
FD-42GW	2 m ☒	—	—	150	20	1	
FD-61	2 m ☒	—	—	450	30	1	
FD-61G	2 m ☒	—	—	420	30	1	
▲ FD-61S	2 m ☒	—	40 (Note 3)	420	30	1	
FD-61W	2 m ☒	—	—	270	30	1	
FD-62	2 m ☒	—	—	520	30	1	
FD-64X	1 m	—	—	280	10	0.5	
FD-A16	2 m ☒	—	—	200	30	1	
FD-AL11	2 m ☒	—	—	320	20	1	
FD-E13	1 m	—	3	12	3	0.1	
FD-E23	1 m	—	5	55	3	0.1	
FD-EG30	500 mm	—	—	48	3	0.1	
FD-EG30S	1 m	—	15	50	3	0.1	
FD-EG31	500 mm	—	—	20	3	0.1	
FD-F4	2 m ☒	—	—	—	10	1	
FD-F41	2 m ☒	—	—	—	10	1	
★ FD-F71	5 m ☒	3 m (Note 4)	—	—	20	1	
FD-FA93	2 m ☒	—	—	—	10	1	
FD-H13-FM2	2 m ☒	—	—	350	30	1	
FD-H18-L31	2 m ☒	—	—	16	5	1	
FD-H20-21	1 m	—	—	230	6.5	0.1	
FD-H20-M1	1 m	—	—	330	6.5	0.1	
FD-H25-L43	3 m	—	—	1.5 to 26	6.5	0.1	
FD-H25-L45	3 m	—	—	5 to 42	6.5	0.1	
FD-H30-KZ1V-S	1 m	—	—	20 to 200	6.5	0.1	
FD-H30-L32	2 m	—	—	17	5	1	
FD-H30-L32V-S	3 m	—	—	8	6.5	0.1	
FD-H35-20S	1 m	—	—	260	6.5	0.1	
FD-H35-M2	2 m	—	—	260	6.5	0.1	
FD-H35-M2S6	2 m	—	—	260	6.5	0.1	
FD-L10	2 m ☒	—	—	0 to 5	5	1	
FD-L11	2 m ☒	—	—	0 to 9.5	5	1	
FD-L12W	1 m ☒	—	—	8	5	1	
FD-L20H	2 m ☒	—	—	30	5	1	
FD-L21	2 m ☒	—	—	1.5 to 16	5	1	
FD-L21W	2 m ☒	—	—	3 to 14	5	1	
FD-L22A	2 m ☒	—	—	0 to 24	5	1	
FD-L23	3 m ☒	—	—	0 to 29	5	1	
FD-L30A	3 m ☒	—	—	0 to 43	5	1	
FD-L31A	3 m ☒	—	—	4 to 33	5	1	
FD-L32H	4 m ☒	—	—	0 to 56	5	1	
FD-R31G	2 m ☒	—	—	170	30	1	
FD-R32EG	500 mm	—	—	45	3	0.1	
FD-R33EG	500 mm	—	—	19	3	0.1	
FD-R34EG	500 mm	—	—	38	3	0.1	
FD-R41	2 m ☒	—	—	210	30	1	
FD-R60	2 m ☒	—	—	290	30	1	
FD-R61Y	2 m ☒	—	—	280	30	1	
FD-S21	1 m	—	—	80	20	1	
FD-S31	2 m ☒	—	—	125	30	1	
FD-S32	2 m ☒	—	—	420	30	1	
FD-S32W	2 m ☒	—	—	270	20	1	
FD-S33GW	2 m ☒	—	—	150	20	1	
FD-S60Y	2 m ☒ (Note 6)	1.5 m (Note 4)	—	320	30	1	
FD-V30	2 m ☒	—	15	65	30	1	
FD-V30W	2 m ☒	—	15	20	10	1	
FD-V50	2 m ☒	—	20	120	30	1	
FD-Z20HBW	1 m ☒	—	—	2 to 85	20	1	
FD-Z20W	1 m ☒	—	—	1 to 65	20	1	
FD-Z40HBW	2 m ☒	—	—	260	20	1	
FD-Z40W	2 m ☒	—	—	190	20	1	
FD-Z50HW	2 m ☒	—	—	10 to 650	30	1	

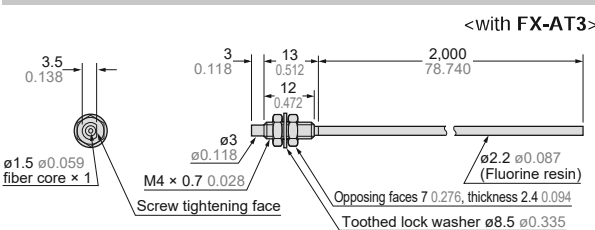

A quality that surpassed that of standard fibers!


New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system.

The basic performance of a standard fiber is greatly enhanced!

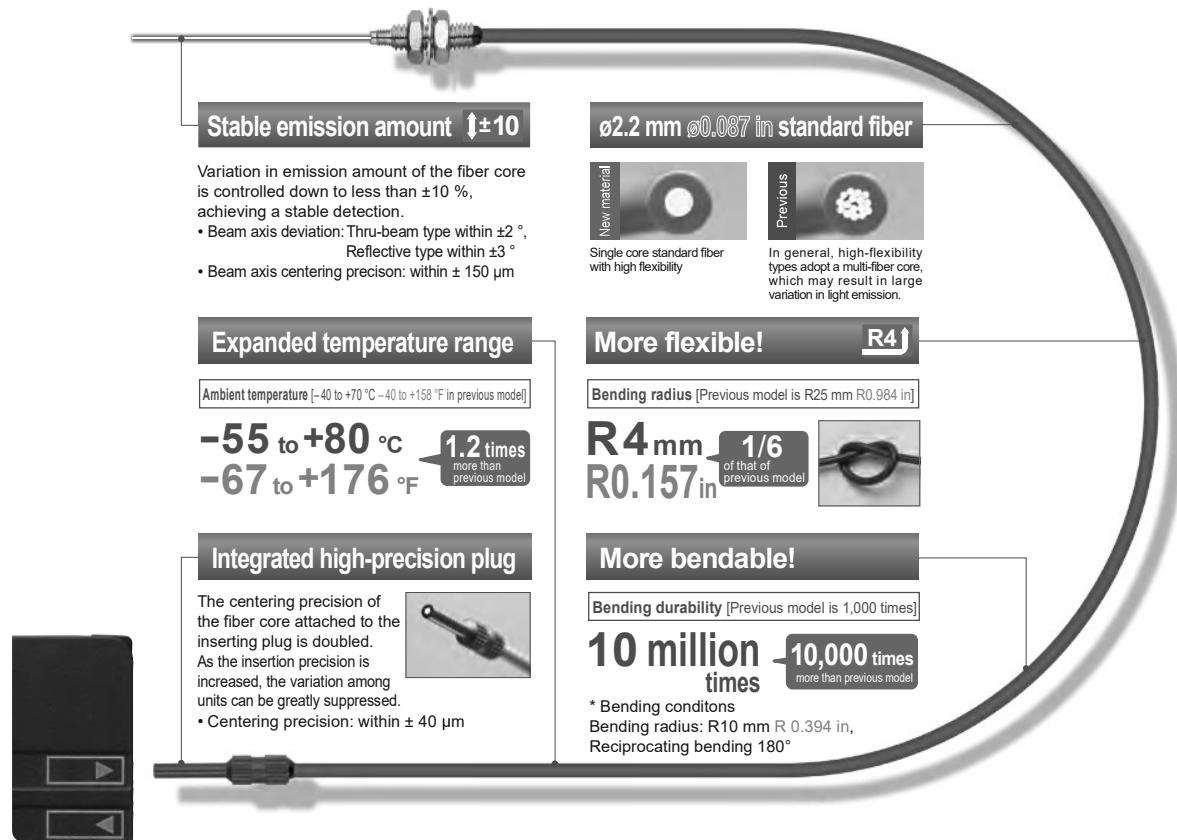

Max. 25 μs response time


FX-500 with its high response time contributes to improve productivity.

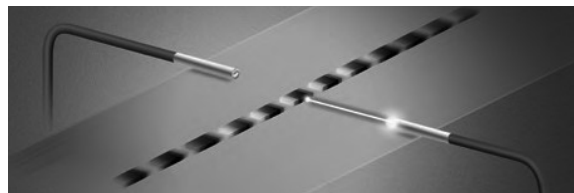

Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.

Hyper HYPR mode incorporated

FX-500 in combination with small diameter fibers which can handle challenging detections, allows long sensing range.

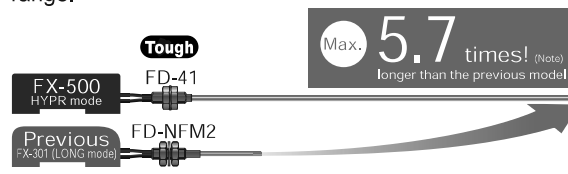


Note: When using FD-NFM2.


So accurate! Sharp detection with suppressed hysteresis

FX-500 with its accurate detection catches fractional differences in light intensity, achieving high precision and solving low-hysteresis applications.

- Long range detection of small objects with small difference in light intensity **H-02 mode**

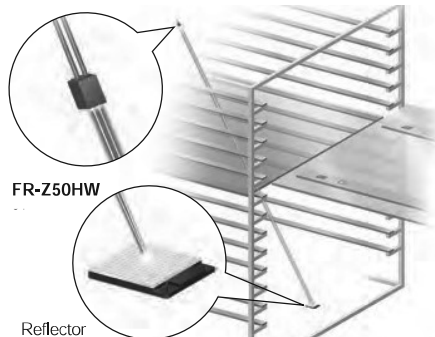

- Highly accurate detection while avoiding saturation **H-01 mode**



New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series


FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.


FT-140 Thru-beam type




FT-30 Thru-beam type




FT-31 Thru-beam type




FT-31S Thru-beam type




FT-31W Thru-beam type




FT-40 Thru-beam type




FT-42 Thru-beam type




FT-42S Thru-beam type




FT-42W Thru-beam type





FT-43 Thru-beam type





FT-45X Thru-beam type



FT-A11 Thru-beam type

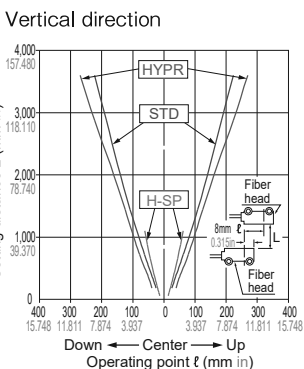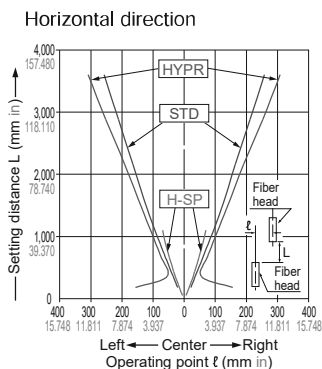

FT-A11W Thru-beam type

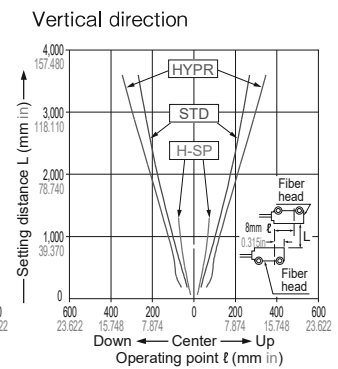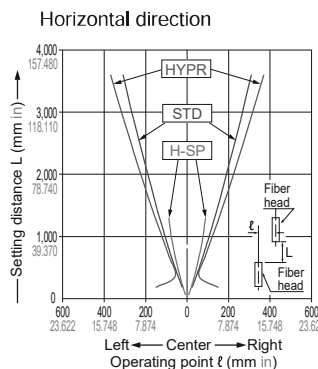

New product
introduction
Tough
Fiber

Fiber
Selection
Guide

Model

Choose
by shape/
application

How to read
Model No.

Earlier models
comparison
table

Fibers

Super
Quality

Threaded
Type

Square Head
Type

Cylindrical
Type

Sleeve

Flat
Type

Small
Spot

Narrow
Beam

Wide
Beam

Convergent
Reflective
Type

Retroreflective
Type

Chemical / Oil-
resistant

Heat-
resistant

Vacuum-
resistant

Liquid Leak /
Liquid Detection

Fiber
Options

Semi-custom
fibers

Fiber
Dimensions

Thru-beam
Type

Retroreflective
Type

Reflective
Type

Others

Amplifiers

FX-500
series


FX-100
series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

FT-31S Thru-beam type


Parallel deviation


FT-31W Thru-beam type


Parallel deviation


FT-42S Thru-beam type


Parallel deviation


FT-42W Thru-beam type


Parallel deviation



FT-43 Thru-beam type

Parallel deviation



FT-45X Thru-beam type

Parallel deviation



FT-A11 Thru-beam type

 Parallel deviation
• Horizontal direction

FT-A11 Thru-beam type


• Vertical direction


FT-S21W Thru-beam type


Parallel deviation


FT-S31W Thru-beam type


Parallel deviation



FD-32G Reflective type

Sensing field



FD-32GX Reflective type


Sensing field


FD-41S Reflective type


 Sensing field
• Horizontal direction

FD-41W Reflective type

• Vertical direction


FD-41W Reflective type

 Sensing field
• Horizontal direction

FD-41W Reflective type

• Vertical direction


 New product
introduction
Tough
Fiber

 Fiber
Selection
Guide

Model

 Choose
by shape/
application

 How to read
Model No.
Earlier models
comparison
table

Fibers

 Super
Quality

 Threaded
Type

 Square Head
Type

 Cylindrical
Type

Sleeve

 Flat
Type

 Small
Spot

 Narrow
Beam

 Wide
Beam

 Convergent
Reflective
Type

 Retroreflective
Type

 Chemical / Oil-
resistant

 Heat-
resistant

 Vacuum-
resistant

 Liquid Leak /
Liquid Detection

 Fiber
Options

 Semi-custom
fibers

 Fiber
Dimensions

 Thru-beam
Type

 Retroreflective
Type

 Reflective
Type

Others

Amplifiers

 FX-500
series

 FX-100
series

INDEX

INDEX

FD-V30	Sleeve Fiber	p.19/p.41/p.64/ p.92
FD-V30W		
FD-V50		p.19/p.41/p.65/ p.92
FD-Z20HBW	Flat Type Fiber	p.21/p.41/p.65/ p.92
FD-Z20W		
FD-Z40HBW		p.21/p.41/p.65/ p.92
FD-Z40W		
FD-Z50HW	Narrow Beam Fiber	p.24/p.41/p.65/ p.92
FDP-1000	Protective Tube (For Reflective Type Fiber)	p.45/p.67
FDP-1500		
FDP-500		
FDP-N1000		
FDP-N1500		
FDP-N500		
FR-KZ22E	Narrow Beam / Retroreflective Type Fiber	p.24/p.27/p.38/ p.55/p.84
FR-KZ50E		
FR-KZ50H		p.24/p.27/p.38/ p.55/p.85
FR-Z50HW		p.24/p.27/p.38/ p.55/p.85
FT-140	Threaded Type Fiber	p.12/p.36/p.48/ p.79
FT-30	Super Quality Fiber	p.11/p.36/p.48/ p.79
FT-31	Threaded Type Fiber	p.12/p.36/p.48/ p.79
FT-31S	Sleeve Fiber	p.19/p.36/p.48/ p.79/p.105
FT-31W	Threaded Type Fiber	p.12/p.36/p.48/ p.79/p.105
FT-40	Super Quality Fiber	p.11/p.36/p.48/ p.79
FT-42	Threaded Type Fiber	p.12/p.31/p.36/ p.48/p.79
FT-42S	Sleeve Fiber	p.19/p.36/p.48/ p.79/p.105
FT-42W	Threaded Type Fiber	p.12/p.36/p.48/ p.79/p.105
FT-43		
FT-45X		p.12/p.36/p.49/ p.79/p.105
FT-A11	Wide Beam Fiber	p.25/p.36/p.49/ p.79/p.105
FT-A11W		p.25/p.36/p.49/ p.79
FT-A32		p.25/p.36/p.49/ p.80
FT-A32W		
FT-AL05		
FT-E13	Cylindrical / Sleeve Fiber	p.16/p.19/p.36/ p.49/p.80
FT-E23		
FT-F93	Liquid Leak / Liquid Detection Fiber	p.35/p.36/p.49

FT-H13-FM2	Heat-resistant Fiber	p.30/p.36/p.50/ p.80
FT-H20-J20		p.31/p.44
FT-H20-J20-S		p.30/p.36/p.50/ p.80
FT-H20-J30		p.31/p.44
FT-H20-J30-S		p.30/p.36/p.50/ p.80
FT-H20-J50		p.31/p.44
FT-H20-J50-S		p.30/p.36/p.50/ p.80
FT-H20-M1		p.31/p.44
FT-H20-VJ50		p.30/p.36/p.50/ p.80
FT-H20-VJ50-S		p.31/p.44
FT-H20-VJ80		p.30/p.36/p.50/ p.80
FT-H20-VJ80-S		p.33/p.44
FT-H30-M1V	Vacuum-resistant Fiber	p.32/p.36/p.50/ p.80
FT-H30-M1V-S		
FT-H35-M2	Heat-resistant Fiber	p.30/p.36/p.50/ p.81
FT-H35-M2S6		
FT-HL80Y	Chemical / Oil-resistant Fiber	p.29/p.36/p.50/ p.81
FT-J8	Fiber for Atmospheric Side	p.33/p.44/p.66
FT-KS40	Narrow Beam Fiber	p.24/p.36/p.51/ p.81
FT-KV26		
FT-KV40		
FT-KV40W		
FT-L80Y	Chemical / Oil-resistant Fiber	p.29/p.36/p.51/ p.81
FT-R31	Square Head Type Fiber	p.15/p.36/p.51
FT-R40	Threaded Type Fiber	p.12/p.36/p.51/ p.81
FT-R41W	Square Head Type Fiber	p.14/p.15/p.36/ p.51/p.81
FT-R42W		
FT-R43		p.15/p.37/p.51
FT-R44Y	Square Head / Chemical / Oil-resistant Fiber	p.15/p.29/p.37/ p.52/p.82
FT-R60Y	Cylindrical Fiber	p.16/p.37/p.52/ p.82
FT-S11	Super Quality Fiber	p.11/p.37/p.52/ p.82
FT-S20	Cylindrical Fiber	p.16/p.37/p.52/ p.82
FT-S21		
FT-S21W		p.16/p.37/p.52/ p.82/p.105
FT-S30	Super Quality Fiber	p.11/p.37/p.52/ p.82
FT-S31W	Cylindrical Fiber	p.16/p.37/p.52/ p.82/p.105
FT-S32		p.16/p.37/p.52/ p.82
FT-V23	Sleeve Fiber	p.19/p.37/p.52/ p.82
FT-V24W		p.19/p.37/p.53/ p.82
FT-V25		p.19/p.37/p.53/ p.83
FT-V30		
FT-V40	Cylindrical Fiber	p.16/p.37/p.53/ p.83
FT-V80Y	Chemical / Oil-resistant Fiber	p.29/p.37/p.53/ p.83

New product
introductionTough
FiberFiber
Selection
Guide

Model

Choose
by shape/
applicationHow to read
Model No.
Earlier models
comparison
table

Fibers

Super
QualityThreaded
TypeSquare Head
TypeCylindrical
Type

Sleeve

Flat
TypeSmall
SpotNarrow
BeamWide
BeamConvergent
Reflective
TypeRetroreflective
TypeChemical / Oil-
resistantHeat-
resistantVacuum-
resistantLiquid Leak /
Liquid DetectionFiber
OptionsSemi-custom
fibersFiber
DimensionsThru-beam
TypeRetroreflective
TypeReflective
Type

Others

Amplifiers

FX-500
seriesFX-100
series

INDEX