

PART NAME: STANDOFF

SCALE: 4:1

DATE: 10/12/16

DR. BY: JAM






P/N:

SH1000

THIS DRAWING IS THE PROPERTY OF DAVIES MOLDING COMPANY, IS SUBMITTED SOLELY AS A DESIGN OR ENGINEERING PROJECT
WE ACCEPT NO RESPONSIBILITY WHATSOEVER FOR THE PRACTICAL APPLICATION OF THE PIECES MADE TO THIS DESIGN.

DAVIES PART #	THREAD	A	B	C	D
SH1000-A	M3	8	10	2.5	7.75
SH1000-B	M3	8	12	2.5	7.75
SH1000-C	M3	8	15	4.5	7.75
SH1000-D	M3	8	20	4.5	7.75
SH1000-E	M3	8	25	4.5	7.75
SH1000-F	M3	8	30	7.5	7.75
SH1000-G	M3	8	35	7.5	7.75
SH1000-H	M3	8	40	7.5	7.75
SH1000-J	M3	8	45	7.5	7.75
SH1000-K	M3	8	50	7.5	7.75
SH1000-L	M3	8	55	7.5	7.75
SH1000-M	M3	8	60	7.5	7.75
SH1000-N	M3	8	65	7.5	7.75
SH1000-P	M3	8	70	7.5	7.75
SH1000-Q	M3	8	75	7.5	7.75
SH1000-R	M3	8	80	7.5	7.75
SH1000-S	M3	8	85	7.5	7.75
SH1000-T	M3	8	60	7.5	4.5

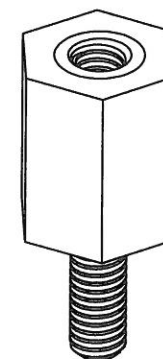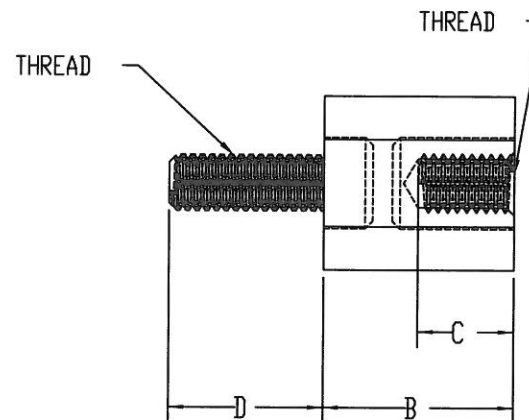

NOTES:

1. OPERATING TEMPERATURE: 125 ° C
2. INSULATION RESISTANCE: 10000 MOHM @500 V DC
3. DIELECTRIC STRENGTH: 11 KV DC

MATERIAL: NYLON
COLOR: BLACK

STUD: STEEL
INTERNAL INSERT: BRASS

A	UPDATED TABLE	JAM	8/24/18
CHANGES			