

MICRO SWITCH
a Honeywell Division



FED. WFO. CODE 81929

SWITCH - ENCLOSED

CATALOG LISTING

ML-1282

CIRCUIT DIAGRAM

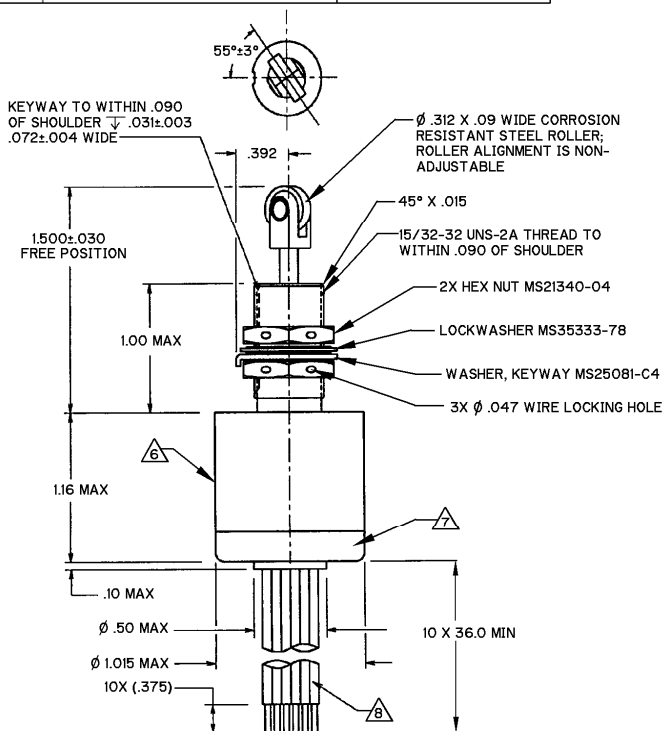

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE - - - - - 3 ± 1 LBS		CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE - - - - - 7 LBS MAX		3X SPDT	
RELEASE FORCE - - - - - .5 LBS MIN		28 VDC	
PRETRAVEL - - - - - .040 MAX		SEA LEVEL	
DIFFERENTIAL TRAVEL - - - - - .020 MAX		50,000 FT	
OVERTRAVEL - - - - - .125 MIN		RESISTIVE	
		INDUCTIVE	
		MOTOR	

NOTES

- 1 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 2 - CORROSION RESISTANT STEEL ENCLOSURE, PLUNGER & ROLLER
- 3 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3
- 4 - BASIC SWITCHES HAVE SOLID GOLD CONTACT MATERIAL
- 5 - SWITCH CURRENT LEVELS SHALL NOT BE MORE THAN 100 MILLIAMPS AT 28 VDC
- 6 - PRINT CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE AND 1534AS392-1 ON NAMEPLATE
- 7 - PLASTIC MATERIAL(S) SHALL CONFORM TO MIL-M-14 OR MIL-M-24519
- 8 - 10X MIL-W-22759/11-22-9 WIRE LEAD MARKED WITH CIRCUIT IDENTIFICATION PER MIL-W-5088