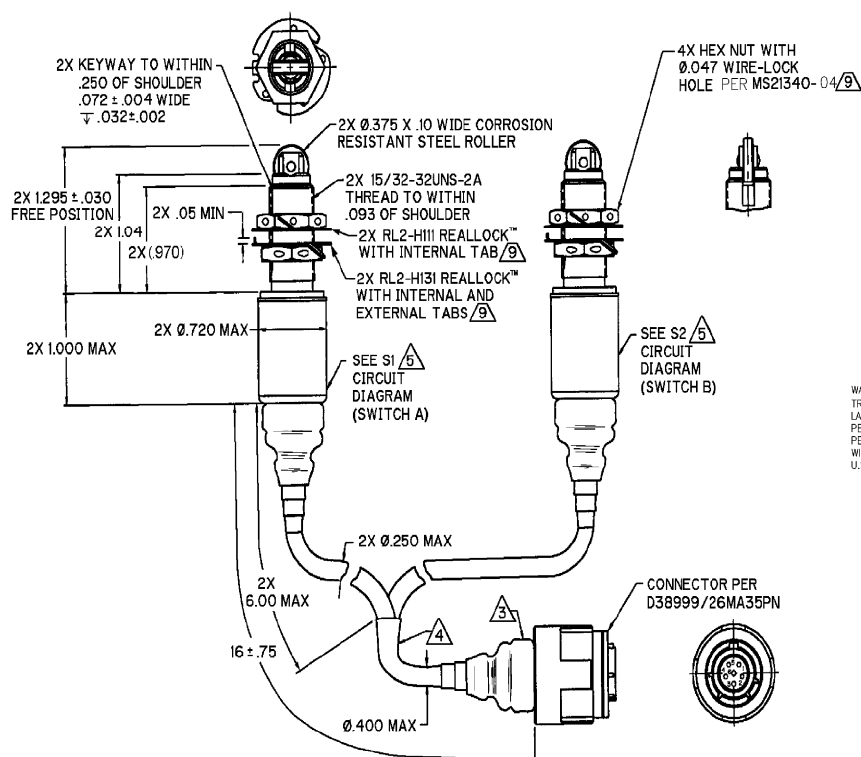


WARNING- THIS PRODUCT IS SUBJECT TO THE U.S. INTERNATIONAL TRAFFIC IN ARMS REGULATIONS (ITAR), AND THE EXPORT CONTROL LAWS OF THE UNITED STATES. TRANSFER OF TECHNICAL DATA PERTAINING TO THIS PRODUCT BY ANY MEANS TO A FOREIGN PERSON PER ITAR DEFINITIONS, WHETHER IN THE UNITED STATES OR ABROAD, WITHOUT A PRIOR EXPORT LICENSE OR OTHER APPROVAL FROM THE U.S. DEPARTMENT OF STATE, IS PROHIBITED.

NOTES

1. GOLD CONTACT BASIC SWITCHES
2. CHARACTERISTICS APPLY TO BOTH SWITCH ASSEMBLIES S1 AND S2
3. STRESS RELIEF PER MS 23053/4 CLASS III
4. HEAT SHRINK PER MS23053/4 CLASS II
5. PRINT CIRCUIT DIAGRAM, CATALOG LISTING AND DATE CODE ON NAMEPLATE
- 6 - CORROSION RESISTANT STEEL ENCLOSURE, ROLLER AND ROLLER GUIDE
- 7 - SWITCH ASSEMBLIES SEALED PER MIL-PRF-8805 SYMBOL 4
- 8 - TEMPERATURE RANGE: -65° TO 260° F
9. HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
10. ORIGINAL DESIGN ACTIVITY CAGE CODE 60198

SAINT SWITCH INC
ST. CHARLES, ILL. 60174
(DESIGN AND PRODUCTION RIGHTS OF THIS PRODUCT PURCHASED BY
HONEYWELL AS OF JUNE 1999)