

Specifications

Electrical Ratings	Evaluated to UL 61058-1	1/2 hp @ 125VAC/250VAC; T120 10.1A @ 277VAC resistive; T120 10.1A @ 125VAC inductive; T120	Contact Resistance	≤ 20mΩ initial
	Evaluated to UL 1054	16A @ 125VAC/250VAC resistive; T120 6A @ 125VAC/250VAC general purpose; T120 5A @ 125VAC inductive; T120	Actuation Force	500 ± 100gF
Electrical Life	100,000 cycles average		Actuation Travel	3.2 ± .25mm
			Dielectric Strength	2,000Vrms min @ sea level contact to contact 2,000Vrms min @ sea level to LED
			Insulation Resistance	≥ 1,000MΩ min @ 500VDC
			Sealing Degree	IP65
			Operating Temperature	-40°C to 85°C
			Storage Temperature	-40°C to 85°C

Materials

Actuator	Stainless Steel, Anodized Aluminum
LED Lens	Polycarbonate (PC)
Threaded Housing	Stainless Steel, Anodized Aluminum
Terminal Support	Polybutylene Terephthalate (PBT)
Snap Action Switch Base / Cover	Polybutylene Terephthalate (PBT), UL94-V0
Snap Action Switch Pin Plunger	Polybutylene Terephthalate (PBT), UL94-V0
Snap Action Switch Contacts	Silver Alloy
Snap Action Switch Terminals	Silver plated Copper Alloy
Snap Action Switch Support Frame	POM
Hardware	One Hex Nut & one "O" Ring supplied

Combining the LED illumination and metal body of the DH Series switch with the UL recognized switching capability of the VM3 Series snap-action switch.


DHU

UL Approved Illuminated Pushbutton


Ordering Information

1. Series	DHU25	1		N	B	S	R	G	12	B
DHU25 DHU28 DHU30										
2. Number of Poles 1 = SPDT										
3. Bezel Style Blank = Standard Bezel H = Straight Bezel										
4. Latching Option N = Momentary L = Latching										
5. Actuator Style: A = Flush actuator, non-illuminated B = Flush actuator, ring illuminated C = Flush actuator, dot illuminated G = Flush actuator, Int'l standby symbol illuminated only available with DHU25 MR = Mushroom actuator, red anodized aluminum only available with DHU25 momentary										
6. Switch Finish S = Brushed Stainless Steel B = Black Anodized Aluminum G = Green Anodized Aluminum R = Red Anodized Aluminum U = Blue Anodized Aluminum Y = Yellow Anodized Aluminum										
7. First LED Color Z = No LED R = Red Y = Yellow G = Green B = Blue W = White O = Orange										
8. Second LED Color Z = No LED R = Red Y = Yellow G = Green B = Blue W = White O = Orange										
9. LED Voltage Z = No LED 24 = 24V 6 = 6V 110 = 110V 12 = 12V 220 = 220V N = No internal resistor in series with the LED										
10. Terminal Option A = .187" Quick Connect Switch Terminals and .110" Quick Connect LED Terminals B = .250" Quick Connect Switch Terminals and .110" Quick Connect LED Terminals										


Dimensions - 25mm, Momentary

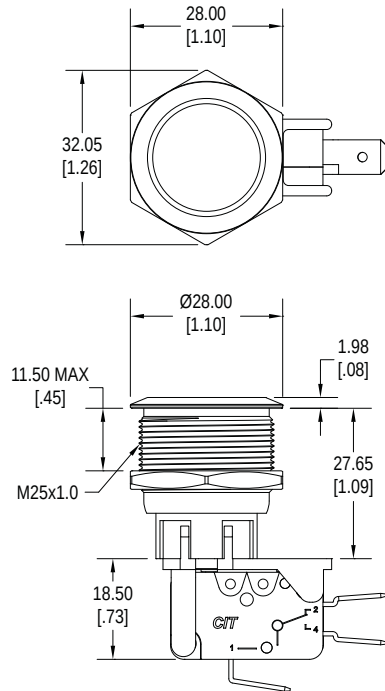


A - Flush, Non-Illuminated

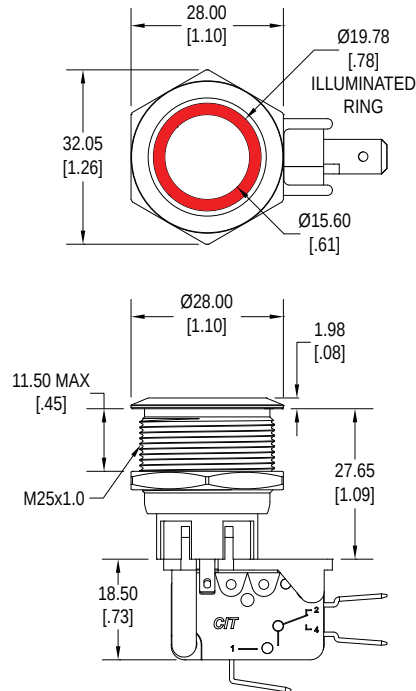


B - Flush, Ring Illuminated

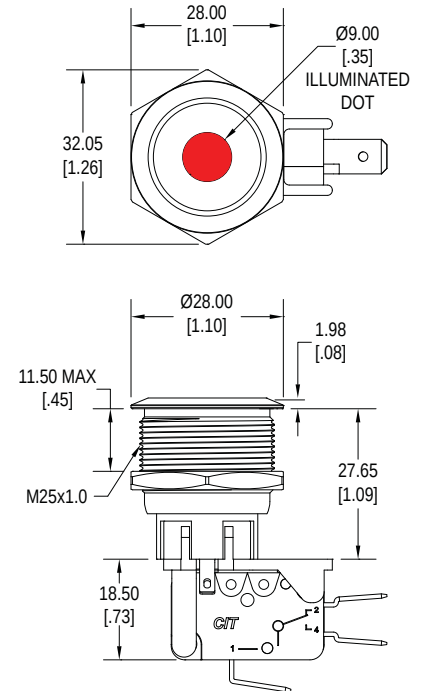

C - Flush, Dot Illuminated

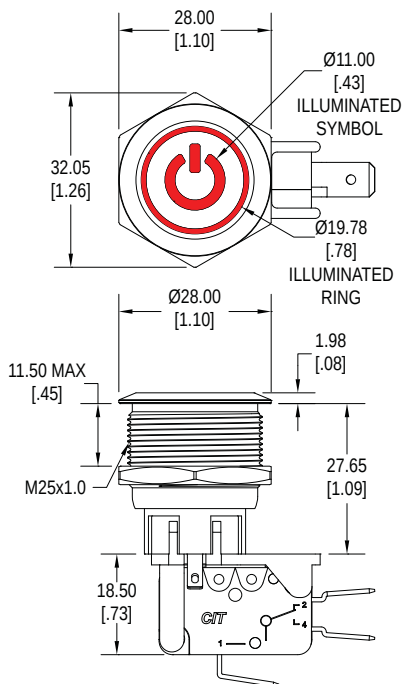

G - Flush, In'tl Standby Symbol

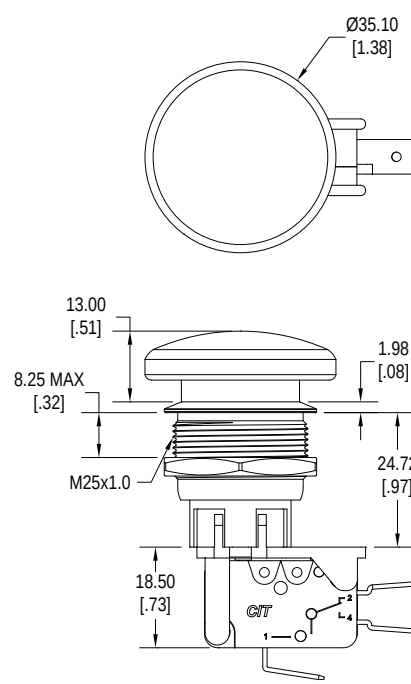


MR - Mushroom Actuator


DHU

UL Approved Illuminated Pushbutton


Dimensions - 25mm, Latching

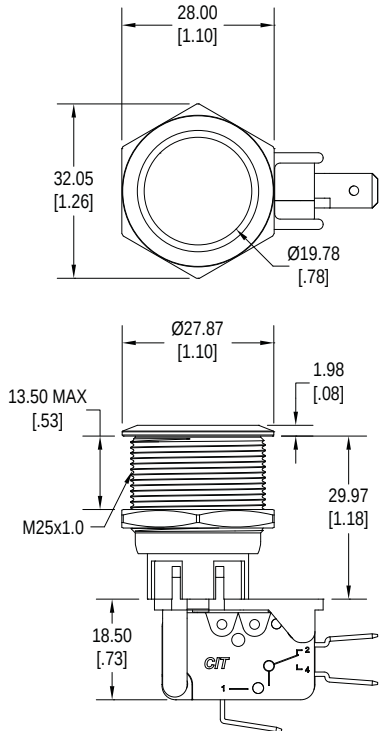


A - Flush, Non-Illuminated

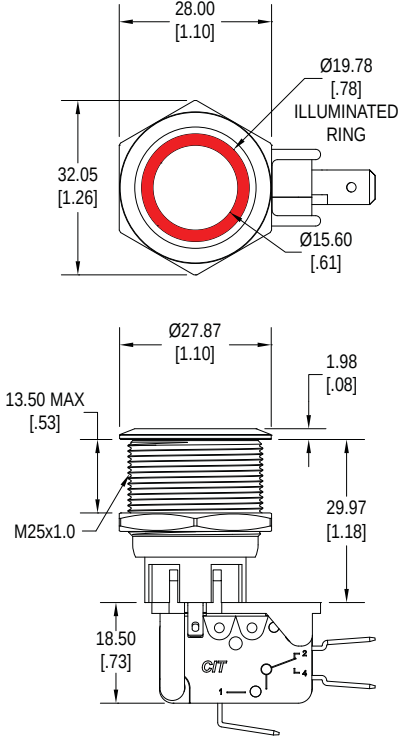

B - Flush, Ring Illuminated

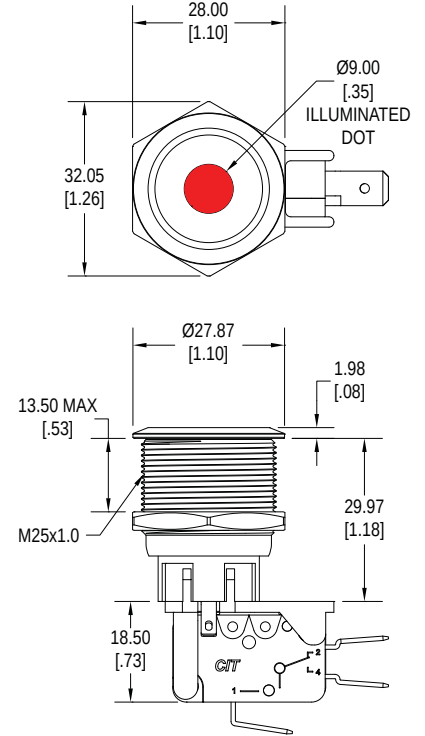


C - Flush, Dot Illuminated

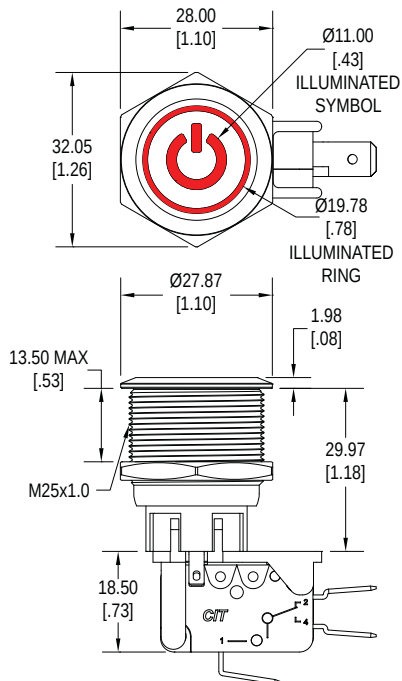


G - Flush, In'tl Standby Symbol


Dimensions - 28mm, Momentary

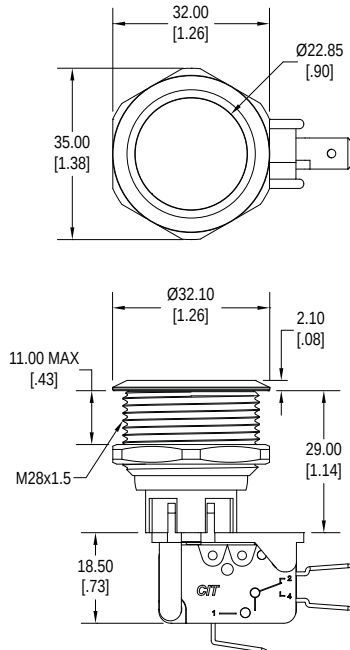

A - Flush, Non-Illuminated

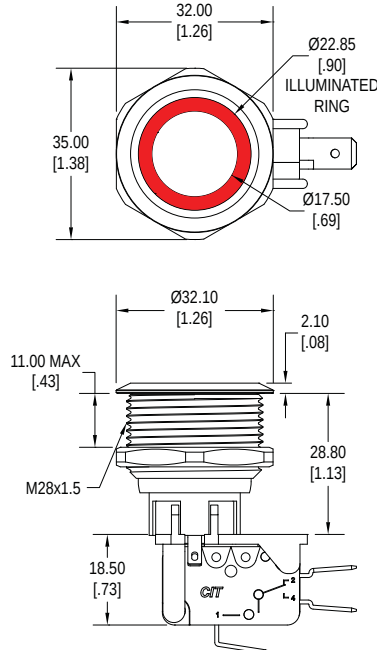


B - Flush, Ring Illuminated

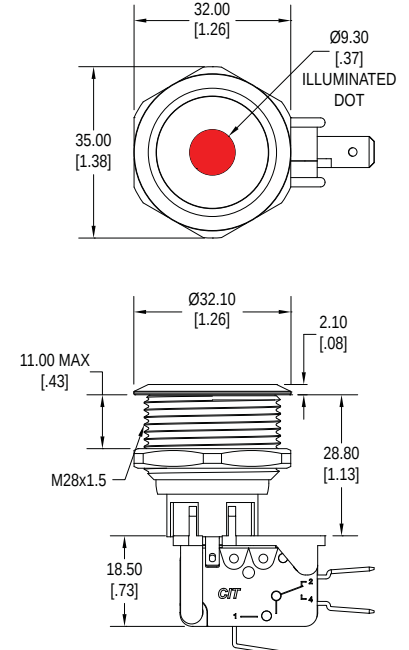


C - Flush, Dot Illuminated


Dimensions - 28mm, Latching

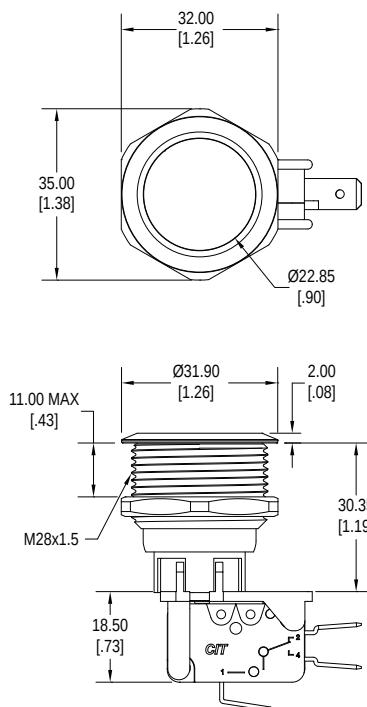

A - Flush, Non-Illuminated

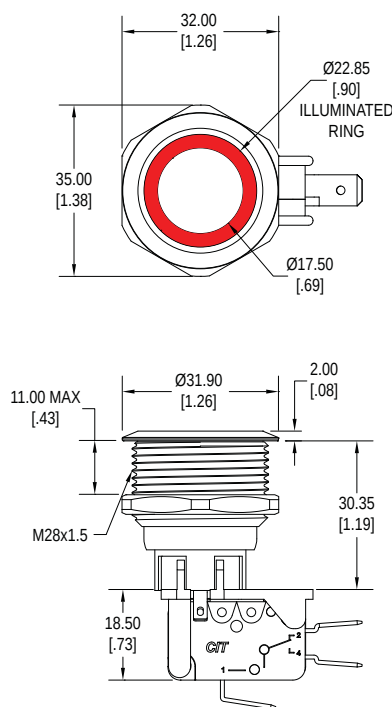

B - Flush, Ring Illuminated

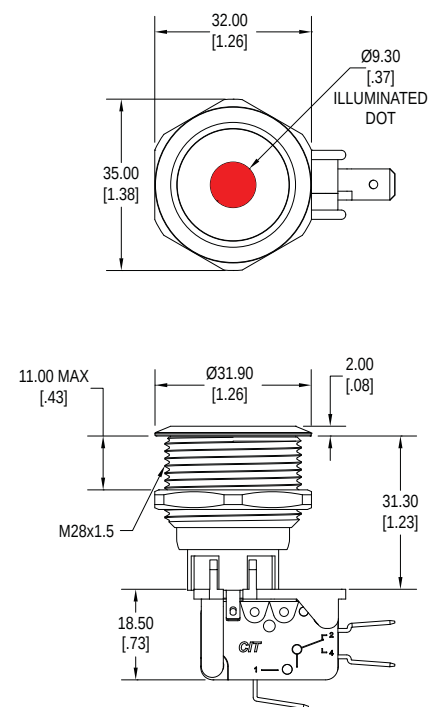


C - Flush, Dot Illuminated


DHU

UL Approved Illuminated Pushbutton


Dimensions - 30mm, Momentary

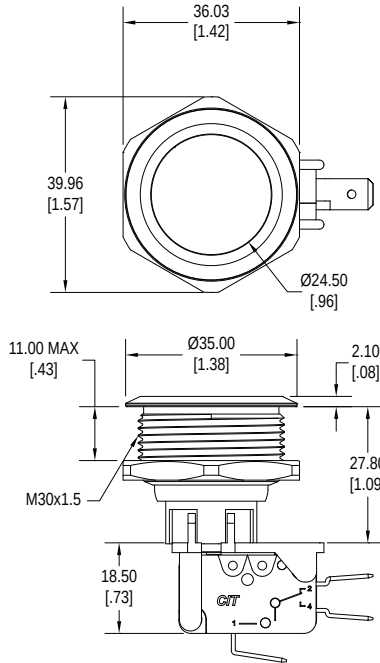

A - Flush, Non-Illuminated

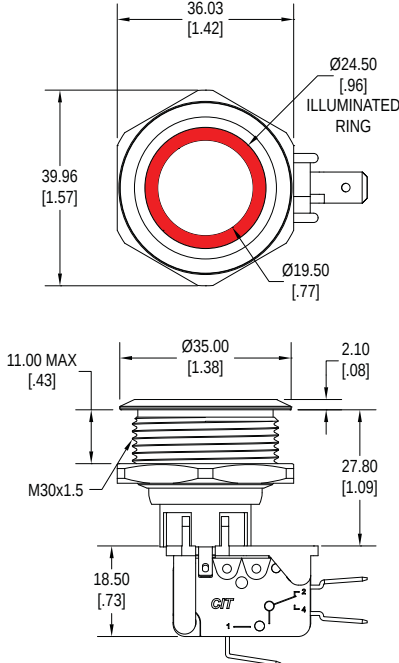


B - Flush, Ring Illuminated

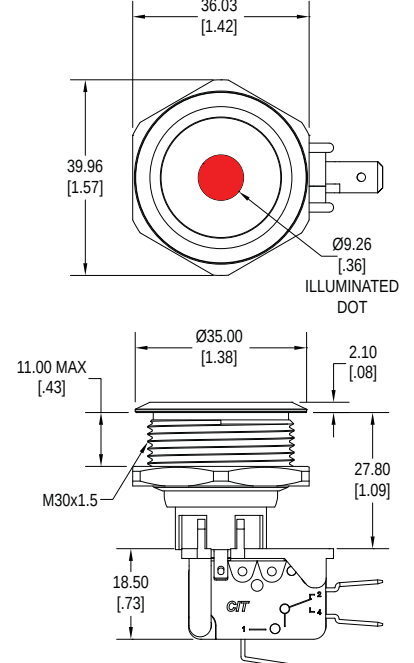


C - Flush, Dot Illuminated


Dimensions - 30mm, Latching

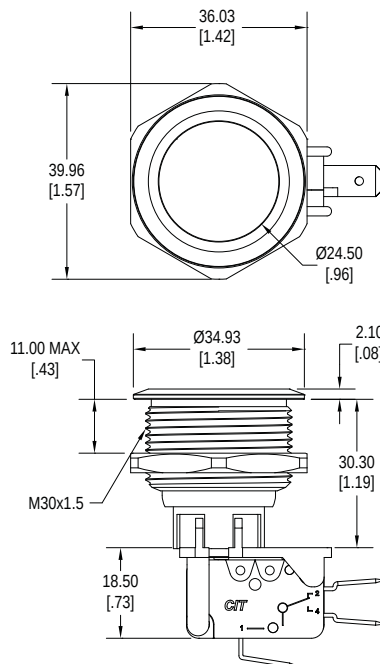

A - Flush, Non-Illuminated

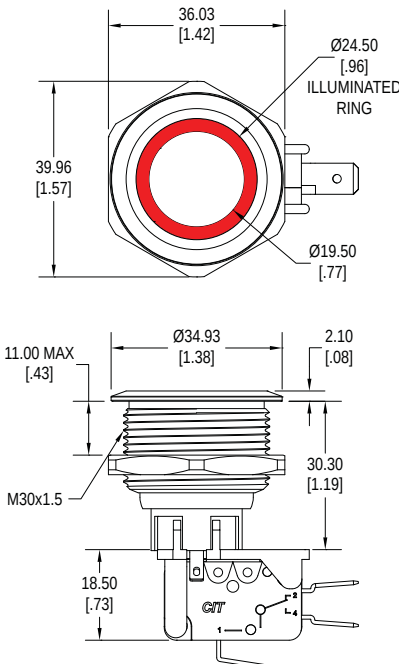



B - Flush, Ring Illuminated

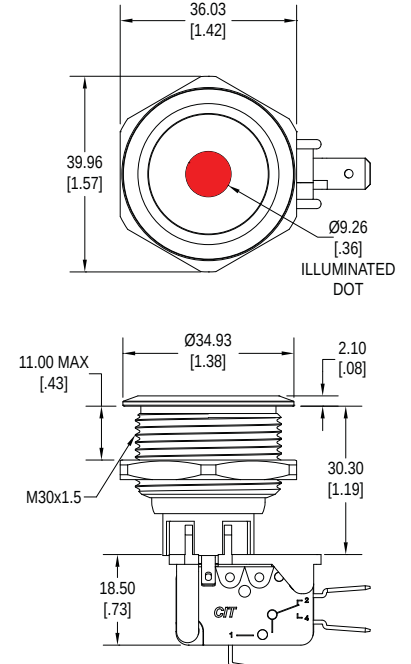



C - Flush, Dot Illuminated

Schematic & Panel Cut-Out



25mm

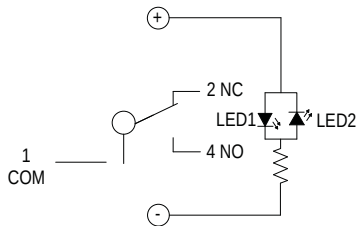

28mm

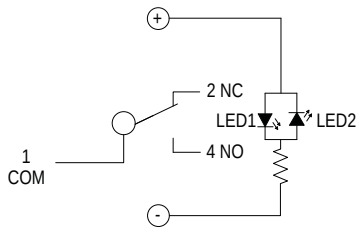

30mm

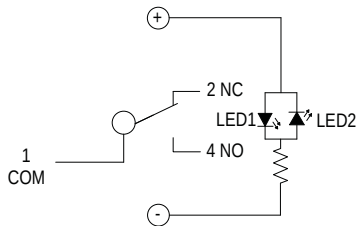


DHU


UL Approved Illuminated Pushbutton

Bezel Detail

25mm




Standard




Straight

28mm

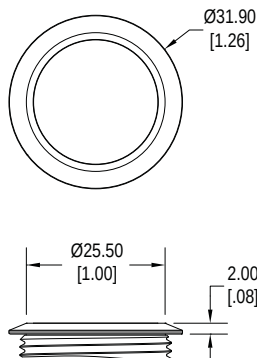


Standard

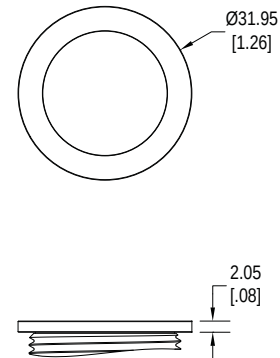


Straight

30mm

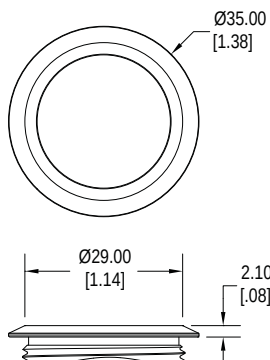


Standard

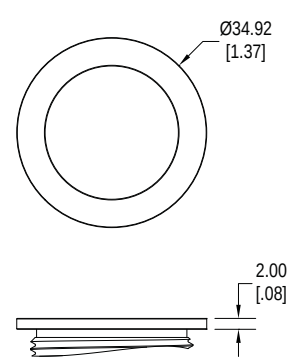

Straight


Terminal Detail

25mm

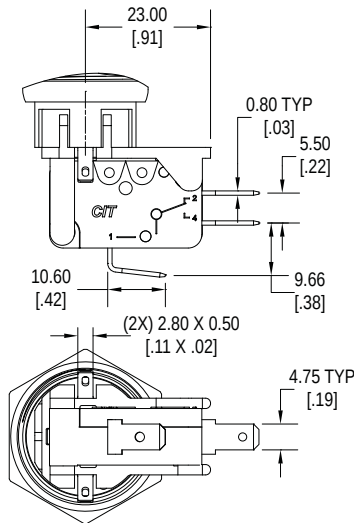

A = .187"


utilizing part number VM3CQF1802L00

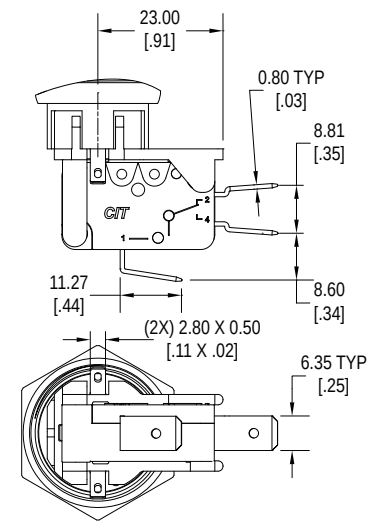

B = .250"


utilizing part number VM3CQF1801L00

28mm

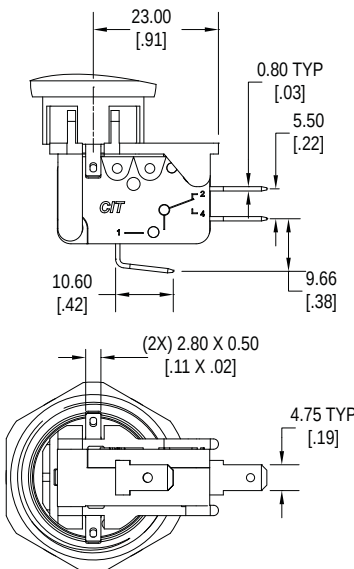

A = .187"

utilizing part number VM3CQF1802L00

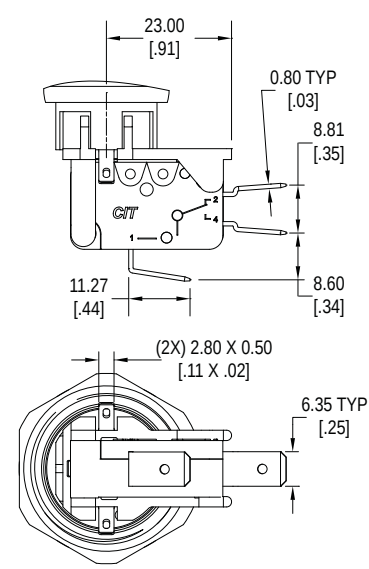

B = .250"


utilizing part number VM3CQF1801L00

DHU

UL Approved Illuminated Pushbutton


Terminal Detail - continued

30mm

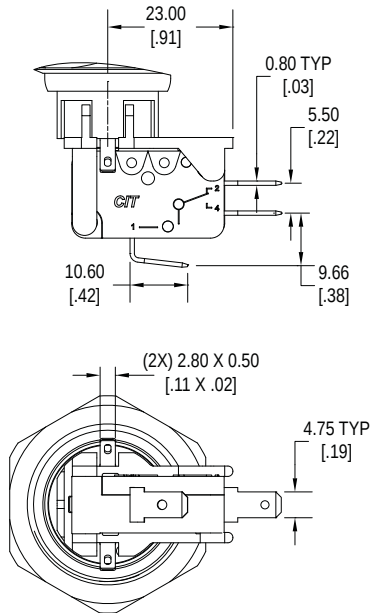

A = .187"

utilizing part number VM3CQF1802L00

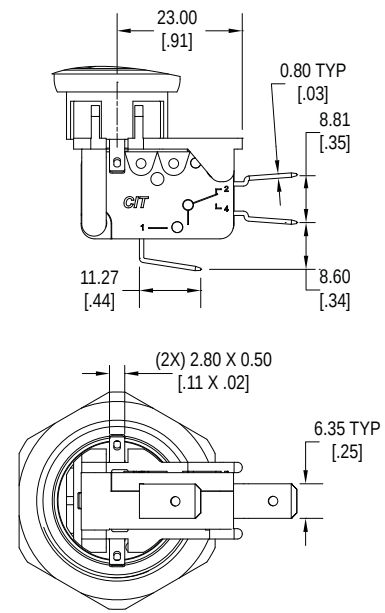

B = .250"

utilizing part number VM3CQF1801L00

LED Characteristics

LED Ratings		Color						
		R	Y	G	B	O	W	Units
Reverse Voltage	V _R	5	5	5	5	5	5	V
Forward Current (peak)	I _{FS}	120	120	160	160	120	160	mA
Reverse Current V _R = 5V	I _R	10	10	10	10	10	10	μA
Power Dissipation	P _T	80	80	120	120	80	120	mW
Forward Voltage (typ) I _F = 20mA	V _F	2.1	2.1	3.3	3.3	2.0	3.0	V
Luminous Intensity, I _F = 20mA	LI	120	120	170	100	120	700	mcd



Features

- ♦ Fits standard size electrical boxes
- ♦ Multiple size options
- ♦ 2 finish options
- ♦ Laser etching available

Ordering Information

1. Series	WP	B	22	A	X
WP					
2. Size:					
A = 40mm x 115mm					
B = 70mm x 115mm					
C = 86mm x 86mm					
3. Hole Size:					
25 = 25mm diameter					
28 = 28mm diameter					
30 = 30mm diameter					
4. Material					
A = Brushed aluminum					
Y = Brushed aluminum, yellow anodized					
5. Laser Etching Symbol:					
Contact Factory with artwork					

Dimensions

