

Specifications




Electrical Ratings	200mA @ 30VDC
Electrical Life	10,000 cycles typical
Contact Resistance	<50mΩ initial
Actuation Force	200 ± 100gF
Actuation Travel	4.0mm total

Dielectric Strength	1000Vrms min
Insulation Resistance	>100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C

Materials

Actuator	6/6 Nylon
Housing	Steel
Base	Phenolic
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated

Dimensions

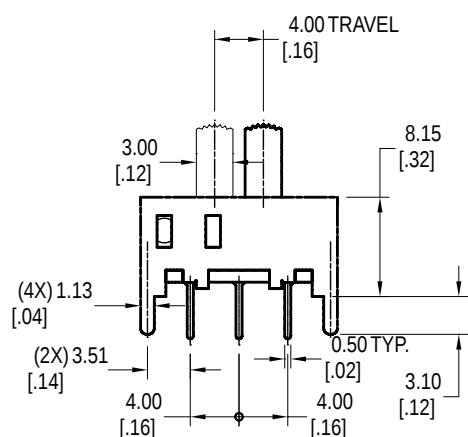

1. Series	MS2201	L3
	MS2201	
2. Actuator Length		
	L3 = 3mm	
	L4.5 = 4.5mm	
	L6 = 6mm	
	L9 = 9mm	
	L12 = 12mm	

Schematic & PC Layout

