



001-0009

Dipole Antenna
2400-2500 MHz/4910-5850 MHz

ELECTRICAL SPECIFICATION

Model Name	001-0009	
Operating Frequency (MHz)	2400-2500	5150-5850
VSWR - max	$\leq 2.0:1$	
Gain (dBi)	2.0	2.0
Nominal Impedance (Ohms)	50	
Polarization	Linear vertical	

MECHANICAL SPECIFICATION

Dimensions - mm (inches)	137 x 13 (5.4 x 0.51)
Weight - g (oz.)	22.0 (0.78)
Radome Material	Black


ENVIRONMENTAL SPECIFICATION

Operating Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
UL Rating	UL 94HB


CONFIGURATION

PART NUMBER	DESCRIPTION
001-0009	2.4/5.5 GHz dipole antenna for Reverse Polarity SMA connector
080-0001	U.FL to Reverse Polarity SMA cable, 105 mm


MECHANICAL DRAWING

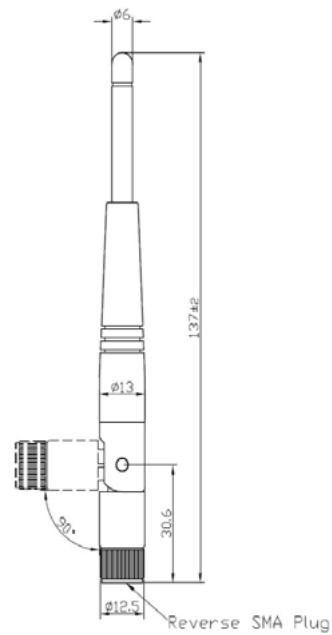

TYPICAL ANTENNA REFLECTION PERFORMANCE

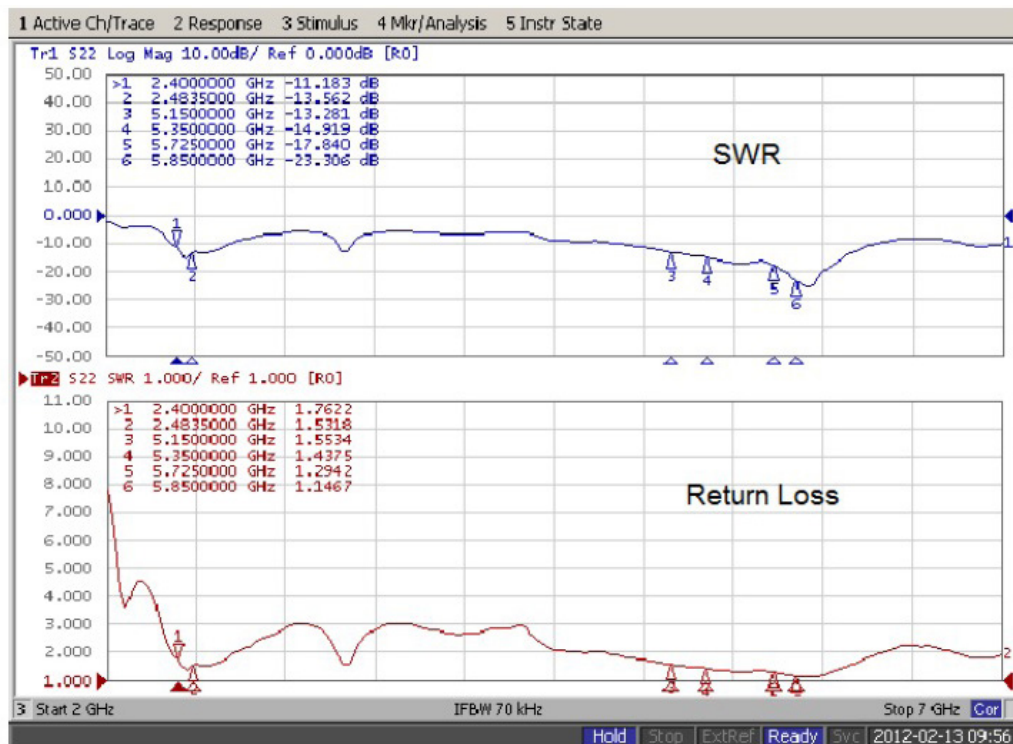

RADIATION PATTERNS

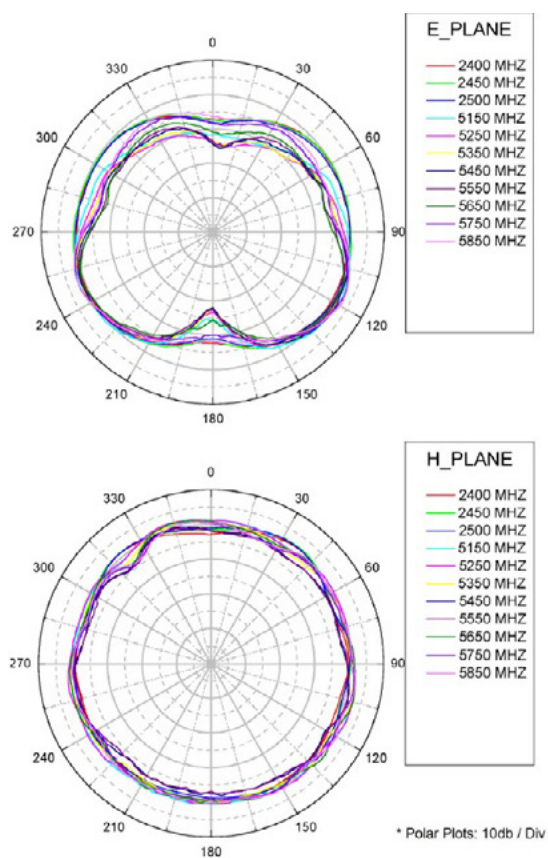

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original