




Series: Shadow

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW



#### Features:

- SLPT in Black and White
- Short, slim profile without sacrificing RF or mechanical performance
- Direct and NMO mount models
- IP67 Weatherproof

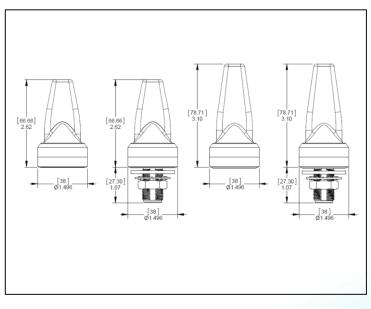

#### **Applications:**

- Models supporting :
  - Public Safety, LMR
  - Wi-Fi,
  - 3G/4G LTE,
  - ISM
  - DSRC
- Bus/Rail/Transit
- IoT Vending, metering and other industrial applications
- Outdoor Vehicular

All dimensions are in mm / inches

Issue: 1745

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

### This document covers all product variants of the following product family:

Project	Color	Frequency	Size	Fixing System Connector	
SLPT698/2170NMOHFW	White	698-960MHz	78.71] 3.10 [38] \$\phi_{1.496}\$	NMOHF NMO + HF Connector	
SLPT698/2170NMOHF	Black	1710-2700MHz			
SLPT698/960NMOW	White	COO OCONALI-			
SLPT698/960NMO	Black	698-960MHz			
SLPT806NMOW	White	806-960MHz			
SLPT806NMO	Black			NMO + Pogo Pin Connector	
SLPT698/869DMNW	White	698-869MHz	[78.71] 3.10 [27.30] 1.07 [38] Ø1.496		
SLPT698/869DMN	Black	098-809IVID2			
SLPT806DMNW	White	OOC OCONALI-			
SLPT806DMN	Black	806-960MHz			
SLPT698/2170DMNW	White	698-960MHz		Direct Mount N Female Connector	
SLPT698/2170DMN	Black	1710-2700MHz		(Screw 5/8-24 UNEF 2A)	

Issue: 1745







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### This document covers all product variants of the following product family:

Project	Color	Frequency	Size	Fixing System Connector	
SLPT2400NMOHFW	White	2400-2500MHz	1		
SLPT2400NMOHF	Black	2400-2500IVIH2	[66.66] 2.62		
SLPT4900NMOHFW	White	4000 60000411-			
SLPT4900NMOHF	Black	4900-6000MHz			
SLPT245NMOHFW	White	2400-2500MHz	1201	NMOHF	
SLPT2400/5900NMOHF	Black	4900-6000MHz	[38] Ø1.496	NMO + HF Connector	
SLPT2400DMNW	White	2400 25000411-	[66.66] 2.62 [27.30]		
SLPT2400DMN	Black	2400-2500MHz			
SLPT4900DMNW	White	4900-6000MHz			
SLPT4900DMN	Black	4900-6000IVIH2			
SLPT2400/5900DMNW	White	2400-2500MHz		Direct Mount N Female Connector	
SLPT2400/5900DMN	Black	4900-6000MHz	[38] $\phi_{1.496}$	(Screw 5/8-24 UNEF 2A)	

P.S.: For DMN fixing system, it requires a 5/8" (16mm) hole in the mounting surface.

Remove any burrs, particularly on the Roof under side of the hole. Remove paint in a narrow ring around the hole. Metal-to-metal contact between the mounting surface and mount is essential for best performance.





**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

Series: Shadow
PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **ELECTRICAL SPECIFICATIONS**

Project	Frequency	VSWR	Peak Gain	Efficiency	
SLPT698/2170NMOHFW	698-960MHz	3.2:1(0.698-0.96GHz) 2:1(1.71-2.5GHz)	3.52dBi(0.698-0.96GHz)	72%	
SLPT698/2170NMOHF	1710-2700MHz	2.2:1(2.5-2.7GHz)	4.95dBi(1.71-2.69GHz)	71%	
SLPT698/960NMOW	698-960MHz	2.1	3.29dBi	68%	
SLPT698/960NMO	698-960IVIHZ	2:1	3.23451	08%	
SLPT806NMOW	806-960MHz	2:1	3.18dBi	67%	
SLPT806NMO	800-900WI112	2.1	3.10001	07/8	
SLPT698/869DMNW	698-869MHz	2:1	3.26dBi	72%	
SLPT698/869DMN	030 003111112				
SLPT806DMNW	806-960MHz	2:1	3.05dBi	70%	
SLPT806DMN	000-300WH2	2.1	3.03001	7070	
SLPT698/2170DMNW	698-960MHz	3.2:1(0.698-0.96GHz)	3.51dBi(0.698-0.96GHz)	76%	
SLPT698/2170DMN	1710-2700MHz	2:1(1.71-2.5GHz) 2.2:1(2.5-2.7GHz)	4.81dBi(1.71-2.69GHz)	67%	

Issue: 1745





**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **ELECTRICAL SPECIFICATIONS**

Project	Frequency	VSWR	Peak Gain	Efficiency	
SLPT2400NMOHFW	2400-2500MHz	2:1	5.06dBi	79%	
SLPT2400NMOHF					
SLPT4900NMOHFW	4900-6000MHz	2.2:1	5.09dBi	71%	
SLPT4900NMOHF	4900-0000WINZ	2.2.1	3.09ubi	71%	
SLPT245NMOHFW	2400-2500MHz	2:1(2.4-2.5GHz) 2.2:1(4.9-6GHz)	5.06dBi	79%	
SLPT2400/5900NMOHF	4900-6000MHz		5.09dBi	71%	
SLPT2400DMNW	2400-2500MHz	2:1	4.78dBi	75%	
SLPT2400DMN	_ 100				
SLPT4900DMNW		2.2:1	5.14dBi	73%	
SLPT4900DMN	4900-6000MHz				
SLPT2400/5900DMNW	2400-2500MHz	2:1(2.4-2.5GHz) 2.2:1(4.9-6GHz)	4.78dBi 5.14dBi	79% 73%	
SLPT2400/5900DMN	4900-6000MHz	2.2:1(4.9-0GHZ)			

Nominal Impedance  $50\Omega$ 

Radiation Pattern omni

Polarization: Vertical

Power with standing 10W

Issue: 1745





**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **MECHANICAL SPECIFICATIONS**

Plastic radome PC

Color White / Black

Ingress Protection IP67

#### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40 ~ +85° C




# PulseLARSEN


**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

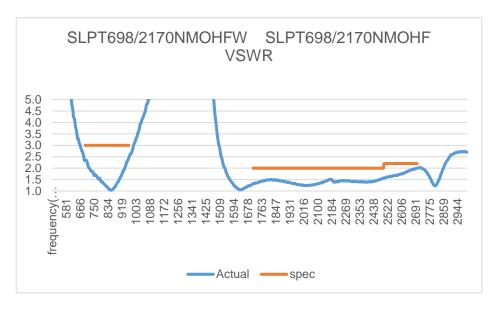

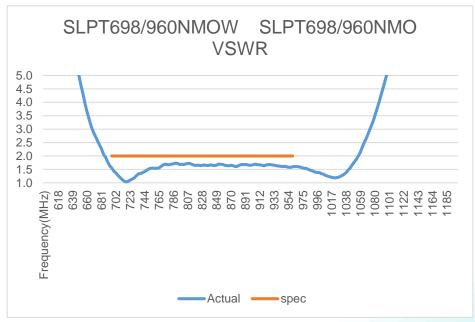







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

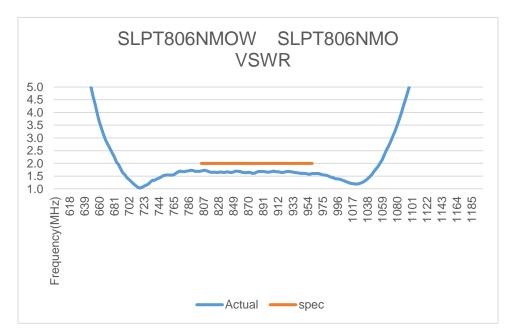

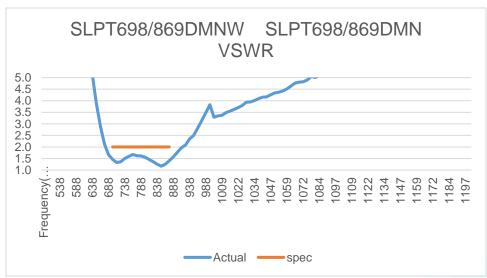







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

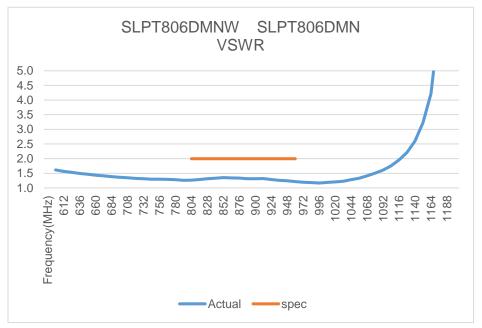

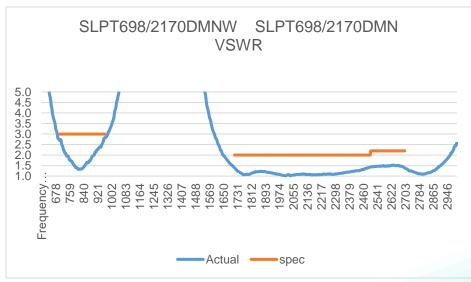









**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

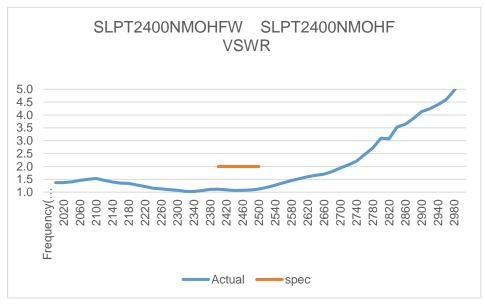

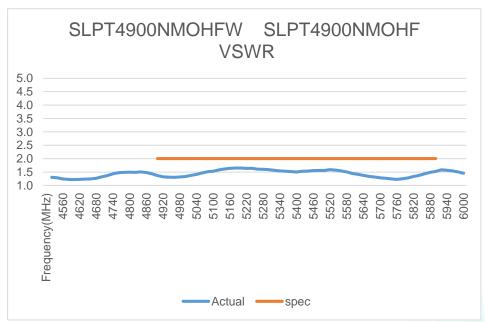







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

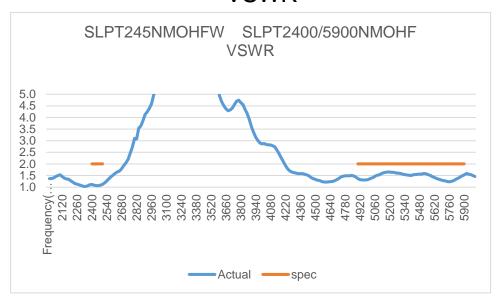

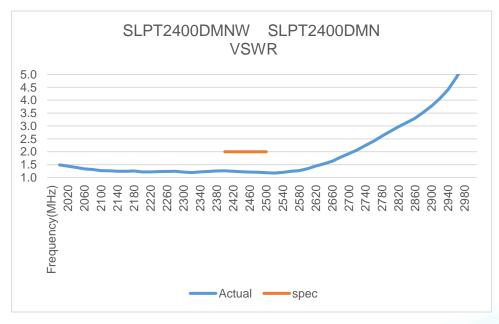







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

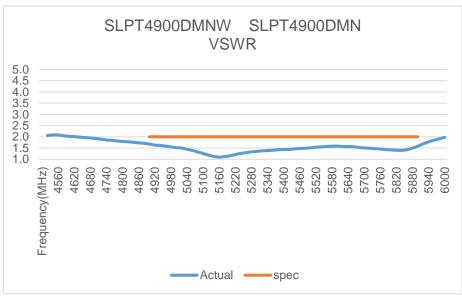

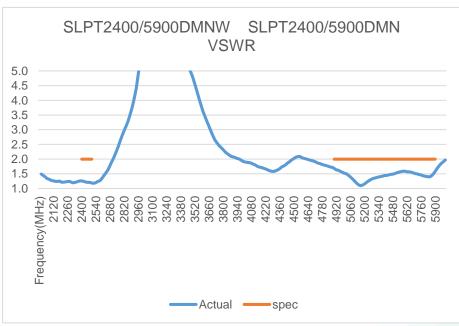



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW


#### **CHARTS**

### Efficiency(%)

## SLPT698/2170NMOHFW SLPT698/2170NMOHF Efficiency (%)

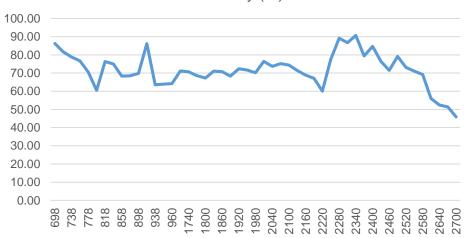

## SLPT698/960NMOW SLPT698/960NMO Efficiency (%)

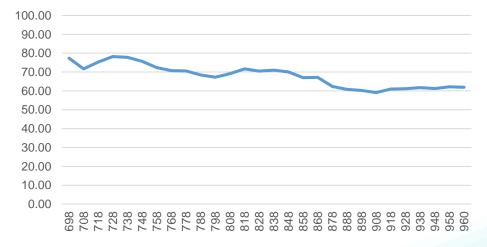



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW


#### **CHARTS**

### Efficiency(%)

#### SLPT806NMOW SLPT806NMO Efficiency (%)

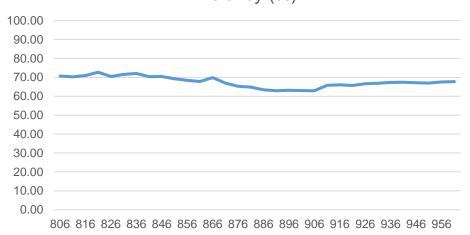

#### SLPT698/869DMNW SLPT698/869DMN Efficiency (%)

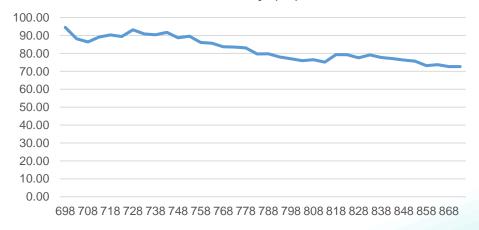

Issue: 1745



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Efficiency(%)

#### SLPT806DMNW SLPT806DMN Efficiency (%)

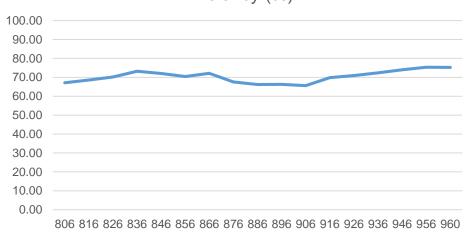

#### SLPT698/2170DMNW SLPT698/2170DMN Efficiency (%)





**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW


#### **CHARTS**

### Efficiency(%)

## SLPT2400NMOHFW SLPT2400NMOHF Efficiency (%)

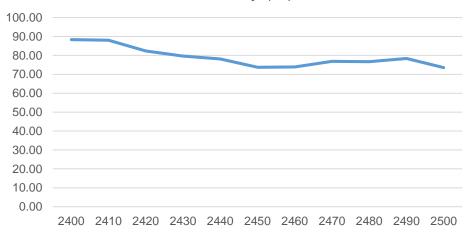

## SLPT4900NMOHFW SLPT4900NMOHF Efficiency (%)

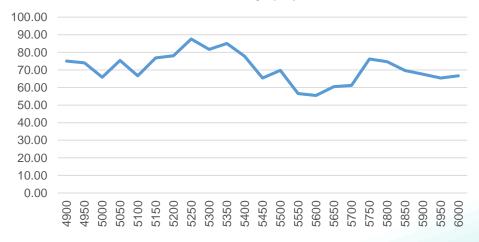



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW


#### **CHARTS**

### Efficiency(%)

## SLPT245NMOHFW SLPT2400/5900NMOHF Efficiency (%)

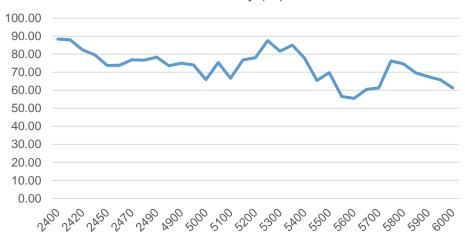

#### SLPT2400DMNW SLPT2400DMN Efficiency (%)

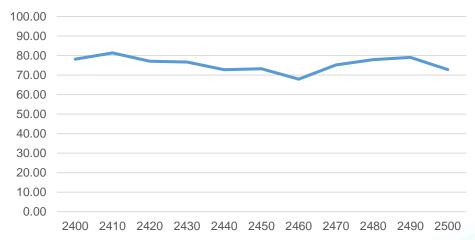



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW


#### **CHARTS**

### Efficiency(%)

#### SLPT4900DMNW SLPT4900DMN Efficiency (%)

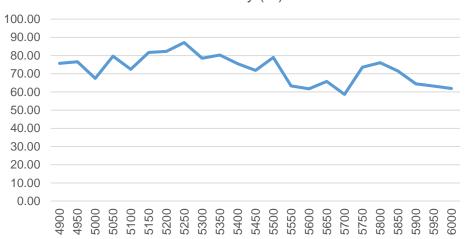

#### SLPT2400/5900DMNW SLPT2400/5900DMN Efficiency (%)

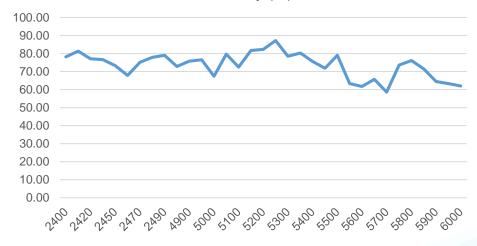









**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

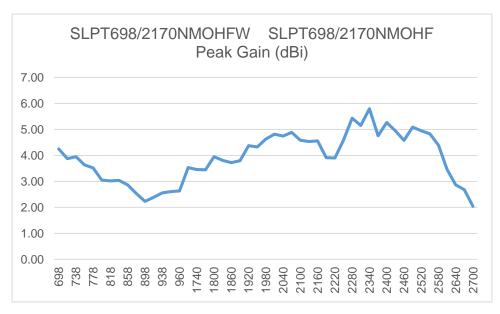

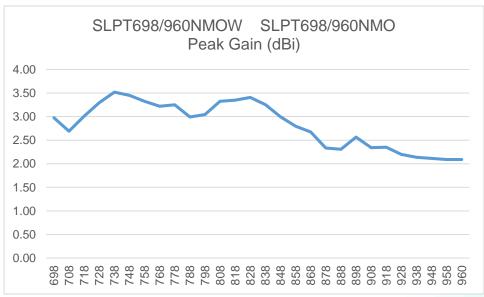







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

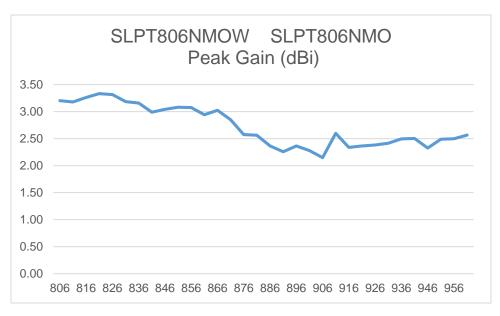

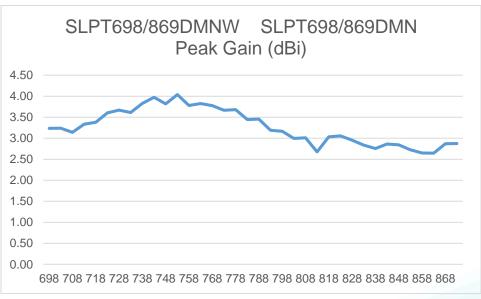







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

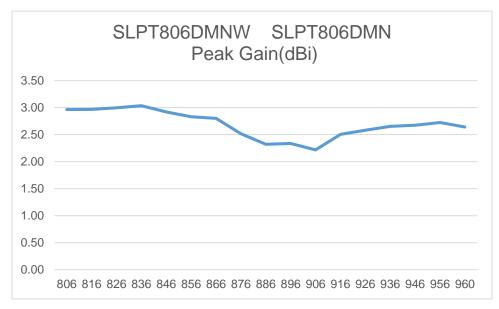

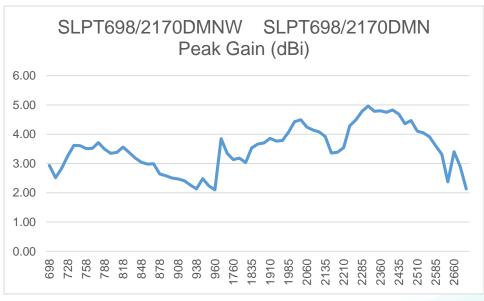









**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

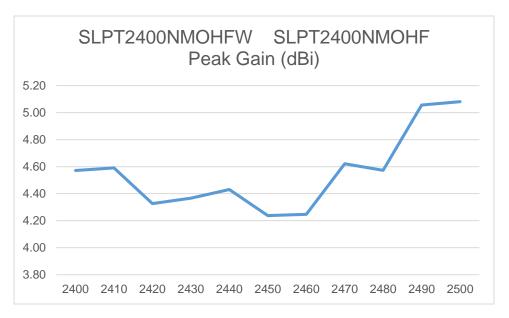

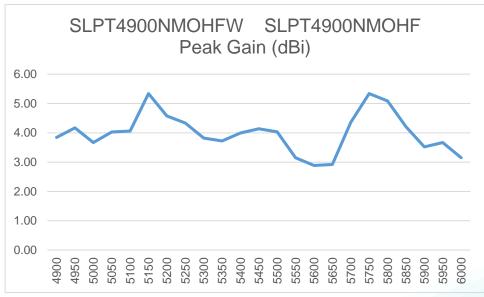







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

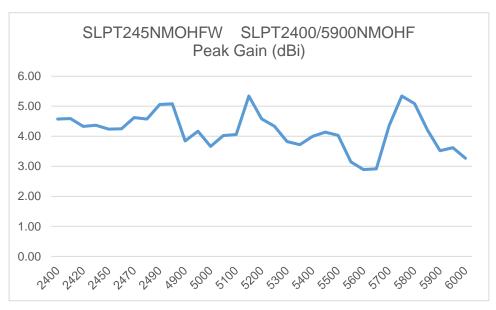

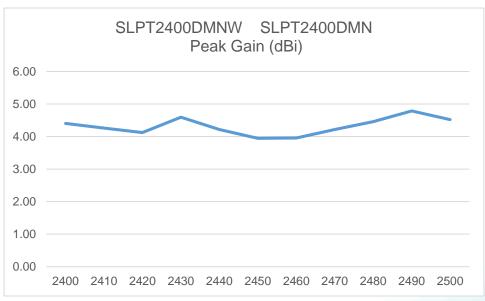







**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

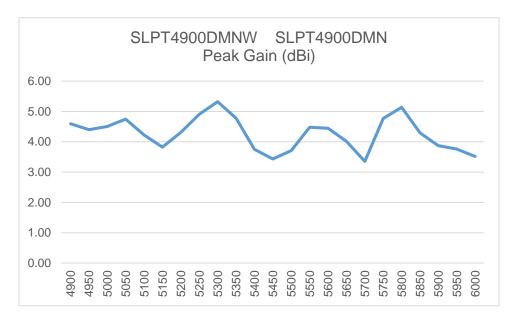

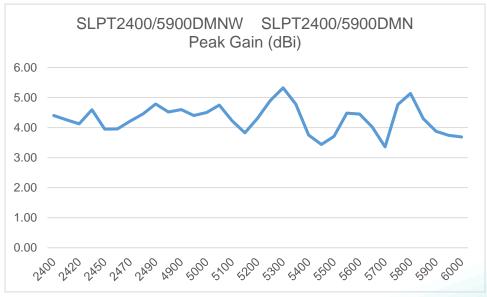








**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT698/2170NMOHFW SLPT698/2170NMOHF

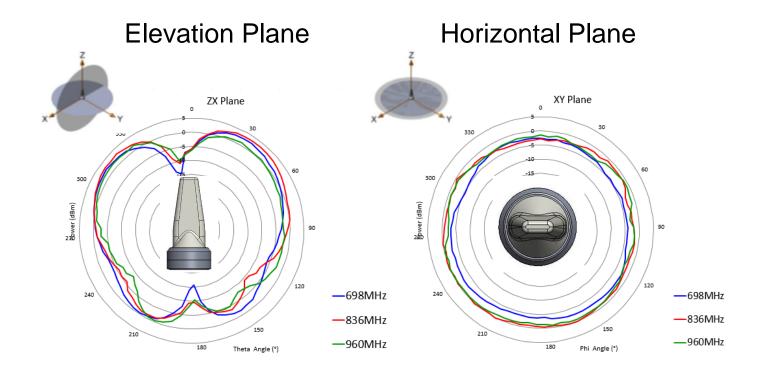






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT698/2170NMOHFW SLPT698/2170NMOHF

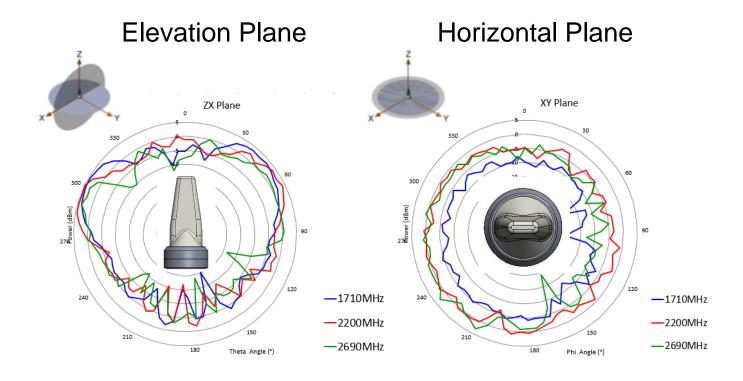






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT698/960NMOW SLPT698/960NMO

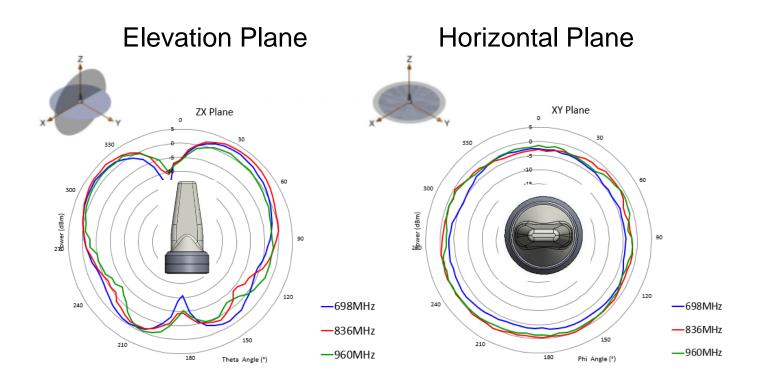






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT806NMOW SLPT806NMO

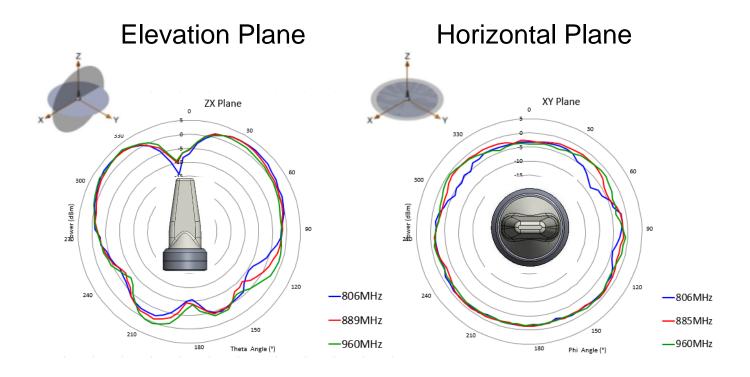






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT698/869DMNW SLPT698/869DMN

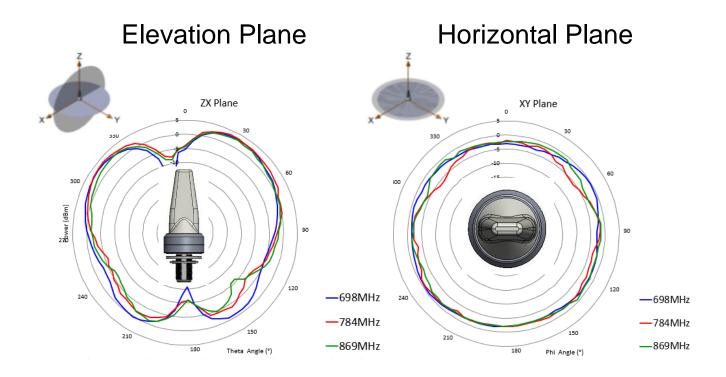






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT806DMNW SLPT806DMN

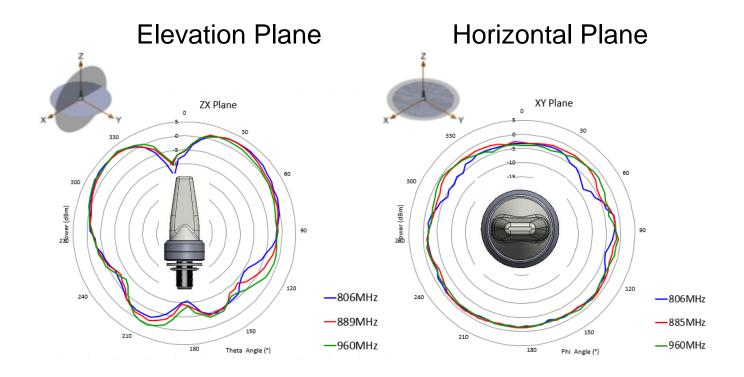










**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT698/2170DMNW SLPT698/2170DMN

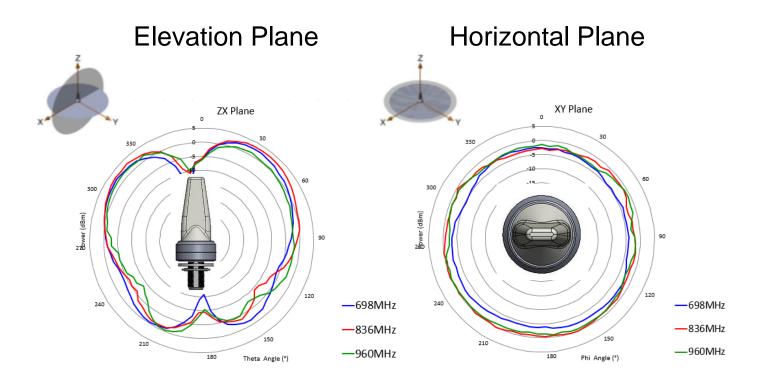






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

#### SLPT698/2170DMNW SLPT698/2170DMN

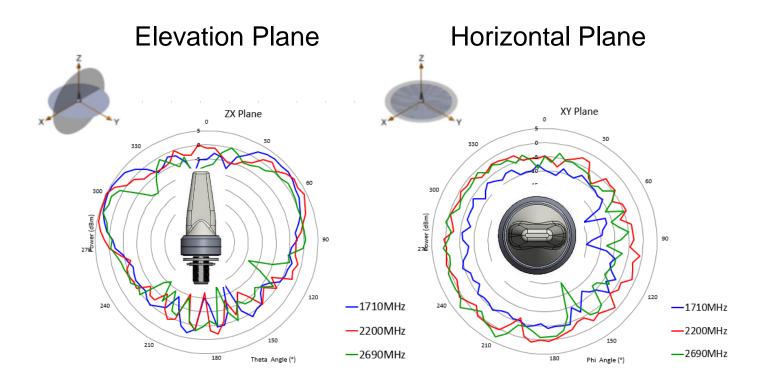






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT2400NMOHFW SLPT2400NMOHF

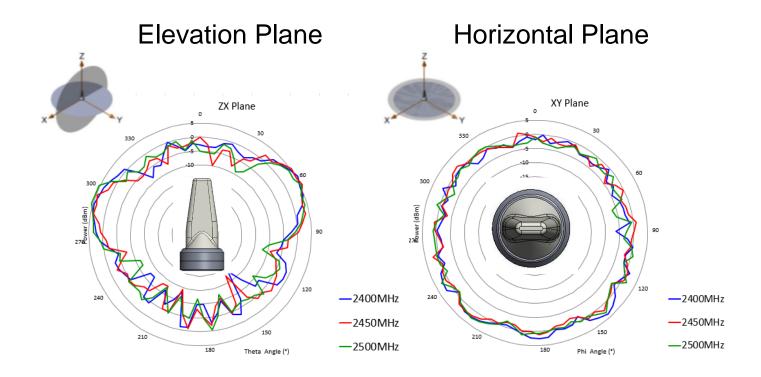



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT4900NMOHFW SLPT4900NMOHF

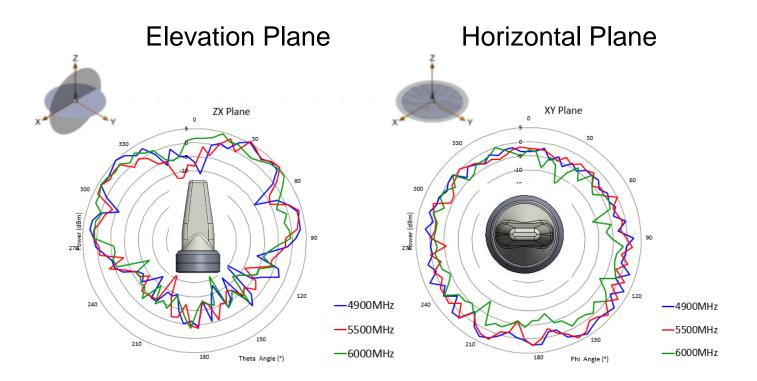






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT245NMOHFW SLPT2400/5900NMOHF

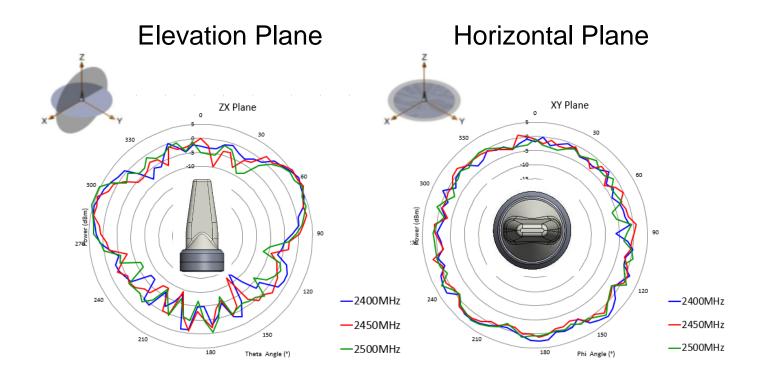



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT245NMOHFW SLPT2400/5900NMOHF

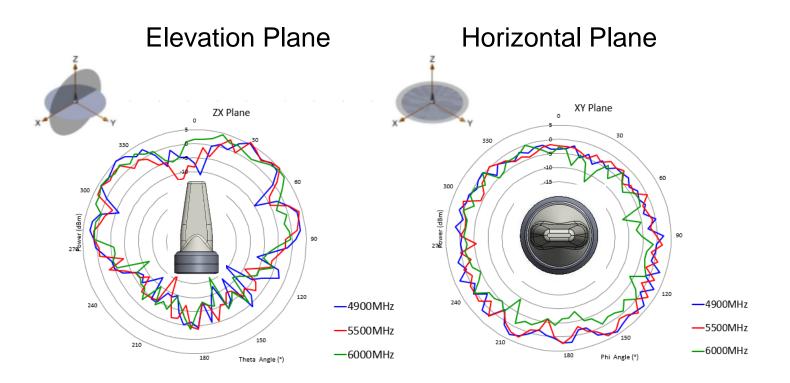






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT2400DMNW SLPT2400DMN

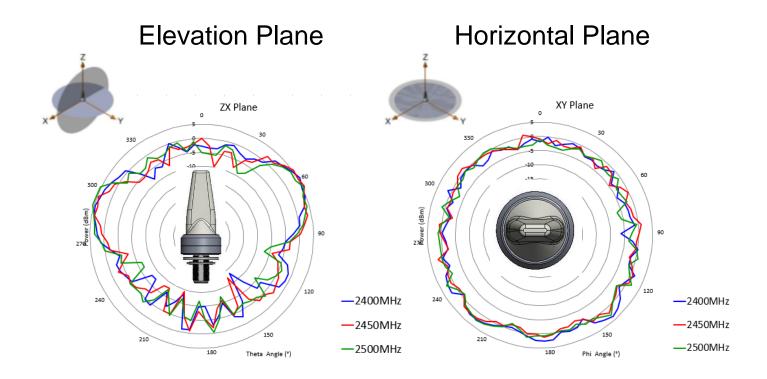



PulseLARSEN

**Description: ON-VEHICLE LOW PROFILE ANTENNA** 


**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT4900DMNW SLPT4900DMN

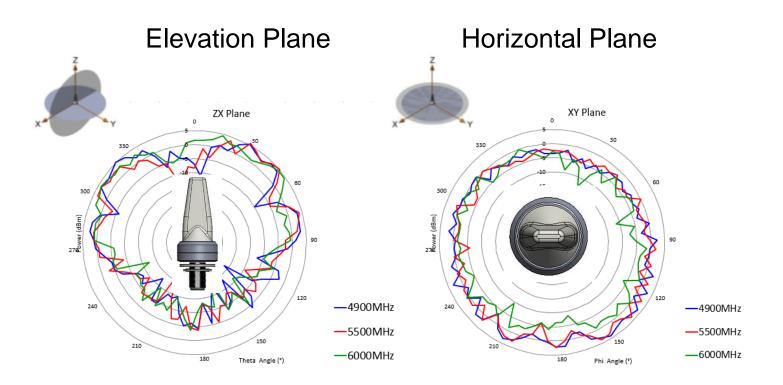






**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT2400/5900DMNW SLPT2400/5900DMN

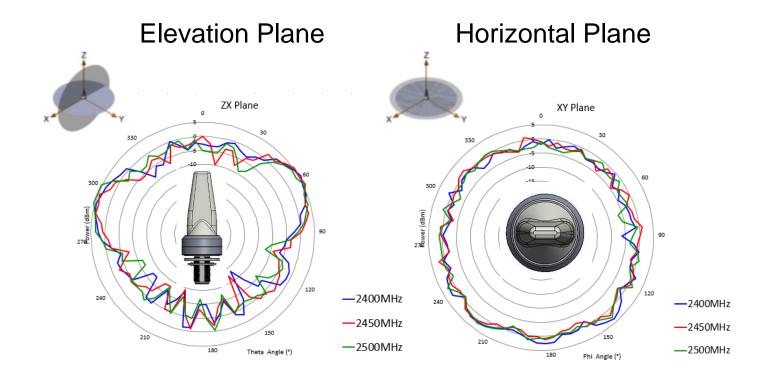



**Description: ON-VEHICLE LOW PROFILE ANTENNA** 

**Series: Shadow** 

PART NUMBER: Black: SLPTXXX / White: SLPTXXXW

#### **CHARTS**

### Free Space Radiation Pattern

SLPT2400/5900DMNW SLPT2400/5900DMN

