


Pro'sKit®

TOTAL TOOL SOLUTION

INNOVATION · QUALITY · SERVICE

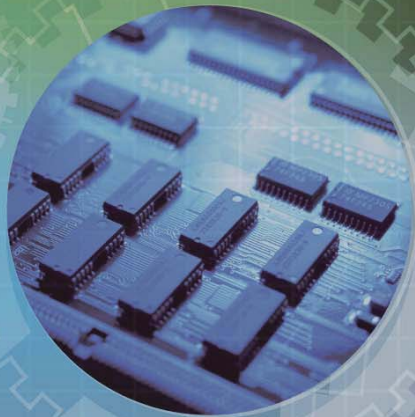

CATALOG 13



Summer 2013

To our Current and Future Eclipse customers:

Eclipse Tools and Pro'sKit enter the 16th year of our partnership and are proud to bring you our Catalog 13. This catalog contains many of your old favorites as well as some exciting new products.

You may have noticed Eclipse has changed its logo and its marketing efforts. We are launching new programs, products, merchandising, etc. We are in the process of upgrading our website and it will make it much easier and simpler to find the products and documentation you need. It will be integrated with our new ERP system. We are investing in our future to serve you better.

We have decided to aggressively move into our next phase of growth. To help accomplish this, we have developed our Purpose and Values to explain why we are here as a company and what we will do for you. These are for internal use and developed not from trendy managerial books, but from our deep commitment to doing the best possible job for you. They are very personal and will enhance the teamwork and performance of our company as a unit. I share them now with you, our valued customer:

Purpose "Realize our full potential.....everyone, every way, every day"

Values our **W**⁴

Work Make work as exciting, challenging and fun as possible while achieving our goals and succeeding at everything we do.	Wonder Continuously seek to improve ourselves, our products, our processes and technologies, never accepting "good enough".
Wow Be the fastest, most reliable supplier to our customers so that they prefer doing business with us over everyone else.	Win Impress our customers in all we do so they choose us over our competition and keep coming back for more.

Best regards,

Roger A. Scott
President

Eclipse Enterprises, Inc.
13302 Chula Rd., Amelia, VA 23002
Ph: 804-561-2610 Fax: 804-561-2642

Innovation • Quality • Service

Pro'sKit® is an international brand of total solution provider for tools and tool kits in electronic, electrical, computer, net-working & telecom fields in the worldwide market. **Pro'sKit®** has been developing its product lines and expanding its busi-ness with the policy of innovation, quality and service.

Quality is the foundation of **Pro'sKit®** brands. As an ISO9001:2008 certified manufacturer since 1998, all **Pro'sKit®** products meet or exceed quality standards and quality control procedures conform to the strict requirements of the standards. There is nothing that cannot be further improved. **Pro'sKit®** always adheres to its quality policy & high standard and will continue to enhance the capability.

Most of **Pro'sKit®** electronic power products are qualified by CE or GS, TUV and **Pro'sKit®** has been devoted to conforming to RoHS since 2006 per the European Union's regulation that secure **Pro'sKit®** high product quality for our customers through-out the world.



Computerized SOP
Production Line



Handheld XRF for RoHS
Compliance Testing



Lifetime Testing Machine



Burst Strength Tester



Reliability Test




Salt Spray Test



Torque Testing Machine



High Compliance
Multi-Product Calibrator

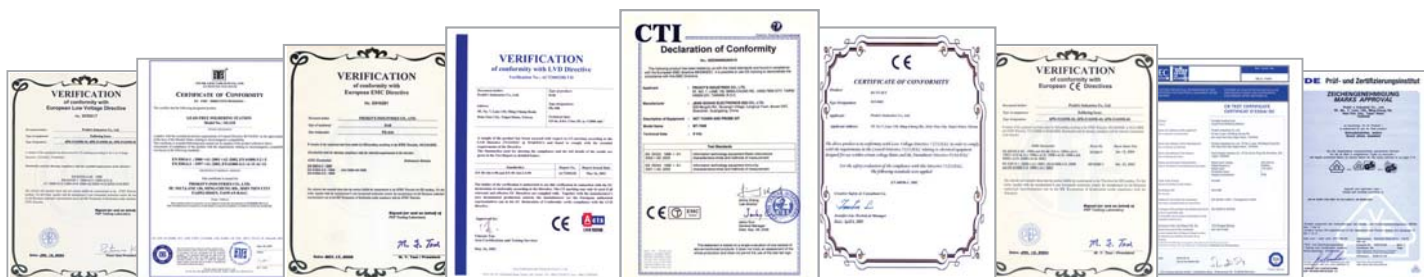

Pro'sKit® Symbols

	Wire spring		RS232 D-sub round barrel contact pins or sockets		TRI-wing		Continuity check
	Leaf spring		Insulated & non-insulated wire ferrules		Ball hex		Diode test
	Flat		Hex type coaxial & fiber optic connectors		Star		Transistor hFE test
	Half-round		Oval type coaxial & fiber optic connectors		Square tamper proof		LED test
	Round		Square type coaxial connectors center contact pins		Torx® plus 5 star		Battery check
	Stripping flat telephone cables		Crimping pressure adjustment		Torx® plus socket		Inductor check
	Stripping twisted pair round cables		Ratcheting release knob		Pentalobe star tip		Backlight
	2 blade stripping coaxial cables		Ratcheting release trigger		ESD safe		Maximum/Minimum value
	3 blade stripping coaxial cables		Force-saving design		Non-magnetic		Maximum value hold
	Mini bevel		Ratcheting force-saving design		Magnetic		Data hold
	Full flush		Black tip		Safety caution		Auto power off
	Extra full flush		Slotted		Insulated		Low battery
	Cross Cut		Phillips		1KV insulated protection		Zero-ohm adjuster
	Serrated		Torx®		RoHS directive		Output terminal
	Smooth		Torx® tamper proof		Lead free		RS232C connector
	Crosswise serrated		Hex		Complied with IEC/EN 60529 IP54 test		USB connector
	4 pin(RJ22) telephone handset plugs		Hex tamper proof		DC voltage		Hygrometer
	6 pin(RJ11/RJ12) telephone plugs		Nut		AC voltage		Thermometer
	8 pin(RJ45) modular plugs		Pozidriv		DC current		Light meter
	10 pin(RJ50) modular plugs		Triangle		AC current		Sound level meter
	Telecom splice connectors		Spanner nut		Resistance		Class2, double insulated
	Pin terminal, insulated & non-insulated ferrules		Spanner		Frequency	Standard Plug Type	
	Insulated & non-insulated wire ferrules		Torq		Capacitance		
	Non-insulated terminals & lugs		Wing nut driver		Temperature °C/°F measurement		
	Open barrel, non-insulated terminals & lugs		Phillips tamper proof		Temperature °C measurement	A type AC110V~120V	
	D-Sub terminal & Non-Insulated Open Barrel Connectors		Clutch		Duty Cycle		
	Insulated terminals, Insulated & Uninsulated Flag		Spline		Relative reference	E type AC110~120V	
	Insulated terminals		Square		Continuity buzzer		

Torx® is a registered trademark of Camcar Textron

All rights reserved. Reproduction in whole or in part in any language without permission is prohibited.

Printed in Taiwan, March, 2013. First Edition

©2013 ProKit's Industries Co., LTD.

	TESTERS
	Page. 4-20

	MAGNIFICATION & LIGHTING
	Page. 110-116

	PRECISION PLIERS & CUTTERS
	Page. 21-32

	ESD STATIC PROTECTION
	Page. 117-119

	ELECTRICAL PLIERS & CUTTERS
	Page. 33-41

	POWER TOOLS
	Page. 120-124

	KNIVES, SCISSORS & SAWS
	Page. 42-45

	FIBER OPTICS
	Page. 125-129


	CRIMPERS
	Page. 46-60

	MISCELLANEOUS
	Page. 130-138

	STRIPPERS
	Page. 61-68

	INSTRUMENT CASES
	Page. 139-144

	PUNCHDOWN TOOLS
	Page. 69-71

	LAN/DATACOMM
	Page. 145-157

	SOLDERING / ASSEMBLY
	Page. 72-79

	CONNECTORS
	Page. 158-159

	SCREWDRIVERS / BITS
	Page. 80-99

	WIRING INSTALLATION
	Page. 160-163

	HEX KEY / WRENCHES
	Page. 100-102

	TOOL CASES
	Page. 164-171

	SOCKET WRENCHES
	Page. 103-105

	TOOL KITS
	Page. 172-195

	TWEEZERS
	Page. 106-109

	INDEX
	Page. 196-200



TEST INSTRUMENTS

MT-8100 Butt Set



Features:

- High impedance monitor
- Line voltage test
- Line Continuity test
- Polarity indication
- Two-way hands-free speakerphone
- Tone and pause operation
- Speed dialing
- Last number redial
- PBX pause button
- Mute switch
- Electronic adjustable Volume
- Auto power off
- Low battery indication
- Audible ring
- Extra large steel locking belt clip
- Angled bed of nails and RJ11 plug



Waterproof



Dustproof

Drop Protection

Rugged

Exterior

Voltage Test

IEC/EN 60529
IP54

Mark for products are complied with IEC/EN 60529
IP54 Dustproof & Waterproof tests

Electrical	
Loop limit	2 K Ω maximum at 48 VDC (nominal 20 mA minimum loop current)
DC resistance	
Talk mode	300 Ω typical
Monitor impedance	39k Ω nominal at 1 kHz
Rotary dial output	
Pulsing rate	10pps $\pm$ 0.8pps
Percent break	61% $\pm$ 2%
Interdigit interval	1000 ms typical
Leakage during Break	>50 k Ω
DTMF output	
Tone frequency error	$\pm$ 1.2% maximum
Tone level	-8 $\pm$ 2dBm combined (typical)
High versus low tone difference	4 dB maximum
Memory dialing	
Memory capacity	13 memories including M1, last number redialing
Digit capacity	16 digits per memory
PBX pause duration	4 seconds
Line voltage test	5 Phase AC/DC voltage indication (under 24V, 24~100V, 101~150V, 151~200V, more than 200V)
Monitor amplifier	9V transistor; provides 25 hours continuous use, typical
Power source	Continuous use, typical
Automatic power shut off(Monitor type)	After 5 min. of no audio signal
Speaker phone levels	Electronically adjustable
Power source	Battery (9V) 6F22 (Not included)
Physical	
Measurement	230 x 82 x 89mm (9.1" x 3.2" x 3.5")
Weight	635g typical
Water resistance	Dust protection & Waterproof tested to an IEC/EN 60529 IP54 rating
Cord sets	Angled bed of nails and RJ11 plug
Environmental	
Temperature	Operating: 0 to 50°C Storage: -10 to 60°C
Altitude	To 10,000 feet (3,000M) max
Relative humidity	5 To 95%

Individual packing: Color box



400-042 Butt Set



Rests easily on shoulder



Polarity LED indications



Features:

- Recognized as the new industry standard, the 400-042 butt set provides superior quality at an affordable price.
- With its high impedance monitor for data safe operation, technicians can clip onto a line in Monitor mode without disrupting existing traffic.
- **Pro'sKit**® unsurpassed protection standards and durability assure the butt set will keep working even in the toughest environments.
- New weatherproofing provides enhanced resistance to severe weather conditions.




Angled bed of Nails

Durable hanger

Electrical	
Loop limit	2 kΩ maximum at 48 VDC (nominal 20 mA minimum loop current)
DC resistance	
Talk mode	300Ω typical
Monitor impedance	39kΩ nominal at 1 kHz
Rotary dial output	
Pulsing rate	10pps±0.8pps
Percent break	61%±2%
Interdigit interval	1000 ms typical
Leakage during break	>50 kΩ
DTMF output	
Tone frequency error	±1.2% maximum
Tone level	-8±2dBm combined (typical)
High versus low tone difference	4 dB maximum
Memory dialing	
Memory capacity	12 memories plus last number redialing
Digit capacity	16 digits per memory
PBX pause duration	4 seconds
Monitor amplifier power source	9V transistor; provides 25 hours continuous use, typical
Speaker levels	Low, medium, high
Automatic power shut off	After 5 min. of no audio signal
Speaker phone levels	Low, medium high
Power source	Shared line and battery power
Physical	
Length	10.2"(26.0 cm)
Width	2.8"(7.0 cm)
Height	3.5"(8.90 cm)
Weight	560 g typical
Environmental	
Temperature	Operating: 0 to 50°C Storage: -40 to 66°C
Altitude relative humidity	To 10,000 feet 5 to 95%

Individual packing: Color box

900-244 In-Line Modular Adapters (4/6/8 Pin 3 In 1)

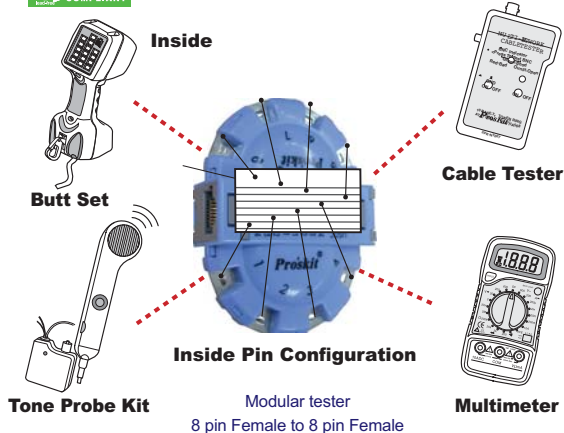

Features:

- The 900-244, In-line Modular Adapter allows in-line testing for any plug/jack combination. It includes two 4-pair jacks plus a modular cord terminated with 4-pair "universal" plug for accessing any standard 6- or 8-position jack.
- Individual conductors are broken out by pin number and correspond to eight separate test pads.
- Test equipment can be securely attached to the test pads using alligator clips.
- For quick reference in the field, USOC, T568A, and T568B wiring charts are printed right onto the body.



6 pin Female to 8 pin Male	8 pin to 8 pin 205mm
4 pin Female to 8 pin Male	8 pin to 6 pin 205mm
	8 pin to 4 pin 205mm

Individual packing: Blister card

MT-8006B Data Diver



Features:

- LCD display for dialing number, Caller ID, Clock and other information
- Indicator for determining the line service
- Smart power saving enables battery life up to 6 months
- 12 phone number memory for speed dialing
- 16 dialing number memories
- Tone (DTMF) and pulse operation
- Up to 32 digits phone number memory for speed dialing key
- Pre-dialing and last number redial function
- PBX pause key, insert a PBX pause in stored numbers
- Telephone line polarity indicators
- Low battery indication
- Backlight function
- RJ-11 port for easy test leads change
- Ringer and voltage LED indication
- Angled bed of nails and RJ-11 plug

Electrical	
Loop limit	2 K Ω maximum at 48 Vdc (nominal 20 mA minimum loop current)
DC resistance	
Talk mode	300 Ω typical
Monitor impedance	>39k Ω nominal at 1 KHz
Rotary dial output	
Pulsing rate	10pps+0.8pps
Percent break	60/40%±2%
Inter digit interval	1000 ms typical
Leakage during break	>130 K Ω
DTMF output	
Tone frequency error	±1.5% maximum
Tone level	-8±2dBm combined (typical)
High versus low tone difference	4 dB maximum
Memory dialing	
Memory capacity	12 memories
Digit capacity	16 digits per memory
PBX pause duration	1~3.6 seconds
Power source	4pcs 1.5V AAA batteries (not included)
Physical (Hook included)	
Measurement	218.5 × 69.5 × 49mm (8.6" × 2.7" × 1.9")
Weight	208g typical

Individual packing: Double blister

New



Accessories: Angled bed of nails & headset



Telephone line testing



High impedance monitor


400-028 Dual Telephone Line Tester



Features:

This tool is for testing the condition of dual telephone line jacks. Multi-color LED indicator light alerts to okay line, reversed line, AC Voltage present and dead line. Fits in shirt pocket.

- Dual telephone line tester that troubleshoots common problem conditions with standard single or dual-line telephone hook-ups.
- Compact unit easily plugs into any single or dual-line telephone jack.
- Tests for three wiring conditions: correct, reversed and AC voltage presence.
- Battery: AA(1.5V) (Not included)

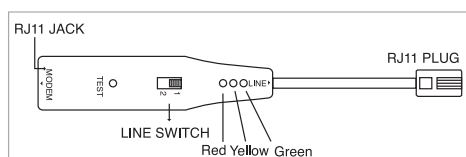

Individual packing: Blister card

902-267 Replacement Test Leads for Butt Set



Features:

- Professional grade "Bed of Nails" insulation piercing clips within the jaws
- Ultra-durable nylon braided jacket
- Guarantee ruggedness and flexibility
- Non-insulated ring terminals
- Connect directly to 400-042 butt set
- Length: 60 inch
- Materials: Nylon, Copper
- Color: Red/Black

Individual packing: Blister card



902-228

All-in-One Toner & Probe Kit**VDV Tester (Voice/Data/Video)****Features:**

- Validate and troubleshoot wiring on RJ11/RJ45 cables, USB, F, BNC and RCA connectors.
- Detects telephone and Ethernet service, indicates polarity and active line numbers on voice circuits, and active pair number on Ethernet circuits
- Ideal for all maintenance fields of telecommunication, networking, datacom, Audio/Video, Cable TV and all weather cabling, etc...
- Locates cables quickly and easily
- Overcome noise and save time
- Tone on live networks safely and effectively
- Verify conductor continuity with cable map



Toner Specifications	
Tone frequency	1kHz
Tone mode	ONE/TWO-note tone
Compatible connectors	RJ-45/RJ-11/USB/F/BNC/RCA/Alligator Clips
Continuity test	<300Ω
Talk battery voltage	6V into 600Ω
Function selection	5-position rotary switch
Cable map indication	8 LED indicators
Voltage protection	100V
Low battery display	6.5V
Battery type	9V (6F22) (Included)
Dimension (LxWxD)	140x70x30mm / 5.5"x2.8"x1.2"

Receiver Specifications	
Frequency	1kHz
Compatible connectors	RJ-45/RJ-11/USB/F/BNC/RCA
Ear jack	1
Signal status indication	8 LED indicators
Cable map indication	8 LED indicators
Low battery display	6.5V
Battery type	9V (6F22) (Included)
Dimension (LxWxD)	250x52x33mm / 9.8"x2.0"x1.3"

Individual packing: Color box



Copper cabling detecting, including shielded (STP) and UTP cable



10 Base-T or 10/100 Base-T datacom networks



Locates and isolates cables quickly and easily

Accessories :
1 zipper bag,
2 RJ-45 cables,
2 BNC connectors,
2 RCA connectors.

400-011

Tone Generator and Probe Kit**Tone Generator****Probe Amplifier**

Packaged in a soft nylon carrying case.

Use it on de-energized AC wire, telephone/twisted pair wire, all voice and data category rated cable, speaker wire, virtually any cable or wire!

Features:

- Fast, accurate wire identification
- Rugged industrial design
- Sends tone to identify wires
- Three selectable tone outputs
- Two-line polarity indication
- Continuity test
- Adjustable volume control
- Visual signal strength indication
- Powerful speaker for noisy environments
- Recessed telephone test set connectors
- Battery: 9V(6F22) Included

Individual packing: Blister card

MT-7058 Mini Lan Cable Tester



Features:

- Complies with CE safety standard
- Automatically detects good connections, opens, crossed wires & split pairs
- Test RJ45 TIA568A/B (AT&T) 258A), 10 Base-T, Token ring, RJ-11/RJ-12 USOC and coaxial BNC cable
- Pin to pin cable map indicator
- Non-contact voltage detection for user safety
- Traces wires with tone & remote lights allowing one person operation
- Compact size and lightweight design, easy to carry around
- Circuit protection design for both units
- Low power consumption with auto power off function to preserve battery
- Long cable test more than 300 meters(1000Ft)

Individual packing: Blister card



BNC cable test



RJ11 cable test



Long cable test more than 300m



New

MT-7057 Cable Sniffer-Remote



Features:

- Simple one push-button operation.
- Power supplied by a 9V battery (Not included).
- Palm size design, easy to carry around.
- Detects open, short, miswired and cross-connected wire.
- Four types of connectors provided to test RJ-45, RJ-11, USB and BNC.
- Protect itself against damage from line voltage.

Individual packing: Color box



With RJ-45 connectors

With RJ-11 connectors

With USB connectors

BNC Terminator included

LED Display Area

Push Button

Battery Cover

Cable Sniffer-Remote Master Unit

Remote Module

400-026 Multi-Modular Cable Tester



Features:

- Tests RJ45 TIA568A/B (AT&T 258A), 10 Base-T, Token ring, RJ-11/ RJ-12 USOC and Coaxial BNC cable.
- Automatically check cable for continuity, short, open and crossed wire pairs.
- Coaxial cable port identifies cable conditions including shorts, shield opens and center conductor breaks.
- Main unit and remote allow one person testing.
- Power source: DC 9V Battery (Not included)
- Dimension: 102x106x28 (mm) / 4.0"x4.2"x1.1"
- Cable not included

Individual packing: Blister card



BNC connector included



400-001 LAN Cable Tester With Remote

Features:

- Multi-network cable tester is specified to quickly test by auto scanning wires continuity, mis-wiring and polarization in your network cables, thin Ethernet (BNC)/10 Base-T (UTP/STP)/356A/TIA-568A/TIA-568B/TOKEN Ring. By using the attached remote terminator, you can easily test the cables before or after the cables are installed. It also allows you to test the ground of shielded twisted pairs cables.

Individual packing: Blister card



For BNC, RJ-45 twisted pair test



With BNC terminator




400-004 Multi-Modular Cable Tester

Features:

- Multi-modular cable tester is applied to quickly test by auto scanning most of modular cables, USOC 4 / USOC6 / USOC 8 terminating with RJ 45, RJ12, and RJ11 modular plug, wires continuity and mis-wiring. It can also be used for testing if the cable is crossed pinning or straight through. Moreover, with the remote terminator, it can be further used in remote testing even when the cable has already been installed.

Individual packing: Blister card

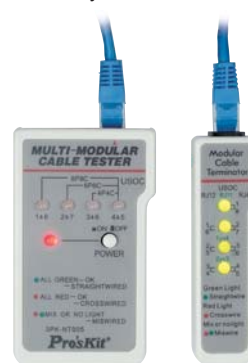


NT-3200 Mini-Pocket Tester Kit With Adaptors



Features:

- Uses a type 23A~12V battery(Included)
- Improved head design with rugged push-on male F connector
- Easily viewable short circuit indicator
- Loud audio level for noisy environments
- Time-saving push-on female connector on audible toner
- Easily stores in shirt pocket or tool pouch

Individual packing: Color box

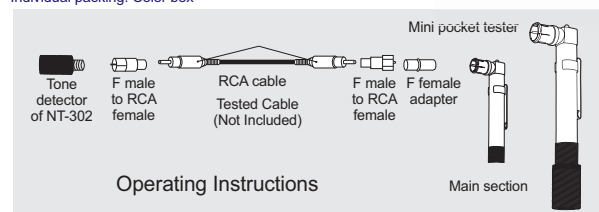

400-007 PC Cable Tester



Features:

- Can test the most used PC data cables, network cables such as printer cable, monitor cable, modem cable, mouse extension cable, game cable, (USB and 1394 cables), BNC coax cable, RJ45 cable etc. for open, shorted miswire, continuity and pin configuration.
- LED glow enhanced for printer cable test
- Auto and manual scans can be selected
- DC battery compartment and AC power adapter jack provided
- Handheld, easy access, simple installation and operation



Interface ports	
TX	RX
DB25 female	Centronics 36 female
DB25 male	DB25 Female DB25 male
DB9 female	DB9 female
DB9 male	DB9 male
HDB15 male	HDB15 female
DB15 male	DB15 female
BNC female	BNC female
RJ45 female	RJ45 female
USB (A)	USB (A) socket
USB (B)	USB (B) socket
1394 socket	1394 socket
LED display	
TX- 25 LEDs RX- 36 LEDs	
Battery low x1	
Ground TX Ground RX	
Wires x 4 (for 4, 9, 15, 25)	
Wire numbers select x 1	
Test x1 (For manual operation)	
Switch	
Auto/Manual scanning switch x1	
LED scanning speed switch x1	
Power on/off switch x1	
Power (Adaptor not incl.)	
DC 9V battery (Not included)	
DC9V 150mA 2.5f power jack	
Size (LxWxD) mm/inch	
250 x 130 x 35/9.8x5.1x1.38	

Pro'sKit® Test Instruments

Maximum display range and accuracy for digital multimeters and digital clamp meters and environmental meters

rdg(reading)
The value on the digital display, readout.

199.9

dgt(digit)
Indicates the least significant digit.
It represents the error used for processing fractions when converting from analog to digital.

Maximum display range

MT-1860/1820: the maximum display range is "5999".
MT-1232: the maximum display range is "3999".
MT-1280/1270/1210: the maximum display range is "1999".
For example of measuring resistance at MT-1232

Resistance	Display	
4000kΩ	4.000MΩ	The range is automatically switched so that the display unit is MΩ or kΩ
4000Ω	4.000kΩ	
40Ω	40.00Ω	The reading is display with three digits.

Accuracy

When ACV measurement using the MT-1270, the maximum display value is 199.9V, minimum display value is 0.01V.

199.9

Example

The accuracy of the AC200 V reading is $\pm(0.8\%rdg+5dgt)$.
when measuring AC100V, the accuracy reading display range is 100.9~99.15.
 $100V \pm (0.8\% + 5dpt)$
 $= 100 + (0.80 + 0.05) \sim 100 - (0.80 + 0.05)$
 $= 100.9 \sim 99.15$

SI prefixes

Symbol	Prefixes	Decimal		Units frequently used
		Long Scale	Short Scale	
G	giga	1X1,000,000,00	1X10 ⁹	GHz
M	mega	1X1,000,000	1X10 ⁶	MΩ, MHz
K	kilo	1X1,000	1X10 ³	kΩ, kV, kW, kHz
m	milli	1/1,000	1X10 ⁻³	mV, mA, mW, mF, mH
μ	micro	1/1,000,000	1X10 ⁻⁶	μV, μA, μW, μF, μH
n	nano	1/1,000,000,000	1X10 ⁻⁹	nA, nF, nH
p	pico	1/1,000,000,000,000	1X10 ⁻¹²	pF, pH

RS 232C

RS232C connector

USB

USB connector



Backlight

MAX MIN

Maximum/Minimum value

MAX HOLD

Maximum value hold

HOLD

Data hold

AP OFF

Auto power off



Low battery

0Ω ADJ

Zero-ohm adjuster

OUT

Output terminal

Most of Pro'sKit® test instruments are approved by CE EN61010-1 CATIII/ CATIII test.

CAT. II Primary circuits or equipments connected to low voltage facilities, such as a standard wall outlet.

CAT. III Equipment used for measurement in building facilities, distribution boards, and circuit breakers.



V

DC voltage

V

AC voltage

A

DC current

A

AC current

Ω

Resistance

Hz

Frequency

+

Capacitance

⌚

Inductor check

°C/°F

Temperature °C/°F measurement

°C

Temperature °C measurement

Hz Duty

Duty cycle

REL

Relative reference

•••

Continuity buzzer

CONT. LED

Continuity check

➔

Diode test

hFE

Transistor hFE test

LED

LED test

Battery

Battery check

RH

Hygrometer

Air

Thermometer

Lux

Light meter

dB

Sound level meter

PC Link System

The Professional Multimeter Series comes with USB or RS232 connector to allow you easy connection to PC for monitor measuring data and recording.



▶ MT-1860 Professional Digital Multimeter

USB connector to computer



Features:

- 3 5/6 digits 5999 counts.
- 0.5% best accuracy.
- Auto range.
- USB connector for PC.
- Dual display with analog bargraph.
- Touch keys.
- Extra functions: duty cycle, relative reference, backlight, Max/Min hold, data hold, auto power off, low battery indication.



mini USB connector



Accessories

Specification	
DCV	600m/6/60/600V $\pm(0.5\%+4d)$, 1000V $\pm(1.0\%+4d)$
ACV	6/60/600V $\pm(0.8\%+10d)$, 750V $\pm(1.0\%+6d)$
DCA	60m/600mA $\pm(1.0\%+10d)$, 6/10A $\pm(1.2\%+10d)$
ACA	60m/600mA $\pm(1.5\%+10d)$, 6/10A $\pm(2.5\%+15d)$
Resistance	600Ω $\pm(0.8\%+5d)$, 6k/60k/600k/6MΩ $\pm(0.8\%+4d)$, 60MΩ $\pm(1.2\%+10d)$
Frequency	10/100/1000/10k/100k/1M/20MHz $\pm(0.3\%+2d)$
Capacitance	40nF $\pm(5\%+30d)$, 400n/4μ/40μF $\pm(3.5\%+8d)$, 200μF $\pm(5.0\%+10d)$
Temperature	-20~400°C (0~750°F) $\pm(1.0\%+5d)$, 400~1000°C (750~1832°F) $\pm(1.5\%+15d)$
Power source	AAA(1.5V)x2pcs (Not Included)
Continuity with beeper	Y
Diode test	Y
Size	185x91x49 mm / 7.3"x3.6"x1.9"
Individual Packing	Color box

▶ MT-1820 Digital Multimeter

RS232 connector to computer



Features:

- 3 5/6 digits 5999 counts.
- 0.5% best accuracy.
- Auto/Manual both range.
- RS232 connector for PC.
- Dual display with analog bargraph.
- Extra functions: duty cycle, relative reference, Max/Min hold, data hold, auto power off, low battery indication.



Transistor hFE test



RS232 Connector



Accessories

Specification	
DCV	600m/6/60/600V $\pm(0.5\%+4d)$, 1000V $\pm(1.0\%+6d)$
ACV	6/60/600V $\pm(0.8\%+10d)$, 750V $\pm(1.0\%+10d)$
DCA	600μ/6000μA $\pm(1.0\%+10d)$, 60m/600mA $\pm(1.0\%+10d)$, 6/10A $\pm(1.2\%+10d)$
ACA	600μ/6000μA $\pm(1.5\%+10d)$, 60m/600mA $\pm(1.5\%+10d)$, 6/10A $\pm(2.0\%+15d)$
Resistance	600Ω $\pm(0.8\%+5d)$, 6k/60k/600k/6MΩ $\pm(0.8\%+4d)$, 60MΩ $\pm(1.2\%+10d)$
Frequency	100/1000Hz $\pm(0.5\%+4d)$, 10k/100k/1M/20MHz $\pm(0.5\%+4d)$
Capacitance	40nF $\pm(5\%+30d)$, 400n/4μ/40μF $\pm(3.5\%+8d)$, 200μF $\pm(5.0\%+10d)$
Temperature	-20~400°C (0~750°F) $\pm(1.0\%+5d)$, 400~1000°C (750~1832°F) $\pm(1.5\%+15d)$
Continuity with buzzer	Y
Diode test	Y
Transistor test	Y
Power source	AAA(1.5V)x2pcs (Not included)
Size	192x95x48 mm / 7.6"x3.7"x1.9"
Individual Packing	Color box

MT-5110 3 1/2 Capacitance Meter

Capacitance Measurement 0.1pF~20,000μF.



Specification	
Capacitance	200pF ±(0.5%+7d), 2n/20n/200n/2μ/20μ/200μF ±(0.5%+5d), 2,000μF ±(2.0%+5d), 20,000μF ±(3.0%+10d)
Zero adjustment	Manual (range:±20pF)
Over-input	Display shows "1"
Input overload protections	Y
Sampling time	0~5 second
EN61010-1	CE
Power source	NEDA1604/6F22 (9V) x 1pcs (Not included)
Size (HxWxD)mm	182x90x46mm/7.2"x3.5"x1.8"
Test Lead model no.	MT-9906
Individual packing	Color box

Features:

- 3 1/2 digits 1999 counts.
- Complies with the newest CE safety standard
- High measuring accuracy: ±0.5%.
- Measurements are possible even under a strong magnetic field.
- LCD display for low power consumption and clear readout even in bright ambient light conditions.
- Zero knob: Knob to zero when testing low capacitance.
- Extra function: LCD backlight, low battery indication.



Capacitance test socket



Alligator clips



MT-5210 3 1/2 LCR Meter

Inductance/Capacitance/Resistance Measurement 3 in 1



Features:

- 3 1/2 digits 1999 counts.
- LCD display for low power consumption and clear readout even in bright ambient light conditions.
- Inductance measurement : 2mH to 20H.
- Capacitance measurement : 2nF to 1000μF.
- Resistance measurement : 200Ω to 20MΩ.
- Extra function : data hold, low battery indication.

Specification	
Inductance	2m/20m/200mH ±(2.0%+5d), 2H ±(5.0%+5d), 20H ±(5.0%+15d)
Capacitance	2n/20n/200nF ±(1.0%+5d), 2μ/20μF ±(2.0%+5d), 200μF ±(5.0%+5d), 1000μF ±(5.0%+25d)
Resistance	200Ω±(0.8%+5d), 2k/20k/200k/2MΩ±(0.8%+3d), 20MΩ ±(1.0%+15d)
Diode Test	Y
Transistor Test	Y
Continuity buzzer	Y (with light up)
Power source	NEDA1604/6F22 (9V) x 1pcs(Not included)
Size	189 x 97 x 35 mm / 7.4"x3.8"x1.4"
Individual packaging	Color box



Test probes, alligator clips



MT-1610 3 In 1 Network Digital Multimeter

3 in 1 for RJ-11 line test, RJ-45 cable test and DMM functions



Specification	
DCV	200m/2/20/200V ±(0.8%+2d), 1000V ±(1.2%+3d)
ACV	200mV ±(1.2%+3d), 2/20/200V ±(0.8%+3d), 700V ±(1.2%+5d)
DCA	200μ/2m/20mA ±(0.8%+3d), 200mA ±(1.5%+2d), 10A ±(2.0%+5d)
ACA	200μ ±(2.0%+3d), 2m/20mA ±(1.0%+3d), 200mA ±(1.8%+3d), 10A ±(3.0%+5d)
Resistance	200Ω ±(0.8%+3d), 2k/20k/200k/2MΩ ±(0.8%+2d), 20MΩ ±(1.0%+2d), 200MΩ ±(5.0%+10d)
Special Function	RJ-45/RJ-11 Cable test for open circuits, shorts, mis-wires, reversals, and split pairs Battery test 1.5/3/9V approx.
Continuity with beeper	Y
Diode test	Y
Display hold	Y (only for multimeter)
Power source	NEDA1604/6F22 (9V) x 1pcs(Not included)
Size	178 x 85 x 48mm / 7.0"x3.3"x1.9"
Individual packing	Color Box

Features:

- 3 1/2 digits 1999 counts.
- 0.8% best accuracy.
- RJ-45/RJ-11 cable test for open circuits, shorts, miswires, reversals and split pairs.
- Auto / Manual both range.
- Extra function: back light, data hold, auto power off, low battery indication.



Cable tester



RJ-45 cable test



Line tester



DMM



RJ-45 / RJ-11 Remote terminator

MT-1280 Professional Digital Multimeter



CAT III 1000V

Features:

- 3 1/2 digits 1999 counts
- 0.5% best accuracy
- Resettable fuse protection
- Complies with the newest CE safety standard
- Extra functions: Auto power off, low battery indication, LCD backlight, data hold, LED indicator



Accessories: test leads, transistor test socket, thermocouple probe



Specification	
DC Voltage	200mV/2V/20V/200V $\pm(0.5\%+3d)$, 1000V $\pm(0.8\%+10d)$
AC Voltage	2V/20V/200V $\pm(0.8\%+5d)$, 750V $\pm(1.2\%+10d)$
DC Current	200 μ A/20mA $\pm(0.8\%+10d)$, 200mA $\pm(1.2\%+8d)$, 20A $\pm(2.0\%+5d)$
AC Current	20mA $\pm(1.0\%+5d)$, 200mA $\pm(2.0\%+5d)$, 20A $\pm(3.0\%+10d)$
Resistance	200 Ω $\pm(0.8\%+5d)$, 2K/20K/200K Ω $\pm(0.8\%+3d)$, 20M Ω $\pm(1.0\%+25d)$, 200M Ω $\pm(5.0\%+10d)$
Capacitance	20nF $\pm(2.5\%+20d)$, 20 μ F $\pm(2.5\%+20d)$, 200 μ F $\pm(5.0\%+20d)$
Temperature	-20°C~400°C $\pm(1.0\%+5d)$, 400°C~1000°C $\pm(1.5\%+15d)$
Continuity with beeper	Y
Diode test	Y
Transistor test	Y
Battery	9V(6F22) (Not Included)
Size (HxWxD)mm	182x90x46/7.2"x3.5"x1.8"
Individual packing	Color box

MT-1270 Digital Multimeter



CAT III 1000V

Features:

- 3 1/2 digits 1999 counts
- 0.5% best accuracy
- Complies with the newest CE safety standard
- Resettable fuse protection
- Extra functions: data hold, auto power off, low battery indication, LCD backlight



Accessories: test leads, transistor test socket, thermocouple probe



Specification	
DC Voltage	200mV/2V/20V/200V $\pm(0.5\%+3d)$, 1000V $\pm(0.8\%+10d)$
AC Voltage	2V/20V/200V $\pm(0.8\%+5d)$, 750V $\pm(1.2\%+10d)$
DC Current	2mA/20mA $\pm(0.8\%+10d)$, 200mA $\pm(1.2\%+8d)$, 10A $\pm(2.0\%+5d)$
AC Current	2mA $\pm(1.0\%+15d)$, 200mA $\pm(2.0\%+5d)$, 10A $\pm(3.0\%+10d)$
Resistance	200 Ω $\pm(0.8\%+5d)$ 2K/20K/200K/2M Ω $\pm(0.8\%+3d)$ 20M Ω $\pm(1.0\%+25d)$ 200M Ω $\pm[5\%(\text{reading}-10)+30d]$
Frequency	20K Hz $\pm(1.5\%+4d)$
Capacitance	2nF $\pm(4.0\%+20d)$, 20nF $\pm(4.0\%+20d)$, 200nF $\pm(4.0\%+20d)$, 2 μ F $\pm(4.0\%+20d)$, 20 μ F $\pm(5.0\%+30d)$
Temperature	(-20°C~1000°C) $\pm(2.0\%+2d)$
Diode Test	Y
Transistor Test	Y
Continuity with beeper	Y
Battery	9V(6F22) (Not Included)
Size (HxWxD)mm	182x90x46/7.2"x3.5"x1.8"
Test Lead model no.	MT-9906
Individual packing	Color box

MT-1232 Digital Multimeter



CAT III 600V

Features:

- 3 3/4 digits 3999 counts
- Complies with the newest CE safety standard
- Overload and mis-use protection
- Resettable fuse protection
- Extra functions: Relative reference, backlight, data hold, auto power off, low battery indication.



Accessories: test leads, transistor test socket, thermocouple probe



Specification	
DC Voltage	400mV/4V/40V/400V $\pm(0.5\%+4d)$, 600V $\pm(1.0\%+4d)$
AC Voltage	4V/40V/400V $\pm(0.8\%+6d)$, 600V $\pm(1.0\%+6d)$
DC Current	400 μ A/4,000 μ A $\pm(1.0\%+10d)$, 40mA/400mA $\pm(1.0\%+10d)$, 10A $\pm(1.2\%+10d)$
AC Current	400 μ A/4,000 μ A $\pm(1.5\%+10d)$, 40mA/400mA $\pm(1.5\%+10d)$, 10A $\pm(2.5\%+15d)$
Resistance	400 Ω $\pm(0.8\%+5d)$, 4k/40k/400k/4M Ω $\pm(0.8\%+4d)$, 40M Ω $\pm(1.2\%+10d)$
Frequency	1/10/100Hz $\pm(0.5\%+10d)$, 1K/10K/100KHz $\pm(0.5\%+10d)$, 1/10MHz $\pm(0.5\%+10d)$
Capacitance	4nF $\pm(0.5\%+9d)$, 40nF/400nF/4 μ F/40 μ F $\pm(3.5\%+8d)$, 100 μ F $\pm(5.0\%+8d)$
Temperature	(-20C~1000C) < 400C $\pm(1.0\%+5d)$, (-20C~1000C) >= 400C $\pm(1.5\%+15d)$
Duty Cycle	0.1% ~ 99.9%
Continuity with beeper	Y
Diode test	Y
Fuse	10A/250V
Power source	1.5V AA x 2 (not included)
Size	147x78x41mm/5.8"x3.1"x1.6"
Test leads model no.	MT-9907
Individual packing	Color box

▶ MT-1132 3 1/2 Digital Multimeter



Features:

- 3 1/2 digits 1999 counts
- Complies with the newest CE safety standard
- Large and easy to read display panel
- Overload and mis-use protection
- Extra functions: backlight, data hold, low battery indication.
- User friendly interface is ideal for students, DIY market. home applications and more

Specification	
DC Voltage	200mV/2V/20V/200V ±(0.5%+2d), 500V ±(0.8%+5d)
AC Voltage	200V ±(1.2%+10d), 500V ±(1.2%+10d)
DC Current	200μA/2mA/20mA/200mA ±(1.0%+5d), 10A ±(2.5%+5d)
Resistance	200Ω ±(0.8%+5d), 2K/20K/200K ±(0.8%+5d), 2MΩ ±(1.0%+5d)
Continuity with beeper	Y
Diode Test	Y
Transistor hFE test	Y
LED test	Y
Battery check	Y (1.5V)
Fuse	10A/250V
Power source	1.5V AA x 2 (not included)
Size	147x78x41mm/5.8"x3.1"x1.6"
Test leads model no.	MT-9907
Individual packing	Color box

New

CAT III 600V



Accessories: test leads, transistor test socket, thermocouple probe



▶ MT-1210 Digital Multimeter

With backlight, data hold, economic type.



Specification	
DCV	200mV/2V/20V/200V ±(1.0%+2d), 500V ±(1.2%+5d)
ACV	200/500V ±(2.5%+10d)
DCA	200μ/2m/20m/200mA ±(2.0%+5d), 10A ±(3.0%+5d)
Resistance	200Ω/2k/20k/200kΩ ±(1.0%+5d), 2MΩ ±(1.5%+5d)
Continuity with beeper	Y
Diode test	Y
Transistor hFE test	Y
Power source	NEDA1604/6F22 (9V) x 1pcs(Not included)
Size	144x70x32 mm / 5.7"x2.8"x1.3"
Individual package	Double blister



Transistor hFE test



Back light



Features:

- 3 1/2 digits 1999 counts.
- 1% best accuracy.
- Extra functions: backlight, data hold, low battery indication.



▶ MT-1630 3 1/2 Pen-Style Meter

Pen type compact in size DMM



Specification	
DCV	200mV/2V/20V/200V/600V ±(0.8%+5d)
ACV	2/20/200V ±(1.0%+3d), 600V ±(1.2%+3d)
DCA	20m/200mA ±(1.5%+10d)
ACA	20m/200mA ±(3.0%+10d)
Resistance	200Ω ±(1.0%+5d), 2K/20K/200K/2MΩ ±(1.0+3d), 20MΩ ±(1.2%+5d)
Continuity with beeper	Y
Diode test	Y
Over range indication	Y
Sampling rate	Approximately 3 times per sec.
Fuse protection	Y
Power source	LR44(1.5V)x2 pcs (not included)
Size	205 x 35 x 30 mm / 8.1"x1.4"x1.2"
Individual packing	Double blister



Features:

- 3 1/2 digits 1999 counts.
- 0.8% best accuracy.
- Auto range.
- Compact in size, light in weight and simple to use.
- Penlight brightly illuminates the point to be measured, even in dark places.
- Unique protection mechanism for the test probe for safety.
- Extra functions: auto power off, data hold, low battery indication.



**MT-3109 AC/DC Digital Clamp Multimeter****AC/DC current, Frequency, Capacitance measurement.****AC / DC
Measurement****Features:**

- 3 3/4 digits 3999 counts
- 1.0% best accuracy.
- Auto range.
- Overload protection.
- Extra function: duty cycle, relative reference, data hold, sleep mode, auto power off, low battery indication.
- Jaw Opening Size: max. 30mm



ACA measurement



DCA measurement

Specification	
DCV	400mV $\pm(1.0\%+3d)$, 40/400V $\pm(1.0\%+1d)$, 600V $\pm(1.0\%+5d)$
ACV	4/40/400V $\pm(1.2\%+5d)$, 600V $\pm(1.5\%+5d)$
DCA	40A $\pm(2.5\%+5d)$, 400A $\pm(2.5\%+3d)$
ACA	40A $\pm(3.0\%+8d)$, 400A $\pm(3.0\%+5d)$
Resistance	400 Ω $\pm(1.2\%+5d)$, 4k/40k/400k Ω $\pm(1.0\%+5d)$, 4M Ω $\pm(1.2\%+5d)$, 40M Ω $\pm(1.5\%+5d)$
Frequency	10/100/1k/10k/100k/1MHz $\pm(0.1\%+5d)$, 10MHz (For reference only)
Capacitance	40n/400n/4 μ /40 μ F $\pm(5.0\%+10d)$, 100 μ F $\pm(6.0\%+10d)$
Diode test	Y
Continuity with Buzzer	Y
Power Source	AAA(1.5V) x 3 pcs (Not included)
Size	203 x 68 x 33 mm / 8.0" x 2.7" x 1.3"
Individual Packing	Double Blister

**MT-3102 3 1/2 2A Mini Digital Clamp Meter****AC current 2A, Temperature measurement.****Features:**

- 3 1/2 digits 1999 counts.
- 0.8% best accuracy.
- Auto range.
- Portable and simple one-hand operation.
- Extra function: Maximum value hold, data hold, auto power off, low battery indication.
- Max. jaw opening: max. 30mm.



ACA measurement



Specification	
DCV	200mV $\pm(0.8\%+5d)$, 2/20/200V $\pm(0.8\%+3d)$, 600V $\pm(1.0\%+5d)$
ACV	2/20/200V $\pm(1.2\%+5d)$, 600V $\pm(1.5\%+5d)$
ACA	2A $\pm(3.0\%+15d) \leq 0.4A \pm(4.0\%+20d)$, 20A $\pm(2.0\%+10d) \leq 0.4A \pm(3.0\%+15d)$, 200/400A $\pm(2.0\%+5d)$
Resistance	200 Ω $\pm(1.2\%+5d)$, 2k/20k/200k Ω $\pm(1.0\%+3d)$, 2M Ω $\pm(1.2\%+5d)$, 20M Ω $\pm(1.5\%+5d)$
Temperature °C/°F	-40~0°C $\pm(3.0\%+4d)$, 0~400°C $\pm(1.0\%+3d)$, 400~1000°C $\pm(2.0\%+10d)$ -40~32°F $\pm(3.0\%+8d)$, 32~752°F $\pm(1.0\%+6d)$, 752~1832°F $\pm(2.0\%+18d)$
Diode test	Y
Continuity with beeper	Y
Power source	AAA(1.5V) x 3 pcs (Not included)
Size	203 x 68 x 33 mm / 8.0" x 2.7" x 1.3"
Individual packing	Double blister

**MT-3266 3 1/2 Hand Held Digital Clamp Meter****Features:**

- 3 1/2 digits 1999 counts.
- 0.8% best accuracy.
- Portable and simple one-hand operation.
- Extra function: data hold, low battery indication.
- Max. jaw opening: max. 50mm.



ACA measurement



Specification	
DCV	1,000V $\pm(0.8\%+2d)$
ACV	750V $\pm(1.2\%+4d)$
ACA	200/1,000A $\pm(3.0\%+5d)$
Resistance	200 Ω $\pm(1.0\%+3d)$, 20k Ω $\pm(1.0\%+1d)$
Continuity with beeper	Y
Power Source	NEDA1604/6F22 (9V) x 1pcs(Not included)
Size	230 x 70 x 37 mm / 9.1" x 2.8" x 1.5"
Individual package	Double blister

MT-3105 Smart Clamp Meter

Auto-selection function, Non-contact ACV detector.



Specification	
DCV	4/40/400V $\pm(0.7\%+4d)$, 600V $\pm(0.8\%+5d)$
ACV	4/40/400V $\pm(0.8\%+4d)$, 600V $\pm(1.2\%+4d)$
ACA	40/400A $\pm(1.8\%+5d)$
Resistance	400 Ω /4k/40k/400k/4M Ω $\pm(0.8\%+2d)$, 40M Ω $\pm(2.0\%+5d)$
EF Detection(NCV)	15V~55V "—" " 30V~85V "—" " 55V~145V "—" " Above 120V "—" "
Continuity with beeper	Y
Power Source	AA(1.5V)x2pcs (not included)
Size	220x76.5x48.5 mm / 8.7"x3.0"x1.9"
Individual package	Color box

Features:

- 3 3/4 digits 3999 counts.
- 0.7% best accuracy.
- Auto range.
- Auto selection DCV, ACV, ACA, Resistance.
- Non-contact voltage detector of ACV.
- 10 sets data store & read.
- Extra function: backlight, data hold, auto power off, low battery indication.
- Jaw Opening Size: max.42mm.

One
Touch



ACA Measurement



Non-contact voltage detection



MT-2017 Protective Function Analog Multimeter

With Null DCV, Capacitance measurement



Specification	
DCV	0.1/2.5/10/50/250V $\pm 3.0\%$ FSD, 1000V $\pm 4.0\%$ FSD
Null DCV	DC $\pm 5V \pm 25V \pm 5.0\%$ FSD
ACV	10/50/250V $\pm 4.0\%$ FSD, 1000V $\pm 5.0\%$ FSD
DCA	50 μ /2.5m/25m/250mA $\pm 3.0\%$ FSD, 10A $\pm 4.0\%$ FSD
Resistance	$\times 1(0.2\sim 2k\Omega)$ / $\times 10(2\sim 20k\Omega)$ / $\times 100(20\sim 200k\Omega)$ / $\times 1k(200\sim 2M\Omega)$ / $\times 10k\Omega(2k\sim 20M\Omega)$ $\pm 4.0\%$ ARC
Capacitance	C1(R $\times 1k$): 2000 μ F(Approx.), C2($\times 50\mu$ A): 0.025 μ /0.25 μ /25 μ $\pm 3.0\%$ FSD(Option MT-2007-C)
Battery check	1.5V/9V
Transistor hFE test	Y
Diode & LED test	Y
Continuity with beeper	Y
Front Panel Controls	Range selector switch with "OFF" position, 0 Ω adjust knob
Power source	AA(1.5V) x 2pcs and NEDA1604/6F22 (9V) x 1pcs
Size	160 x 105 x 40 mm / 6.3"x4.1"x1.6"
Individual packing	Color box

Features:

- Double-sided glass epoxy PCB.
- Mirrored Aluminum dial plate.
- Overload and mis-used protection via two fuses, oxide varactor & diodes.
- Robust protective holster alongside.
- 20k Ω /V DC & 9 k Ω /V AC input sensitivity.
- Adjustable back tilt device with hook-up design.
- Ideal for using in the fields of lab, school, home applications and more.



Double-sided glass
epoxy PCB



Adjustable back tilt
device with hook-up



NULL DCV
measurement



Including test leads,
batteries & fuses

MT-2018 Protective Function Analog Multimeter

With capacitance measurement



Specification	
DCV	0.1/0.5/2.5/10/50/250V $\pm 3.0\%$ FSD, 1000V $\pm 4.0\%$ FSD
ACV	10/50/250V $\pm 4.0\%$ FSD, 1000V $\pm 5.0\%$ FSD
DCmA	50 μ /2.5m/25m/250mA $\pm 3.0\%$ FSD
Resistance	$\times 1(0.2\sim 2k\Omega)$ / $\times 10(2\sim 20k\Omega)$ / $\times 100(20\sim 200k\Omega)$ / $\times 1k(200\sim 2M\Omega)$ / $\times 10k\Omega(2k\sim 20M\Omega)$ $\pm 4.0\%$ ARC
Capacitance	C1(R $\times 1k$): 2000 μ F(Approx.), C2($\times 50\mu$ A): 0.025 μ /0.25 μ /25 μ $\pm 3.0\%$ FSD(Option MT-2007-C)
Battery Check	1.5V/9V
Transistor hFE test	Y
Diode & LED test	Y
Front Panel Controls	Range selector switch with "OFF" position, 0 Ω adjust knob
Power Source	1.5V AA x 2pcs and 9V(NEDA1604) x 1pcs
Size	160 x 105 x 40 mm / 6.3"x4.1"x1.6"
Individual Packing	Color box

Features:

- Mirrored Aluminum dial plate.
- Overload and mis-used protection via two fuses, oxide varactor & diodes.
- Robust protective holster alongside.
- 20k Ω /V DC & 9 k Ω /V AC input sensitivity.
- Adjustable back tilt device with hook-up design.
- Ideal for using in the fields of lab, school, home applications and more.



Adjustable back tilt
device with hook-up



Including test leads,
batteries & fuses

MT-4017 Light Intensity Meter



Cover and wrist strap included



Box

Features:

- 6 digits LCD display.
- Portability and simplicity one-hand operation
- Extra functions: data hold, auto power off, low battery indication, Max/Min mode.
- Ideal for light measuring in office, library, hospital or home use and more.

Specification	
Parameters	Lux(lm/m ²); foot candle (lm/ft ²)
Range	0~90000 Lux; 0~8300.0 ftc
Accuracy	±(3% +30d) to reference
Sample rate	1 time/sec
Resolution	1 Lux(0~90000 Lux), 0.1 ftc(0~8300.0 ftc)
Power source	AAA(1.5V) x 3pcs (Not Included)
Size	157 x 60 x 30 mm / 6.2"x2.4"x1.2"
Individual packing	Carrying Case + Color Box

MT-4018 Sound Level Meter



Cover and wrist strap included



Box

Features:

- 4 digits LCD display.
- Dual display with analog bargraph.
- Auto / Manual range.
- Extra functions: auto power off, low battery indication, Sound OVER or UNDER display
- Usually apply to traffic, factory, office for sound level monitoring

Specification	
Microphone	Electret condenser microphone
Response frequency	31.5Hz~8KHz
Frequency weighting	A Type
Range	30~60dB, 50~80dB, 70~100dB, 90~120dB
Resolution	0.1 dB
Accuracy	30~60dB ±3 dB; 60~120dB ±2 dB
Time response	Analog bar: 125ms ; Digital :750ms
Power source	AAA(1.5V) x 3pcs (Not Included)
Size	175 x 60 x 32 mm / 6.9"x 2.4"x1.3"
Individual Packing	Carrying Case + Color Box

NT-311 Digital Temperature Humidity Meter



For Home, warehouse, Internet server center and more

Features:

- Large LCD display, easy to read
- Integrating Temperature, Humidity, Clock, Alarm clock & Calendar Multi-functions.
- MAX. and MIN. temperature and humidity memory function
- 12-hour/24-hour displaying system selection.
- Wall hanging or desk-top stand support.

Specification	
Temperature range	-10 ~ +55°C / 14 ~ 130°F
Humidity range	10%RH~99%RH
Accuracy	0 ~ 50°C : ±1°C; otherwise : ±2°C 32 ~ 112°F : ±1.8°F 40% ~ 80%RH : ±8%RH
Resolution	Temperature : 0.1°C (0.2°F) Humidity : 1%RH
Storage condition	-20~60°C (20%RH ~ 80%RH)
Power source	AAA(1.5V) x 1pcs (Not included)
Size	100 x 108 x 20 mm / 3.9"x4.3"x0.8"
Individual packing	Blister card

NT-312 Digital Temperature Humidity Meter With Probe



For Home & Office Use



For Indoor / Outdoor Measuring

Features:

- Economical way to monitor ambient temperature and humidity as well as outdoor temperature via remote temperature probe.
- Large LCD display, easy to read.
- MAX. and MIN. temperature and humidity memory automatic update functions.
- Wall hanging or desk-top stand support.

Specification	
Temperature range	-10 ~ +55°C / 14 ~ 130°F
Humidity range	20% RH ~ 99%RH
Accuracy	0 ~ 50°C : ±1°C, otherwise : ±2°C 40% ~ 80%RH : ±8%RH
Resolution	Temperature :0.1°C Humidity 1%
Probe wired length	2.9 Meters
Ambient temperature	-10 ~ +50°C / +14 ~ 122°F
Power source	AAA(1.5V) x 1pcs (Not included)
Size	75x60x23 mm / 3.0"x2.4"x0.9"
Individual packing	Blister card

▶ MT-4011 K Type Digital Thermometer



Ideal For use in labs, industrial control and audits and measuring differential temperature T1/T2.

Features:

- Large LCD displays (LCD 18.2mm):
4 Digital liquid crystal display.
- Dual K type probe input.
- T1, T2 or T1-T2 dual channel display.
- 10 set data memory function.
- Function: °C/°F selection, Max/Min reading, Data Hold, Relative reference, Memory, Limit, Hi/Lo, T1-T2 Type.
- Extra function: Auto power off, Low battery indication.



Specification	
Measurement range	K Type : -200~1372°C (-328~2501°F)
Accuracy	±(0.2%+1°C): -250 ~ -100°C ; ±(0.1%+0.7°C): -100 ~ 1372°C ; ±(0.2%+2°F): -418 ~ -148°F ±(0.1%+1.4°F): -148 ~ 2501°F
Resolution	0.1°C/0.1°F (below 1000°C), 1°C/1°F (above 1000°C)
Power source	AAA/UM-4(1.5V) X 4pcs (not included)
Size	125 X 82 X 43 mm / 4.9"x3.2"x1.7"
Accessories	K-type thermocouple wire x 2pcs
Individual packing	Sleeve with white box



T1, T2 dual channel



Dual probe input

▶ NT-306 Non-Contact Voltage Detector



Warning:
• Never test voltage more than 1000 VAC
• Test voltage range: 90V~1000 VAC

Features:

- Built-in white LED illumination light provides convenient work in dark areas
- Compact size with pocket clip easily fits into pockets or tool pouches
- Red LED and audible alarm if voltage is present
- Entire outer surface is non-conductive for safety, helps avoid high voltage shock
- Powered by two 1.5V AAA batteries (not included)
- CAT IV 1000V Safety rating.
- Applications: Electricians, maintenance staffs, service and safety personnel, and even homeowners
- Detects AC voltage from 90 to 1000 VAC without metallic contact

Individual packing: Blister card



Red LED and audible alarm if voltage is present



Built-in white LED illumination light



Detects AC voltage from 90 to 1000 VAC

▶ NT-6352 3 in 1 Metal Voltage Stud Detector




Fast, accurate, easy to use, LED & buzzer indicators




Features:

- Combined unit to accurately detect live or dead electricity cables, water or gas pipes and wooden studs or battens
- LED & buzzer indicators
- Depth penetration 18~20mm (0.7 to 0.8 inches)
- Uses precision screwdriver for easy unit sensitivity adjustment
- Power source: NEDA1604/6F22 (9V) x 1pcs(Not included)
- Size: 178 x 120 x 34.7mm (7 x 4.8 x 1.4 inches)


Individual packing: Color box



Wooden stud detection



Metal detection



Wiring detection



▶ NT-6556 Ultrasonic Distance Meter with Laser Tape




Save time, money & effort

Features:


- Easily and quickly measure up to 50 feet.
- Calculation of area and volume.
- Measured data memory function.
- Multi-length accumulation.
- Auto converts feet to meters.
- Auto power off.



Point to point measuring



Area measuring



Cube measuring



Specification:	
Recommended use	indoor
Measurement range	2~50 feet (0.6 ~ 15 meters)
Accuracy	±(0.5% +1digit)
Resolutions	1' (0.01m)
Aperture angle	Approx. ±5 degrees
Laser diode type	650nm
Power supply	9V alkaline battery x1 pcs(Not included)
Operating temperature	32~104°F (0~40°C)
Calculation range	Length: 9999 feet (9999m), Area: 999999 sq ft (99999m²), Volume: 999999 cu ft (99999m³)
Individual packing	Blister card

MT-9906/MT-9907 Test Leads

CE

New



CAT III 1000V

Features:

- One pair (one red, one black) comfort grip probes with protective cap for user comfort and safety
- Durable quality PVC insulated test leads with right-angle shrouded banana plugs
- Banana plugs are molded directly to the wire for superior pull strength
- Needle tip test probe, allowing easy access of hard to reach test points
- Compatible with most of multimeters that accept safety style sheath banana plugs

MT-9906 Specification	
Probe	Ø2x17mm
Hand piece	129mm
Lead length	900mm
Plug	Ø4.2x15mm
OAL	1045mm/41.1"
Weight	78.5g

MT-9907 Specification	
Probe	Ø2x17mm
Hand piece	109mm
Lead length	900mm
Plug	Ø4.2x15mm
OAL	1025mm/40.4"
Weight	74g

Individual packing: Blister card

400-029/400-030 Receptacle Testers



400-029



400-030



Features:

- Tests for correct wiring, open ground, reverse polarity, open hot, open neutral, hot on neutral, hot and ground reversed with open hot and ground fault interruption in 3-wire, 120VAC circuits
- Model 400-030 features proper operation GFI receptacles testing.

Individual packing: Blister card



Light pattern indicates condition of wiring.

● Red is on ● Amber is on ○ Light is off

OPEN GROUND

○ ● ○ Ground contact not connected

OPEN NEUTRAL

○ ○ ● Neutral contact not connected

OPEN HOT

○ ○ ○ Hot contact not connected

HOT/GRD REVERSE

● ○ ● Hot and ground contacts interchanged

OPEN NEUTRAL

● ○ ● Hot and neutral contacts interchanged

CORRECT

○ ● ● Receptacle is wired correctly

6HP-9xxx Series Oscilloscope Probe Kit



Features:

- Switchable X1/X10 attenuation with reference switch positions.
- Break-resistant center conductor & wide compensation range.
- Flatter response, sharper leading edges.
- Faster rise time and replaceable cable probe head tip and ground lead.
- Max. input voltage: 600V (DC-peak AC).
- Includes BNC adapter, IC tip, insulating tip & trimming tool.

Individual packing: Pouch bag



6HP-9xxx Series
(Standard type)

Switchable series							
Model No.	Attn.	Readout	Input impedance	Band width	Resetime	Max input V	Compensation range
6HP-9060	x1	No	1MΩ 90PF	6MHz	58ns	600VDC	NA
	x10		10MΩ 18PF	60MHz	5.8ns		10-35PF
6HP-9100	x1		1MΩ 47PF	6MHz	58ns	600VDC	NA
	x10		10MΩ 16PF	100MHz	3.5ns		10-35PF
6HP-9150	x1		1MΩ 47PF	6MHz	58ns	600VDC	NA
	x10		10MΩ 15PF	150MHz	2.3ns		10-35PF
6HP-9250	x1		1MΩ 47PF	6MHz	58ns	600VDC	NA
	x10		10MΩ 14PF	250MHz	1.4ns		10-35PF




PRECISION PLIERS & CUTTERS

PRECISION PLIERS & CUTTERS

Pro'sKit® Precision Pliers

Cutting edge shapes:

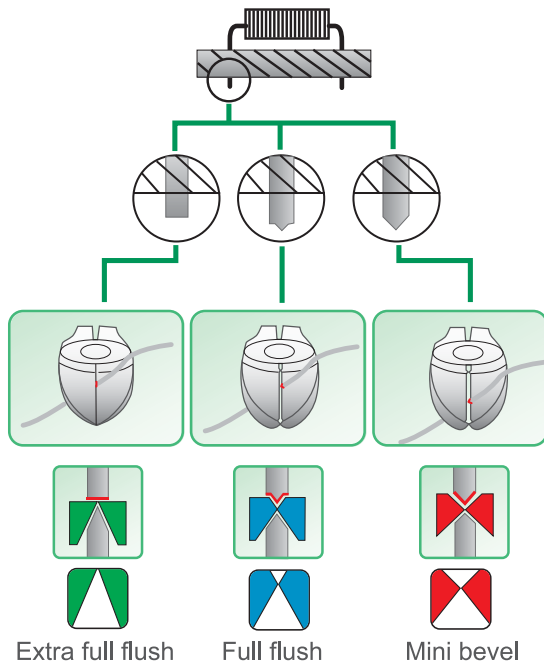


Finish of Pliers:



All of Pro'sKit® pliers are made of high quality steel to ensure excellent performance and long life. A variety of materials are used for Pro'sKit® pliers, including: Middle Carbon Steel (S45C, S50C, S55C, SK7, SK5), High Carbon Steel (S60C), High Carbon Tool Steel (SAE 1085), Chrome Vanadium Steel (CrV, SAE 6168, SAE 6150), Chrome-molybdenum Vanadium Steel (SCM 440), Stainless Steel (AISI 420, 410, 420J2, 420K2).

- The overall lengths of most Precision Pliers range from 90 to 145mm (4" to 5-1/2") and are great for use on flattening, bending, holding and cutting precise electronic components, wires and PCB. They are also popular in the jewelry industry.
- The overall lengths of most Electrical Pliers range from 150 to 230mm (6" to 9"), suited for cutting various kinds of heavy duty metal wires, mainly used in electronic, automobile, building field.


Basic shapes of jaws :

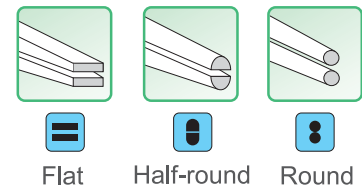


Gripping surfaces:



Handles:

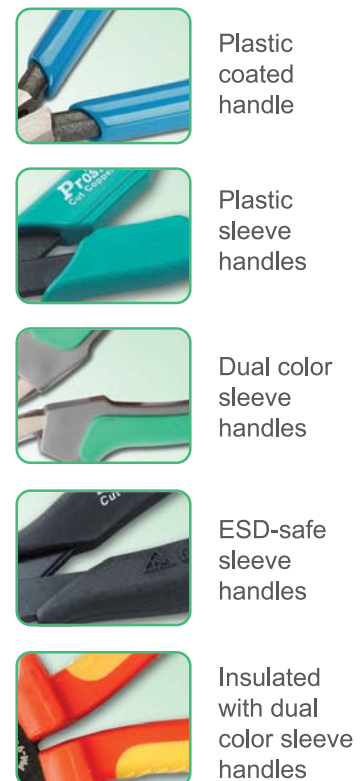

Spring:

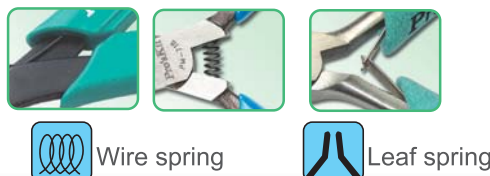

Pliers Technical Basics

Spring




Wire Spring

Precision pliers with double leaf springs or wire spring to keep the handles always self-opening to supply smooth and efficient operation.



Leaf spring

Gripping surfaces




Serrated

Serrated jaws provide a good grip but serrations can mar jewelry when you exert force excessively.



Crosswise serrated

Crosswise serrated jaws provide the best grip, suited for pulling and cutting various kinds of heavy duty metal wires whatever in horizontal or vertical angles, but serrations will cause abrasion when exerting force too much.




Smooth



Smooth jawed pliers are unlikely to mar objects but do not provide good grip. Suited for flattening wire, flattening pins and precision assembly work.

Shapes of jaws:



- **Flat jaws** : Mainly used in gripping and holding flat or square objects securely and for making angular bends. Insides of jaws may be smooth or serrated. Typically design for electric pliers and electronic flat nose pliers.



- **Half-round jaws** : Mainly used in holding objects, pulling wires and bending wires. Insides of jaws may be smooth or serrated. It is widely designed in various needle nose pliers.



- **Round jaws** : Mainly used in making bends, loops, circles, coils from wire or sheet metal. Tapered circular jaws are smooth so that they will not scratch or nick soft metals. It is popular in the jewelry industry



Cutting edge shapes:



Without bevel : This kind of cutting edge shape is usually designed in micro nippers, precision electronic pliers, plastic cutting pliers. Its blades are very sharp, suited for cutting soft wire up to Ø1.0mm(AWG 18).



Small outside bevel : This kind of cutting edge shape is usually designed in electronic pliers, suited for cutting soft wire, copper wire from 0.6 to Ø1.2mm (AWG 22 to16) or small components.



Outside bevel : It is usually designed in electric pliers, needle pliers, suited for cutting thick copper wire or hard iron wire from Ø 0.8 to Ø1.6mm (AWG 20 to14) or heavy duty metal pins.

Safety Caution



- When using cutting pliers, please wear protective goggles and gloves and beware of wire ends flying off.
- Each tool should only be used for its specified purpose.
- Only handles marked with the symbol  1000V are insulating.



Precision Stainless Steel Pliers Mirror Polished

- Made of stainless steel with mirror polished finish
- Leaf springs are spot welded to the tool handles to fix the jaws in a comfortable position
- Forged box joint construction gives strength and precision



Forged box joint




High grade alloy steel, hot drop forged, oil hardened and tempered for long life and perfect precision work

Dipped handle for user comfort



Individual packing: Blister Card


▶ 100-011 5" Needle Nose Plier



Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	45 $\pm$ 3°	125/4.9


▶ 100-013 5 1/2" Needle Nose Plier



Unit: inch


Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3°	135/5.3

▶ 200-056 4 1/2" Semi-Flush Diagonal Cutter



Unit: inch


Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	45 $\pm$ 3°	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 2.0mm 12AWG	110/4.3



Unit: inch


Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	45 $\pm$ 3°	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 1.6mm 14AWG	110/4.3

▶ 200-057 4 1/2" Full-Flush Diagonal Cutter




Unit: inch

Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	45 $\pm$ 3°	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 2.0mm 12AWG	110/4.3




Unit: inch

Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	45 $\pm$ 3°	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 2.0mm 12AWG	110/4.3

▶ **100-014 5 1/2" Bent Nose Plier**


Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	135/5.3

▶ **100-015 5 1/2" Flat-Nose Plier**


Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	130/5.1

▶ **200-060 5" Flush Oblique Cutter Slim Tip Plier**


Unit: inch

Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	45 $\pm$ 3*	Ø 0.8mm 20AWG	Ø 1.0mm 18AWG	Ø 1.6mm 14AWG	125/4.9

▶ **100-025 5" Long Nose Plier**


Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	140/5.5

▶ **100-017 6" Needle Nose Plier**


Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	145/5.7

▶ **100-012 6" Needle Nose Plier**


Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	140/5.5

▶ **100-006 7 1/2" Long Nose Flat Blade Plier**

Unit: inch

Material	HRC	OAL. (mm/inch)
	Body	
AISI 420	48 $\pm$ 3*	185/7.3

▶ **200-067 5" Side Cutting Plier**

Unit: inch

Material	HRC	Application			OAL. (mm/inch)
	Body	Hard steel	Soft steel	Copper	
AISI 420	48 $\pm$ 3*	Ø 0.8mm 20AWG	Ø 1.6mm 14AWG	Ø 2.0mm 12AWG	125/4.9

Stainless Specialty Electronic Pliers

- Made of AISI420 stainless steel which assures cleanliness and corrosion-resistance.
- Dual color non-slip TPR handles for user comfort.
- Polyoxymethylene (POM) spring for self-opening action to supply smooth operation.



Made of high quality
AISI 420 stainless steel

Dual color non-slip
TPR handles




Polyoxymethylene
(POM) spring



Individual packing:
Blister Card

PM-396F Stainless Cutting Plier




Unit: inch



Material	HRC	Application	OAL. (mm/inch)
		Copper	
AISI 420	48°±3°	Ø 1.3mm/16AWG	115/4.5

200-092 5" Micro Cutter




Unit: inch



Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Copper	
S55C	52°±2°	60°±3°	Ø 1.3mm/16AWG	130/5.1

PM-396G Stainless Long Nose Plier




Unit: inch



Material	HRC	OAL. (mm/inch)
AISI 420	43°±3°	120/4.7

PM-396H Stainless Flat Nose Plier




Unit: inch



Material	HRC	OAL. (mm/inch)
AISI 420	43°±3°	120/4.7

PM-396I Stainless Bent Nose Plier




Unit: inch



Material	HRC	OAL. (mm/inch)
AISI 420	43°±3°	120/4.7

PM-396J Stainless Round Nose Plier




Unit: inch



Material	HRC	OAL. (mm/inch)
AISI 420	43°±3°	120/4.7

100-046 6" Long Nose Plier




Unit: inch



Material	HRC	OAL. (mm/inch)
S55C	Body 52°±2°	150/5.9


PM-731 Mini Lineman's Plier



Unit: inch

Material	HRC	Application	OAL. (mm/inch)
	Cutting edge	Copper	
S45C	50°~55°	Ø 1.0mm	120/4.7


PM-736 Long Nose Plier



Unit: inch

Material	HRC	Application	OAL. (mm/inch)
	Cutting edge	Copper	
S45C	50°~55°	Ø 1.0mm/18AWG	135/5.3


PM-737 Diagonal Cutting Plier



Unit: inch

Material	HRC	Application	OAL. (mm/inch)
	Cutting edge	Copper	
S45C	50°~55°	Ø 1.0mm/18AWG	115/4.5

PM-746 Needle Nose Plier




Unit: inch

Material	HRC	OAL. (mm/inch)
	Cutting edge	
S45C	50°~55°	150/5.9


Precision Pliers

- High quality carbon steel S45C forged, hardened, finished with nickel plating for corrosion resistance.
- Spring-loaded for self-opening action to reduce fatigue during long term operation.
- Dual color, non-slip TPR handles for user comfort.
- Particularly designed for electronic and precision field.



Individual packing: Blister Card


PM-754 Flat Nose Plier



Unit: inch

Material	HRC	OAL. (mm/inch)
	Cutting edge	
S45C	50°~55°	138/5.4

PM-755 Bent Nose Plier




Unit: inch

Material	HRC	OAL. (mm/inch)
	Cutting edge	
S45C	50°~55°	135/5.3

Precision Pliers with Adjustable Screw

- Adjustable screw insures precise cuts every time.
- Made of high-quality 63CRM material, precise and durable
- Ergonomic, non-slip handle with dual colors ensures great operator comfort
- Leaf spring, energy saving design for efficient work

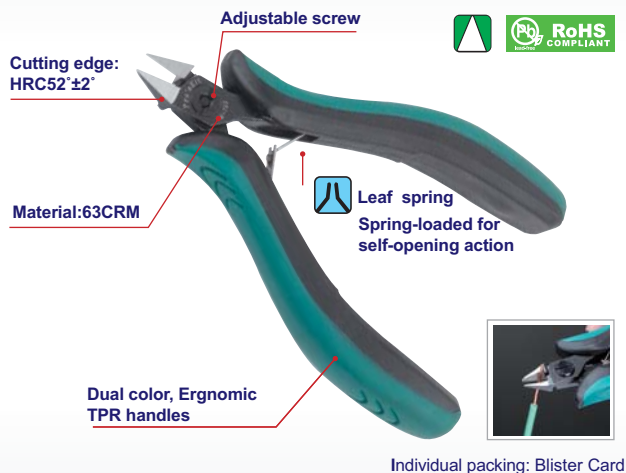


Smooth surface is cut
(By PM-721/PM-723)



Adjustable screw
(By PM-720/PM-721/PM-723)


PM-721 Diagonal Flush Cutting Nipper



Unit: inch

Material	HRC Body	Application Copper	OAL. (mm/inch)
63CRM	55'±3'	Ø 1.3mm/16AWG	115/4.5


PM-723 Diagonal Flush Cutting Nipper



Unit: inch

Material	HRC Body	Application Copper	OAL. (mm/inch)
63CRM	55'±3'	Ø 1.3mm/16AWG	115/4.5


PM-727 Cutting Plier



Unit: inch

Material	HRC Body	Application Copper	OAL. (mm/inch)
SAE 6050	40'±3'	Ø 1.3mm/16AWG	130/5.1


PM-728 Cutting Plier



Unit: inch

Material	HRC Body	Application Copper	OAL. (mm/inch)
SAE 6050	40'±3'	Ø 1.3mm/16AWG	130/5.1


902-078 4 1/2" Precision Cutting Plier



Unit: inch

Material	HRC Body	Cutting edge	Application Copper	OAL. (mm/inch)
AISI 6140	45'±3'	61'±3'	Ø 2.0mm/12AWG	120/4.7

902-079 5" Extra Long Nose Plier



Unit: inch

Material	HRC Body	Cutting edge	Application Hard steel	Copper	OAL. (mm/inch)
AISI 6140	45'±3'	61'±3'	Ø 0.8mm/20AWG	Ø 2.0mm	155/6.1

ESD Safe Pliers and Cutters

- Made of high-quality carbon steel with nickel plating
- ESD safe, soft touch cushioned handle provides a secure hold and comfort.
- With double leaf springs for self-opening action




PK-ST902 4 Pc Ergonomic ESD Safe Plier And Cutter Kit



Contents

PM-055CN /PM-023CN/PM-037CN/PM-036CN

PM-037CN 4 1/2" Diagonal Cutting Plier




Unit: inch



Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S45C	43'±2'	52'±2'	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 1.6mm 14AWG	115/4.5

PM-029CN 5" Round Nose Plier




Unit: inch



Material	HRC: Body	OAL.(mm/inch)
S45C	43'±2'	127/5.0

PM-055CN 5" Bent Nose Plier



Unit: inch



Material	HRC: Body	OAL.(mm/inch)
S45C	43'±2'	127/5.0

PM-023CN 4 1/2" Pointed Diagonal Plier




Cutting edge: HRC52'±2'

Material: Carbon steel with Nickel Plating, Body: HRC 43'±2'



ESD safe cushioned grips for superior comfort and protection 10⁷~10⁹Ω




Unit: inch



Individual packing:
Blister Card

Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S45C	43'±2'	52'±2'	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 1.6mm 14AWG	115/4.5

PM-036CN 5" Snipe Nose Plier




Unit: inch



Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S45C	43'±2'	52'±2'	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 1.6mm 14AWG	127/5.0

PM-046CN 6" Needle Nose Plier




Unit: inch



Material	HRC: Body	OAL.(mm/inch)
S45C	43'±2'	150/5.9

PM-053CN 5" Flat Nose Plier



Unit: inch



Material	HRC: Body	OAL.(mm/inch)
S45C	43'±2'	127/5.0

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PINCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS

Non-Slip Handles Precision Pliers

- Clean and smooth cutting
- Lightweight design for easy operation
- Particularly designed for electronic and precision field



Material: S45C
Carbon steel

Nickel-iron plated




Wire spring for self-opening

Non-Slip handles
PVC plastic coated



Individual packing:
Blister Card


▶ 100-042 6" Needle-Nose Plier



Unit: inch

Material	HRC	OAL.
	Body	(mm/inch)
S45C	43±3°	150/5.9


▶ 100-044 5" Flat-Nose Plier



Unit: inch

Material	HRC	OAL.
	Body	(mm/inch)
S45C	43±3°	135/5.3


▶ 100-004 5" Bent-Nose Plier



Unit: inch

Material	HRC	OAL.
	Body	(mm/inch)
S45C	43±3°	130/5.1


▶ 100-003 5" Needle-Nose Plier



Unit: inch

Material	HRC		Application		OAL.
	Body	Cutting edge	Hard steel	Copper	(mm/inch)
S45C	43±3°	48±3°	Ø 0.8mm 20AWG	Ø 1.6mm 14AWG	136/5.4

▶ 100-040 5 1/2" Long Nose Plier




Unit: inch



Material	HRC		Application		OAL.	Individual packing
	Body	Cutting edge	Hard steel		(mm/inch)	
SAE 6140	45±3°	62±3°	Piano wire: Ø1.2mm (under HRC: 45°)		140/5.5	Blister Card


▶ 200-037 4 1/2" Diagonal Cutter Plier



Unit: inch

Material	HRC		Application			OAL.
	Body	Cutting edge	Hard steel	Soft steel	Copper	(mm/inch)
S45C	43±3°	48±3°	Ø 0.8mm 20AWG	Ø 1.3mm 16AWG	Ø 1.6mm 14AWG	110/4.3

▶ 200-087 5" Heavy Duty Cutter




Unit: inch




Material	HRC		Application		OAL.	Individual packing
	Body	Cutting edge	Hard steel		(mm/inch)	
SAE 6140	45±3°	62±3°	Piano wire: Ø0.5mm (under HRC: 45°)		125/4.9	Blister Card

5" ESD Safe Cutter



Unit: inch

200-041



Unit: inch


200-082



Safety clip design prevents flying leads, good for PC board lead trimming, or any soldered wire leads cutting to ensure user's safety.

Model No.	Material	HRC		Application Copper	OAL. (mm/inch)
		Body	Cutting edge		
200-041	S50C	50 $\pm$ 3°	50 $\pm$ 3°	Ø 2.0mm	125/4.9
200-082				12AWG	

100-007 5" ESD Safe Plier




Unit: inch

Material	HRC		OAL. (mm/inch)
	Body	Cutting edge	
S50C	50 $\pm$ 3°		140/5.5



200-040 5" ESD Safe Micro Cutter




Unit: inch

Material	HRC		Application Copper	OAL. (mm/inch)
	Body	Cutting edge		
SK7	50 $\pm$ 3°	50 $\pm$ 3°	Ø 1.3mm 16AWG	130/5.1



200-083 5" Clean Cut Micro Nipper



Unit: inch

Material	HRC		Application Copper	OAL. (mm/inch)
	Body	Cutting edge		
SK7	50 $\pm$ 3°	50 $\pm$ 3°	Ø 0.8mm 20AWG	120/4.7




Specialty Electronic Pliers Conductive Handle

- Made from high carbon steel. Accurately machined, these high quality precision tools are designed for fine assembling and adjustment operations on electronic circuits.
- Provide easy work on high density PC board
- Conductive handle



Individual packing:
Blister Card

PM-251 Cutting Plier




Unit: inch




Material	HRC		Application Copper	OAL. (mm/inch)
	Body	Cutting edge		
AISI 420J2	48 $\pm$ 3°		Ø 1.3mm 16AWG	122/4.8

PM-252 Bent Nose Plier




Unit: inch

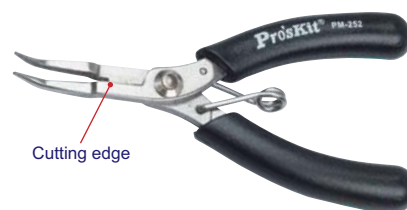


Material	HRC		Application Copper	OAL. (mm/inch)
	Body	Cutting edge		
AISI 420J2	43°~46°		Ø 1.0mm 18AWG	118/4.6

PM-254 Long Nose Plier



Unit: inch

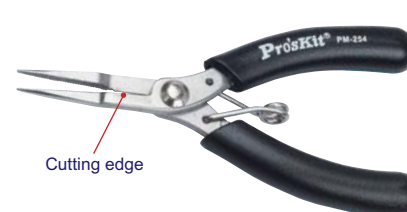

Material	HRC		Application Copper	OAL. (mm/inch)
	Body	Cutting edge		
AISI 420J2	43°~46°		Ø 1.0mm 18AWG	118/4.6

Specialty Electronics Pliers

High quality

- Clean and smooth cutting
- Light for easy operation
- Particularly made for electronic and precision field
- Cut copper wire only

Material: SK7
High carbon steel
Hardness: HRC50*



Anti-slip PVC for comfortable operation.


Leaf spring

Lanyard hole for easy carrying



Individual packing: Blister Card


200-002 5" Economy Flush Cutter



Unit: inch

Material	HRC		Application		OAL. (mm/inch)
	Body	Cutting edge	Copper		
SK7	50°±3°	50°±3°	Ø 1.6mm 14AWG		125/4.9


200-071 5" Precision Flush Cutter



Unit: inch

Material	HRC		Application		OAL. (mm/inch)
	Body	Cutting edge	Copper		
SK7	50°±3°	50°±3°	Ø 1.3mm 16AWG		130/5.1


902-077 5" Micro Cutting Plier



Unit: inch

Material	HRC		Application		OAL. (mm/inch)
	Body	Cutting edge	Copper		
SK5	50°±3°	55°±3°	Ø 1.6mm 14AWG		130/5.1

200-088 5" Micro Cutter



Unit: inch


Material	HRC		Application		OAL. (mm/inch)
	Body	Cutting edge	Soft steel Ø 0.8mm /20AWG	Copper Ø 1.6mm 14AWG	
SK5	50°±3°	55°±3°			130/5.1

200-080 2 in 1 Wire Stripper/Cutter



Material	HRC Body	Application	OAL. (mm/inch)
AISI 420	48°±3°	Cutter: Ø 1.2mm Stripper: 0.4~1.6mm ² (26~14AWG)	130/5.1

902-011 5" Micro Cutter




Unit: inch

Material	HRC		Application		OAL. (mm/inch)
	Body	Cutting edge	Copper		
SK5	48°±3°		Ø 1.2mm 16AWG		125/4.9

902-075/902-076 5" Micro Cutting Plier



902-076 with safety clip
Safety clip design prevents flying leads, good for PC board lead trimming, or any soldered wire leads cutting to ensure user's safety.



Unit: inch



Model No.	Material	HRC		Application		OAL. (mm/inch)
		Body	Cutting edge	Soft steel Ø 0.8mm 20AWG	Copper Ø 1.6mm 14AWG	
902-075	SK5	50°±3°	50°±3°			130/5.1
902-076						



Electrical Insulated Tools

Pro'sKit® Insulated VDE Series come with high visibility molded ergonomic cushion handles for maximum comfort to ensure full force transfer through the grip. They also have been tested for dielectric strength under 10,000 Volts in a water bath in accordance with DIN EN 60900 (IEC 60900:2004) to encourage the users to trust a reliable insulation when live working up to 1000 Volt.

VDE tools are often used under extreme conditions, such as very low or very high temperature. Pro'sKit Insulation VDE Series are made from high grade materials, which have been tested by low-temperature impact test, high-temperature adhesive power test and burning test to offer more safety to users.



1000V 11
IEC 60900



Safety Caution



- Please keep your insulated tools dry and clean.
- Wear protective goggles and gloves when working.
- Do not touch the non-insulated parts when working live.

Testing Procedure





Dielectric Strength Test

Individual immersion test at 10,000 Volt to guarantee safety working up to 1000 Volt.



Low-temperature Impact Test

Cool the tools to -40°C then conduct the impact test. The insulation must retain its toughness and not break.



High-temperature Adhesive Power Test

After storage for 168 hours at 70°C, pull the insulated part with tensile force of 500Nm for 3 minutes. This test ensures that the insulation still stays firm and remain snug against the tool body.



Burning Behavior Test

Pro'sKit® insulated tools use flame-resistant plastics for insulation to protect users.

▶ 902-202 Insulated Wire Stripping Plier



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Adjustable to accept conductors up to 10mm²/8AWG overall diameter		160/6.3

▶ 902-206 Insulated Side Cutter



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø2.0mm/12AWG	Ø2.8mm/10AWG	165/6.5

▶ 902-205 Insulated Heavy Duty Side Cutter



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø2.7mm/10AWG	Ø3.8mm/8AWG	200/7.9

▶ 902-203 Insulated Combination Plier



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø2.5mm/10AWG	Ø3.8mm/8AWG	195/7.7

▶ 902-204 Insulated Combination Plier



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø2.0mm/12AWG	Ø3.1mm/8AWG	175/6.9

Insulated VDE Pliers



1000V 11
IEC 60900 : 2004



- Certified to IEC 60900: 2004, VDE, and DIN 1,000V safety standards and bear GS sign.
- High visibility molded ergonomic cushion handle for maximum comfort.
- Hard chrome finish with PTFE coating for anti-rust protection. Drop forged from special tool steel.




Adjusting Screw

Hard chrome finish with PTFE coating



Wire Spring

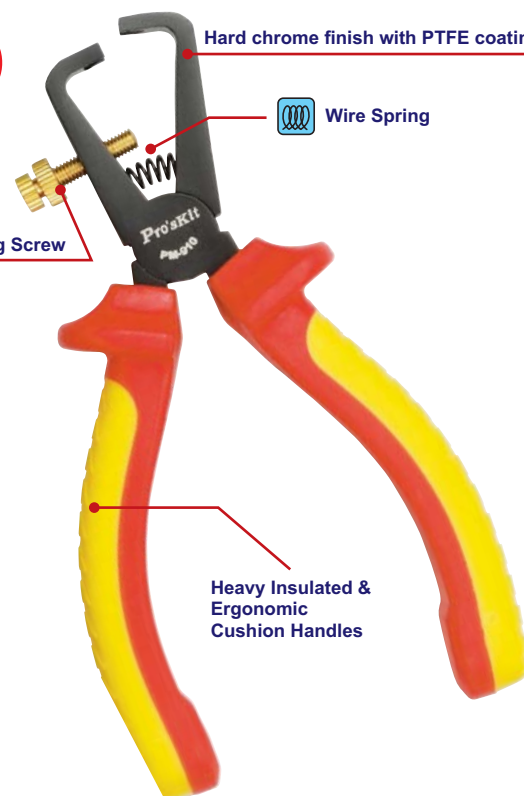

Heavy Insulated & Ergonomic Cushion Handles

Individual packing: Blister Card

▶ 902-207 Insulated Long Nose Plier



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø2.2mm/12AWG	Ø3.2mm/8AWG	200/7.9

▶ 902-208 Insulated Long Nose Plier



Material	HRC	Application		OAL. (mm/inch)
	Body	Hard steel	Soft steel	
AISI 6150	46°±4°	Ø1.6mm/14AWG	Ø2.5mm/10AWG	170/6.7

High Leverage Pliers



- New mechanical design, up to 50% cutting force saving than regular pliers
- Induction-hardened cutting edge stay sharp for a long service life, hardness approx. HRC56°~62°
- Hot-riveted joint ensures smooth action and no handle wobble
- Made from Cr-V steel with nickel plating for corrosion resistance
- Ergonomically shaped non-slip TPR handle for user comfort


Material: 60Cr-V
Cutting edge: HRC56°~62°

Nickel plating for
corrosion resistance

New mechanical design,
up to 50% force saving


Ergonomically shaped
non-slip
TPR handle

PM-93 series Cutting force comparison graph

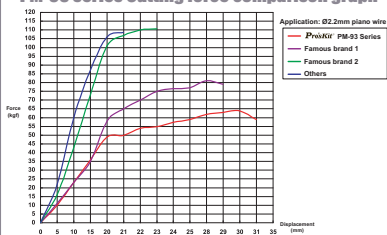

Individual packing: Blister Card


PM-931 8.5" High Leverage Combination Cutting Plier



Unit: inch

Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Hard steel	
60Cr-V	46°± 2°	59°± 3°	Ø2.2mm/12AWG (HRC40°~43°)	215.5/8.5


PM-934 7.5" High Leverage End Cutting Plier



Unit: inch

Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Hard steel	
60Cr-V	46°± 2°	59°± 3°	Ø2.0mm/12AWG (HRC40°~43°)	189/7.4


PM-936 8" High Leverage Diagonal Cutting Plier



Unit: inch

Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Hard steel	
60Cr-V	46°± 2°	59°± 3°	Ø2.0mm/12AWG (HRC40°~43°)	201.5/7.9


PM-937 7" High Leverage Diagonal Cutting Plier



Unit: inch

Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Hard steel	
60Cr-V	46°± 2°	59°± 3°	Ø2.0mm/12AWG (HRC40°~43°)	177/7.0

PM-938 8" High Leverage Long Nose Plier



Unit: inch

Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge	Hard steel	
60Cr-V	46°± 2°	59°± 3°	Ø2.0mm/12AWG (HRC40°~43°)	207/8.2


Tungsten Steel Pliers & Cutters

- Tungsten steel cutting edge, hardness of HRC up to $72^{\circ}\pm 2^{\circ}$ providing high durability, long service life and anti-rust.
- High leverage powerful diagonal cutter
- High quality PVC handle will not easily come off

Individual packing: Blister Card




PM-923 Tungsten Diagonal Cutting Plier



High leverage powerful
Force saving design

Material: SAE 6140 & tungsten double alloy steel
Hardness: HRC $45^{\circ}\pm 3^{\circ}$
Steel cutting edge hardness: $72^{\circ}\pm 2^{\circ}$


PVC plastic coated handle

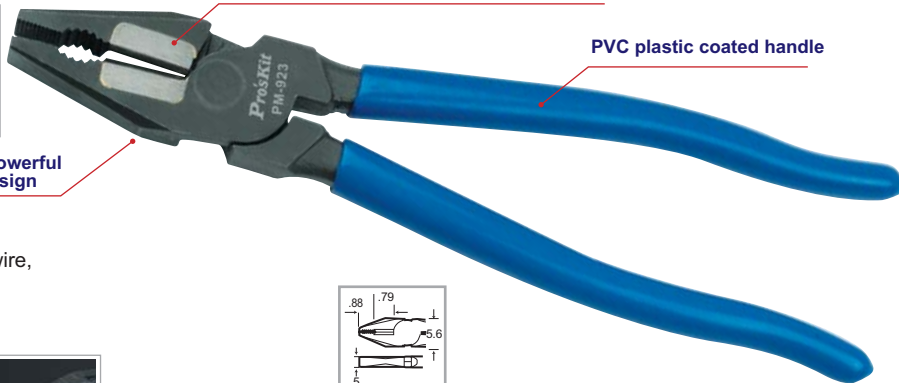

- Precisely cuts wire rope strand, steel wire, spring steel wire, steel nail, piano wire (under HRC 50')




Cutting capacity: piano wire $\phi 2.5\text{mm}$ (.10") under HRC 50'



Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
SAE 6150 + Tungsten	$45^{\circ}\pm 3^{\circ}$	$72^{\circ}\pm 2^{\circ}$	Piano wire: $\phi 2.5\text{mm}$ (under HRC: 50')	$\phi 3.0\text{mm}$ 8AWG	$\phi 5.5\text{mm}$ 4AWG	225/8.9

PM-925 Tungsten Diagonal Cutting Plier



Unit: inch

- Precisely cuts dot matrix printer firing pin, wire spring, piano wire, hard steel components pin (under HRC 50')
- Spring-loaded for self-opening action to supply smooth operation


Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
SAE 6140 + Tungsten	$45^{\circ}\pm 3^{\circ}$	$72^{\circ}\pm 2^{\circ}$	Piano wire: $\phi 0.5\text{mm}$ (under HRC: 50')	$\phi 1.6\text{mm}$ 14AWG	$\phi 2.0\text{mm}$ 12AWG	125/4.9

Tungsten Diagonal Cutting Plier



- Precisely cuts dot matrix printer firing pin, wire spring, piano wire, hard steel components pin (under HRC 50')
- Spring-loaded for self-opening action to supply smooth operation

PM-955





Unit: inch



Material	HRC		Application			OAL. (mm/inch)
	Body	Handle	Body	Cutting edge	Piano Wire Soft steel Copper	
SAE 6140 + Tungsten	PVC	$45^{\circ}\pm 3^{\circ}$	$72^{\circ}\pm 2^{\circ}$	$\phi 0.5\text{mm}$ under HRC: 50'	$\phi 1.6\text{mm}$ 14AWG $\phi 2.0\text{mm}$ 12AWG	130/5.1

PM-956

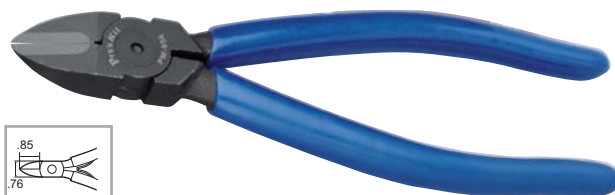


Unit: inch

Material	HRC		Application			OAL. (mm/inch)
	Body	Handle	Body	Cutting edge	Piano Wire Soft steel Copper	
SAE 6140 + Tungsten	PVC	$45^{\circ}\pm 3^{\circ}$	$72^{\circ}\pm 2^{\circ}$	$\phi 0.5\text{mm}$ under HRC: 50'	$\phi 1.6\text{mm}$ 14AWG $\phi 2.0\text{mm}$ 12AWG	160/6.3

Steel Wire Cutting Crimping Plier

- Made of high quality SCM440 hot-riveted design features smooth, wobble-free operation.
- The high-leverage design provides greater cutting and gripping power
- Special design for cutting round cable with multi-conductor up to Ø3/8"



Unit: inch

Unit: inch

PM-924



Serrated jaw for gripping




Crimping non-insulated terminals



Cutting up to Ø3/8"

100-021 Long Nose Plier




Unit: inch



Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S60C	48°±3°	55°±3°	Ø1.2mm 16AWG	Ø2.0mm 12AWG	Ø2.6mm 10AWG	160/6.3

Individual packing: Blister Card

902-049 Plastic Cutting Plier



Unit: inch



Material	HRC		Application	OAL. (mm/inch)
	Body	Cutting edge		
S55C	45°±3°	55°±3°	plastic	185/7.3

Individual packing: Blister Card

! This series of pliers are made for plastic cutting only

PM-924 9" Steel Wire Cutting Crimping Plier



Material		HRC		Application	OAL. (mm/inch)
Body	Handle	Body	Cutting edge		
SCM440	TPR	45°±3°	61°±3°	For cutting round cable up to Ø 9.2mm (Ø3/8") and crimping non-insulated terminals with wire 1.25/2.0/5.5/8mm² /AWG22-16/16-14/12-10/8	225/8.9

902-307 9.5" Lineman's Plier





Material	HRC Body	Application		OAL. (mm/inch)
		Hard steel	Soft steel	
Cr-V	45°±3°	Piano wire: Ø2.5mm 10AWG	Ø 3.0mm 8AWG	238/9.5

Individual packing: Blister Card

100-033 6" Slip-Joint Pliers




Plastic coated handle Non-slip

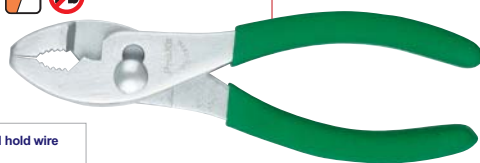

Model No.	Material	HRC Body	Handle	OAL. (mm/inch)
PN-086N	S45C	38°±3°	PVC	154/6.1

Individual packing: Blister Card

200-038 6" Diagonal Cutter




Unit: inch

Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S60C	48°±3°	55°±3°	Ø1.2mm 16AWG	Ø 2.0mm 12AWG	Ø2.6mm 10AWG	160/6.3

Individual packing: Blister Card

902-246 8" Diagonal Cutter



Unit: inch

Material	HRC		Application			OAL. (mm/inch)
	Body	Cutting edge	Hard steel	Soft steel	Copper	
S55C	45°±3°	55°±3°	Ø0.8mm 20AWG	Ø 2.0mm 12AWG	Ø2.6mm 10AWG	200/7.9

Individual packing: Blister Card

100-039 Multi-Crimp Tool



- Wire cutter in nose
- Plastic-coated handle
- For crimping non-insulated terminals from 10 to 22 AWG




Material	Handle	HRC Body	Application		OAL. (mm/inch)
			Hard steel	Crimping	
S60C	PVC	42°±3°	Ø1.6mm 14AWG	Non-insulated terminal 10 ~ 22 AWG	248/9.8

Individual packing: Blister Card

100-022 Snap Ring Plier Set



- 3 convertible tip jaws can be changed easily for 6 different internal-external purposes.




Material	Handle	HRC	Application	OAL. (mm/inch)
		Body	Hard steel	
S45C	PVC	43°±3°	Effective range: 10~50mm (3/8"~2")	155/6.1

Individual packing: Blister Card

SR-008 PVC Pipe Cutter (Economy type)

- Ideal for cutting PVC, Aluminum or plastic pipes

Best Value

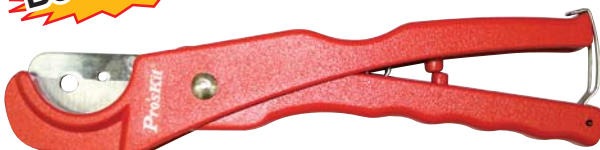

Material		HRC	Application	OAL.
Body	Blade	Cutting edge	Hard steel	(mm/inch)
Aluminum alloy	3Cr13	53°±3°	Product characteristics: cuts PVC, Aluminum or plastic pipes. Scope of cut: rigid plastic pipes to a maximum diameter of 26mm	210/8.3

Individual packing: Blister Card

200-063 Wire Rope and Armored Cable Cutter



- Special cutting action for cutting wire strand cable armour, electric cable, metal wire and rods.
- Distortion free cut
- Spring loaded handle



Material	Body	Blade	HRC Cutting edge	Application	OAL. (mm/inch)
S55C+PVC		SK5	55°±3°	Cutting: Ø4mm/6AWG (Copper) Wire rope: Ø1.5mm/14AWG spring wire	190/7.5

Individual packing: Blister Card

300-151 Strain Relief Bushing Assembly Tool



- Designed to install all sizes of strain relief bushing
- Close lock and return spring function



Material	Handle	Hardness Body	Application	OAL. (mm/inch)
Low carbon steel	PVC	HR30N58°	Thickness: 3mm/1/8"	170/6.7

Individual packing: Blister Card

200-039 Plastic Pipe Cutter



Ratcheting force-saving design

Material	Body	Blade	Application	Replacement blade	OAL. (mm/inch)
Aluminum alloy		SK5	Ø6~42mm/ 1/4"~5/8" OD. plastic pipes	200-045	195/7.7

Individual packing: Blister Card

TESTERS

PRECISION PLIERS & CUTTERS

ELECTRICAL PLIERS & CUTTERS

KNIVES, SCISSORS & SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN TOOLS

SOLDERING / ASSEMBLY

SCREWDRIVERS/ BITS

HEX KEY/ WRENCHES

SOCKET WRENCHES

TWEZERS

SR-228 Copper Clad Steel Coaxial Cable Cutter



- Body made of high quality S45C with black oxide finish for anti-rust.
- Palm-fit ergonomic cushion grip handle provides user comfort.
- Adjustable screw and nut ensures proper fix and durability
- Safety lock for easy storage

New



For cutting steel center conductor and keeping cable round



200-015 6 1/2" Round Cable Cutter



- Made of S45C carbon steel
- Safety lock for easy storage
- For cutting Multi-conductor cable up to 0.5" (12.7mm) and Strand wire up to 8 AWG (10mm²)



Cutting round cable



Spring



Safety lock



200-046 Round Cable Cutter



- Made of S45C carbon steel
- Safety lock for easy storage
- For cutting Thick wire up to 2/0 (70mm²/00AWG) cable, 100 pair group telephone cable size



Spring



Safety lock



Cutting round cable



Model No.	Material	HRC	Handle	Application	OAL. (mm/inch)
		Body		Copper cable	
SR-228	S45C	50°±2°	PVC	RG-6, RG-58, RG-59 copper clad steel coaxial cable max. 16mm ²	159/6.3
200-015		45°±3	PVC	38mm ² flexible/3AWG	165/6.5
200-046		45°±3	PVC	16mm ² solid/4AWG, 35mm ² stranded/2AWG, 70mm ² flexible/00AWG	215/8.5

Individual packing: Blister Card

200-068/200-013/200-069 Forged Cable Cutter



- This heavy duty cable cutter has high-leverage jaw. with shear-cut blades.
- Do not cut steel or ACSR.
- Plastic coated handle.



Cuts up to 70mm²/00AWG aluminum and copper cables (200-069)

200-068



200-013



200-069



Model No.	Material	HRC		Handle	Application		OAL. (mm/inch)
		Body	Cutting edge		Copper cable	Aluminum cable	
200-068	SCM 440	45°±3	60°±5°	PVC	25mm ² flexible/4AWG	25mm ² stranded/4AWG	160/6.3
200-013	SCM 440	45°±3	60°±5°	PVC	38mm ² flexible/3AWG	38mm ² stranded/3AWG	210/8.3
200-069	S45C	45°±3	60°±5°	PVC	16mm ² solid/4AWG, 35mm ² stranded/2AWG, 70mm ² flexible/00AWG	70mm ² stranded/00AWG	235/9.3

Individual packing: Blister Card

SR-538 Ratchet Cable Cutter 750MCM



**New Innovation
Industrial Grade**

Material: SAE4340
Cutting edge: HRC 46 $\pm$ 2°

Ratchet release trigger

Handle lock

Material: S45C

Material: PP



Cutting cables up to 750MCM (300mm²)

Application	Replacement blade	OAL. (mm/inch)
750MCM(300mm ²) Copper and Aluminum cable	5SR-538-RB (Moving blade) 5SR-538-FB (Fixed blade)	335/13.2

⚠ Not designed for cutting steel or ACSR

Individual packing: Inner box+ color label

200-006 Round Cable Cutter 500MCM



- Cut Ø32mm(1-1/4") and smaller hard-drawn copper and aluminum cables.
- Case hardened blades improve performance and cutting life.
- Unique ratchet design ensures a non-slip cut, and increases cutting power on tough jobs.
- Cut up to 350 MCM copper 500 MCM Al-jacketed S.O. cord up to Ø1-1/4" (Ø32mm) dia or up to 200 Pair Communication cable.



Material		Hardness		Handle	Application	Replacement blade	OAL. (mm/inch)
Body	Blade	Body	Cutting edge		Hard steel		
Low carbon steel	SAE 4340	HR 30N 55~70	HRC 45 $\pm$ 3	PVC	Ø32mm copper & Aluminum cable	200-034 (Moving blade) 200-035 (Fixed blade)	254/10

⚠ Not designed for cutting steel or ACSR

Individual packing: Blister Card

200-043 24" Heavy Duty Cable Cutter



- SCM4 Chrome-Vanadium-Steel forged, efficient and secure in operation.
- Alloy-Aluminum handle, treated by T6 heat, strong durable and handy.

SCM4 Chromium-Molybdenum steel;
efficient and secure in operation

Aluminum handles with
non-fracture character

Soft rubber sleeves handle

200-043

Model No.	Material	HRC	Application	OAL. (mm/inch)	Individual packing
200-043	Blade: SCM4	Blade: 52 $\pm$ 2	Copper cable: DIN 250mm ² /500MCM	600/23.6	Inner box + Color label

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS



KNIVES & SCISSORS

902-318 Utility Knife

- Body is made of durable heavy duty aluminum alloy, corrosion.
- Single screw design for easy blade change.
- Retractable blade with 3 adjustable positions of locking mechanism to prevent injuries.
- Handle with loop design for comfortable use and easy hanging.



Replacement blade:
902-261(100pcs/pack)



Blade locks with 3 positions



Handle	Blade	OAL. (mm/inch)	Individual packing
Aluminum Alloy	#60 Carbon Steel	155/6.1	Blister card

902-319 Electrician's Knife



- High quality stainless steel blade construction for extra strength and durability
- Both a heavy duty knife for cutting cable easily and for stripping wires encased in a durable composition handle
- Flathead screwdriver blade with self-locking system for safety.
- Rugged bail hangs onto belt clasp for convenient carrying
- Black composition handle with brass liners, non-slip



Handle	Blade	OAL. (mm/inch)	Individual packing
Steel and Nylon	40Cr	95/3.6	Blister card

902-317 Carton Cutter

- All metal made cutter and cover for safe usage, equipped with standard replaceable single-side razor blade
- Reverses to become a scraper
- Lightweight and compact design with easy blade change
- Excellent cutter for cutting corrugated, paper, films, acetates, cardboard, and more



Carton cutter



Scraper



Handle	Blade	OAL. (mm/inch)	Individual packing
Stainless Steel	#60 Carbon Steel	101/4	Blister card

DK-2112 Auto Loading Utility Knife



Blade storage compartment

- Comfortable ergonomic shaped handle with non-slip TPR grip
- Automatic blade reload for effortless and quick blade changes
- Convenient blade storage compartment holds up to 6pcs blades (blades included)
- Perfect for cutting carpet, cardboard, upholstery, sheetrock and more.
- 10mm < carpet plastic cardboard PVC leather



Handle	Blade	Replacement blade	OAL. (mm/inch)	Individual packing
Zinc Alloy+TPR	SK5	902-261(100pcs/pack)	165/6.5	Blister card

PD-998 Electrician's Knife



- High quality stainless steel, large curved hawk bill blade offer durability and artistic appearance
- Ideal for heavy-duty line work




PVC, PE cable stripping



Handle	Blade	OAL. (mm/inch)	Individual packing
ABS	3Cr13	110/4.3	Blister card

900-215 Nibbling Tool



Material to be nibbled shall be placed in the gap between the punch and blade channel.



By squeezing the handle together, the punch will move down into the channel to cut out a slug of metal.



A scribe line can be followed by locking down on work in this position. A slot is cut by making successive cuts.



To make a sharp 90 degrees turn, pull the tool out of the slot. Turn the work 90 degrees and insert the tool again.



By turning the tool before each cut, a 5/16\"/>



Almost any size or shape hole can be cut by starting with a 3/8\"/>



Material	HRC	Application	OAL. (mm/inch)	Individual packing
	Body			
Body:FCD45 Blade:S45C	45±3°	Cut up to 18AWG soft steel, 1/16" copper, Al and Plastic	184/7.2	Blister card

PD-395A 30PCS Deluxe Hobby Knife Kit



Contents
3pcs TPR+PP dual color non-slip handles
19pcs SK5 carving blades (3pcs in handle)
2pcs awl blades
4pcs shovel blades
1pcs tweezers
1pcs grind stone
Dual color TPR+PP case (8"x5.2"x1.77")

Individual packing: Blister Card



PCB layout cutting



Solder paste & glue

Precision Knife


- Surgically sharp knives with high-impact plastic safety cap.



900-112 Ø8mm




900-113 Ø11mm




900-112B (10pcs/pack) **900-113B** (10pcs/pack)

Model No.	Handle	Blade	Replacement blade	OAL. (mm/inch)	Individual packing
900-112	Aluminum	SK-5	900-112B(10pcs/pack)	145/5.7	Blister card
900-113			900-113B(10pcs/pack)	150/5.9	

902-189 Jab Saw



Wood




Non-Ferrous

Material		Application	OAL. (mm/inch)	Individual packing
Handle	Blade			
ABS+TPR	65Mn	Wood, plastic and drywall	314/12.5	Blister card

900-135 Cable Splicing Knife


- Short blade for strength
- Stainless-steel blade for durability and longer lasting blade edge
- Soft, easy-to-grip handle



Handle	Blade	OAL. (mm/inch)	Individual packing
TPR	AISI 420	160/6.3	Blister card

900-257 Quick Point Snap-Blade Knife

- Includes 2 pcs blade inside
- Locking slide



900-257B
(10Pcs/Pack)


**Economic
Type**

Handle	Blade	Replacement blade	OAL. (mm/inch)	Individual packing
ABS	SK-5	900-257B (10Pcs/Pack)	140/5.5	Blister card

900-169 Utility Knife



- All blades are made of high carbon tool steel SK-4
- Blade in thickness: 0.5mm
- includes 3 pcs blade inside



900-169B
(6Pcs/Pack)

Handle	Blade	Replacement blade	OAL. (mm/inch)	Individual packing
ABS+TPR	SK-4	900-169B(6Pcs/Pack)	170/6.7	Blister card

900-229 Dualgrip Wallboard Saw



Material		Application	OAL. (mm/inch)	Individual packing
Handle	Blade			
Plastic w/Rubber	-	Wallboard, plywood, plastic	318/12.7	Blister card

902-083/902-084 All Purpose Snip



Safety latch for easy storage

Heavy-duty stainless steel blade

902-083

Dual-color, Non-slip handle

902-084

- Cut cable, wire, cloth, carpet, leather, cardboard tin plate, branch, foam rubber and so on.
- Heavy-duty stainless steel blade.
- Dual-color, non-slip handle.



Leather



Aluminum sheet



Cable

Model No.	Material	Handle	Application	OAL. (mm/inch)	Individual packing
902-083	AISI 420	PP+ T.P.R	Cardboard, PVC Leather, Rubber: thickness < 5mm. Aluminum sheet, Copper sheet: thickness < 1mm Steel sheet: thickness < 0.5mm	165/6.5	Blister card
902-084			Cable, PVC water pipe, plastic tube up to Ø10mm		

902-082 All Purpose Snip



- Ideal for cutting cable, leather, card-board, foam rubber and more.
- Non-slip handle, stainless steel blade and safety lock

Safety lock



Cable



Copper

Material	Handle	Application	OAL. (mm/inch)	Individual packing
AISI 410	PP+ T.P.R	Cardboard, PVC Leather, Rubber: thickness < 3mm. Aluminum sheet, Copper sheet: thickness < 1mm PVC, PET, plastic: thickness < 0.2mm Fixable flat cable: thickness < 0.3mm	165/6.5	Blister card

100-035 Fiber Optic Kevlar Cutter



For cutting Kevlar fiber
optic cable



Micro serrated

Material	Handle	OAL. (mm/inch)	Individual packing
High carbon alloy steel	TPR	160/6.3	Blister card

100-049 Electrician's Scissor



- Designed for use in telephone and electrical service applications.
- Scraper and file on side edge of blade.



Cutting 16 AWG solid wire



Stripping 18 and 22 AWG

Material	Handle	Application	OAL. (mm/inch)	Individual packing
AISI 420	Nylon+ Fibber	Stripping from AWG 18 and 22 wire Cutting up to AWG 16 solid wire and AWG 12 stranded wire	145/5.7	Blister card

902-230 7 in 1 Multi-Function Pocket Tool Key Chain



LED light



Be careful:
a sharp blade can cut!



Material	HRC Body	Application	OAL. (mm/inch)	Individual packing
2Cr13	48°±3°	Serrated Saw, Opener & Slotted Screwdriver, Phillips Screwdriver, Fruit Knife, Mini LED Flashlight	67x32/2.6x1.3	Blister card

SR-333 Micro Scissor




- Made of stainless steel to resist rust and corrosion.
- Dual color handle provides user comfort
- Return spring offers more smooth operation



Safety cap

Material	Handle	Application	OAL. (mm/inch)	Individual packing
AISI 420	ABS+ TPE	Cooper, IC, component pin: thickness < 0.3mm. PVC, PET, plastic: thickness < 0.2mm Fixable flat cable: thickness < 0.3mm	120/4.7	Blister card

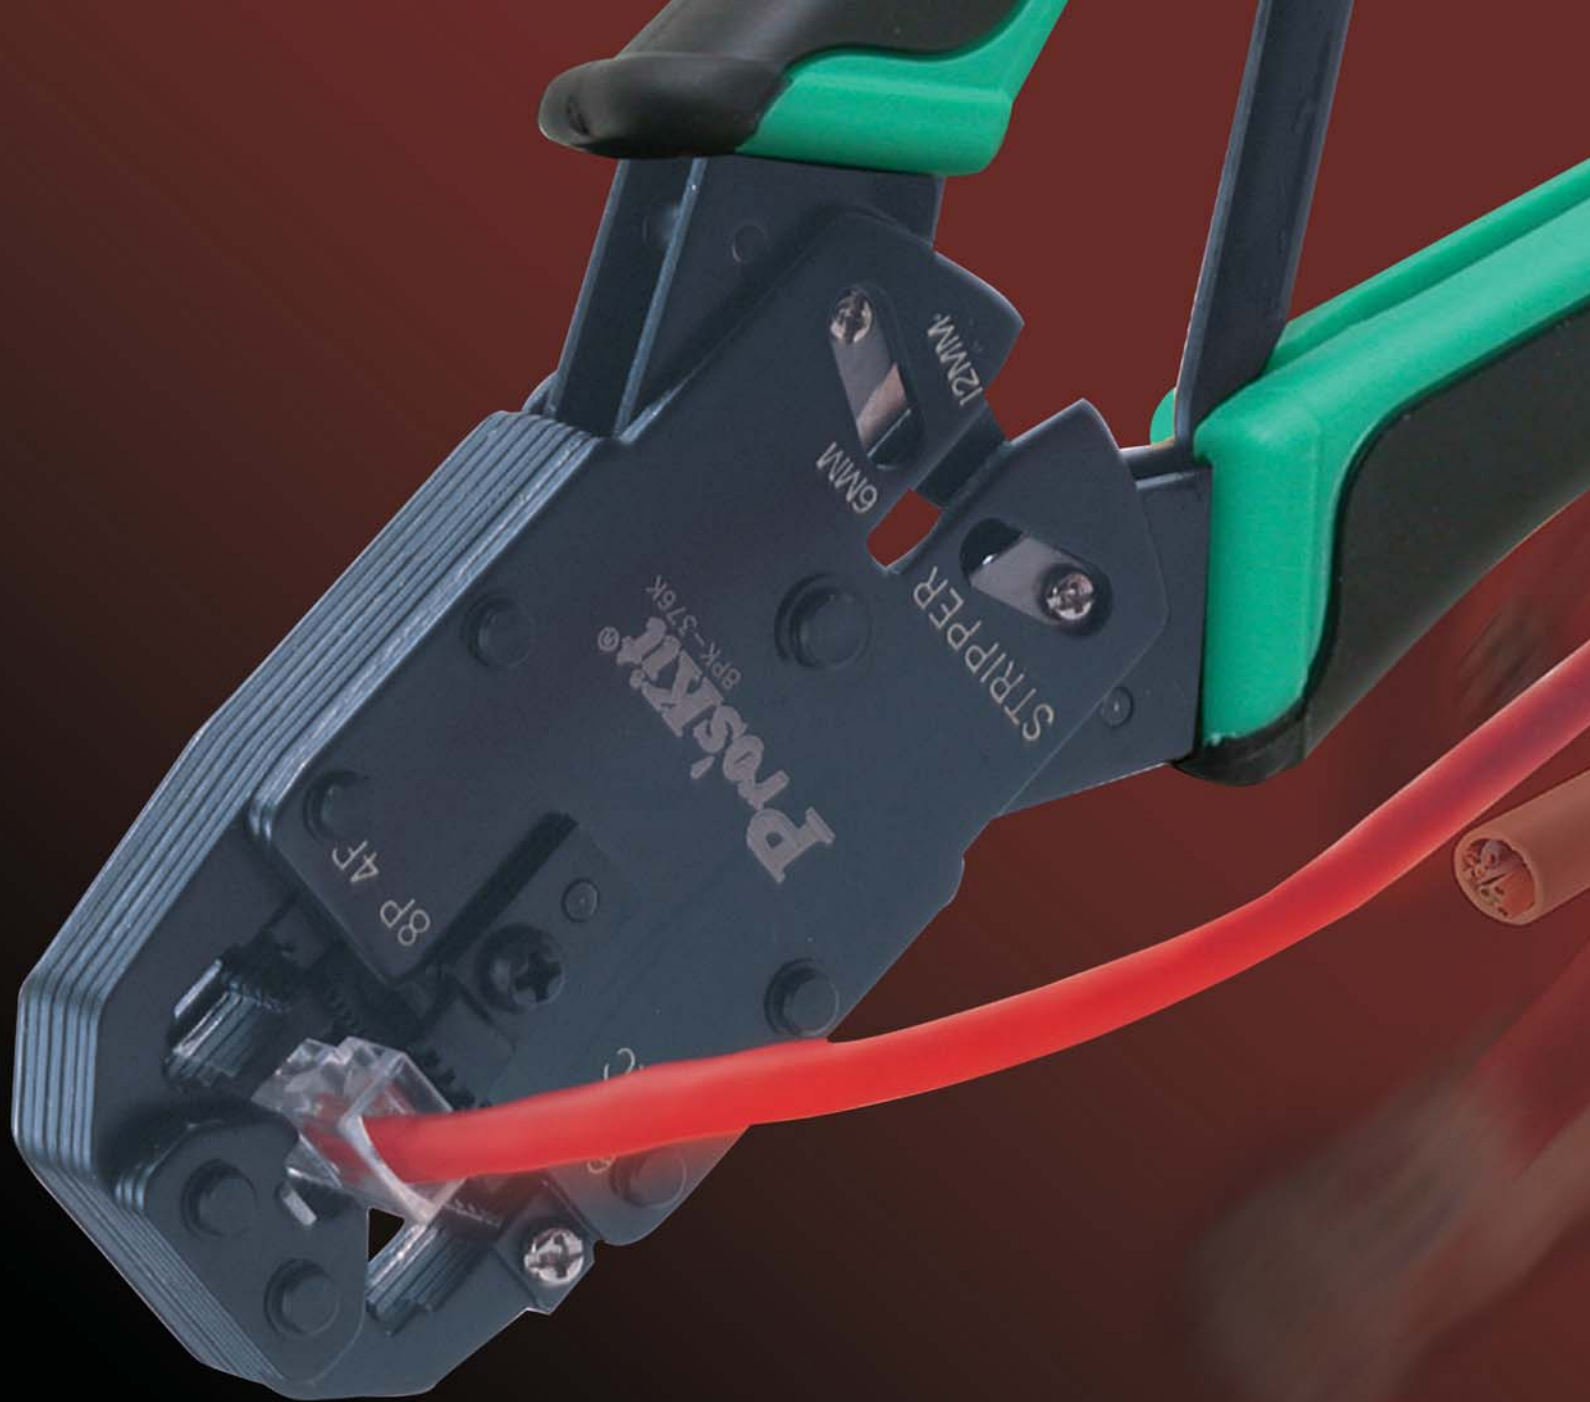

CRIMPERS

CRIMPER2


Pro'sKit® Crimpers

All parts of **Pro'sKit®** crimping tools are made of special steel, oil-hardened and tempered. They come with ergonomically designed handles and lever action features the optimum transmission of force for fatigue-reduced operation, and high crimping quality due to precision dies and integral ratcheting mechanism.

Pro'sKit® crimping tools use interchangeable die sets to crimp a wide variety of different connectors for twisted pair & flat phone cable, fiber optic cable, coaxial cable, electrical and Industrial wire...etc.


Symbols for Crimp die profiles

The **Pro'sKit®** crimping dies are made from high precision lost-wax casting technology, providing the high accuracy and long service life!

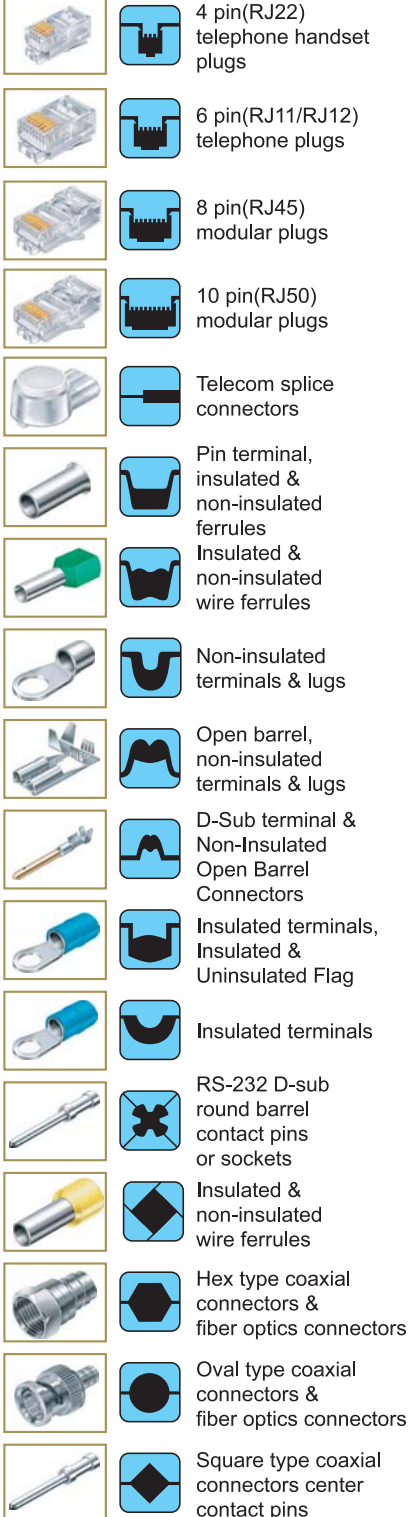


Symbols for ratcheting mechanism

Pro'sKit® ratcheting crimping tools usually combine crimping pressure adjustment and ratcheting release trigger. The different models have different ratcheting mechanism designs.

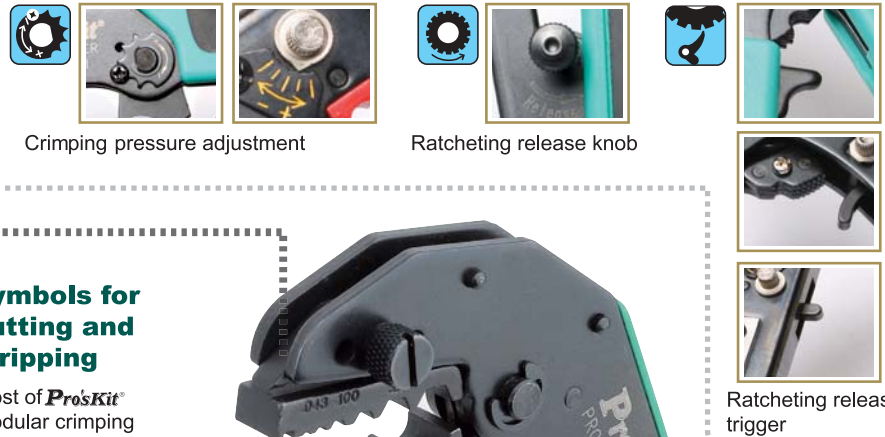


Symbols for cutting and stripping

Most of **Pro'sKit®** modular crimping tools usually feature cutting and stripping functions

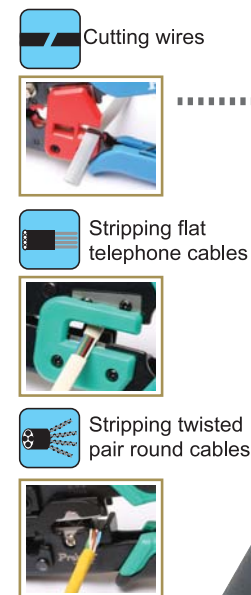

Symbols for force-saving design

Pro'sKit® new design of crimping tools designed with lever action, features optimum transmission of force for fatigue-reduced operation and comes with the ratcheting mechanism which helps to ensure the crimping quality. This design requires less force than general hand tools.

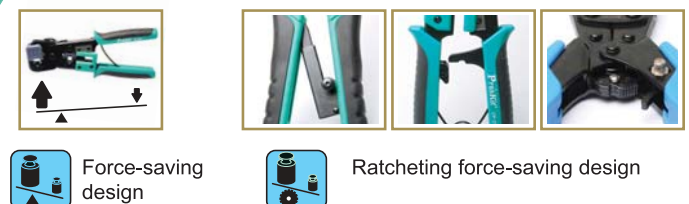

CP-3005F Quick Interchange Ratcheting Crimper Frame



Material: AISI 4140
HRC43 $\pm$ 2 $^{\circ}$
(Die not included)




Interchangeable die with quick release trigger

Material: S50C
HRC: 45 $\pm$ 3 $^{\circ}$

Crimping pressure adjustment

Elastomeric resin, double TPR structure.

Ratcheting release trigger



Special quick release trigger design for easy die changes without extra tools

Material		HRC	OAL (mm/inch)	Individual packing
Body	Handle	Body		
S50C	TPR	45 $\pm$ 3 $^{\circ}$	226/9.3	Blister card

902-085 CrimPro Crimp Frame



Crimping force saving up to 30%

Change Dies with thumbscrews.

Elastomeric resin, double structure. non-slip.

Crimping pressure adjustment wheel

Ratcheting release trigger



Replacement Die Screw 300-056

- Right angled head design prevents awkward wrist bending during operation
- Interchangeable die with thumbscrew


Material		HRC	Replacement Die Screw	OAL (mm/inch)	Individual packing
Body	Handle	Body			
S45C	TPR	45 $\pm$ 3 $^{\circ}$	300-056	236/9.3	Blister card

We provide a variety of optional dies to meet the most applications, please contact our sales department to discuss custom needs.
All dies on pages 50-52 fit these frame

300-096 Ergo-Lunar Crimp Frame



Crimping force saving up to 50%

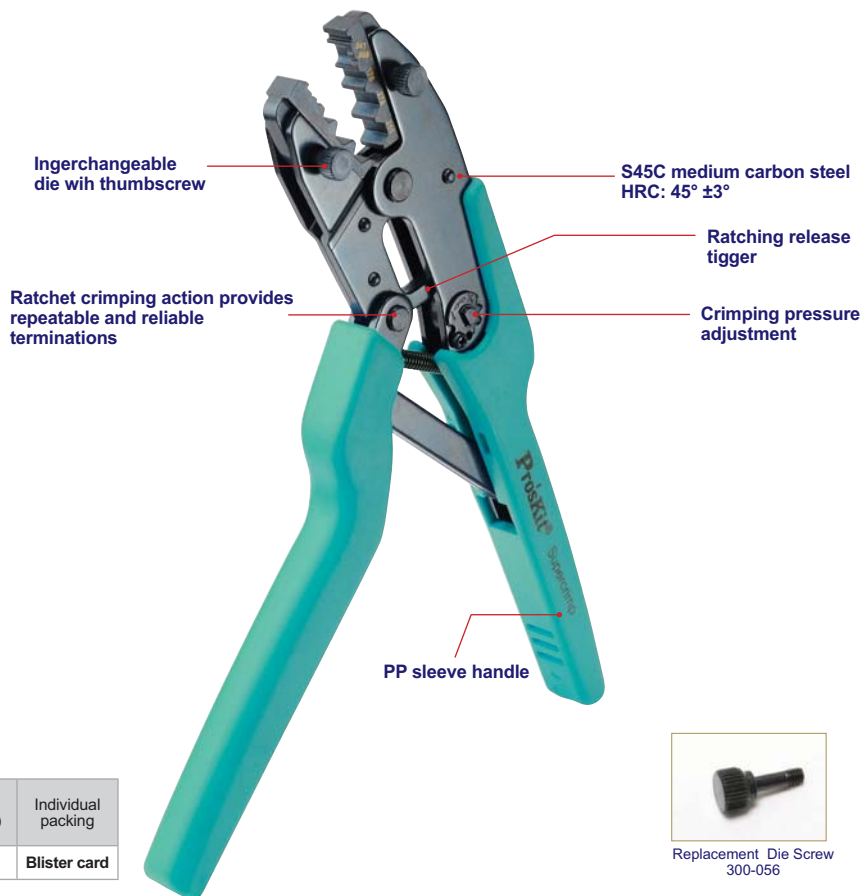

- 40%~50% lower crimping force
- Interchangeable die with thumbscrew

Material		HRC	Replacement Die Screw	OAL (mm/inch)	Individual packing
Body	Handle	Body			
S45C	PP	45° ±3°	300-056	260/10.2	Blister card



Replacement Die Screw 300-056

300-054 Lunar Crimp Frame



Compact size for easy operation



Material		HRC	Replacement Die Screw	OAL (mm/inch)	Individual packing
Body	Handle	Body			
S45C	PP+TPR	45° ±3°	300-056	220/8.6	Blister card



Replacement Die Screw 300-056

We provide a variety of optional dies to meet the most applications, please contact our sales department to discuss custom needs.
All dies on pages 50-52 fit these frame

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS



300-096
Ergo-Lunar
Crimp Frame



300-054
Lunar
Crimp Frame



902-085
CrimpPro Crimp
Frame



CP-3005F
Quick Interchange
Ratcheting Crimper
Frame

Note: CP-3005F sold as frame only, but all dies on this page fit it

DIE Set	Crimp die profile	Application	Crimp Size	Terminals	Description	Model No.
Coaxial Connectors						
		RG174, mini RG59 BNC/TNC connectors	HEX.068", .128", .178" HEX 1.73, 3.25, 4.52mm		Lunar frame w/die	300-190
					Ergo-Lunar frame w/die	300-191
					CrimpPro frame w/die	300-192
					Die only	1PK-3003D7
		Amphenol and General RG58, RG59, RG62, BNC/TNC, F-Type, LMR-240	SQ.052", HEX.068", .100", .213", .255" SQ1.32, HEX1.73, 2.54, 5.41, 6.48mm		Lunar frame w/die	902-277
					Ergo-Lunar frame w/die	902-278
					CrimpPro frame w/die	902-279
					Die only	902-201
		HDTV, SMA, True 75-ohm BNC/TNC & mini-UHF, RG174, RG59/62, mini-coaxial & Belden 1855A	SQ .042", HEX.068, .178", .197, .255" SQ 1.07mm, HEX1.73, 4.52, 5.00, 6.48mm		Lunar frame w/die	300-187
					Ergo-Lunar frame w/die	300-188
					CrimpPro frame w/die	300-189
					Die only	1PK-3003D34
		RG58, 59 and 62 AU, BNC and TNC 3-piece connectors	HEX.068", .213", .256" HEX1.73, 5.41, 6.5mm		Lunar frame w/die	300-019
					Ergo-Lunar frame w/die	300-109
					CrimpPro frame w/die	902-143
					Die only	300-045
		HDTV BNC/TNC 3-piece coaxial connectors	SQ .042", HEX.178", .275" SQ 1.07mm, HEX4.52, 6.99mm		Lunar frame w/die	300-184
					Ergo-Lunar frame w/die	300-185
					CrimpPro frame w/die	300-186
					Die only	1PK-3003D33
		HDTV true 75-ohm BNC/TNC coaxial connectors: Belden 1855A, 1865A, 1505A, 1505F, 1694A, 1694F	HEX .041", .068", .178", .255", .278" SQ1.04, HEX1.73, 4.52, 6.48, 7.06mm		Lunar frame w/die	300-158
					Ergo-Lunar frame w/die	300-159
					CrimpPro frame w/die	902-171
					Die only	300-157
		HDTV BNC/TNC 3-piece coaxial connectors	SQ.042", Hex. 197", .278" SQ1.07mm, HEX 5.00, 7.06mm		Lunar frame w/die	300-193
					Ergo-Lunar frame w/die	300-194
					CrimpPro frame w/die	300-195
					Die only	1PK-3003D30
		HDTV BNC/TNC true 75-ohm coaxial connectors, RG6, Belden 1694 & 1694A	SQ.042", HEX.068", .275", .278" SQ1.07mm, HEX1.73, 6.99, 7.06mm		Lunar frame w/die	300-178
					Ergo-Lunar frame w/die	300-179
					CrimpPro frame w/die	300-180
					Die only	1PK-3003D31
		BNC, TNC, Mini-UHF, RG58, 141, 142, 303, 400, 59, 62, 210 Belden 8279, 8281, 9231, 9141 RG-6, 212, 222, 304	HEX.068", .098", .213", .255", .321" HEX1.73, 2.49, 5.41, 6.48, 8.15mm		Lunar frame w/die	300-003
					Ergo-Lunar frame w/die	300-119
					CrimpPro frame w/die	902-137
					Die only	300-038
		RG59 and Belden 8281/1694A cable groups for both 50 & 75 ohm center pins	HEX.042", .068", .255", .324" HEX1.07, 1.73, 6.48, 8.23mm		Lunar frame w/die	300-022
					Ergo-Lunar frame w/die	300-116
					CrimpPro frame w/die	902-146
					Die only	300-048
		HDTV true 75 ohm BNC/TNC & CATV "F" coaxial connectors, RG59, RG6, Belden 8281, 1694A & 1505A	SQ .042", .052", HEX .068", .255", .324" SQ 1.07, 1.32mm, HEX1.73, 6.48, 8.23mm		Lunar frame w/die	300-181
					Ergo-Lunar frame w/die	300-182
					CrimpPro frame w/die	300-183
					Die only	1PK-3003D32
		CATV "F" connectors RG-59, RG-6 and RG-6 Quad	HEX.255", .320", .350" HEX6.48, 8.13, 8.89mm		Lunar frame w/die	300-007
					Ergo-Lunar frame w/die	300-112
					CrimpPro frame w/die	902-139
					Die only	300-041
		RG8, RG11, RG213, RG216 BNC, TNC and N Series Connectors LMR400	HEX.80", .100", .429" HEX2.03, 2.54, 10.90mm		Lunar frame w/die	300-023
					Ergo-Lunar frame w/die	300-117
					CrimpPro frame w/die	902-147
					Die only	300-049
		Crimps Amphenol connectors. Coaxial - Belden 7810A, 9913, 9914, LMR 400.	HEX .429", .118" HEX10.89, 3.00mm		Lunar frame w/die	300-163
					Ergo-Lunar frame w/die	300-168
					CrimpPro frame w/die	300-173
					Die only	9PK-3003D29
		Combi-Die for RJ45 WE/SS Modular plugs and RG6/6Q(CATV F-Type)	RJ45 plug HEX.324", .360" HEX 8.23, 9.14mm		Lunar frame w/die	300-161
					Ergo-Lunar frame w/die	300-162
					CrimpPro frame w/die	902-172
					Die only	902-054



300-096
Ergo-Lunar
Crimp Frame



300-054
Lunar
Crimp Frame



902-085
CrimPro Crimp
Frame



CP-3005F
Quick Interchange
Ratcheting Crimper
Frame

Note: CP-3005F sold as frame only, but all dies on this page fit it

DIE Set	Crimp die profile	Application	Crimp Size	Terminals	Description	Model No.
Fiber Optic Connectors						
		RG174,RG179 Belden 8218, fiber optics.	SQ.042", HEX.068", .078", .128", .151", .178" SQ1.07, HEX1.73, 1.98, 3.25, 3.84, 4.52mm		Lunar frame w/die	300-024
					Ergo-Lunar frame w/die	300-118
					CrimPro frame w/die	902-148
					Die only	300-050
		For FC,SC,ST,LC, SMA & MT-RJ fiber optics.	HEX .139", .151", .178", RD.134", .190" HEX3.53, 3.84, 4.52mm, RD3.40, 4.83mm		Lunar frame w/die	300-167
					Ergo-Lunar frame w/die	300-172
					CrimPro frame w/die	300-177
					Die only	9CP-336DF4
		SMA,SMB, FC Biconic and SC & ST fiber optic connectors,RG58,RG174,Belden8218	SQ.042", HEX.068", .151", .178", .213" SQ1.07, HEX1.73, 3.84, 4.52, 5.41mm		Lunar frame w/die	300-021
					Ergo-Lunar frame w/die	300-115
					CrimPro frame w/die	902-145
					Die only	300-047
		Fiber Optic and Coaxial SMA/SMB/ SFR Connectors SC/ST/FC	HEX.151", .178", .213" HEX3.84, 4.52, 5.41mm		Lunar frame w/die	300-106
					Ergo-Lunar frame w/die	300-143
					CrimPro frame w/die	902-167
					Die only	300-102
Electrical and Industrial Terminals						
		Miniature Insulated Terminals Nylon and Vinyl	AWG26-16 DIN 0.2-1.5mm²		Lunar frame w/die	300-146
					Ergo-Lunar frame w/die	300-147
					CrimPro frame w/die	902-169
					Die only	300-104
		Red, Yellow, Blue Insulated terminals AWG 10-12, 14-16, 18-22 Nylon and Vinyl	AWG22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4.0- 6.0mm²		Lunar frame w/die	300-002
					Ergo-Lunar frame w/die	300-108
					CrimPro frame w/die	902-152
					Die only	300-058
		Thin Style Insulated Terminals (red/yellow/blue) Nylon and Vinyl	AWG22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4.0- 6.0mm²		Lunar frame w/die	300-141
					Ergo-Lunar frame w/die	300-142
					CrimPro frame w/die	902-166
					Die only	300-101
		Insulated Terminals	AWG22-18/16-14/12-10/8 DIN 0.5-1.0/1.5-2.5/4.0- 6.0/10.0mm²		Lunar frame w/die	CP-336FD27
					Ergo-Lunar frame w/die	1PK-3003FD27
					CrimPro frame w/die	CP-372FD27
					Die only	9PK-3003D27
		Uninsulated Terminals	AWG20-18/16-14/12-10/8 DIN 0.5-1.0/1.5-2.5/4.0- 6.0/10.0mm²		Lunar frame w/die	300-132
					Ergo-Lunar frame w/die	300-133
					CrimPro frame w/die	902-161
					Die only	300-095
		Open Barrel Contacts Molex/Tyco D-Sub, Molex, AMP Style Pin	AWG30-24/22-18 DIN 0.05-0.25/0.5-1.0mm²		Lunar frame w/die	300-164
					Ergo-Lunar frame w/die	300-169
					CrimPro frame w/die	300-174
					Die only	9PK-3003D36
		Open barrel contacts D-sub, Molex, AMP style pin	AWG20-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4.0- 6.0mm²		Lunar frame w/die	300-005
					Ergo-Lunar frame w/die	300-120
					CrimPro frame w/die	902-138
					Die only	300-039
		For Red and Blue Insulated Flag Terminals AWG 22-18, 16-14	AWG22-18/16-14 DIN 0.5-1.0/1.5-2.5mm²		Lunar frame w/die	300-072
					Ergo-Lunar frame w/die	300-130
					CrimPro frame w/die	902-158
					Die only	300-070
		For Yellow and Blue insulated Flag Terminals	AWG16-14/12-10 DIN 1.5-2.5/4.0-6.0mm²		Lunar frame w/die	902-332
					Ergo-Lunar frame w/die	902-331
					CrimPro frame w/die	902-330
					Die only	9PK-3003D42
		Uninsulated Flag Terminals	AWG22-18/16-14 DIN 0.5-1.0/1.5-2.5mm²		Lunar frame w/die	300-073
					Ergo-Lunar frame w/die	300-131
					CrimPro frame w/die	902-159
					Die only	300-071

DIE Set	Crimp die profile	Application	Crimp Size	Terminals	Description	Model No.
Electrical and Industrial Terminals						
		Wire ferrules (Insulated and Non-Insulated)	AWG22/20/18/16/14/12 DIN 0.5/0.75/1.0/1.5/2.5/ 4.0mm²		Lunar frame w/die	300-001
					Ergo-Lunar frame w/die	300-134
					CrimPro frame w/die	902-162
					Die only	300-097
		Wire Ferrules (Insulated and Non-Insulated)	AWG10/8/6 DIN 6/10/16mm²		Lunar frame w/die	300-144
					Ergo-Lunar frame w/die	300-145
					CrimPro frame w/die	902-168
					Die only	300-103
		Wire Ferrules (Insulated and Non-Insulated)	AWG6/4/2 DIN 16/25/35mm²		Lunar frame w/die	300-077
					Ergo-Lunar frame w/die	300-160
					CrimPro frame w/die	902-160
					Die only	300-077D
		Spark Plug Cable-Cut, Strip, Crimp	8-8.5mm Spark plug wires		Ergo-Lunar frame w/die	902-275
					CrimPro frame w/die	902-276
					Die only	9PK-3003D26
Solar Terminals						
		Multi-Contact (MC3)Ø3mm solar contacts	AWG14/12/10 DIN 2.5/4.0/6.0mm²		Lunar frame w/die	300-165
					Ergo-Lunar frame w/die	300-170
					CrimPro frame w/die	300-175
					Die only	CP-5S1D
		Multi-Contact (MC4)Ø4mm solar contacts	AWG14/12/10 DIN 2.5/4.0/6.0mm²		Lunar frame w/die	300-166
					Ergo-Lunar frame w/die	300-171
					CrimPro frame w/die	300-176
					Die only	CP-5S2D

Solar Series Crimpers



Material	OAL (mm/inch)	Individual packing
S45C	203/8.12	Blister card

DIE Set	Crimp die profile	Application	Description	Model No.
		D-Subminiature contacts, RS232 pins & sockets AWG 30-18	Completed set with die	300-009
		Open Barrel contacts (Molex/AMP style)	Die only	300-086
			Frame only	300-087
		Wire Ferrules AWG 22-10	Completed set with die	300-010
			Die only	300-105
			Frame only	300-087

902-337 PowerPole® Crimper



PowerPole® is a registered trademark of Anderson Power products

Material	Application	OAL (mm/inch)	Individual packing
S45C	PowerPole® modular connector #15(20~16 AWG/0.5~1.0mm ²) #30(16~12 AWG/1.0~2.5mm ²) #45(14~10 AWG/1.5~4.0mm ²)	260/10.2	Blister card

CP-3006F Parallel Action Crimping Tool



Features:

- Reliable:** Parallel action crimping performance is consistent and accurate
- Practical:** Safety crimp release helps eliminate rejected terminations due to incorrect positioning.
- Comfortable:** Ergonomically shaped non-slip TPR handle for comfortable use in all conditions
- Versatile:** Interchangeable die sets for wide range of applications.



Material		HRC	OAL. (mm/inch)	Individual packing
Body	Handle			
S50C	TPR	45±3°	254/10	Blister card

Model No.	Replacement Die model no.	DIE Set	Crimp die profile	Application	Terminals
CP-3006F				Frame only	
CP-3006FD2	300-039			Non insulated open barrel connectors, commercial type AWG 22-18/16-14/12-10 DIN 0.5-1.0/1.5-2.5/4.0-6.0 mm² JIS 0.35-0.9/1.25-2.0/3.5-5.5 mm²	
CP-3006FD36	9PK-3003D36			Non-insulated open barrel connectors & D-SUB V.35 contact pins AWG 30-24/22-18 DIN 0.05-0.25/0.50-1.0 mm² JIS 0.05-0.25/0.35-0.9 mm²	
CP-3006FS1	CP-5S1D			For MC 3 solar connector (Multi-Contact) & 2.5/4.0/6.0 mm² (AWG 14/12/10) solar cable AWG 14/12/10 DIN 2.5/4.0/6.0 mm²	
CP-3006FS2	CP-5S2D			For MC 4 solar connector (Multi-Contact) & 2.5/4.0/6.0 mm² (AWG 14/12/10) solar cable AWG 14/12/10 DIN 2.5/4.0/6.0 mm²	

PK-2061 Solar MC3 & MC4 Crimping Tool Kit



This is a complete tool kit to install MC3 & MC4 solar connectors easily and accurately.



Contents:

Parallel Action Crimper frame
Die set for MC 3 solar connector (Multi-Contact) & 2.5/4/6mm² (AWG 14/12/10) solar cable.
Die set for MC 4 solar connector (Multi-Contact) & 2.5/4/6mm² (AWG 14/12/10) solar cable.
Universal solar cable stripper, for 2.5/4/6mm² (AWG 14/12/10) solar cable
Forging cable cutter (160mm), for copper cable: 25mm² flexible
2 Pcs Open-end spanner and unlocking tool (MC4 and MC4 PLUS)
Pro-soft screwdriver 5x75mm
Pro-soft screwdriver #2 x100mm
Zippered carrying bag-280×197×70(mm)/11"×7.8"×2.8"

**Professional Modular Crimps Strips & Cuts Tool****For AMP style connectors only**

- For crimping modular plugs in parallel action.
- Cuts, strips, and crimps modular plugs without changing modular (DIE) set.

300-06410P 10C, AMP
8P8C/RJ-45 onlyStripping twisted
pair round cable**CP-376K****New****300-004 4P/6P/8P Telecom Crimping Tool****Ratchet Type**

4/6/8P Crimping



Strips twisted pair wire



Strips flat telephone wire

300-004B
(6pcs/pack)

Model No.	Material	Handle	HRC	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
300-064	S45C	Black:T.P.R Green:PP	45°±3°	10P10C, AMP 8P8C/RJ45, 6P6C/RJ12, 6P4C/RJ11, 4P4C & 4P2C/RJ22 plugs, and DEC/Offset 6P6C plugs	-	205/8.1	Blister card
CP-376K				8P8C/RJ-45, 6P6C/RJ11, 4P4C & 4P2C/RJ22 plugs, and RJ11/6P6C DEC-Offset plugs	5PK-376K-BLADE(6pcs/pack)	205/8.1	
300-004				8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs, RJ-22 4P2C/4P4C handset modular plugs	300-004B (6Pcs/pack)	190/7.5	

**Modular Crimping Tool****CP-376M**


Stripping



Cutting



Crimping


900-078
(2pcs/pack)**300-063****902-086 Pro-Crimper Modular Tool****Best Value**300-004B
(6pcs/pack)

Model No.	Material	Handle	HRC	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
CP-376M	S45C	Black:T.P.R Green:PP	HV 555~650°	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs, RJ-22 4P2C/4P4C handset modular plugs	900-078 (2pcs/pack)	225/8.9	Blister card
300-063	S45C	Black:T.P.R Green:PP	HV 555~650°	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs	900-078 (2pcs/pack)	216/8.5	Blister card
902-086	ABS + carbon steel	-	-	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs, RJ-22 4P2C/4P4C handset modular plugs	300-004B (6Pcs/pack)	160/6.3	Blister card

▶ 300-018 Modular Crimping Tool



Lock for easy storage



5CP-376E-B
(2pcs/pack)



▶ 300-028/300-078 Economy All-In-One Modular Plug Crimper




300-028



300-078



200-053
(2pcs/pack)




200-053
(2pcs/pack)



Model No.	Material	Handle	HRC	Application	Replacement blade	O.A.L.(mm/inch)	Individual packing
300-018	Low carbon steel	PP	45°±3°	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs	5CP-376E-B (2pcs/pack)	200/7.9	Blister card
300-028	S45C	PP	45°±3°	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11, DEC/MMJ modular plugs	200-053 (2pcs/pack)	200/7.9	Blister card
300-078	S45C	PP	45°±3°	6P2C/6P4C/6P6C RJ11 modular plugs, RJ-22 4P2C/4P4C handset modular plugs	200-053 (2pcs/pack)	200/7.9	Blister card

▶ 300-037 Pro-Crimper Modular Tool



Crimping



Cutting




Wire Stripper
Wire Cutter

Stripping

▶ 300-088/300-089/300-090 Modular Crimping Tool



300-004B
(6pcs/pack)



▶ 100-008 Telecom Splice Crimp Tool



- Designed for UG, UR and UY connectors.
- A special stop behind cutout prevents connectors from damage.



▶ 900-055 Double End Socket Can Wrench



- Used to place fuses in cable terminals and connect wires to fuses and binding posts.
- 3/8" & 7/16" hex double end. Plastic handle.




Model No.	Material	Handle	HRC	Application	Replacement blade	O.A.L. (mm/inch)	Individual packing
300-037	Nylon+Fiber	-	-	8P8C/RJ45, 6P2C/6P4C/6P6C RJ11 modular plugs, RJ-22 4P2C/4P4C handset modular plugs	200-053 (2pcs/pack)	166/6.5	Blister card
300-088	Low carbon steel	PVC	HR30N 55~65	RJ-22 4P2C/4P4C handset modular plugs	900-117 (6pcs/pack)	190/7.5	Blister card
300-089	Low carbon steel	PVC	HR30N 55~65	6P2C/6P4C/6P6C RJ11 modular plugs	900-117 (6pcs/pack)	190/7.5	Blister card
300-090	Low carbon steel	PVC	HR30N 55~65	8P8C/RJ45 modular plugs	300-004B (6Pcs/pack)	200/8	Blister card
100-008	-	-	-	UR, UY, UG connectors Solid copper wire UR 19 to 26AWG UY 22 to 26 AWG UG 19 to 26 AWG	-	150/5.9	Blister card
900-055	S45C	Plastic	45°±3°	-	-	180/7.1	Blister card

902-087 Fiber Optic Crimping Tool




This is a rugged, easy to use, well made Crimp Tool, crimps broad range of fiber optic connectors or coaxial cable applications.



Adjustable Disc



902-270 Heavy Duty Coaxial Crimping Tool



Adjustable Disc



300-074 "F" Type Crimper



Model No.	Material	Handle	HRC	Application	O.A.L.(mm/inch)	Individual packing
902-087	S45C DIE: AISI 4140	PP	45°±3°	SC & ST fiber optic connectors HEX .122", .133", .151", .188" HEX 3.10, 3.38, 3.84, 4.78mm	240/9.4	Blister card
902-270	S45C DIE: AISI 4140	PP	45°±3°	RG58, RG59, 6, 11 & UHF-58, 8 Cables and BNC, TNC Connectors HEX: .100", .359", .406	225/9	Blister card
300-074	S45C DIE: AISI 4140	PP	46°±3°	RG59, 6, 62 Cables and CATV Connectors HEX: .322", .255"	225/9	Blister card

300-092 Plier Style Economy Crimper



- For RG59/62/6 F-connectors



CP-808/300-091 Compression Connector Crimping Tool



- Compression tool for waterproof connectors such as RG-58, RG-59 and RG-6 (F,BNC,RCA) connectors.
- Advanced ratchet mechanism.
- Anti-slip handle for easy operation.



RCA waterproof connectors




BNC waterproof connectors



F waterproof connectors



CP-808



Before crimping

After crimping



300-091

Model No.	Material	Handle	HRC	Application	O.A.L.(mm/inch)	Individual packing
300-092	Carbon steel	PVC	45°±3°	RG59/62, 6 hex type, F connector	200/8	Blister card
CP-808	Middle carbon steel	TPR+PP	45°±3°	RG-58, 59, 6 (3C, 4C, 5C), F / BNC / RCA Connectors	195/7.7	Blister card
300-091	S45C	PVC	45°±3°	RG-58, 59, 6 (3C, 4C, 5C), F Connectors	215/8.5	Blister card

▶ 902-265 Compression Connector Crimping Tool

- Crimps RG58/59/6/6 Quad F-Compression Connectors.
- Crimps RG7/8/11 Riser F-Compression Connectors.
- Fully adjustable to fit common connector sizes.



▶ 300-156 Compression Connector Crimping Tool

- Universal tool for all F, BNC, and RCA connectors.
- Works on RG58/59/6/6Q and large RG7/11 Riser Cable Connectors.



Model No.	Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
902-265	Carbon steel + ABS	PP	40'±5"	RG-58, 59, 6, 8,11 / F Connector	174/6.8	Blister card
300-156	Aluminum	PVC	45'±3"	RG-58, 59, 6, 8,11 / F, BNC, RCA Connectors	170/6.7	Blister card

▶ CP-315 Adjustable Compression Tool



▶ CP-313 Adjustable Compression Crimping Tool



▶ 902-245 Compression Connector Crimping Tool



Model No.	Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
CP-315	Carbon steel	Nylon	40'±5"	Connecting waterproof connectors F, BNC, RCA on RG-58, RG-59 and RG-6 coaxial cables	120/4.7	Blister card
902-245	Carbon Steel + ABS	PVC	40'±5"	RG-58, 59,6 / F Connector	143/5.6	Blister card
CP-313	Carbon steel	PVC	40'±5"	RG-58, 59,6 (3C, 4C, 5C), F / BNC / RCA Connectors	152/6.0	Blister card

▶ MS-3207 Advanced 3 in 1 Connector Tool



- Comes with 3 different positions: RG-59, RG-6 and F connectors.
- Users can use one end to enlarge space between shield and insulation for RG59, another end for RG6, the other end locks F connector into tool socket and twist it onto a stripped cable end.




▶ 800-072/800-079 CATV Install/Extract Tool

- Installs and removes F-Type connectors in hard to reach places
- Handle contains male F-Type holder



▶ 800-049/800-050 BNC Connector Insertion/Removal Tool

- Provides easy access to difficult to reach, high density connectors

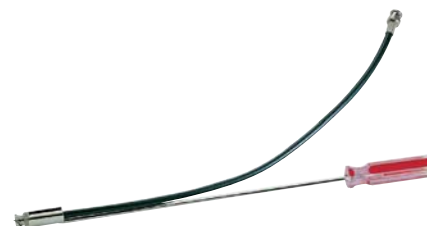

Model No.	Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
MS-3207	PP	-	-	RG59, RG6, F connectors	100/3.9	Blister card
800-072	Cr-V	PVC	45'±3"	-	300/12	Polybag+header card
800-079	Cr-V	PVC	45'±3"	-	150/6	Polybag+header card
800-049	Cr-V	PVC	45'±3"	-	200/8	Polybag+header card
800-050	Cr-V	PVC	45'±3"	-	300/12	Polybag+header card

▶ Crimper Insulated and Non-Insulated Wire Ferrules



300-149



▶ 300-075 D-Sub, 2-Stage, Open Barrel Crimper



▶ 300-035 Multi-Purpose Crimper



Model No.	Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
300-149	S45C	PP	45°±3°	For Insulated and Non-Insulated Wire Ferrules and AWG20-12 wire	205/8.1	Blister card
300-075	Carbon steel	Cushion	45°±3°	For crimping D-Sub AWG.20/24/28	175/6.9	Blister card
300-035	Carbon steel	Cushion	45°±3°	For computer pins & sockets, D-Sub 26-28 AWG wire, For butt-Insulated connectors, 22-26 AWG wire, For telephone piercing spade lugs, 22-26 AWG wire, For open barrel connectors, 20-22 AWG wire, For open barrel connectors, 14-18 AWG wire, For non-insulated terminals, 10-14, 16-18 and 20-22 AWG wire	185/7.3	Blister card

▶ 500-037 Insulated Terminal Crimp Kit





- Ratcheted Crimper
- Ring insulated Terminal (22-16 AWG & Stud size: #6) X 50 pcs
- Ring insulated Terminal (16-14 AWG & Stud size: #8) X 40 pcs
- Ring insulated Terminal (12-10 AWG & Stud size: #10) X 20 pcs
- Butt Splice insulated (22-16 AWG) x 30 pcs
- Butt Splice insulated (16-14 AWG) x 20 pcs
- Butt Splice insulated (12-10 AWG) x 15 pcs

▶ 300-011 IDC Crimp Tool



- For crimping IDC-type of connectors onto flat cables

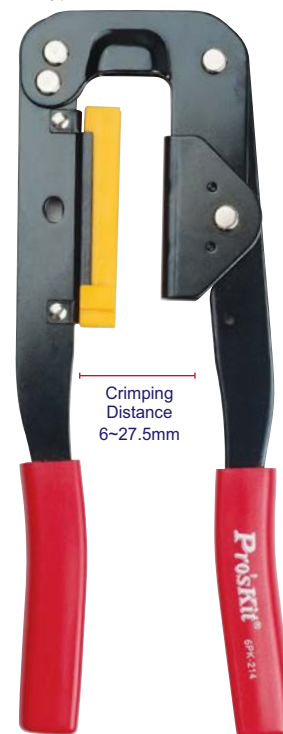

Crimping Distance
6~27.5mm

Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
Low carbon DIE:ABS Handle:PP	PVC	45°±3°	IDC-type connectors Height: 6mm~27.5mm Width(Max): 55mm	240/9.4	Blister card

300-016 Precision Crimping Tool With Wire Ferrules



Terminal crimper

Including wire ferrules
0.5 x 6mm: 40pcs
0.75 x 6mm: 40pcs
1.0 x 6mm: 30pcs
1.5 x 7mm: 20pcs
2.5 x 7mm: 20pcs



Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
S45C	PVC	45°±3°	Non-insulated wire ferrules AWG 23/22/20/18/17/15/13 0.25/0.34/0.5/ 0.75/1.0/1.5/2.5mm ²	160/6.3	Blister card

CP-416 Cutter/Stripper & Crimper Insulated and Non-Insulated Wire Ferrules




Features:

- All in one combination for crimping, stripping and cutting.
- Made of high quality carbon steel with black oxide finished for anti-rust.
- PVC cushion grip handle provides user comfort.
- The stripper is processed by CNC lathe to ensure the accuracy.

wire ferrules
crimper

Wire cutter



Wire stripper



Material	Handle	HRC	Application	O.A.L (mm/inch)	Individual packing
DIE: 4140 Frame: S45C	PVC	DIE: 42°±2° Frame: 44°±2°	Crimping, Wire Ferrules 0.25-2.5 mm ² , Stripping wire AWG 26-14	200/8	Blister card

CP-463 D-Sub Contact Crimping Tool



Features

- Ergonomic handle design provides low-effort operation
- Superior pull strength results
- High quality crimping standard ensures repetitive, reliable crimping action
- Adjustable pin height locator



4 Way Crimping

300-015 4 Way Indent Crimping Tool




Features

- Used to crimp closed barrel, screw machine pin and socket style contacts.
- Performs a simultaneous 4 indent crimp for superior contact retention.



4 Way to Crimping



For Larger
Wire Size

Model No.	Material	Handle	Application	O.A.L (mm/inch)	Individual packing
CP-463	Carbon steel	PVC	RS-232 D-sub round barrel contacts AWG 12-20(0.50-4.0 mm ²)	165/6.5	Blister card
300-015	S50C	PVC	RS-232 D-sub round barrel contacts, pins or sockets AWG 26-20, DIN 0.2-0.5mm ² , JIS 0.2-0.5mm ²	162/6.4	Blister card

900-065 Insertion/Extraction Tool



Features

- RS232 insertion & extraction use
- Red: insertion PIN
- White: extraction PIN



Body	Handle	O.A.L (mm/inch)	Individual packing
Metal	PP	102/4	Pouch

▶ CP-251B/CP-351B Modular Ratchet Crimping Tool



- New generation of energy saving crimper designed for Non-Insulated Spade/Ring Terminals.
- Equipped with outstanding ratcheting cycle and quick safety release.
- Anti-rust, blackened surface finish.
- All stressed parts are made of high quality steel, oil-hardened and tempered.
- High leverage handles, compound action mechanism provide superior mechanical advantage.

CP-251B



(For Non-Insulated Terminal)



Energy saving ratcheting design

CP-351B





Model No.	Material	HRC	Handle	Application	OAL. (mm/inch)	Individual packing
CP-251B	Frame:S50C Die: AISI 4140	45°±3°	TPR	Non-insulated spade/ring terminals,AWG 22-16/16-14/12-10/8/6,DIN 1.5/2.5/6.0/10/16 mm ² JIS 1.25/2.0/5.5/8.0/14 mm ²	245/9.6	Blister card
CP-351B	Frame:S50C Die: 4340	45°±3°	TPR	For crimping AWG 8, 6, 4, 2, JIS 8, 14, 22, 38 mm ² , DIN 10, 16, 25, 35mm ²	350/13.8	Inner box + color label

▶ 300-055 Non-Insulated Terminal Crimper



- Energy saving ratcheting crimper designed for non-insulated spade/ring terminals
- High leverage handles, compound action mechanism provide superior mechanical advantage.



(For Non-Insulated Terminal)



Material	HRC	Application	O.A.L (mm/inch)	Individual packing
Frame:S45C Die:SK-5	39°±2°	For Solderless, Non-Insulated terminals and AWG.22-16/16-14/12-10/8/6	185/7.3	Blister card


▶ 300-107 Heavy Duty Crimping Tool



- The best crimping solution for heavy duty tinned terminals
- Adjustable crimp nests with clearly marked gauges
- Lightweight and easy for operation
- Rugged cast steel construction for durability
- For terminating insulated and non-insulated cable lugs from AWG 8 to 250MCM copper and AWG 8 to 4/0 Aluminum



Material	HRC	Application	O.A.L (mm/inch)	Individual packing
Body: FCD45 Die: SK5	40°±2°	AWG 8, 6, 4, 2, 1/0, 2/0, 3/0, 4/0,DIN 10, 16, 25, 35, 50, 70, 95, 120mm ² ,JIS 8, 14, 22, 38,60 70, 80, 100 mm ²	570/22.4	Inner box+ color label

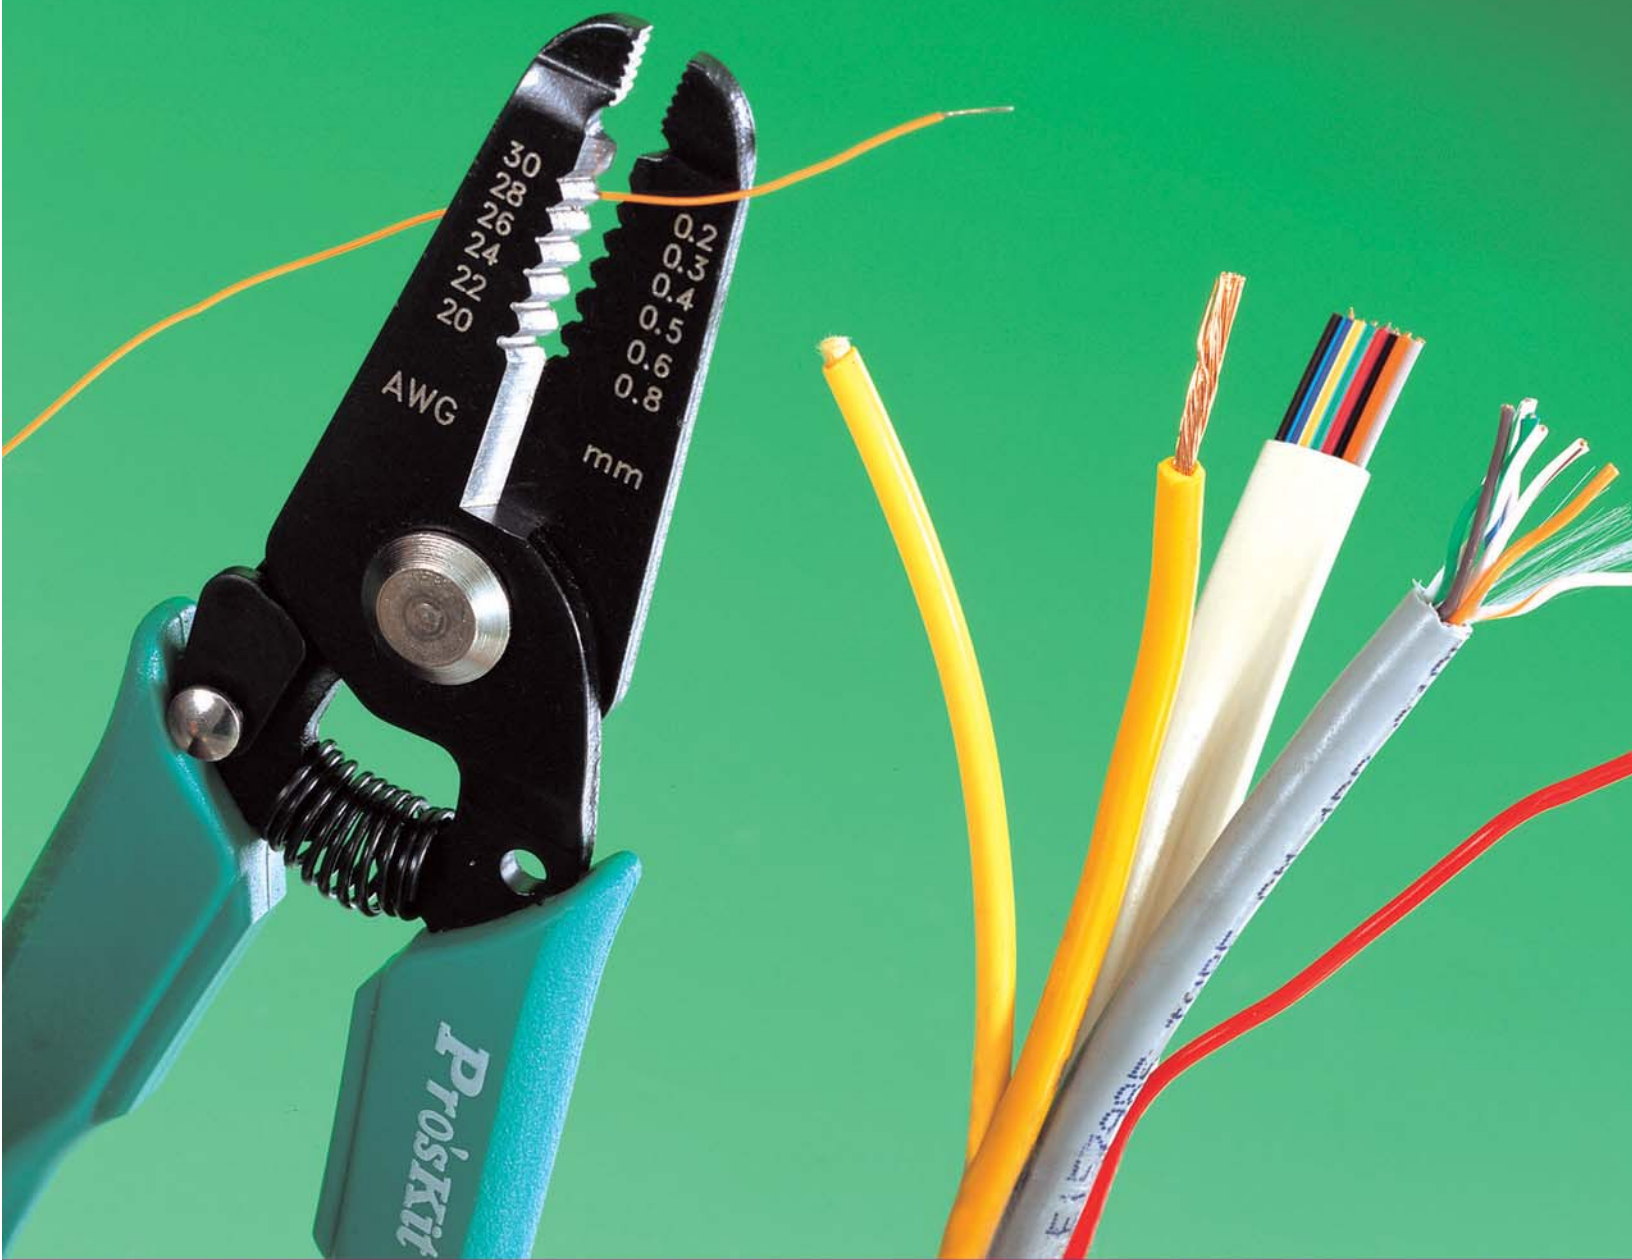

STRIPPERS


Pro'sKit® Strippers

All Pro'sKit® precision strippers pass strict quality control using precision instruments and ensuring accurate stripping with much less effort against injury and long service life.

Pro'sKit® offers a complete range of strippers, including precision wire strippers, automatic wire strippers, coaxial cable strippers, round cable slitting & ringing tools, for most applications, such as electrical wire, hook-up wire, multi-conductor cable, flat telephone cable, twisted pair round cables, coaxial cables, fiber optics cables...etc.

Gripping

Mainly used in holding, pulling and bending wires.



Cutting wires




With cutting edge for soft wires from Ø0.25 to Ø1.2mm (AWG 30 to 16), not for hard or thick objects.

Wire spring



Stripping wires



Pro'sKit® precision strippers are processed by CNC machine to guarantee the accurate size of notches for accurate stripping without damage.



Pro'sKit® end-action wire stripper comes with V type design and screw adjustment to preset wire size up to 3.9mm/0.15".



Pro'sKit® automatic wire stripper requires much less effort to strip wires quickly. The notch size could be custom made upon special request.



2 blade stripping coaxial cables

2 blade coaxial cable stripper usually used in stripping braided shields coaxial cables



3 blade stripping coaxial cables

3 blade coaxial cable stripper usually used for stripping foil/braided shields coaxial cables

Pro'sKit® coaxial cable strippers and twisted pair round cable strippers are designed with lever action that requires much less force for operating as effectively as possible. Blades made from special grade steel provide sharp and durable edges. Some of Pro'sKit strippers come with adjustable wire size function to preset wire size to meet applications requirement.

Cutting wires

Coaxial & twisted pair round cable strippers With cutting edge for cutting soft wires from Ø0.25 to Ø1.0mm (AWG 30 to 18), not for hard or thick objects.



Stripping flat telephone cables

For stripping flat telephone cables



Stripping wires

For stripping electrical wires



Stripping twisted pair round cables

For stripping twisted pair round cables.



Wire spring

Safety Caution



- Blades are very sharp, please use carefully and keep them out of reach of children.
- Blades are consumables, please replace when worn or damaged.

SR-363A/SR-363B 2 in 1 Round Cable Cutter & Stripper



SR-363A



SR-363B



- The stripper is processed by CNC machining process to ensure its accuracy.




Cutting round cable



Stripping

Model No.	Material		HRC	Application	O.A.L (mm/inch)	Individual packing
	Body	Handle				
SR-363A	SK5	TPR	54'±3'	Stripping AWG 14/12/10/8 Cutting round cable up to 10.7mm	168/6.6	Blister card
SR-363B				Stripping AWG 20/18/16/14/12/10 Cutting round cable up to 10.7mm		

CP-301G Precision Wire Stripper

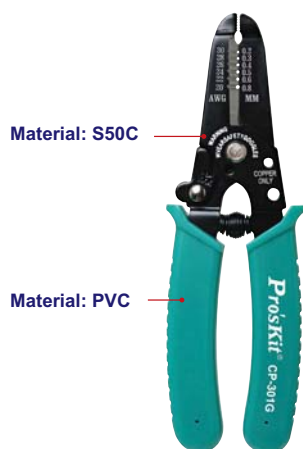

Material: S50C


Material: PVC

Heat-treated sharp angle
w/fine laser marking

Safety lock design

Material	Hardness	Handle	Application	O.A.L (mm/inch)	Individual packing
S50C	45'±3'	PVC	30,28,26,24,22,20 AWG / 0.2,0.3,0.4,0.5,0.6,0.8 mm	165/6.5	Blister card

CP-302G Precision Wire Stripper

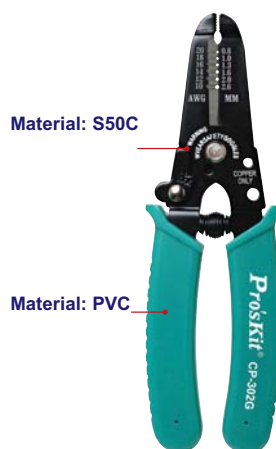

Material: S50C

Material: PVC

Heat-treated sharp angle
w/fine laser marking

Safety lock design

Material	Hardness	Handle	Application	O.A.L (mm/inch)	Individual packing
S50C	45'±3'	PVC	20,18,16,14,12,10 AWG / 0.8,1.0,1.3,1.6,2.0,2.6 mm	165/6.5	Blister card

902-090 Precision Wire Stripper



- Plier nose
- Cutter jaws
- Soft handles
- Spring return



Material	Hardness	Handle	Application	O.A.L (mm/inch)	Individual packing
SK7	50'±3'	PVC	For cutting and stripping AWG 16, 14, 12, 10, 8	156/6.1	Blister card

200-047 Fiber Optic Stripper



- Strips 125 micron glass fiber with 250 micron buffer coating without scratching or nicking glass fiber.




Material	Application	O.A.L (mm/inch)	Individual packing
Blade: S50C	Strips 125 micron glass fiber with 250 micron buffer coating without scratching or nicking glass fiber.	148/5.8	Blister card

CP-412G/CP-413G Heavy Duty Wire Strippers/Crimpers

CP-412G



RoHS
COMPLIANT



Wire cutter

Wire stripper




Bolt cutter



Crimp insulated and non-insulated Terminals

CP-413G




RoHS
COMPLIANT



Model No.	Material	Handle	HRC	Application			OAL. (mm/inch)	Individual packing
				Wire strip	Bolt cutter	Crimp		
CP-412G	S50C	PVC	45 $\pm$ 3°	Stranded wire: 12-24AWG Solid wire: 10-24AWG	4-40, 8-32, 6-32, 10-32, 10-24	10-22 AWG (Barrel-type insulated and Non-Insulated terminal)	206/8.1	Blister card
CP-413G	S50C	PVC	45 $\pm$ 3°	Stranded Wire: 26-24, 22-20, 18, 16, 14, 12, 10 AWG Solid Wire: 22-20, 18, 16, 14, 12, 10, 8 AWG	4-40, 10-32, 10-24, 8-32, 6-32	26-14, 12-10 AWG (Insulated Terminal) 22-10 AWG (Non-Insulated Terminal)	215/8.5	Blister card

100-002 Crimping Tool



Wire cutter

Wire stripper



Bolt cutter



Crimp insulated and non-insulated Terminals

902-088 Multi-Purpose Crimping Tool



Material	Handle	HRC	Application			OAL. (mm/inch)	Individual packing
			Wire strip	Bolt cutter	Crimp		
SAE1008	PVC	HV 450~800	AWG: 10, 12, 14, 16, 18, 20-22	4-40, 6-32, 10-24, 10-32, 8-32	Insulation: 16-14, 12-10, 22-18 Non-insulation: 22-18, 16-14, 12-10 AWG	235/9.3	Blister card

Material	Hardness	Handle	Application			O.A.L. (mm/inch)	Individual packing
			Strip	Cutter	Crimp		
S45C	HRC: 45 $\pm$ 3°	PVC	10, 12, 14, 16, 18, 20, 22, AWG	Bolt cutter: 4-40, 5-40, 6-32, 8-32, 10-32, 10-24	Insulation & Non- insulation: 10-16, 18-22AWG	210/8.3	Blister card

902-247 Adjustable Stripper



- For removing insulation from electrical wire.
- Rotating dial allows effortless changes between wire sizes.
- Hardened steel cutting jaws for clean wire cuts.
- Spring-opening jaws for repetitive stripping and cutting.
- Jaw lock protects cutting edges when tool is not in use.
- Vinyl cushion handles.

Material	Hardness	Handle	Application	O.A.L. (mm/inch)	Individual packing
S45C	45 $\pm$ 3°	PVC	For stripping AWG 26-12	140/5.5	Blister card

CP-415 Cutter Stripper and Crimper



Stripper




Cutter

O.A.L. (mm/inch)	Individual packing
175/6.9	Blister card

Material	Hardness	Handle	Application		
			Strip	Cutter	Crimp
SK7	HRC: 53 $\pm$ 3°	TPR	10~30 AWG (5.5~0.05mm ²)	Cutter: 12~30 AWG (2.0~0.25 mm) Cutter: 10~30 AWG (5.5~0.05 mm ²)	AWG: 12-10/16-14/22-18 JIS: 5.5-3.5/2.0/1.25mm ² DIN: 6-4/2.5/0.9 mm ²

▶ 200-007/ Adjustable Stripper with spring/ 200-007W Stripper without spring



Model No.	Material	Hardness	Handle	Application	O.A.L. (mm/inch)	Individual packing
200-007	S45C	45±2°	PVC	Stripping wire From10~30 AWG/4~0.5mm (with spring)	127/5.0	Blister card
200-007W	S45C	45±2°	PVC	Stripping wire From10~30 AWG/4~0.5mm (without spring)	127/5.0	Blister card

▶ CP-511A Universal Stripping Tool



Stripping low volt
cable Ø8~13mm



Stripping regular cable
AWG 20~10(0.5~6mm²)
and RG59, RG6 Coaxial Cable



Material		Application	O.A.L. (mm/inch)	Individual packing
Blade	Body			
SK5	ABS+TPR	Regular cable AWG 20/18/16/14/12/10(0.5/1.0/2.5/4.0/6.0 mm²), RG59/RG6 coaxial cable, Ø8~13mm low-volt cable	125/4.9	Blister card

▶ 200-042 Economy UTP Stripper



- A simple tool for UTP/STP cable.
- Rotate stripper just three times to extract the jacket of cable.
- Also a function for 110 punch down tool.



Material	Application	O.A.L. (mm/inch)	Individual packing
Poly-Resin	Stripping UTP/STP cable & 110 punch down	94/3.7	Blister card

▶ 200-085 Wire Stripper-Cutter W/Spring



Material	Hardness	Handle	Application	O.A.L. (mm/inch)	Individual packing
S45C	45±3°	PVC	For cutting and stripping AWG 24-10	132/5.2	Blister card

▶ 200-009/200-048 Rotary Cable Slitter



Cable slitting and stripping



Replacement blade:
200-036

O.A.L. (mm/inch)	Individual packing
140/5.5	Blister card

Model No.	Material		Application	Replacement blade
	Blade	Body		
200-009	Blade: SWP spring steel Blade holder: Metal	Nylon+Fiber	Range 0.18"~1.0" diameter	200-036
200-048	Blade: SWP spring steel Blade holder: Metal	Nylon+Fiber	Range 1.0"~1.4" diameter	200-036

▶ 200-042-100 Economy UTP Stripper (100pcs/jug)

- A simple tool for UTP/STP cable.
- Rotate stripper just three times to extract the jacket of cable.
- Also a function for 110 punch down tool.



Material	Application	O.A.L. (mm/inch)	Individual packing
Poly-Resin	Stripping UTP/STP cable & 110 punch down	94/3.7	Color Label

▶ **CP-246 Solar Cable Stripper**

- With adjustable length stop for accurate stripping length setting



Material			HRC	Application	O.A.L. (mm)	Individual packing
Body	Blade	Handle				
Zinc alloy	SK5	TPR	56±2°	For 2.5/4/6mm ² (AWG 14/12/10) solar cable	177/7	Blister card

▶ **CP-367A Self-Adjusting Insulation Stripper**

- To adjust length stop of 5-12mm
- Fully insulated for user comfort!



Material			HRC	Application	O.A.L. (mm/inch)	Individual packing
Body	Blade	Handle				
Nylon	SK5	55±3°		Stripping: AWG24~10/0.2~6.0mm ² Cutter: under Ø 2.0mm	115/4.5	Blister card

▶ **200-072 Automatic Wire Stripper & Crimper**

- The EASY STRIPPER cutters are made by precision machines for a long-life use.
- 15N 88-90 (HRC55°~60°) blade cuts wire fast and smoothly.
- Plastic insulated handles keep your work safe.



Stripping



Crimping



Stripping



Cutting

Model No.	Material			Blade HRC	Application	O.A.L. (mm/inch)	Individual packing
	Body	Blade	Handle				
200-072	SS 41	Powder metallurgy	PVC	52°~57°	Stripper range: AWG 24-10 (0.2~6.0mm ²) For insulated terminals AWG 22-10 (0.5-6.0mm ²) For non-insulated terminals AWG 22-10 (0.5-6.0mm ²) For auto ignition terminals 7-8mm	210/8.3	Blister card
200-070	SS 41	Powder metallurgy	ABS+TPR	52°~57°	Stripper range: AWG 24-10 (0.2~6.0mm ²) For insulated terminals AWG 22-10 (0.5-6.0mm ²) For non-insulated terminals AWG 22-10 (0.5-6.0mm ²) For auto ignition terminals 7-8mm	210/8.3	Blister card

▶ **200-003 Wire Stripping Tool**

Material			Blade HRC	Application	O.A.L. (mm/inch)	Individual packing
Body	Blade	Handle				
Zinc alloy	S45C	PVC	45°~55°	Stranded/Solid wire: AWG 22, 18-20, 14-16, 12, 10, 8	170/6.7	Blister card

▶ **200-091 Wire Stripping Tool**

Cutting

Material			HRC Blade	Application	O.A.L. (mm/inch)	Individual packing
Body	Blade	Handle				
ABS & low carbon steel	65Mn	45°~55°		Stripping flexible cable from 0.2~4mm ² (AWG 24-12)	172/6.8	Blister card

▶ **200-070 Automatic Wire Stripper & Crimper**

- Micro adjusting the swivel knob to strip electrical wire gauge smaller than AWG24 (0.2mm²)
- Adjustable stopper is swiveled if user does not use this function.



Stripping




Crimping

Micro adjuster knob
& wire stopper

Cutting

CP-522 Rotary Coaxial Cable Stripper



Replacement blade cassette:
902-268
(1pcs/pack)



Material		Application	O.A.L. (mm/inch)	Individual packing
Body	Blade			
ABS	SK5	coaxial cable RG59/6/7/11	128/5	Blister card

902-229 Universal Stripping Tool




- Reversible stripping UTP/STP cable, flat telephone cable and coaxial cable with cutter function.



Replacement blade :
902-269
(4pcs/pack)



Replacement blade cassette:
902-268
(1pcs/pack)



Material	Application	Replacement	O.A.L. (mm/inch)	Individual packing
ABS	Stripping UTP/STP twisted pair round cable, flat telephone cable, RG-59/11/7/6 coaxial cable	Blade: 902-269 Cassette: 902-268	125/4.9	Blister card

200-016 Wire Stripper Tool



Replacement blade :
900-117(6 pcs/pack)




Material	Application	Replacement blade	O.A.L. (mm/inch)	Individual packing
Body				
ABS	Wire(UTP/STP) or wire & multiconductor cable from Ø3.2-9mm(0.13"-0.35") max.	900-117 (6 pcs/pack)	112/4.4	Blister card

200-065 Rotary Coaxial Cable Stripper



- New design for stripping ethernet, thinnest RG-62/58/59/6 coaxial cable and other cable size. Each tool does 2 or 3 step strips with out any adjustment.



Stripper Distance




Material	Application	O.A.L. (mm/inch)	Individual packing
ABS	Thinnest RG-62/58/59/6 coaxial cable and other cable size	108/4.3	Blister card

200-064 Multi-Function Wire Strippers



- Compact and lightweight design for easy operation.
- Provide multifunction for cutting and stripping RG-58/59/62 coaxial cable, flat telephone cable, 26-16 AWG precision wire.
- Blades are made for precision stripping and are quality built with carbon steel and finished with black oxide to prevent corrosion.




Material	Application	O.A.L. (mm/inch)	Individual packing
ABS	Stripping: RG-58/59/62 coaxial cable, 26-16 AWG(0.13~1.3mm ²) precision wire, flat telephone cable, cutting: 3.5~9mm ² (12-8 AWG)	125/4.9	Blister card

200-090 Coaxial Stripper



- Slot "A" for stripping center core.
- Slot "B" for stripping outer jacket. Rotating each by 3 to 5 times in clockwise direction (as arrow).
- Stripping cables by 2 steps.

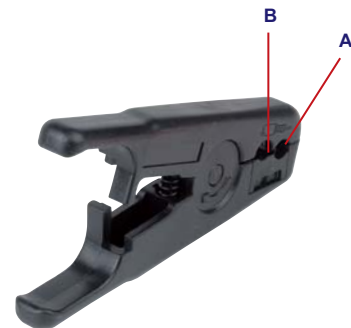

Model No.	Material	Application	O.A.L. (mm/inch)	Individual packing
	Body			
200-090	ABS	RG-58,59,62,6	100/4	Blister card

▶ **200-081 Rotary Coaxial Cable Stripper**

3 Blade Model
8 4 mm

Stripper Distance



Replacement blade :
900-027(6pcs/pack)

Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	For big cable O.D. around 10.5mm such as RG213	900-027 (6 pcs/pack)	105/4.1	Blister card

▶ **200-005 Rotary Coaxial Cable Stripper**

3 Blade Model
8 4 mm

Stripper Distance

Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	RG-58/59/62/3C/4C	900-027 (6 pcs/pack)	107/4.2	Blister card

▶ **200-004 Rotary Coaxial Cable Stripper**

2 Blade Model
4/6/8/12 mm

Stripper Distance



Replacement blade :
900-026(6pcs/pack)

Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	RG-58/59/62/6/3C2V/4C/5C	900-026 (6 pcs/pack)	98.5/3.9	Blister card

▶ **200-084 Coaxial Stripper**

- Clothespin design
- Strip configuration for RG6, 58 and 59
- Adjustable blades



Material		O.A.L. (mm/inch)	Individual packing
Blade	Body		
SK5	ABS	120/4.7	Blister card

▶ **200-051 Rotary Coaxial Stripper**

Replacement blade :
900-027(6pcs/pack)

Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	3-Blade model RG-59/62/6	900-027 (6 pcs/pack)	105/4.1	Blister card

▶ **200-050 Rotary Coaxial Stripper**

Replacement blade :
900-027(6pcs/pack)

Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	RG-59/62/6	900-027 (6 pcs/pack)	105/4.1	Blister card

▶ **902-334 Rotary Coaxial Stripper**

- Compact and lightweight design for stripping RG-174 coaxial cable easily.
- Made of ABS handle with SK5 blade.
- Rotary stripping, one-squeeze cutting action.
- Includes a small hex wrench in handle for blade depth adjustment.



Material	Application	Replacement blade	O.A.L (mm/inch)	Individual packing
ABS	Stripping RG-174 coaxial cable	902-334-BLADES	98.5/3.9	Blister card

▶ **902-323 Coaxial Cable Stripper**

- For stripping RG-58, RG-59, RG-6 coaxial cable




Optional replacement
cassettes: 902-324,
902-325, 902-326



Comes with 902-324
cassette

Model No.	Material		O.A.L.(mm/inch)	Individual packing
	Blade	Body		
902-323	SK5	ABS	120/4.7	Blister card

Model No.	Cassette color	Application
902-324	Red	3 Step strips for dual crimp N series connectors Strips braid 0.236 in. (6mm) and Dielectric 0.236 in. (6 mm)
902-325	Green	2 Step strips for twinax and UHF connectors Strips braid 0.480 in. (12mm)
902-326	Blue	2 Step strips for F-type and single crimp BNC/TNC connectors Strips braid 0.250 in. (6.35mm)

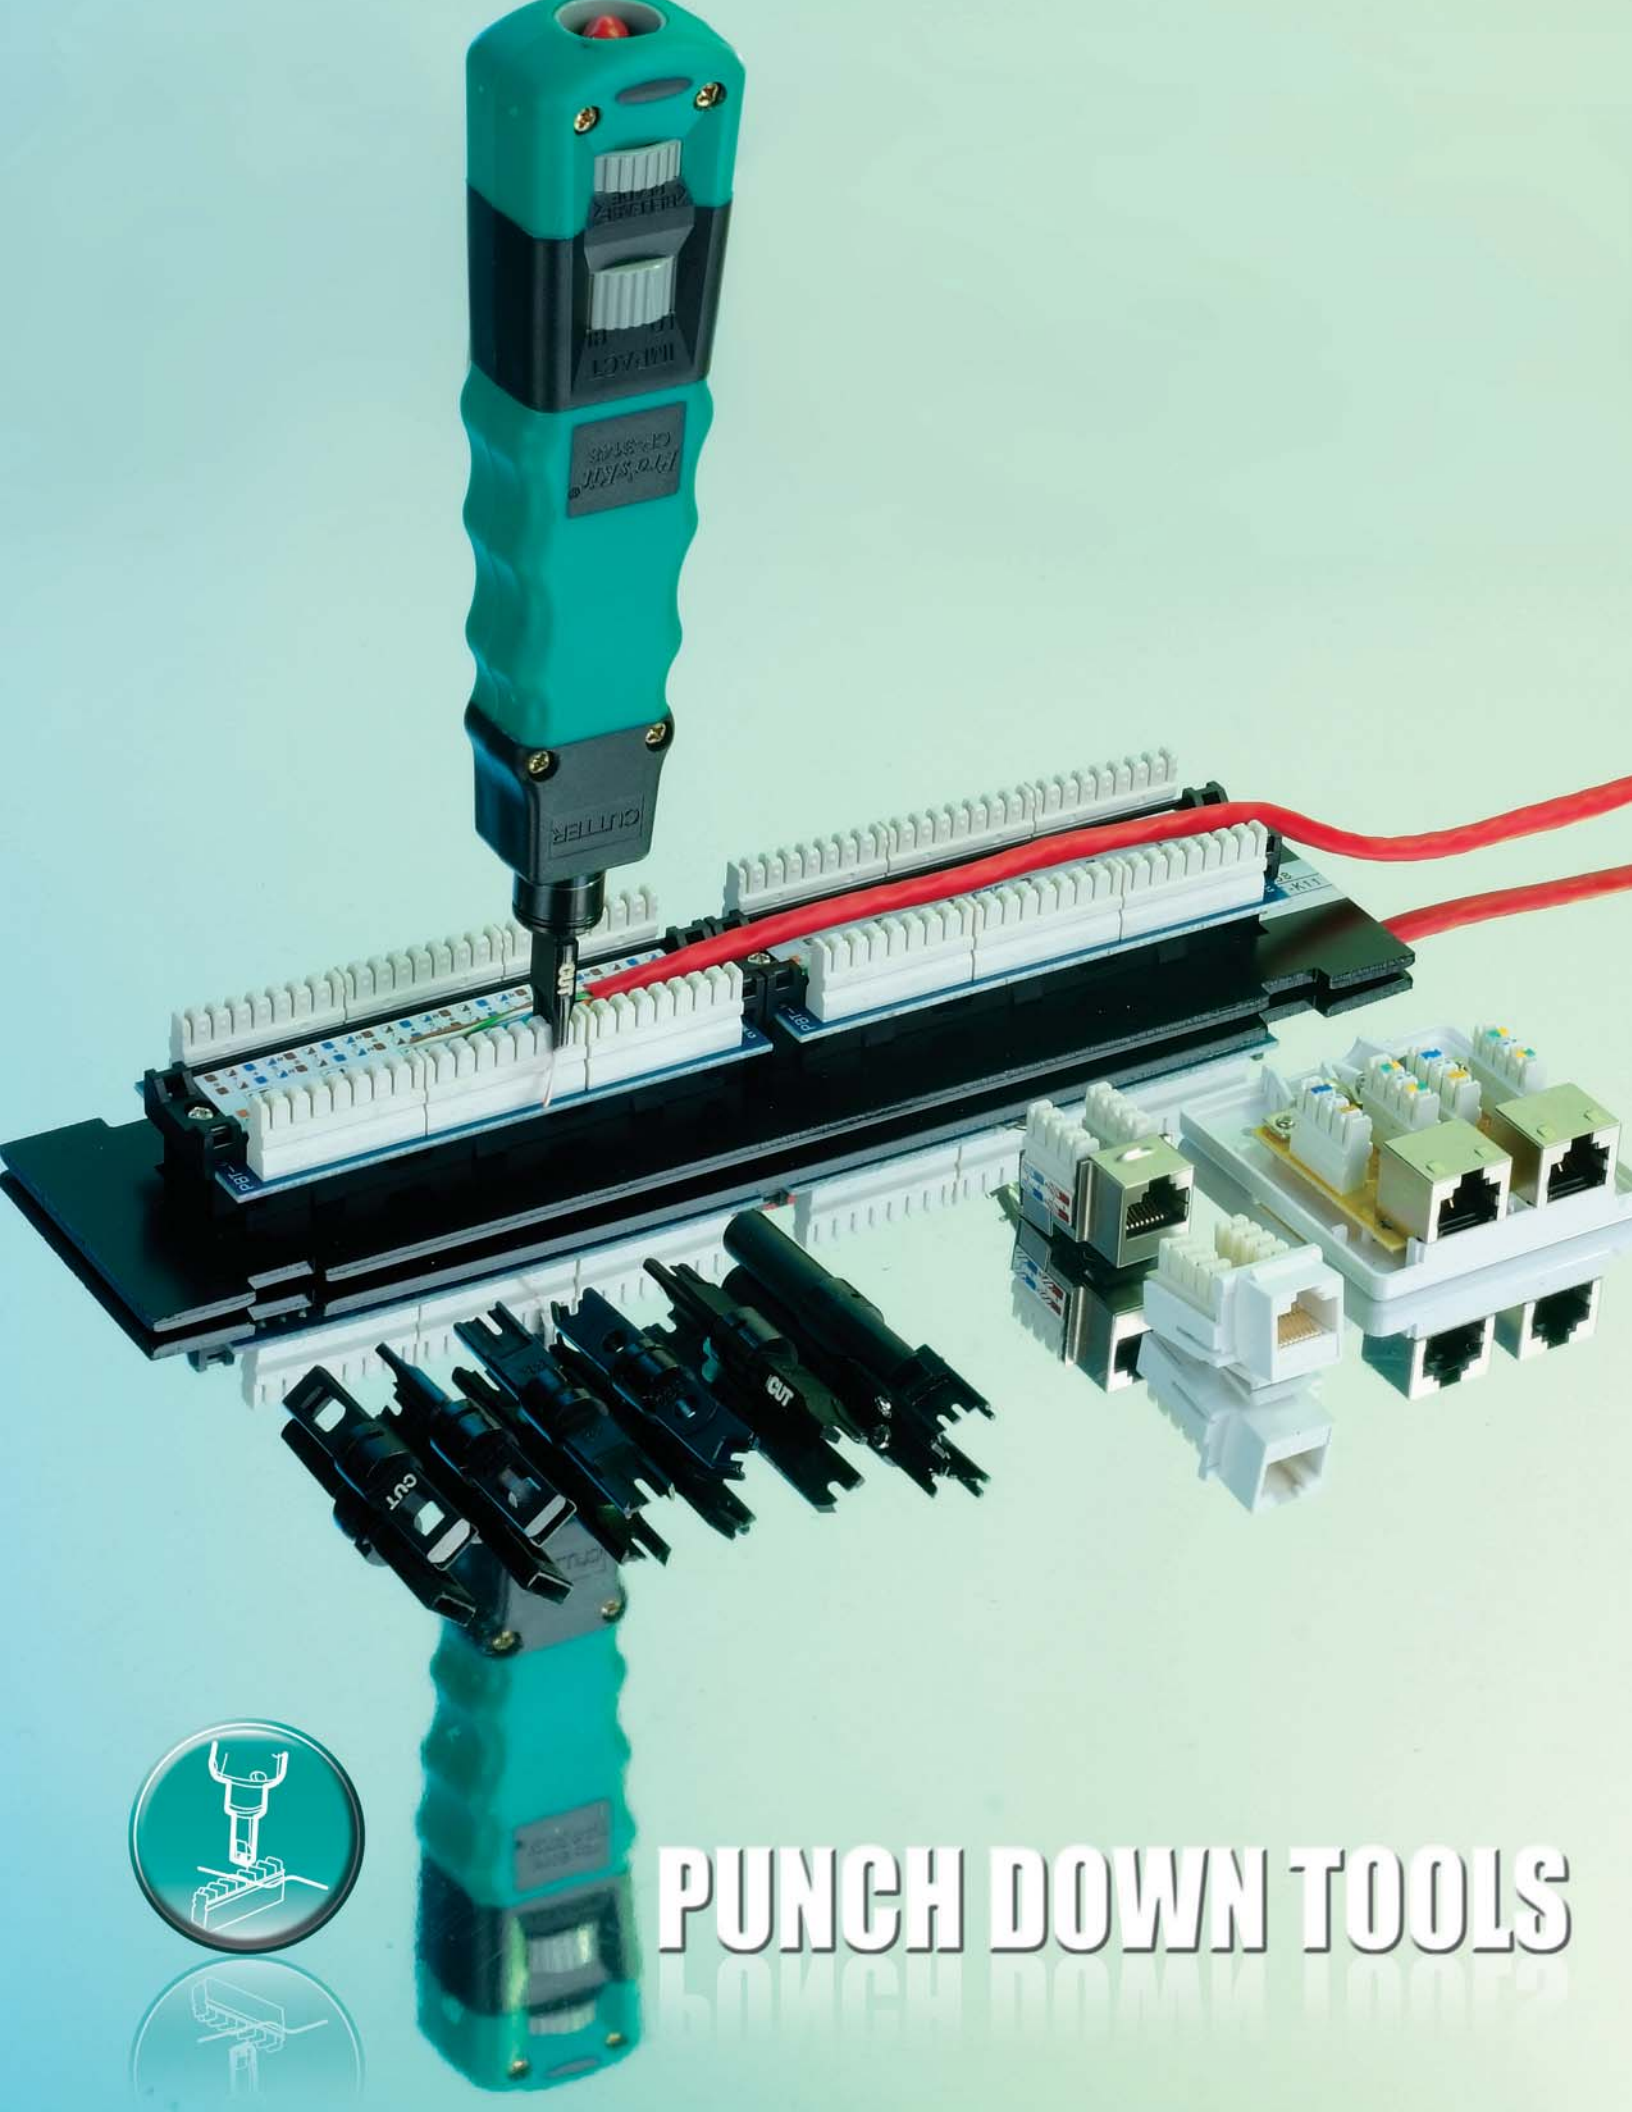

PUNCH DOWN TOOLS



700-025/700-024

Mini Punchdown Tool



- Lid flips to allow storage of protective cap



Punch and cut cable terminals

Economic Type



Model No.	Material		Application	Standard blade type	O.A.L. (mm/inch)	Individual packing
	Blade	Body				
700-025	SNCM-21	Rubber (Anti-slip)	Fixed blade, not changable	66 (with cutter)	129/5.1	Blister card
700-024	SNCM-21	Rubber (Anti-slip)	Fixed blade, not changable	110 (with cutter)	129/5.1	Blister card

700-025-25/700-024-25

Mini Punchdown Tool

- Holds 25 pcs for retail display.



Model No.	Description
700-025-25	66 Blade Type in display jug shown at right
700-024-25	110 Blade Type in display jug shown at right

CP-3145A Punchdown Tool



Punch and cut cable terminals




- Rotatable blade holder
- Blade on both ends



Material		Standard blade type	O.A.L. (mm/inch)	Individual packing
Blade	Body			
S45C	ABS	110/88 blade, one end with, one end without cut function	128/5.1	Blister card

900-140 Spudger

- Probe & Pick
- Tough nylon glass fiber construction
- Non-conductive - prevents shorting

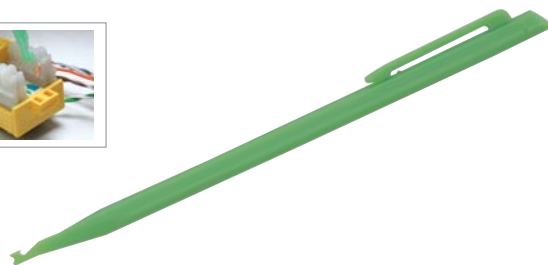

Material		O.A.L. (mm/inch)	Individual packing
Blade	Body		
Nylon+Fiber glass		142/5.6	Blister card

700-014/700-029 110 Punchdown Tool



- For use on LAN and telecom, seating 5 pairs or 4 pairs UTP (24 AWG) at a time.
- Suitable for both 110 type cable side and cross-connect side terminals blocks.
- The termination block head w/blades are changeable and reversible
- One end for seating and cutting off wires, and the other end for seating wires only.
- Patented: Taiwan.



700-018
(4 pairs)
For 110 type



700-016
(5 pairs)
For 110 type



Model No.	Material		Application	Standard blade type	Optional blade	O.A.L. (mm/inch)	Individual packing
	Blade	Body					
700-014	SNCM-21	T.P.R (Anti-slip)	Hi-low adjust pressure (Hi: 15±2kg, Low: 10±2kg)	110 (5 pairs)	700-016 700-018	140/5.5(w/o blade)	Blister card
700-029	SNCM-21	T.P.R (Anti-slip)	Hi-low adjust pressure (Hi: 15±2kg, Low: 10±2kg)	110 (4 pairs)		140/5.5(w/o blade)	Blister card

CP-3147/CP-3148/CP-3150 Impact Punchdown Tool



- Ergonomic cushion grip with duplex color design.
- Spare blade storage chamber in handle.
- Increased HI/LOW forces to meet demands of all Category cables through Cat6.



Model No.	Material	Application	Standard Blade type	Optional blade	O.A.L. (mm/inch)	Individual packing
CP-3147	ABS + TPR	Hi-low adjust pressure (Hi: 40lbs 178N, Low: 30lbs /133N)	Handle Only (no blades)	700-008 700-009 700-015 700-017	162/6.4 (w/o blade)	Blister card
CP-3148			110/88 & 66 both ends cut only			
CP-3150			1pcs 110/88 & 1 pcs dual 66 with cut function			

700-007/700-010/700-011/700-012 Punchdown Tool

- Spring loaded impact
- Hi-Lo settings
- Spare blade storage in handle
- Blades/Handle inter-changeable with Harris Dracon and Fluke 814 tool and other industry standard tools






Model No.	Material	Application	Standard Blade type	Optional blade	O.A.L. (mm/inch)	Individual packing
700-007	ABS	Hi-low adjust pressure (Hi:15±2kg, Low:10±2kg)	Handle Only (no blades)	700-008 700-009 700-015 700-017	146/5.7 (w/o blade)	Blister card
700-010			w/110 & 66 Blades			Blister card
700-011			w/110 Blades			Blister card
700-012			w/66 Blade			Blister card

700-020/700-021/ 700-022/700-023 Impact Punchdown Tool



- A built-in combination hook/spudger for tracing and removing wires.
- Twist-lock style holder provides quick, easy blade changes and prevents pullout.
- An additional safe storage for one more spare blade



Model No.	Material	Application	Standard Blade type	Optional blade	O.A.L. (mm/inch)	Individual packing
700-020	TPR+PP (Anti-slip) (w/o Blade)	Hi-low adjust pressure (Hi:15±2kg, Low:10±2kg)	Handle Only (no blades)	700-008 700-009 700-015 700-017	168/6.6 (w/o blade)	Blister card
700-021			w/110 & 66 Blades			Blister card
700-022			w/110 Blades			Blister card
700-023			w/66 Blade			Blister card

700-027 Punchdown Tool-Locking Collar



Economic Type



Hex type	Model No.	For terminal block
	700-026	Dual 110/88 type, one end with cut function(Hex type)
	700-028	Dual 66 type, one end with cut function(Hex type)

Material	Application	Standard Blade type	Optional blade	O.A.L. (mm/inch)	Individual packing
ABS	Hi-low adjust pressure (Hi:15±2kg, Low:10±2kg)	110/88	700-026 700-028	186/7.3 (w/o blade)	Blister card

700-008/ 5CP-16A/ 700-009/ 700-015/ 700-017 Spare Blades



For CP-3147,CP-3148,CP-3150,700 series punchdown tools



These five blades do not fit the 700-027 punchdown tool

Model No.	Material	For terminal block
700-008	SAE 4140	Dual 66 type, one end with cut function
5CP-16A	AISI 4140	66, 110/88 type, both ends with cut function
700-009	SAE 4140	Dual 110/88 type, one end with cut function
700-015	SAE 4140	Dual KRONE 110 type, one end with cut function
700-017	SNM-21	BIX, with cut function



SOLDERING & DESOLDERING

SS-989A 2 In 1 SMD Hot Air Rework Station




With hot air and cool air functions


Quick replacement design
for heater of heat gun




SMD rework



Soldering Iron




All around air-tight seal in
hot air gun



Only three screws, easy
disassembly



High quality assembly



Connectorized design for quick
change heater

Features

- 2 In 1 rework station to save cost
- Closed circuit sensor design
- High power, quick warm up times
- Individual function start saves energy
- LED digital display

- Quiet operation
- Auto cool-off process to prolong the life of heating element
- ESD safe design
- Interchangeable and applicable to most of branded hot air nozzles and tips

Specification	
Model No.	SS-989A
Power Consumption	700W
Soldering Power	60W
Soldering Iron Temperature Range	200°C ~ 480°C (392°F ~ 896°F)
Hot Air Temperature Range	100°C ~ 450°C (212°F ~ 842°F)
Heating Element	Metal Heating Core
Pump/Motor Type	Diaphragm Pump
Air Capacity	24L/min (max)
Equipment noise	45dB
Temperature Display	LED
Power Input	110V 60Hz
Standard Plug	
Dimensions	330(L)x275(W)x195(H)mm 13" x 10.8" x 7.7"
Weight	3700g
Accessories	
Soldering Iron (60W)	110V x 1pcs
Hot Air Gun	110V x1 pcs
Soldering Stand	1pcs
Nozzle	9SS-900-A1 (Ø2.2mm) x 1pcs 9SS-900-A2 (Ø6.6mm) x 1pcs 9SS-900-A3 (Ø8.5mm) x 1pcs
Individual packing	Color Box

Replacement Tips:

Please refer to 5SI-216N series on page.75

Replacement Nozzle:

IC Package	IC (mm/inch)	Model No.	AxB (mm/inch)	CxD (mm/inch)
Single 	10x10 / .4x.4	9SS-900-A1	ø2.2 / .09(I.D)	
		9SS-900-A2	ø6.6 / .26(I.D)	
		9SS-900-A3	ø8.5 / .33(I.D)	
QFP (Quad Flat Pack) 	14x14 / .55x.55	9SS-900-B	10.2x10.2 / .4x.4	10x10 / .4x.4
	17.5x17.5 / .69x.69	9SS-900-C	15.2x15.2 / .6x.6	15x15 / .6x.6
	14x20 / .55x.79	9SS-900-D	19.2x19.2 / .76x.76	19x19 / .75x.75
	28x28 / 1.1x1.1	9SS-900-E	15.2x21.2 / .6x.83	15x21 / .59x.83
SOP (Small Outline Package) 	28x28 / 1.1x1.1	9SS-900-F	29.7x29.7 / 1.2x1.2	29x29 / 1.14x1.14
	4.4x10 / .17x.4	9SS-900-H	10x4.8 / .39x.19	
	5.6x13 / .22x.51	9SS-900-I	15x5.7 / .59x.22	
	7.5x15 / .3x.6	9SS-900-J	16x7.2 / .63x.28	
PLCC (Plastic Leaded Chip Carrier) 	7.5x18 / .3x.71	9SS-900-K	19x7.2 / .75x.28	
	17.5x17.5 / .69x.69	9SS-900-L	18.5x18.5 / .73x.73	15x15 / .6x.6
	20x20 / .79x.79	9SS-900-M	21x21 / .83x.83	19x19 / .75x.75
	25x25 / .98x.98	9SS-900-N	26x26 / 1x1	24x24 / .95x.95
	30x30 / 1.18x1.18	9SS-900-O	31x31 / 1.2x1.2	29x29 / 1.1x1.1

SS-969E SMD Rework Station



Microprocessor-controlled

Brushless motor

Auto-sleep and work mode

Features:

- Microprocessor-controlled, closed circuit sensor design, high power and quick warm-up times
- Adjustable air flow, air volume and temperature, suitable for a variety of applications.
- Handle with sensor design provides real-time operating convenience.
- Auto cool-off process to prolong the life of heating element
- Plastic shell, compact body, attractive styling, and small footprint.
- Brushless motor design, quiet in operation, equipment noise less than 45dB
- Safe solder QFP, PLCC, BGA and other temperature-sensitive components.
- Also for heating shrink, viscosity removal, lacquer removal, preheating.



Standard nozzles x 3 pcs



SMD rework

Specification	
Model No	SS-969E
Power Consumption	700W
Temperature Range	100~450°C(212~842°F)
Heating Element	Metal Heating Core
Equipment Noise	<45dB
Temperature Display	LED
Air Volume	120L / min (Max.)
Fuse type	250V / 10A
Input Voltage	110V
Plug Type	E
Machine Size	170mm x 170mm x 140mm 6.7" x 6.7" x 5.5"
Overall Package	280mm x 185mm x 170mm 11" x 7.3" x 6.7"
Weight	1.45 kgs
Accessories	
Heat Air Gun	110V x 1pcs (225 x 60 x 40mm / wire length 115cm) (8.9" x 2.4" x 1.6" / wire length 3' 9.3")
Nozzle	9SS-969-A1 x 1pcs (ID: Ø 4.5mm/0.18") 9SS-969-A2 x 1pcs (ID: Ø 7.5mm/0.3") 9SS-969-A3 x 1pcs (ID: Ø 11.2mm/0.44")
Individual packing	Color box

SS-611A Heat Gun Set



Improved

- Smart overheat protection design
- Automatic cool air flow to reduce waiting time from overheating shut down while working
- 2 temperature settings from 300°C~500°C for a variety of applications
- Dual color ergonomic grip and lightweight design provides greater comfort
- Includes 4 nozzles and 1 scraping tool with carrying case, easy to carry and store



Included 4 Nozzles + 1 Scraper



Voltage	Power	Dual temperature range	Case size (mm/inch)	Standard plug
120V 60Hz	I-750W II-1500W	I-300°C II-500°C	295x275x85 11.6" x 10.8" 3.3"	A

Individual packing: Color sleeve + shrink pack

Caution:

- For safety, after using this product for one hour, please shut-off for 10 minutes to cool down temperature
- If this product is overheating after shut-off, the protection function will be coercively booted and shut this appliance off for 10 minutes. To prevent any overheating problem, never put the appliance down on its air outlet nozzle. Always keep its outlet nozzle upward or put it on one of its sides.

SS-206E / SS-207E Temperature-Controlled Soldering Station



SS-206E



(Soldering stand included)



SS-207E

Features

- Comply with CE, ESD safe certification.
- Adjustable temperature control with lock/set screw.
- Temperature range 200- 480°C (392-896°F).
- Made with an efficient ceramic heating element assuring a fast heating time.
- Soldering iron handles are insulated and ergonomically designed for ease and comfort.
- Celsius or fahrenheit temperature setting.
- Control IC modular design for easy and quick repair.



Modular design for easy repair (only for SS-207)



AC 110/220V switch

Replacement tips: Pb-free

OAL: 43mm I.D.: 4.0mm O.D.: 6.3mm (OAL: 1.7" I.D.: 0.16" O.D.: 0.25")

Model No.	SS-206E	SS-207E
Power consumption	60W	
Output voltage	24VAC	
Display	Analog	Digital
Heater	Normal Heater	
Temperature range	200°C- 480°C (392°F-896°F)	
Station Size	115mm x 95mm x 130mm 4.5" x 3.7" x 5.1"	
Voltage	AC 110V/220V switch	
Standard Plug	E type	
Individual packing	Color Box	

	5SI-216N-B		5SI-216N-3.2D
	5SI-216N-B1.0		5SI-216N-1C
	5SI-216N-BC		5SI-216N-2C
	5SI-216N-0.8D		5SI-216N-3C
	5SI-216N-1.2D		5SI-216N-4C
	5SI-216N-1.6D		5SI-216N-I
	5SI-216N-2.4D		5SI-216N-K

▶ **900-066N 50W Soldering Station**

Model No.	Voltage	Consumption	Temperature	Replacement heater:
900-066N	110~120V	50(W)	250~480°C (482~896°F)	902-174

Replacement heater	Standard plug	Station size LxWxH (mm/inch)	Individual packing
902-174		175x103x90(6.9x4.1x3.5)	Color Box

Replacement tip: (Offered by 5 pcs in a bag)

	900-073N		902-132 (Standard)		902-134
	900-074N		902-133		902-135

▶ **SI-125A-15/SI-125A-20 Mini Soldering Iron**

- Specifically for areas that require small size and fine application.
- Lightweight and triangle shape plastic handle for user comfort.
- Heats up fast but less wattage required.
- Tips screw on and off for easy changing.



Safety stand

Standard plug	OAL (mm/inch)	Individual packing
A	168/6.6	Blister card

Replacement tip:

	5 SI-125T-B (Standard)
	5SI-125T-SB
	5SI-125T-D

Model No.	Voltage	Consumption	Temperature	Heater	Handle color
SI-125A-15	110-120V	15W	360°C±10%	Ceramic heater	Orange
SI-125A-20	110-120V	20W	410°C±10%	Ceramic heater	Orange

▶ **902-329 25W Soldering Iron**

Replacement tip:

902-333 (Pencil type)

Voltage	Consumption	Temperature	Handle color	Standard plug	Individual packing
120V	25W	340°C	Black	A	Blister card

▶ **900-259 Mini Soldering Station**

- Precision temperature control: ~330°C (~626°F)
- Super slim, pen-like style for greater control and visibility
- Specially designed for repairs to cell phones and PC boards
- Conductive soldering stand
- Dual voltage AC 110/220V



AC 110/220V Switch



Mini Ceramic Heater & Tip



Replacement tip:

	900-245
--	---------

Voltage	Consumption	Temperature	Standard plug	Individual packing
110V	4~14W	~330°C (~626°F)	E	Color box

▶ **900-035 20W~40W Soldering Station**

- 20W-40W switchable solder station
- UL approved
- Comes with pencil tip



Replacement tip:

	900-036 (Chisel type)
	900-146 (Pencil type)

Voltage	Consumption	Temperature	Standard plug	Individual packing
110V	20~40W	400°C±30%	A	Color box

▶ **900-044 15W Soldering Iron**

Replacement tip:

900-050 (Pencil type)

Voltage	Consumption	Temperature	Handle color	Standard plug	Individual packing
110V	15W	320°C	Yellow	E	Blister card

GS-200K Gas Soldering Iron Kit-Auto Ignition

- Butane is easy to refill and check with see-through fuel window
- Auto ignition is easy to start and operate under any condition
- Adjustable flame control for precision use
- The kit includes, blow pen torch, protection cap, soldering head, needle soldering tip, 2.4mm soldering tip, double sharp tip, hot knife tip, hot air blower, polyfoam cutter, tube of solder, tip-cleaning sponge with safety stand and tool rest packed in rugged plastic case.



Hot air for SMD reworking



Torching



Soldering

Soldering temperature	Hot blow temperature	Torch temperature	Fuel cap.	Time	Size (mm/inch)	Individual packing
400 °C	500 °C	1300 °C	26 ml	100~120 min	220×Ø30 8.7xØ1.2	Color box

Auto Ignition



900-115 Glue Gun



- Solid state electric glue provides a fast, easy way to dispense hot melt adhesive for hundreds of fastening and repair jobs.
- Specially designed feed mechanism, spring-tensioned nozzle and silicone sleeve assure precise control of adhesive flow for neater work.



Decoration model and more...



Models

Voltage	Power	Preheat time	Flow of glue	Standard plug	Individual packing
120V	30-80W	10 min	14-16g per min	A	Double blister

900-118A Glue Stick




- 6pcs per pack




900-018N 30W Soldering Iron



- Converts easily from pen to gun configuration.
- When not in use handle covers tip for storage protection.



Replacement tip:



900-020N (Pencil type)

- offered by 10 pcs in a bag

Voltage	Consumption	Temperature	Standard plug	Individual packing
110~120V	30W	400°C±10%	E	Blister card

GS-210 Professional Soldering Iron & Gas Torch

- Auto ignition is easy to start and operate under any condition
- Adjustable flame control for precision use
- Built-in stand for safety and easy placement during work
- Needle soldering tip and soldering head included
- Optional tips available for different applications

Auto Ignition



Soldering temperature	Hot blow temperature	Torch temperature	Fuel cap.	Time	Size (mm/inch)	Individual packing
370 °C	500 °C	1300°C	7 ml	30~40 min	170×Ø 24 6.7xØ.94	Blister card

GS-520 Professional Torch



- Auto ignition is easy to start and operate under any condition
- Power butane blue torch flame.
- Anti-flare flame.
- Fingertip adjustable flame control.
- Child-resistant ignition for safety
- Includes detachable base for hands free work.

Auto Ignition



Torch temperature	Fuel cap.	Time	Size (mm/inch)	Individual packing
1300 °C	20 ml	60~90 min	130×73×155 5.1x2.9x6.1	Blister card

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS

900-004 ESD Mini-Desolder Pump



900-008

DP-366D Desoldering Pump



5DP-366D-T

DP-366P Desoldering Pump




5DP-366P-T

Model No.	Material	Suction Capability	Replacement Tip	OAL(mm/inch)	Individual packing
900-004	Aluminum	30cm-Hg	900-008	163/6.4	Blister card
DP-366D	ABS	32cm-Hg	5DP-366D-T	210/8.3	Blister card
DP-366P	ABS	40cm-Hg	5DP-366P-T	330/13.0	Blister card

902-227 Helping Hands Octopus Clamp Kit

- Maximum thickness of table or bench edge: 1.5"(40mm)
- Including magnifier arm x1, magnet arm x1, stayput arms x4
- Magnification: 2.5X



Multi function

Individual packing: Blister card

902-094 Helping Hands



- The practical helper for soldering work for electronics and model-making.
- Holding clamps adjustable in many ways, complete with magnifying glass 3.5"(90mm) dia: 2X.
- Sturdy stand.



Individual packing: Color box

Helping Hands

900-037



900-206



900-015



Model No.	Material			Magnification	Base OAL(mm)	Individual packing
	Magnifier	Arm	Base			
900-037	Acrylic	Low carbon steel	Cast-iron	Ø 50mm 6D(2.5X)	54x54x57	Color box
900-206	Glass			Ø 64mm 6D(2.5X)	54x54x32	
900-015	N/A			N/A	54x54x57	



SCREWDRIVERS/BITS

Screwdrivers/Bits

Pro'sKit® screwdrivers with ergonomic handles, high quality blades and super hardened finished tips feature the maximum torque and user comfort.

Handle styles:

Pro'sKit® screwdrivers come in various handle styles to meet requirements of most applications, including PVC, ABS, dual color non-slip ABS&TPR, ESD safe, VDE 1000V insulated handles..



PVC / ABS handles



Dual color ABS&TPR handles, non-slip



ESD safe handle



VDE 1000V Insulated handles



Ratchet types:

Pro'sKit® screwdrivers have a variety of styles. Some come with ratchet mechanism design, and some are articulated handles. Ratchet screwdrivers require less force but more torque than conventional handles. It comes with 3 adjustable positions adjustment; forward, reverse rotation and fixed. The articulated handles allow adjustment of the reverse angle up to 180° for quick screwing, especially in narrow working spaces.



Material of bits and blades:

Pro'sKit® screwdriver blades and bits are made from high grade steel to meet most of applications, including Chrome-Vanadium steel(Cr-V), Chrome-Molybdenum Vanadium steel(Cr-Mo-V), S2 alloy steel(S2). Tips with special hardened finish for perfect fit in screw slots and lasting durability.

Black tip

Black tip with hardened finish guarantees a long service life and increased corrosion protection.



Magnetic

Magnetic tip for greater fastener control and guarantees a perfect fit every time.



Symbols for blade and bit shapes

Pro'sKit® screwdriver assortment with many bit specifications apply to most screws.

		Slotted			Spanner			Clutch			Wing nut driver
		Phillips			Phillips tamper proof			Pozidriv			Torq
		Torx®			Torx® tamper proof			Star			Spline
		Hex			Hex tamper proof			Ball hex			Nut
		Square			Square tamper proof			Triangle			TRI-wing

* Torx® is a trademark of Camcar Textron

Safety Caution



• Don't use tools on live or energized circuits or equipment.

SD-083 ESD Precision Screwdriver



Pro'sKit Precision ESD Safe Screwdrivers are tested in accordance with ESD Association standard; meet the requirements for tools used in static sensitive areas. Surface resistance of handles is $10^7 \sim 10^9 \Omega$



Model No.		Spec	Blade length (inch)
SD-083-S3	⊖	2.0	2.0
SD-083-S4	⊖	2.4	2.4
SD-083-S5	⊖	3.0	3.0
SD-083-P2	⊕	#00	2.0
SD-083-P3	⊕	#0	2.4
SD-083-P4	⊕	#1	3.0
SD-083-T4	⦿	T4	3.0
SD-083-T5H	⦿	T5H	3.0
SD-083-T6H	⦿	T6H	3.0

Individual packing: Blister card


SD-0839 ESD Precision Screwdriver Set



Contents	
⊕	SD-083-P2 SD-083-P3 SD-083-P4
⊖	SD-083-S3 SD-083-S4 SD-083-S5
⦿	SD-083-T4
⦿	SD-083-T5H SD-083-T6H

Individual packing: Pouch

800 Series Ceramic Driver




RF coils & trimmers



Model No.		Spec.
800-114	⊖	0.4x0.9mm (0.015"x0.035")
800-115	⊖	0.4x1.2mm (0.015"x0.047")
800-116	⊖	0.4x1.4mm (0.015"x0.055")
800-117	⊖	0.4x1.8mm (0.015"x0.070")
800-118	⊖	0.4x2.0mm (0.015"x0.078")
800-119	⊖	0.4x2.4mm (0.015"x0.094")
800-120	⊖	0.7x2.4mm (0.027"x0.094")
800-121	⊕	PH0
800-122	⊕	PH1.7

Individual packing: Double blister


Handle: ABS

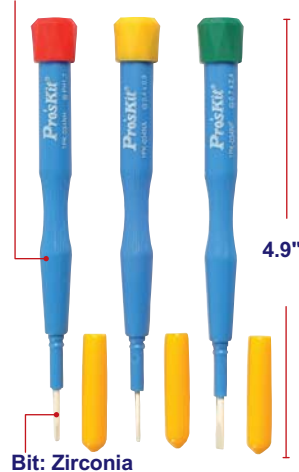

800-130 3 PC Anti-Static Alignment Tool Kit



- For protection of sensitive components
- Duplex, trimmer and square/hex tool
- Conductive nylon-avoid high voltage

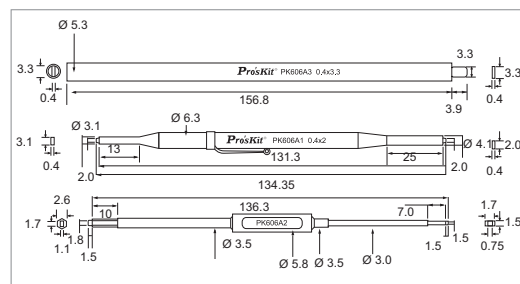

Conductive handle resistivity: $10^6 \sim 10^9 \Omega$



Material	Spec.
Conductive nylon	As sketch

Individual packing: Blister card

SD-081 Series Precision Screwdriver



Model No.	Spec.	Blade length	Model No.	Spec.	Blade length	Model No.	Spec.	Blade length			
SD-081-S1	⊖	1.0	2"	SD-081-TRI1	⚙	#1	2"	SD-081-M3	⚙	M3.0	2.8"
SD-081-S2	⊖	1.6	2"	SD-081-T1	⚙	T1	2"	SD-081-M3.5	⚙	M3.5	2.8"
SD-081-S3	⊖	2.0	2"	SD-081-T2	⚙	T2	2"	SD-081-M4	⚙	M4.0	2.8"
SD-081-S4	⊖	2.4	2"	SD-081-T3	⚙	T3	2"	SD-081-M4.5	⚙	M4.5	2.8"
SD-081-S5	⊖	3.0	2"	SD-081-T4	⚙	T4	2"	SD-081-M5	⚙	M5	2.8"
SD-081-S6	⊖	2.4	3"	SD-081-T5	⚙	T5	2"	SD-081-M5.5	⚙	M5.5	2.8"
SD-081-S7	⊖	3.0	3.9"	SD-081-T6	⚙	T6	2"	SD-081-M6	⚙	M6	2.8"
SD-081-S8	⊖	4.0	5.9"	SD-081-T7	⚙	T7	2"	SD-081-H1	⚙	0.7	2"
SD-081-P1	⊕	#000	2"	SD-081-T8	⚙	T8	2"	SD-081-H2	⚙	0.9	2"
SD-081-P2	⊕	#00	2"	SD-081-T9	⚙	T9	2"	SD-081-H3	⚙	1.3	2"
SD-081-P3	⊕	#0	2"	SD-081-T10	⚙	T10	2"	SD-081-H4	⚙	1.5	2"
SD-081-P4	⊕	#1	2"	SD-081-T15	⚙	T15	2"	SD-081-H5	⚙	2.0	2"
SD-081-P5	⊕	#0	3"	SD-081-T20	⚙	T20	2"	SD-081-H6	⚙	2.5	2"
SD-081-P6	⊕	#1	3.9"	SD-081-T5H	⚙	T5H	2"	SD-081-H7	⚙	3.0	2"
SD-081-P7	⊕	#1	5.9"	SD-081-T6H	⚙	T6H	2"	SD-081-Z1	⊕	#000	2"
SD-081-TA20	⚙	2.0	2"	SD-081-T7H	⚙	T7H	2"	SD-081-Z2	⊕	#00	2"
SD-081-TA23	⚙	2.3	2"	SD-081-T8H	⚙	T8H	2"	SD-081-Z3	⊕	#0	2"
SD-081-TA27	⚙	2.7	2"	SD-081-T9H	⚙	T9H	2"	SD-081-Z4	⊕	#1	2"
SD-081-TRI000	⚙	#000	2"	SD-081-T10H	⚙	T10H	2"	SD-081-TS1	⚙	TS1	2"
SD-081-TRI00	⚙	#00	2"	SD-081-T15H	⚙	T15H	2"	SD-081-A1	⚙	A1	2"
SD-081-TRI0	⚙	#0	2"	SD-081-T20H	⚙	T20H	2"	SD-081-A2	⚙	A2	2"

Individual packing: Blister card



SD-081A 7 PC Electronic Set



Contents	
AISI 8660 Cr-Mo-V alloy steel with TPR Handle screwdriver X 7Pcs (OAL:147mm/5.8")	
⊖	1.6x2", 2.0x2", 2.4x2", 3.0x2"
⊕	#00x2", #0x2", #1x2"
Carrying case: 170x139x23mm/ 6.7"x5.5"x0.91"	

Individual packing: Plastic box + Color box

SD-081G 4PC TRI-wing Precision Screwdriver Set



Contents	
⚙	SD-081-TRI000
⚙	SD-081-TRI00
⚙	SD-081-TRI0
⚙	SD-081-TRI

Individual packing: Blister card



TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY


SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS


SD-081E 12 IN 1 Precision Screwdriver Set w/Bit



Contents	
TPR non-slip handle with bits holder	
12pcs 4mm hex x 28mm (1.12"), Material: AISI 8660 Cr-Mo-V steel	
SL2.0, 2.5, 3.0, 4.0	#000, #00, #0, #1
Carrying case: 134x65x25mm/ 5.3"x2.6"x1"	

Individual packing: Plastic box + Color box

SD-9824 24-IN-1 Screwdriver Set

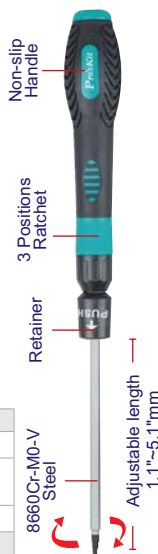

Contents	
3 position ratchet handle: 130mm /5.1"	
12pcs double end hex bits: 4mm hex x 160mm (6.3"), Material: AISI 8660 Cr-Mo-V steel	
PZ1	PZ0
T8H	T10H
T7H	T9H
T6H	T15H
T5H	T20H
H2.5	H2.0
H4.0	H3.5
H1.5	H3.0
#1	#00
#0	#000
Carrying Case :192x130x26mm /7.6"x5.1"x1"	

Individual packing: Plastic box + Color box

SD-9802 31 IN 1 Precision Electronic Screwdriver Set



(Storage box size: 212x142x30mm/ 8.3"x5.6"x1.2")

800-129 33 PC Screwdriver Set W/Bits



Contents	
TPR non-slip handle with bits holder	
30pcs 4mm hex x 28mm (1.12"), Material: AISI 8660 Cr-Mo-V steel	
PH000, PH00, PH0, PH1	
SL1.0, SL1.5, SL2.0, SL2.5, SL3.0, SL3.5, SL4.0	
T4, T5, T6, T7, T8, T9, T10, T15, T20	
H0.7, H0.9, H1.3, H1.5, H2.0, H2.5, H3.0, H4.0	
PZ1, PZ0	
2 pcs ø4mm/ ø0.16" socket, material: AISI 6150 Cr-V steel	
Socket: M5, M6	
Carrying Case: 170x139x23mm/ 6.7"x5.5"x0.9"	

Individual packing: Plastic box + Color Label

SD-9312 14 PC Ratchet Precision Screwdriver Set



Contents	
3 position ratchet handle: 135mm /5.3"	
10pcs hex bits: 4mm hex x 28mm /1.1", Material: AISI 8660 Cr-Mo-V steel	
#00, #0, #1	1.0, 1.5, 2.5
2Pcs socket: 4mm hex x32mm /ø0.16 x 1.3", Material: AISI 6150 Cr-V steel	
4.0, 5.0	
Extension blade: 120mm /4.7"	
Carrying case: 137x104x26mm /5.4"x4.1"x1"	

Individual packing: Color sleeve



- Smooth rotating cap for quick and easy screw/unscrew without lifting from screw
- Ergonomic design with non-slip and dual color TPR handle for operator comfort
- Keyless chuck for easy adjustment of bits holder extension bar
- Adjustable bit holder design for easy work inside narrow or hard to reach places
- A versatile set for driving and retrieving very small screws
- With bits holding storage box for bits managing and carrying

Contents	
TPR non-slip handle: 115mm/4.5"	
Extension bar :110mm /4.3"	
30pcs hex bits: 4mm hex x 28mm (1.1"), Material: AISI 6150 Cr-V steel	
PH00, PH0, PH1, PH2	0.9, 1.3, 1.5, 2.0, 2.5, 3.0, 4.0mm
T4, T5, T6, T7, T8, T10, T15, T20	2mm, Pin 1.0mm
1.5, 2, 2.5, 3, 3.5, 4mm	Extension bar: 110mm
3mm, 2.6mm, 3mm	TPR non-slip handle:115mm/4.5"
Carrying case: 205x126x34mm / 8"x5"x1.3"	

Individual packing: Double Blister

SD-9315 22 In 1 Precision Screwdriver Set



- Ergonomic designs with non-slip and dual color PP-TPR handle for user comfort
- Comes with 20pcs Cr-Mo alloy steel precision bits and sockets for different applications
- With extension bar design, ideal for accessing fasteners in tight areas
- Bits are color-coded for easy identification and management
- Durable compact size storage box for easy bits collection and carrying
- Ideal for mobile phone, PC, DIY home use & other applications

Contents	
	2.5/3.0/3.5/4.0/4.5/5
	1.0/1.5/2.0/2.5 /3.0
	PH1/PH0/PH00/PH000
	T4/T5/T6/T7/T8
Extension bar: 4mm x 70mm	
1pc Dual color PP+TPR handle	
Carry case: 118x205x33mm/ 4.6"x8.1"x1.3"	

Individual packing: Blister card



Ideal for mobile phone, PC, DIY home use & more

New

Spring-loaded
one-touch opening case



Rotating cap for screw
turning with fingertip

Dual color PP+TPR
anti-slip handle

Bits are color coded

SD-9316 23 In 1 High Performance Screwdriver Set



- Anodized aluminum alloy handle combines 4mm & 1/4" type bits holder, 2 in 1 design for user convenience
- Comes with 10pcs Cr-Mo alloy steel precision bits and 10pcs S2 alloy 1/4"hex bits
- Bits are color-coded for easy identification and management
- Durable compact size storage box for easy bits collection and carrying
- Ideal for mobile phone, PC, DIY home use & other applications

Contents	
	H2/H3/H4/H5
	T15H/T20H/T25H
	6/8/10
	PH1/PH0/PH00
	1.5/2.0/2.5
	T4/T5/T6/T7
Extension bar: 4mm x 70mm, 1/4" x 70mm	
1pc Anodized aluminum alloy handle	
Carry case: 118x205x33mm/4.6"x8.1"x1.3"	

Individual packing: Blister card



Ideal for mobile phone, PC, DIY home use & more

New

Spring-loaded
one-touch opening case



Rotating cap for screw
turning with fingertip

Anodized aluminum
alloy handle

Push back become
4mm bit holder



Pull out become
1/4" bits holder

SD-9804 15 IN 1 Precision Electronic Screwdriver Set



- Ergonomic designs with non-slip and dual color TPR handle for operation comfort.
- 14pcs interchangeable precision bits made of high quality chrome vanadium steel.
- With extension bar design, ideal for accessing fasteners in tight areas
- Durable compact size box in dual colors for easy storing and carrying.

Contents	
TPR non-slip handle: 110mm	
Extension bar: 110mm	
14pcs hex bits: $\phi 4 \times 28$ mm, Material: AISI 6150 Cr-V steel	
	#000, #00, #0, #1
	1.5, 2.0, 2.5, 3.0, 4.0mm
	T5, T6, T7, T8, T9
Carry case: 147x95x24mm/ 5.8"x3.7"x0.9"	

Individual packing: Blister card



New



Non-Slip
TPR handle

110mm

Bits holder

120mm

SD-9313 30 IN 1 Video Game Screwdriver Set

Contents

19pcs hex bits: 4mm hex x 28mm (1.1"),
Material: AISI 8660 Cr-Mo-V steel

- ⊕ #000, #00, #0
- ⊖ 2.0, 3.0, 5.0mm
- ⊗ T5H, T6H, T8H, T10H, T15H, T20H
- ⊙ T4
- ⊙ H0.7
- ⊙ TRI 1, TRI 0, TRI 00
- ⊙ 1.7, 2.0, 2.3mm

5pcs hex bits: 1/4" x 25mm (1.0"),
Material: SAE 6150 Cr-V steel

- ⊕ 4.0, 5.0, 6.0mm
- ⊕ #1, #2

4pcs Nut & Torx plus socket, Material: SAE 6150 Cr-V steel

- ⊕ TS3.8, TS4.5(L:38mm/1.5")
- ⊙ 6mm, 8mm (L:36mm/1.4")

3 position ratchet handle: 135mm /5.3"

ø4mm to ø1/4" adaptor: 45mm /1.8"

Extension bar: 115mm /4.5"

Carrying case : 205x126x34mm /8"x5"x1.3"

Individual packing: Color box



SD-9314 17 IN 1 Tool Kit For Apple Products



Contents

Dual color precision screwdriver handle: 110mm /4.3"

12pcs 4mm precision screwdriver bits:

4mm hex x 28mm, material: AISI 8660 Cr-Mo- V steel
 ⊕ TS1, ⊕ PH000, ⊖ 1.5mm, ⊗ T4, T5, T6, T8, T10, T15, T20
 ⊙ H2.0mm, H1.5mm
 Needle type bits for iPhone / iPad SIM card tray ejection

Polyoxymethylene (POM) opening lever x 2
 OAL: 84.4mm, 88.7mm / 3.3", 3.5"

Suction cup Ø36mm/Ø1.4"

Prying paddle 30.5x30.5x30.5mm / 1.2"x1.2"x1.2"

Individual packing:
Plastic box + Sleeves + Shrink

Carrying case :135x94x30mm /5.3"x3.7"x1.2"

500-041 9PC Cellular Kit



Contents

9pcs screwdrivers: 146mm/5.7"
Material: AISI 8660 Cr-Mo-V steel

- ⊙ T4
- ⊗ T5H, T6H, T7H, T8H
- ⊙ 1.9, 2.9
- ⊕ #00
- ⊙ TRI1

Carrying case:
205x126x34mm/8.1"x5"x1.3"

Individual packing: Shrink



PK-9110 6 PC iPhone 3 & 4 Disassemble Set



Contents

⊙ TS1X40mm : OAL 91.5mm/3.6"

⊕ #000X40mm : OAL 91.5mm/3.6"

Polyoxymethylene (POM) opening lever x 2 OAL: 84.4mm, 88.7mm/3.3",3.5"

Suction cup Ø36mm/Ø1.4"

Prying paddle 30.5mm x 30.5mm x 30.5mm / 1.2"x1.2"x1.2"

Individual packing: Blister card

500-024 7 PC Cellular Phone Tool Kit



Contents	
7pcs screwdrivers: 140mm/5.5"	
Material: AISI 8660 Cr-Mo-V steel	
⊕ #0,	
⊗ T5, T6, T7,	
Back panel opener	
Folding cover opener	
⊖ Security screwdriver	
Carrying case:	
170x132x21mm / 6.7"x2.5"x0.8"	

Individual packing:
Plastic box+Color box



800-073 15 PC Precision Screwdriver Set



- Blade length: 40mm/1.6"
- Overall length: 132mm/5.2"

Contents	
1.0, 2.0, 3.0, 3.5	1.5, 2.0, 2.5, 3.0
#000, #00, #0	T6, T8, T10, T15
Carrying case: 262x183x43mm/10.3"x7.2"x1.7"	

Individual packing: Plastic box + Color label

902-219 58-piece Precision Electronic Screwdriver Set



- Non-Magnetic for precision working application.
- Light weight designed (285g/set)



Contents	
TPR non-slip handle: 123mm/4.8"	
Extension bar: 115mm/4.5"	
56Pcs hex bits: 4mm hex x 28mm/1.1", Material: AISI 8660 Cr-Mo-V steel	
#000, #00, #0, #1	
1.0mm, 1.5mm, 2.0mm, 2.5mm, 3.0mm, 3.5mm, 4mm	
T5H, T6H, T7H, T8H, T9H, T10H, T15H, T20H	
T3, T4, T5, T6, T7, T8, T9, T10, T15	
1.5mm, 2mm, 2.5mm, 3mm, 1/16", 5/64", 3/32"	
2mm, 2.3mm, 2.5mm	
0.7mm, 0.9mm, 1.3mm, 1.5mm, 2mm, 2.5mm, 3mm, 4mm 0.028", 0.035", 0.05", 1/16", 5/64", 3/32"	
PZ0, PZ1	
TR1	
2mm	
Carrying case: 175x73x39mm/6.9"x2.9"x1.5"	

Individual packing: Shrink pack + Color sleeve



902-222 11 PC Cellular Phone Maintenance Tool Kit



Contents	
2.0mm	
#0	
T6, T7, T8H	
5mm	
T-Grip holder	Antenna repair tool
Pressing blade	Panel pry bar

Individual packing: Plastic box + Color label

800-060 20 PCS Precision Electronic Screwdriver Set



This useful set contains slotted / phillips / star / hex / ball point / blades. Special quick-release design, makes blade change quickly and easily.



Contents	
19pcs bits: 4mm hex x 28mm/1.1", Material: AISI 8660 Cr-Mo-V alloy steel	
#00, #0	
2.0, 2.5, 3.0, 4.0	
T6, T7, T8, T9, T10	
1.5, 2.0, 2.5	
PZ#00, PZ#0	
1.5, 2.0, 2.5	
Handle: 163mm/6.42" (OAL)	

Individual packing: Plastic box + Color box

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS



Precision Screwdriver

Features:

- Rotating cap to facilitate support and rotation control.
- The handle is made by durable ABS material with anti-slipstrip for easy operation.
- Blade made of high quality alloy Ni-Cr-Mo steel, heat-treated and black.



800-007 6 PC Precision Screwdriver Set



- A 6 piece screwdriver set with 3 flat blades and 3 Philips screwdrivers.
- The screwdrivers have long shafts and are ideal for reaching recessed screws in electronic equipment.
- Handles are made from molded plastic and incorporate finger grips.
- Shafts are made from nickel chrome molybdenum.

Contents	Blade length (mm/inch)
⊕ #0 (Ø 2.4)	75/3.0
⊕ #1 (Ø 3.0)	100/3.9
⊕ #1 (Ø 3.8)	150/5.9
⊖ 2.4mm	75/3.0
⊖ 3.0mm	100/3.9
⊖ 3.8mm	150/5.9

Individual packing: Blister card

800-009 6 PC Precision Screwdriver Set



Contents	Blade length (mm/inch)
⊕ #000	40/1.6
⊕ #00	75/3.0
⊕ #0	75/3.0
⊖ 0.08	40/1.6
⊖ 0.10"	75/3.0
⊖ 0.12"	75/3.0

Individual packing: Plastic box + Color label

800-077 6 PC Electronic Screwdriver Set With Cutter



Contents	Blade length (mm/inch)
⊕ #1	150/5.9
⊕ #0	100/3.9
⊕ #0 (Ø 2)	75/3.0
⊖ 2.4mm	75/3.0
⊖ 3.0mm	100/3.9
⊖ 4.0mm	150/5.9

3.5" Stainless micro cutting plier

Individual packing: Plastic box + Color label

800-149 Screwdriver Set



Contents	Blade length (mm/inch)
⊕ #0, #00, #1	20 mm/0.78
⊖ 2.0, 2.4, 3.0	20 mm/0.78

Individual packing: Color box

SD-3102 Screwdriver Set



Contents	Blade length (mm/inch)
⊕ T4	20 mm/0.78
⊕ T5H, T6H, T7H, T8H, T9H	20 mm/0.78

Individual packing: Color box

800-150 Screwdriver Set



Contents	Blade length (mm/inch)
⊕ T5H, T6H, T7H, T10H, T15H, T20H	20 mm/0.78


Individual packing: Color box

SD-9811 18-IN-1 Precision Screwdriver Set



Contents		Bit length	
Aluminum handle: 90mm			
9pcs double end screwdriver bits: 52mm, Material: AISI 8660 Cr-Mo-V steel			
	1.5		#000 52mm/2.2"
	2.0		#00 52mm/2.2"
	2.5		#0 52mm/2.2"
	3.0		#1 52mm/2.2"
	T5		T10 52mm/2.2"
	T6		T8 52mm/2.2"
	T7		T9 52mm/2.2"
	H1.5		H2.5 52mm/2.2"
	H2.0		H1.3 52mm/2.2"
Carrying case: 114x136x26mm			

Individual packing: Plastic box + Color box

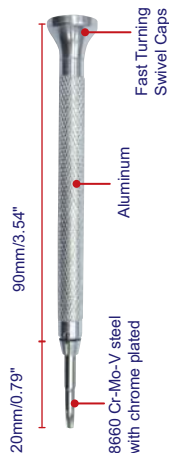


8660Cr-Mo-V steel

SD-9812 12 IN-1 Reversible Ratchet Precision Screwdriver Set



- Transparent PC handle with 6 double-end precision bits inside
- Adjustable blade lengths, good for hard to reach areas
- Ratchet action with 3 positions: Forward, reverse and lock
- Retainer lock system prevents the end cap from accidental slip damage

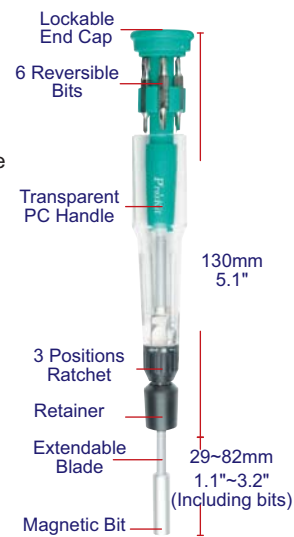


Contents	
3 position ratchet handle with bits holder : 155~205mm/6.1"~8.1"	
6pcs double end bits: 4mm hex x 30mm/1.2", Material: AISI 8660 Cr-Mo-V steel	
T4	T8
T6	T10
T7	T15
1.5	#000
2.0	#00
2.5	#0

Individual packing: Blister card



SD-9815 Precision Screwdriver Set



Bit size	A(mm/inch)	B(mm/inch)	OAL(mm/inch)
#0	29/1.1	76/3.0	105/4.1
#1	31/1.2	81/3.2	112/4.4
1.4mm	18/0.7	63/2.5	81/3.2
1.8mm	25/0.1	68/2.7	93/3.7
2.4mm	29/1.1	75/3.0	104/4.1
3.0mm	31/1.2	81/3.2	112/4.4

Individual packing: Color box

SD-9814 9 IN 1 Aluminum Handle Precision Screwdriver Set



Contents	
Anodized aluminum alloy steel handle: 110mm/4.3"	
9pcs hex bits: 4mm hex x 28mm/1.1", Material: AISI 6150 Cr-V steel	
#000, #00, #0, #1	
2.0, 3.0mm	
T4, T5, T6	

Individual packing: Blister card

800-040 Double-ended Screwdriver



- Pocket clip
- Straight blade on long end
- Phillips on short end



Contents	
3mm	#0

Individual packing: Hanger

8PK-6182 9 In 1 Electronic Screwdriver Set



Contents	
TPR non-slip handle: 115mm	
9Pcs hex bits: 4 x 50mm, Material: AISI 6150 Cr-V steel	
T5, T6, T7, T8	
2.0	
#0	
Back panel opener	
Folding cover opener	
Security screwdriver	
Carrying case: 104x60x30mm	

Individual packing: Color label



TESTERS

PRECISION PLIERS & CUTTERS

ELECTRICAL PLIERS & CUTTERS

KNIVES, SCISSORS & SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN TOOLS

SOLDERING / ASSEMBLY

SCREWDRIVERS/ BITS

HEX KEY/ WRENCHES


SOCKET WRENCHES

TWEEZERS

SD-9810A/SD-9810A-BC 10 in 1 Auto Loading Ratchet Screwdriver Set



- Precision screwdriver features 3 ways gearless ratchet with twist reverse for efficient operation.
- Pump-action design for easily and quickly auto-loading bits exchange.
- Ergonomically non-slip handle provides user comfort
- Rotatable marked barrel for 6pcs bits pre-loading and storage.
- Includes ten high quality AISI 8660 Cr-Mo-V alloy steel bits with satin finish.

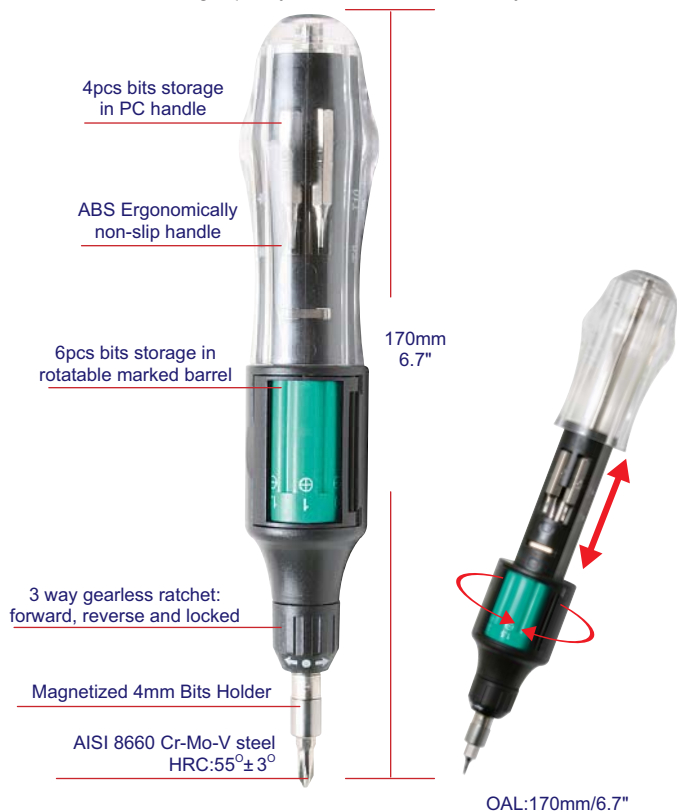

Available only in 25pcs display box



SD-9810A-BC

Contents	
10 pcs 4mm Hex screwdriver bits	
⊖ 1.5, 2.0, 3.0	
⊕ #00, #0, #1	
⦿ T5, T6, T8, T10	
Model No.	Individual packing:
SD-9810A	Color box (25pcs/box)
SD-9810A-BC	Single pc

800-092/800-092-50 4-In-1 Screwdriver Set



- Offered in 50PC in a display pack and blister pack (individually)
- Two double-ended, reversible tips
 - Material: Blade: AISI 6150 Cr-V steel
 - HRC: 52°±3°
 - Handle: ABS



Contents		O.A.L (mm/inch)
⊖ 1/16", 1/8"	⊕ #00, #0	131/5.2"
Display box: 213x123x144mm/8.4"x4.8"x5.7"		
Model No.	Individual packing	
800-092	Single pc	
800-092-50	50 pcs display pack	

SD-804/SD-804-1 5-In-1 Screwdriver With LED Flashlight




- Offered by 50PCS in a display - box
- Two double-ended, reversible tips
 - Material: Blade: AISI 6150 Cr-V steel
 - HRC: 52°±3°
 - Handle: ABS



Contents		O.A.L (mm/inch)
⊖ 1/16", 1/8"	⊕ #00, #0	135/5.3"
Display box: 213x123x144mm/8.4"x4.8"x5.7"		
Model No.	Individual packing	
SD-804	50 pcs display pack	
SD-804-1	Blister card	

800 Series Soft-Handled Screwdrivers

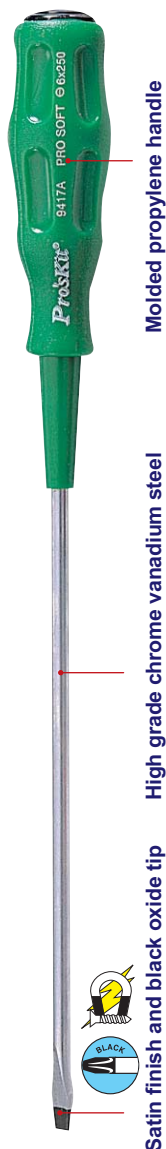

Molded propylene handle

High grade chrome vanadium steel

Satin finish and black oxide tip



Special inlaid blade insert; safe and durable



Molded propylene handle



High grade chrome vanadium steel


Satin finish and black oxide tip

Model No.	A	B(mm)	C	D	E
800-001	3	3.2	3.3	1/8	6.3
800-003	3	5.0	4.3	3/16	7.3
800-010	4	3.2	3.3	1/8	7.3
800-012	6	3.2	3.3	1/8	9.3
800-005	2.3	6.0	6.0	1/4	8.3
800-014	4	5.0	4.3	3/16	8.3
800-020	10	5.0	4.3	3/16	14.3
800-022	4.3	6.0	6.0	1/4	10.3
800-024	6.3	6.0	6.0	1/4	12.3
800-018	8	5.0	4.3	3/16	12.3
800-016	6	5.0	4.3	3/16	10.3
800-026	8.3	6.0	6.0	1/4	14.3

Individual packing: Hanger

Model No.	A	B	C	D	E
800-002	3	#0	3.3	1/8	6.3
800-004	3	#1	4.3	3/16	7.3
800-011	4	#0	3.3	1/8	7.3
800-013	6	#0	3.3	1/8	9.3
800-006	2.3	#2	6.0	1/4	8.3
800-015	4	#1	4.3	3/16	8.3
800-021	10	#1	4.3	3/16	14.3
800-023	4.3	#2	6.0	1/4	10.3
800-025	6.3	#2	6.0	1/4	12.3
800-019	8	#1	4.3	3/16	12.3
800-017	6	#1	4.3	3/16	10.3
800-027	8.3	#2	6.0	1/4	14.3

Individual packing: Hanger



Unit: inch

Star-Tip with Tamper-proof holes (Larger sizes)

Model No.	A	B	C	D	E
800-032	2	T5	3.3	5/32	5.3
800-033	2	T6	3.3	5/32	5.3
800-034	2	T7	3.3	5/32	5.3
800-035	3	T8	3.3	5/32	6.3
800-036	3	T9	3.3	5/32	6.3
800-037	3	T10	3.3	5/32	6.3
800-038	3	T15	3.3	5/32	6.3
800-043	2	T7H	3.3	5/32	6.3
800-044	3	T8H	3.3	5/32	6.3
800-045	3	T9H	3.3	5/32	6.3
800-046	3	T10H	3.3	5/32	6.3
800-047	3	T15H	3.3	5/32	6.3

Individual packing: Hanger

Tri-wing Type Screwdriver

Model No.	A	B	C	D	E
800-123	2	TRI	3.3	1/8	5.3

Individual packing: Blister card

SW-2125H 5 PC Star Screwdriver Set



New



Model No.	Contents
SW-2125H	T05H, T06H, T07H, T08H, T09H

Individual packing: Blister card

800-030 11 PC Star Screwdriver Set



Contents
T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40
Carrying case: 310x230x50 mm 12.2"x9.1"x2"

Individual packing: Inner box + Color label shrink

TESTERS

PRECISION PLIERS & CUTTERS

ELECTRICAL PLIERS & CUTTERS

KNIVES, SCISSORS & SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN TOOLS

SOLDERING / ASSEMBLY

SCREWDRIVERS/ BITS

HEX KEY/ WRENCHES

SOCKET WRENCHES

TWEEZERS

▶ SD-2800 Series Dual Color Grip Nut Driver


New



Dual color PP+ TPR cushion grip handle

Chrome plated anti corrosion finish

Material:
AISI50BV30
Boron steel



Heavy duty deep head blade




- Dual color, ergonomic cushion grip handles for maximum comfort.
- The handle is molded directly onto the blade for permanent bonding.
- Heavy duty deep head blades, hardened for maximum torque and wear resistance
- Precision heads for accurate fastener fit, chrome plated anti corrosion finish
- Handle end comes with screw type mark for easy identification



Model No.	Nut size (mm) & depth(mm)	Blade length	OAL
SD-2800-11	3/16 x 1"	4.9"	9.3"
SD-2800-12	5/32 x 0.12"	4.9"	9.3"
SD-2800-13	9/32 x 1"	4.9"	9.3"
SD-2800-14	7/32 x 1"	4.9"	9.3"
SD-2800-15	11/32 x 1"	4.9"	9.3"
SD-2800-16	1/2 x 1"	4.9"	9.3"
SD-2800-17	7/16 x 1"	4.9"	9.6"
SD-2800-18	1/4" x 1"	4.9"	9.6"
SD-2800-19	5/16" x 1"	4.9"	9.3"
SD-2800-111	3/8" x 1"	4.9"	9.3"

Individual packing: Double blister card

▶ 1PK-9402 7 PCS Electronic Hex Nut Driver Set



Contents
M3, M3.5, M4, M4.5, M5, M5.5, M6

Individual packing: Pouch

▶ 8PK-2066 Interchangeable Screwdriver Set (7 PCS)



- Shock proof cellulose acetate plastic handle with circuit testing lamp.
- Range: AC 100~250V.

New




Contents
Circuit testing handle, length: 120mm
6 Pcs bits, length: 125mm material: AISI 8660 Cr-Mo-V Alloy steel
⊖ 3x130
⊖ 5x130
⊕ No.1x130
⊕ No.2x130
⦿ 5.5x130
⦿ AWLx130

Individual packing: Plastic box+Color label

SD-2400 Series Spanner Type Security Screwdrivers



- Made of Cr-Mo-V steel with chromium (Cr) plating for anti-rust
- Special inlaid blade molded into dual color TPR and PP non-slip handle provides high torque and user comfort.
- Fast turning swivel cap for easy operation.



Model No.	D	OAL (mm/inch)
SD-2400-S4	1.5mm	186/7.3
SD-2400-S6	2.3mm	186/7.3
SD-2400-S8	2.5mm	186/7.3
SD-2400-S10	3.1mm	186/7.3
SD-2404	Contents: 4pcs Security Screwdriver Set. SD-2400-S4, SD-2400-S6 SD-2400-S8, SD-2400-S10	

Individual packing: Blister card



Fast turning swivel cap for easy operation


Dual color TPR and PP non-slip handle

Made of AISI 8660 Cr-Mo-V steel with Cr plating for antirust HRC:55'±2'

SD-7213 Series Go Through Screwdrivers



- "Go-Through" construction provides greater striking force than traditional cap end.
- The hex shaft and bolster fit any brand of wrench which can loosen tight screws easily.
- Black oxide magnetic tip for greater fastener control and guarantees a perfect fit every time.



Model No.	A (mm/inch)	B	C (mm/inch)	D (mm/inch)	E (mm/inch)
SD-7213A	150/5.9	6.0mm	109/4.3	6/0.23	259/10.2
SD-7213B	150/5.9	#2	109/4.3	6/0.23	259/10.2
SD-7222A	150/5.9	8.0mm	121/4.8	8/0.31	271/10.7
SD-7222B	150/5.9	#3	121/4.8	8/0.31	271/10.7



Steel Cap

Elastomeric resin, double structure, Non-slip.

Ergonomically designed handle provides comfort and power
Black: TPR
Orange: PP

Hex shaft increases extra torque.

High grade AISI 6150 Cr-V steel hex blade HRC: 52°± 2°

Black oxide magnetic tip for greater fastener control



Individual packing: Hanger



The hex shaft and bolster fit any brand of wrench which can loosen tight screws easily.



The steel cap withstands hammer blows

902-096/902-097 Pro-soft Screwdriver Set



Elastomer resin fitting exactly and double structure. Non-slip.



Model No.	Contents
902-096	3.0x75mm(3"), 5x75mm (3"), 6x100mm (4") #0x75mm(3"), #1x75mm(3"), #2x100mm(4")
902-097	T5HX50mm(2"), T6HX50mm(2"), T7HX50mm(2"), T8HX50mm(2") T9HX50mm(2"), T10HX75mm(3"), T15HX75mm(3")

Individual packing: Color box

800-028/800-029 Stubby Screwdrivers



New design fits your hand shape, provides comfortable and powerful grip.

High grade chrome-molybdenum vanadium steel.

Exact fit to screws and high accuracy hardened finish.



Model No.	Contents
800-028	6.0x40mm (1.6")
800-029	#2x40mm (1.6")

SD-800 Series 1000V Insulated VDE Screwdrivers

SD-800-I8/I9/I11 Insulated VDE Nut Driver



New

- Certified to IEC 60900: 2004, VDE, and DIN 1000V safety standards and bear the GS sign.
- High visibility molded ergonomic cushion grip handles for maximum comfort.
- The insulation of the handle is molded directly onto the blade for permanent bonding.



High visibility molded ergonomic cushion grip handles

Heavy insulated shank

AISI 8660 Cr-Mo-V alloy steel
HRC:55'±2'




Dual color PP + TPR ergonomic cushion grip handles

Heavy insulated shank

Heavy duty deep head blade

Model No.	Spec.	Blade length (mm/inch)
902-212	0.4x2.5mm	75/3
SD-800-S3.0	0.5x3.0mm	100/4
902-214	0.8x4.0mm	100/4
SD-800-S5.5	1.0x5.5mm	125/5
902-216	1.2x6.5mm	150/6
902-217	1.2x8.0mm	175/7
902-209	PH0	60/2.4
902-210	PH1	80/3.2
902-211	PH2	100/4
902-220	PH3	150/6

Individual packing: Double blister card



Model No.	Nut size (mm) & depth(mm)	Blade length	OAL
SD-800-I8	1/4" x 1"	4.9"	9.3"
SD-800-I9	5/16" x 1"	4.9"	9.3"
SD-800-I11	3/8" x 1"	4.9"	9.3"

902-213 Insulated Screwdrivers Set



- 7 piece set. VDE safety screwdriver set with Cr-Mo-V alloy.
- Steel AISI: 8660 blade.
- This essential kit is a must when working with electrical items.
- Supplied in a case.

Contents
S2.5, S3.0, S5.5, S6.5,
Carrying case : 310x230x50mm 12.2"x9.1"x2.0"

Individual packing:
Inner box+Color label shrink

902-215 8Pc 1000V Insulated Screwdriver & Plier Set



Contents
0.4x2.5x75mm (3")
0.5x3.0x100mm (4")
1.0x5.5x125mm (5")
PH1x80mm (3.1")
PH2x100mm (4")
6.3" Insulated wire stripping plier
6.3" Insulated side cutter
6.3" Insulated long nose plier
Zippered carrying bag

- Case size: 255x175x50/10.0x6.9x2.0 (mm/inch)
- Individual packing: Inner box & Color label shrink



902-218 11Pc 1000V Insulated Plier & Screwdriver Set



Contents
0.4x2.5x75mm (3")
0.8x4.0x100mm (4")
1.0x5.5x125mm (5")
1.2x6.5x150mm (6")
PH0x60mm (2.4")
PH1x80mm (3.1")
PH2x100mm (4")
7.9" Insulated combination plier
6.3" Insulated side cutter
7.9" Insulated long nose plier
6.3" Insulated long nose plier
Zippered carrying bag

- Case size: 294x240x50 / 11.6x9.4x2.0(mm/inch)
- Individual packing: Inner box & Color label shrink



902-099 6 Pc Insulated Precision Screwdriver Set



- Provides shock protection to 1000V AC
- Meet VDE standards for safety to 1000V AC
- Comes complete with a plastic storage case
- Material (Blade): Cr-Mo

Contents	O.A.L.(mm/inch)
0.4x2.0x65mm(2.6")	165/6.5"
0.23x1.5x65mm(2.6")	165/6.5"
0.4x2.5x65mm(2.6")	165/6.5"
PH00x65mm(2.6")	165/6.5"
PH0x65mm(2.6")	165/6.5"
PH1x65mm(2.6")	165/6.5"

Carrying case : 195x184x28mm/ 7.7"x7.2"x1.1"

Individual packing: Shrink



TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS

800-041/800-042 Pocket Clip Screwdriver



800-041

1/8"



800-042


#0



Model No.	Spec.
800-041	⊖ 3x135mm (5.31")
800-042	⊕ #0x135mm (5.31")

Individual packing: Hanger

SW-9109D 10 In 1 Double End Reversible Screwdriver Set



Contents			
1pcs PVC handle with , 1/4" bits holder, length: 100mm/3.9"			
6 bits, material: AISI 6150 Cr-V, HRC 52°±2°			
⊕ #2 ⊖ 6.0	Length: 110mm/4.3"	⊕ #2	Length: 100mm/4.3"
⊕ #2 ⊕ #2	Length: 110mm/4.3"	⊕ #1	Length: 100mm/4.3"
⊕ #2 ⊕ #2	Length: 65mm/2.6"	⊕ #2 ⊕ #2	Length: 150mm/5.9"

800-074 Ratcheted Screwdriver Handle



- Ratcheting
- Swiveling
- Reversible
- Heavy-duty rubber grip
- Your bits can be stored in handle holder



Individual packing

Blister card

800-148 Double-end Reversible Screwdriver



1/4"



#2

Material	HRC	Handle (mm/inch)	Blade (mm/inch)	Working length (mm/inch)
AISI 6150	48°±3°	108/4.3	125/4.9	100/3.9"

Individual packing: Blister card

800-080 6 In 1 Magnetic Quick Change Screwdriver



- Industrial quality with maximum versatility.
- Shock proof T.P.R + P.P. and S2 alloy steel bit.
- O.A.L: 200mm/7.9"



Contents	
Dual color TPR non-slip handle 125mm/4.9"	
3pcs double end bits and socket:	
⊕ 8mm socket x115mm/4.5"	
⊕ 6mm socket x115mm/4.5"	
⊖ 3/16", 1/4" x75mm/3.0"	
⊕ #1, #2 x75mm/3.0"	

Individual packing: Blister card



Flash interchangeable



Double ended socket

8PK-SD010 12-In-1 Ratchet Screwdriver Set



New



Bits holder.

Ergonomic TPR+PP handle for user comfort.

Easy to adjust reversing collar.

Plastic tube for holding screw easily

Magnetic bits holder for easy of positioning

Made of S2 alloy steel


O.A.L:230mm



Bits holder



For holding screw



Contents	
Dual color TPR non-slip ratchet handle	
12pcs ø1/4"x30mm bits:	
⊕ T6, T7, T8, T9, T10, T15	
⊕ #0, #1, #2	
⊖ 3, 4.7, 6.3	

Individual packing: Blister card

SD-2318M 27pcs 1/4" Drive Socket & Screwdriver Set



- 72 teeth 2-way ratchet stainless steel handle for easy forward and reverse rotating operation
- Mini size gets into smaller and tighter spots easily
- Bits come with color ring for easy specification identification
- Covers most common use bits and sockets
- EVA tray complied with RoHS standard
- Compact box with hanger design for easy carrying and storage

New



Contents	
5pcs 1/4" Drive socket:	6, 7, 8, 10, 12mm
18pcs 1/4" Bits:	3.0, 4.0, 5.0, 6.0mm #1, #2, #3 H3.0, H4.0, H5.0, H6.0 PZ1, PZ2, PZ3 T10, T15, T20, T25
Magnetic Bit Adaptor: 60mm(L) / 2.4"	
1pcs 1/4" Hex(male) to 1/4" socket(male) adaptor 1/4" square drive(female) to 1/4" hex bit holder 1/4" 72 Teeth stainless reversible ratchet handle	
Carrying case: 84x39.5x129mm/3.3"x1.6"x5.1"	

Sockets meet DIN standard



Individual packing: Blister card

SD-2319M 22pcs Palm Ratchet Wrench Bit & Socket Set




- Faster than a ratcheting wrench, the palm ratchet for easy operate in limited areas
- Combine with ergonomic aluminum handles provides maximum speed and torque
- Compact size, durable plastic box for easy carrying and storage
- Covering most common use bits and sockets to meet most applications

New



Aluminum handles provides maximum speed and torque



The palm ratchet for easy operate in limited areas

Contents	
5pcs 1/4" Drive socket:	5, 6, 7, 8, 10mm
14pcs 1/4" Bits:	3.0, 4.0, 6.0mm #1, #2, #3 T10, T15, T20 H2.5, H3.0, H4.0, H5.0, H6.0
1/4" Hex(male) to 1/4" socket(male) adaptor	Extension handle for palm ratchet
1/4" Drive aluminum palm ratchet	Carrying case 126x82x30mm/ 5.0"x3.2"x1.2"

Individual packing: Blister card



800-048/800-048E 33Pc Security Bit Set



- Available in lower quality SAE 6150 CR-V steel for a lower price-part#: 800-048E
- 800-048 Material: S2 alloy steel bits

Contents	
1/4" Magnetic extension bar 60mm/2.4"	
32pcs 1/4" hex x30mm(1.2") bits	
Spec.	Spec.
5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 1/4"	4, 6, 8, 10 6, 8, 10
T8H, T10H, T15H, T20H, T25H, T27H, T30H, T35H, T40H	1, 2, 3, 4 1, 2, 3, 4

Individual packing: Blister card



800-068 Twin Wrench Driver Set



SAE-6150



Contents

Both end handle 110mm/4.3"
10pcs 4mm hex x30mm/1.2"
AISI 6150 Cr-V steel bits:

- 4, 5, 6
- #1, #2
- PZ1, PZ2
- T10, T15, T20

Individual packing: Blister card



Design with tips at both ends
for horizontal and vertical use.

902-069 Twin Wrench Driver Set



SAE 6150

T6 to T30H have tamper
proof holes for preventing
tampering for cordless
telephones and wireless
equipment.



Contents

Both end handle 110mm/4.3"
8pcs ø1/4"x30mm/1.2" AISI 6150 Cr-V steel bits:

- T6
- T8H, T10H, T15H, T20H, T25H, T27H, T30H

2pcs ø1/4"x37mm/1.5"
AISI 6150 Cr-V steel double end bits:

- #1 - 4.5
- #2 - 6.0

Individual packing: Blister card



Design with tips at both
ends for horizontal and
vertical use.

800-078 17 Pc Offset Ratchet & Socket Drivers Set



2-way ratchet design
for forward and reverse rotation.

Contents

1pcs 2-way ratchet handle,
6pcs sockets(ø1/4" x 25mm/1", AISI 6150 Cr-V):
3/8", 11/32", 5/16", 1/4", 7/32", 3/16" (Inch size)
10pcs bits(ø1/4" x30mm/1.2", AISI 6150 Cr-V):
4, 5, 6mm #1, #2
PZ1, PZ2 T10, T15, T20

Individual packing: Blister card



Double end design and
a direction switch
for clockwise or counter-
clockwise.

800-076 Flexible Ratchet Driver Set



Contents

10pcs ø1/4"x30mm/1.2" AISI 6150 Cr-V steel bits:

- 4, 5, 6
- #1, #2
- PZ1, PZ2
- T10, T15, T20

Flexible shaft (190mm/7.5") Mini ratchet handle

Individual packing: Blister card



Flexible shaft gets into
hard to reach areas.

SD-9701M 20 IN 1 T-handle Driver Sockets & Bits Set



T handle, provides no
stress on fingers

Socket

Adaptor



Green: PP
Black: TPR

Magnetized
carbon steel
bits holder
for 1/4" bits



Contents

TPR non-slip T handle with bits holder (182mm/7.2")

10Pcs hex bits: ø1/4" x 25mm/1",
Material: SAE 6150 Cr-V steel

- #1, #2
- 4.0, 5.0mm
- T15, T20
- PZ1, PZ2
- 4.0, 5.0mm

9 pcs ø1/4" DR. Socket bits, Material:
SAE 6150 Cr-V steel 5, 6, 7, 8, 9, 10, 11, 12, 13mm
5, 6, 7, 8, 9, 10, 11, 12, 13mm (3/16", 1/4", 9/32",
5/16", 11/32", 3/8", 7/16", 1/2", 9/16")

50mm Adaptor

Carrying case: 115x55x17mm/4.5"x2.2"x0.67"

Individual packing: Blister card

SD-2313 30Pc Do-It-All Kit



- Triangle magnetic bits storage case with a hanger.
- Magnetic extension handle.
- Compact and versatile set of bits.



Magnetic storage case



Triangle bits case

Bits

TPR non-slip handle with bits holder
30Pcs hex bits: ø1/4" x 25mm/1",
Material: SAE 6150 Cr-V steel

- SQ1, SQ2
- #0, #1, #2, #3
- PZ0, PZ1, PZ2, PZ3
- SL3.5, 4.5, 5.5, 6, 8mm
- HX2, 2.5, 3, 4, 5, 6, 8
- T5, T6, T7, T8, T10,
T15, T20, T35

Individual packing: Hanger

SD-2307M 35 Pc 1/4" DR Socket & Screwdriver



Materials: SAE 6150 Cr-V Steel
Light weight design: 733g



Contents


11 pcs 1/4" DR sockets:	
4mm, 5mm, 5.5mm, 6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm	
20 pcs 4mm hex x 25mm bits:	
#0, #1, #2, #3	3mm, 5mm, 7mm
2.5mm, 3mm, 4mm, 5mm, 6mm, 8mm	
T10, T15, T20, T25, T30, T40	PZ2
1 pcs ratchet handle 1/4" DR	1 pcs bit holder
1 pcs handle driver	1 pcs 1/4" x 2" extension bar
Case: 253x76x42mm/10"x3"x1.7"	

Individual packing: Color sleeve + Shrink pack

SD-2308M 35 Pc 1/4" DR Socket & Screwdriver W/Long Nose Plier Set



Materials: SAE 6150 Cr-V Steel
Light weight design: 902g

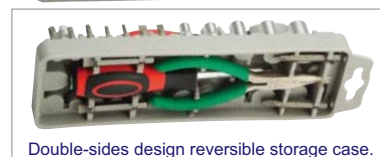

Double-sides design reversible storage case.



Contents

11 pcs 1/4" DR sockets:	
4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13mm	
12 pcs bits:	
PH1, PH2, PH3	3, 4, 5, 6mm
T10, T15, T20, T25, T30	
4 pcs 50mm bit	
PH2, PH3	6, 7mm
2 pcs ext bar 1/4"x3", 1/4"x6"	1 pc long nose plier (135mm/5.3")
1 pc ratchet handle	1 pc 1/4" DR adjustable T-bar
1 pc bit holder	1 pc handle driver
1 pc 1/4" x 1/4" universal joint	


Case: 225x70x71mm/8.9"x2.8"x2.8"

Individual packing: Color sleeve + Shrink pack

800-081 62 Pc Security Bit Set



Materials: SAE 6150 Cr-V Steel
Light weight design: 575g

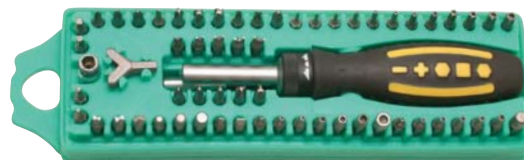

Contents

M5, M6, M8	C1, C2, C3	6, 8, 10
1/8", 3/16"	TA2.0	4, 6, 8, 10, 12
S0, S1, S2, S3	1, 2, 3, 4, 5	PZ0, PZ1, PZ2
#0, #1, #2	Wing nut driver	
T-5H, T-6H, T-7H, T-8H, T-9H, T-10H, T-15H, T-20H, T-25H, T-27H, T-30H, T-40H		
2, 2.5, 3, 4, 5, 6, 8mm, 5/64", 3/32", 7/64", 1/8", 9/64", 5/32"		
1 pc socket adapter	1 pc 1/4" x 60mm(2.36") magnetic bits holder	
1 pc bits holder socket	1 pc ratchet screwdriver (190mm/7.5")	

Case: 256x80x43mm/10.1"x3.1"x1.7"

Individual packing: Shrink packing

SD-2310 100 Pc Assorted Power Bits Set



Materials: SAE 6150 Cr-V Steel
Light weight design: 699g



Contents

96 pcs bits:	
PH1, PH2	PH0, PH1, PH2, PH3
C1, C2, C3	S0, S1, S2, S3
1, 2, 3, 4, 5	6, 8, 10
PZ0, PZ1, PZ2, PZ3	TA2.0
M5, M6, M8	2, 3, 5mm
4, 6, 8, 10, 12	Wing nut driver
1.5mm, 2mm, 2.5mm, 3mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 7mm, 8mm, 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	
2, 3, 4, 5, 6, 7, 8mm, 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"	
T5H, T6H, T8H, T10H, T15H, T20H, T25H, T27H, T30H, T35H, T40H	
T5, T6, T8, T10, T15, T20, T25, T27, T30, T40	
1 pc sockets adapter	1 pc bits holder
1 pc dry wall stopper	1 pc magnetic bit holder

Individual packing: Color sleeve + Shrink pack

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES


SOCKET
WRENCHES

TWEEZERS



HEX KEY / WRENCHES

800-124/800-066 7 Pc Folding Hex Key Set

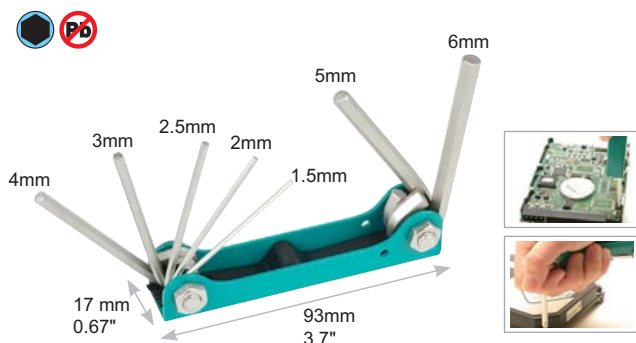

Model No.	Contents	
800-124	 1.5, 2, 2.5, 3, 4, 5, 6mm (Metric size)	
800-066	 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4" (Inch size)	
Key Material	Case	Individual packing
SAE6150 with Satin finish	Green lacquered	Blister card

902-100 8 Pc Folding Star Key Set




Contents			
T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H			
Key Material	Case	OAL. (mm/inch)	Individual packing
SAE 6150 with Satin finish	T.P.R. Anti-slip	109x43x23 4.3"x1.7"x1"	Hanger

HW-928 1/2" T-Handle Hex Key

- Long reach design with T-handle for greater torque and ease of use
 - Hardened S2 steel alloy
- Individual packing: Hanger



800-052 8 Pc Folding Star Key Set

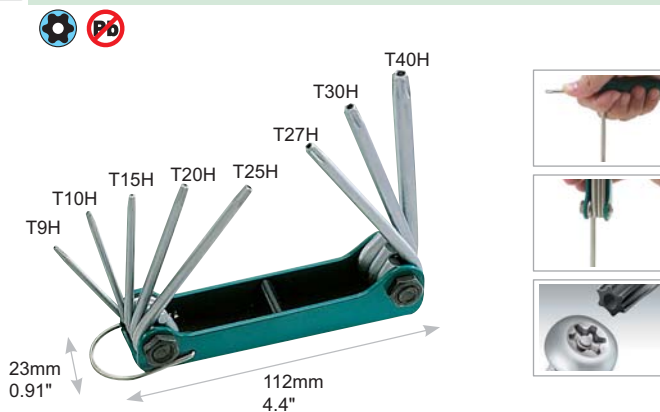

Contents		
T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H		
Key Material	Case	Individual packing
SAE 8660 with Satin finish	Green lacquered	Blister card

902-226 9 Pc Folding Hex Key Set



Contents		
5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4" (Inch size)		
Key Material	Case	Individual packing
SAE 6150 with Satin finish	T.P.R. Anti-slip	Hanger

800-091 7 pc T-Handle Hex Key Set

- Long reach design with T-handle for greater torque and ease of use
 - Hardened S2 steel alloy
 - Set comes in a durable blow-molded case
 - 3/32", 1/8", 5/32", 3/16", 1/4", 5/16" and 3/8"
- Individual packing: Shrink wrap



TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY


SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS

▶ HW-229B 9 Pc Ball Point Long Arm Hex Key Set



Tip size(mm)	S (mm/inch)	L (mm/inch)
1.5	15.5/0.61	63.5/2.5
2	18/0.71	76/3.0
2.5	20.5/0.81	85.5/3.4
3	23/0.91	91/3.6
4	29/1.1	102/4.0
5	33/1.3	118/4.6
6	38/1.5	139/5.5
8	44/1.7	155/6.1
10	50/1.9	177/6.9
Key Material		SAE 6150 with Satin finish

Individual packing: Blister card

▶ 902-101 16 Pc Hex Key Wrench Set



- Material: SAE6150 chrome vanadium steel
- Portable packaging.
- Case can be hung for storage or display



Individual packing: Blister card



Tip size(mm)	S (mm/inch)	L (mm/inch)	Tip size(inch)	S (mm/inch)	L (mm/inch)
1.5	14/0.55	45/1.8	1/16"	14/0.55	46/1.8
2	16/0.62	51/2.0	5/64"	17/0.62	48/1.9
2.5	19/0.74	57/2.2	3/32"	17/0.62	52/2.0
3	20/0.78	65/2.6	1/8"	20/0.78	58/2.3
4	24/0.94	70/2.8	5/32"	22/0.86	65/2.6
5	29/1.14	80/3.1	3/16"	25/0.98	72/2.8
5.5	29/1.14	88/3.5	7/32"	28/1.10	77/3.0
6	33/1.3	94/3.7	1/4"	29/1.14	86/3.4


▶ 900-038 30 Pc Metric & Inch Combination Hex Key Set



- Material: SAE6150 chrome vanadium steel
- Portable packaging.
- Case can be hung for storage or display



Individual packing: Blister card



Hanger

Tip size(mm)	S (mm/inch)	L (mm/inch)	Tip size(inch)	S (mm/inch)	L (mm/inch)
0.7	8/0.31	35/1.4	0.028"	8/0.31	65/2.6
0.9	10/0.39	38/1.5	0.035"	10/0.39	68/2.68
1.3	12/0.47	41/1.6	0.050"	12/0.47	72/2.83
1.5	14/0.55	45/1.8	1/16"	14/0.55	77/3.0
2	17/0.66	50/2.0	5/64"	15/0.59	82/3.23
2.5	19/0.74	56/2.2	3/32"	18/0.70	89/3.5
3	20/0.78	65/2.6	7/64"	18/0.70	93/3.7
4	25/0.98	70/2.8	1/8"	19/0.74	98/3.86
4.5	27/1.06	77/3.0	9/64"	20/0.78	103/4.1
5	29/1.14	81/3.2	5/32"	22/0.87	107/4.21
5.5	31/1.2	86/3.4	3/16"	25/0.98	117/4.6
6	33/1.3	93/3.7	7/32"	28/1.10	127/5.0
7	36/1.4	100/3.9	1/4"	29/1.14	138/5.43
8	37/1.5	103/4.1	5/16"	35/1.4	155/6.1
10	44/1.7	117/4.6	3/8"	36/1.4	177/6.97



SOCKET WRENCHES

▶ HW-6509B/ HW-6514B 9 Pcs/ 14 Pcs Combination Wrench

Cr-V

New



Tool Pouch

- Made of Chrome Vanadium Steel with mirror finish provides corrosion resistance
- Compact size for easy access in confined spaces
- Slim line spanners reduce problems with hard to reach nuts
- Complete set for automotive, industry, home use and more
- Comes with tool pouch for easy carrying and storage



Model No.	Spec.(Metric)
HW-6509B	8.10.11.12.13.14.15.17.19mm
HW-6514B	8.9.10.11.12.13.14.15.16.17.18.19.22.24mm

Individual packing: Color box

▶ HW-312S / HW-312B / HW-5912E 12 in 1 Type Ratcheting Box End Reversible Wrench



12 in 1



HW-312S

HW-312B



72-teeth gear, only 5° space for each turn



Long bolts and threaded rods are not a problem for the 12 in 1 wrench.

- 12 sizes in one reversible ratcheting wrenches for superior versatility and ease of use
- 72-teeth gear design delivers 5 degree effective swing arc which makes work more efficient in limited areas
- Made of heat treated Cr-V steel with full polish for durability
- High torque capacity
- With forward, fixed and reversible function for easy operation

Model No.	Spec.	OAL(mm/inch)
HW-312S	8, 10, 11, 13mm	160/6.3
	5/16", 3/8", 7/16", 1/2"	
	E10, E12, E14, E16	
HW-312B	14, 16, 17, 19mm	230/9.06
	9/16", 5/8", 11/16", 3/4"	
	E18, E20, E22, E24	
HW-5912E	Contents: HW-312S, HW-312B	160/230 (6.3/9.06)

Individual packing: Blister card

▶ 900-070 / 900-217 10 PCS Electronic Combination Wrench



• Material: AISI 1045

Model No.	Spec.
900-070 (Inch Size)	Closed end 7/16", 11/32", 3/8", 9/32", 5/16", 1/4", 15/64", 7/32", 5/32", 3/16"
	Open end 3/8", 5/16", 11/32", 1/4", 9/32", 15/64", 7/32", 13/64", 3/16", 5/32"
900-217 (Metric Size)	Closed end 11, 10, 9, 8, 7, 6, 5.5, 4.5, 4mm
	Open end 10, 9, 8, 7, 6, 5.5, 5, 4, 4.5mm

Individual packing: Pouch

▶ 900-067/900-068/900-069 Adjustable Wrenches



- Economy type
- Knurled adjustable screw
- Drop forged
- PVC coated handles



900-067 900-068 900-069

Model No.	Material	Jaw open (Max)	OAL.
900-067	S50C	1/2"(13mm)	4"(100mm)
900-068	S50C	13/16"(19mm)	6"(150mm)
900-069	S50C	1"(25mm)	8"(200mm)

Individual packing: Blister card

SK-42601M 26 Pc 1/2" Drive Socket Tool Set

Tools meet DIN standard



72Teeth Reversing
Flat Ratchet Handle



Spark Plug Socket



Sliding T Handle
with Quick Release



14pcs Hand Socket 10,12,13,14,15,16,17,18,19,22,24,27,30,32mm

4pcs Hand Deep Socket 12,14,17,19mm

2pcs Spark Plug Socket W/Magnetic 16,21mm

Extension Bar W/Quick Release 125mm

Extension Bar W/Quick Release 250mm

Sliding T Handle W/Quick Release 250mm

LED Light Adaptor

Universal Joint

72 Teeth Reversing Flat Ratchet Handle W/Quick Release

Metal Case: 445x185x50mm (18"x7.3"x2")

Individual Packing : Color Sleeve Shrink

SK-22401M 24 Pc 1/4" Drive Socket Tool Set

Tools meet DIN standard



Universal Joint



Spinner T Handle



Extension Bar
W/2 way



13pcs Hand Socket 4,4.5,5,5.5,6,7,8,9,10,11,12,13,14mm

5pcs Hand Deep Socket 8,10,11,12,13mm

Extension Bar W/Wobble 2 Way 100mm

Extension Bar 55mm

Sliding T Handle 115mm

Universal Joint

Spinner Handle

72 Teeth Reverse Flat Ratchet Handle W/Quick Release

Metal Case: 245x120x35mm (9.6"x4.7"x1.4")

Individual Packing : Color Sleeve Shrink

900-194 23 Pc 1/4" Drive Socket Set



Contents	
	18 pcs 1/4" DR 4, 5, 6, 7, 8, 9, 10, 11, 12mm 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2"
	140mm (5.5") ratchet handle
	Adaptor: 70mm(2.8"), 145mm(5.7")
	Steel box (214x84x44mm) /(8.4"x3.3"x1.7")
	Individual Packing : Color Sleeve Shrink






TWEEZERS
MEETER2



Ergo-Grip Tweezer

- Static dissipative handle $10^8 \sim 10^{11}$
- Light weight design
- Precise tip offers safe access to hard-to-reach areas
- Cushioned handle increases operation comfort with less fatigue
- Constructed of high-quality stainless, chemical resistant; tough, non-magnetic surface.


TZ-202N Super Fine Tip Straight Tweezer




Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120.5/4.7	Blister card




TZ-204N Fine Tip Curved Tweezer



Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120.5/4.7	Blister card




TZ-205N Fine Tip Straight Tweezer



Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	140.5/5.5	Blister card




TZ-212N Extremely Fine And Sharp Tip Tweezer



Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	129/5.1	Blister card




TZ-225N Super Fine Tip Straight Tweezer




Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120.5/4.7	Blister card




▶ **900-071 Super Fine Tip Straight Tweezer**


Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120/4.7	Blister card

▶ **900-072 Fine Tip Curved Tweezer**

Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120/4.7	Blister card

▶ **1PK-125T Super Fine Tip Straight**

Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 304	Non	120/4.7	Blister card

▶ **902-072 Heavy-Duty Tweezer**

Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 410	Yes	165/6.5	Blister card

▶ **900-204 4 PCS Tweezer Set**

OAL:115mm/4.5"



OAL:110mm/4.3"



OAL:119mm/4.7"




OAL:116mm/4.6"

Material	Magnetic	OAL (mm/inch)	Individual packing
AISI304	Non	110-120 4.3-6.3	Pouch

4 different style stainless steel tweezers for every need. Includes one self-locking; ideal for picking up small components in hard to reach places, as well as component assembly one pc prototype boards.


902-071 Universal Tweezer



Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 410	Yes	175/6.9	Blister card




900-267 Reverse Action Tweezer (Self-Gripping)



Material	Magnetic	OAL (mm/inch)	Individual packing
AISI 410	Yes	165/6.5	Blister card




900-268 Static Dissipative Soft Tip Tweezer



Material		Resistance	Replacement Tip	Magnetic	OAL (mm/inch)	Individual packing
Handle	Tip					
AISI 302	PPS-hb	<10 ⁶ Ω	5TZ-300A	Non	130/5.1	Blister card



900-269 Static Dissipative Soft Tip Tweezer



Material		Resistance	Replacement Tip	Magnetic	OAL (mm/inch)	Individual packing
Handle	Tip					
AISI 302	PPS-hb	<10 ⁶ Ω	5TZ-300B	Non	125/4.9	Blister card



900-263/900-264/900-265/900-266 Conductive Tweezer



900-263







900-264



900-265



900-266



Model No.	Material	Resistance	Magnetic	OAL (mm/inch)	Individual packing
900-263	PC Carbon Fiber	<10 ⁴ Ω	Non	115/4.5	Blister card
900-264				120/4.7	

Model No.	Material	Resistance	Magnetic	OAL (mm/inch)	Individual packing
900-265	PC Carbon Fiber	<10 ⁴ Ω	Non	115/4.5	Blister card
900-266					



MAGNIFICATION & LIGHTING

Magnification/Lighting

The materials of **Pro'sKit®** magnifier & lamps include Glass and Acrylic.

The characters of Glass:

- **Scratch-resistance:** The glass is not easy scratched due to their high density.
- **High-transmission:** It comes with smooth surface providing high transmission for clear view, anti-dust.
- **Low-glare:** The glass Lens feature low glare to reduce eye fatigue when used for long times.

The characters of Acrylic:

- **Light-weight:** The weight of Acrylic is only half of glass.
- **Anti-impact:** The impact strength of Acrylic is 7-18 times higher than that of glass.
- **High-transmission:** It has the excellent transparent materials at present, and transmission is better than glass.



Glass Lens



Acrylic Lens

The light source and electronic rectifier:

Pro'sKit® is always striving to improve its products to become more energy efficient and environment-friendly. All of **Pro'sKit®** magnifiers & lamps come with Electronic Rectifier features reducing the electromagnetic interference to almost zero and meet RoHS compliance. The Electronic Rectifier will provide even more stable performance and will light up more quickly for use than the traditional linear transformer.



Magnification Chart of Pro'sKit® Magnifiers & Lamps:

- **Diopter(D)** is a measurement unit of the refractive power of a lens. Each diopter means an object has been magnified by 25%.
- **Magnification(X)** is a measurement of how much larger an object is after magnification. A power of 2x means the object size has been magnified by 100%.
- **Focal Length** is the distance from a point where the image of a distance object is formed (focal point) to lens



Diopter	% Bigger Than Object	Magnification (X)	Focal Length (mm/inch)
1D	25%	1.25 X	1016 (40.00")
2D	50%	1.5 X	508 (20.00")
3 D	75 %	1.75 X	339 (13.33")
4 D	100 %	2.00 X	254 (10.00")
5 D	125 %	2.25 X	203 (8.00")
6 D	150 %	2.50 X	169 (6.67")
7D	175%	2.75X	145(5.71")
8 D	200 %	3.00 X	127 (5.00")
9 D	225 %	3.25 X	113 (4.44")
10 D	250 %	3.50 X	102 (4.00")
12 D	300 %	4.00 X	85 (3.33")
20 D	500 %	6.00 X	51 (2.00")
28 D	700 %	8.00 X	36 (1.43")
30 D	750 %	8.50 X	34 (1.33")




Caring for Eye Care

When you are doing any of these things which require staring at one place for 30 minutes, it is important to take a break for 5 minutes and look at things farther away.

MA-1209LA LED Table Clamp Magnifier Lamp



- The glass lens will provide high transmittance and will not easily scratch.
- 90 LEDs energy saving, low temperature and long life.
- Standard mount: Desktop clamp
- Power supplied with electronic rectifier provides even more stable performance
- Adjustable arm for easy positioning where it is most needed.
- Clamps easily and securely onto most flat surfaces up to 65mm/2.6" thick.

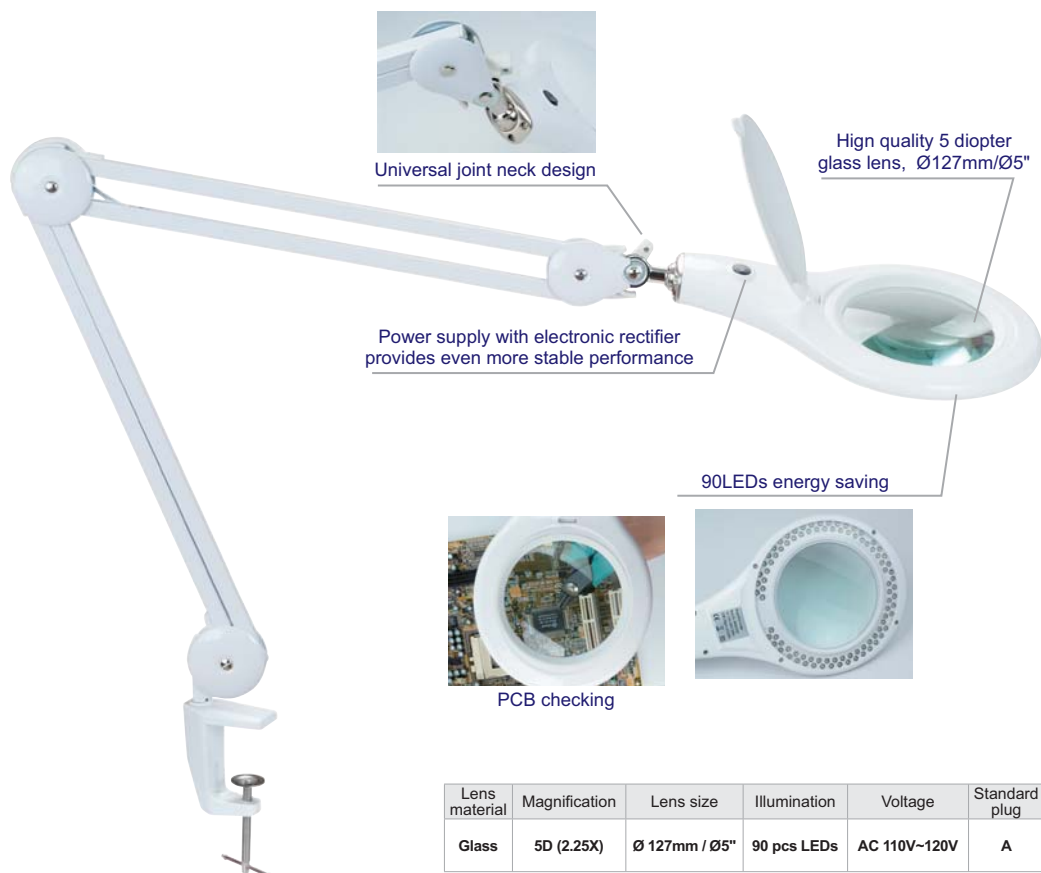

Lens material	Magnification	Lens size	Illumination	Voltage	Standard plug	Individual packing
Glass	5D (2.25X)	Ø 127mm / Ø5"	90 pcs LEDs	AC 110V~120V	A	Color Box

MA-1503A Wide View Magnifier



- Power supplied with electronic rectifier provides even more stable performance
- Even, shadow-free light will make it easier for you to see and reduce eye strain.
- Spring balanced adjustable arm for easy maneuverability and positioning.
- Easy to replace the fluorescent tubes.




Lens material	Magnification	Lens size (mm/inch)	Illumination	Voltage	Standard plug	Individual packing
Glass	3D(1.75X)	Ø 190x155mm Ø7.5"x6.1"	PL 9W x 2 pcs	AC 110V~120V	A	Color Box

900-061/MA-1205CA-B Magnifier Workbench Lamp



- Fully-adjustable spring arm with extra ABS sleeves outside of the springs for secure operation
- Power supplied with electronic rectifier provides reduced electromagnetic interference
- Wide open protection cover design can be swiveled up and won't spring back
- Even, shadow-free light will makes it easier for you to see and enjoy the activities longer.
- Spring balanced adjustable arm for easy maneuverability and positioning.
- Adjustable clamp base fits up to 65mm/2.6" thick surfaces.



Model No.	Lens material	Magnification	Lens size	Illumination	Voltage	Standard plug	Color	Individual packing
900-061	Glass	5D(2.25X)	ø127mm (5")	22W	AC 120V	A	White	Color Box
MA-1205CA-B					AC 120V	A	Black	

Model No.	Description
900-061B	Light bulb
900-061-CLAMP	Clamp



902-109 Table Clamp Magnifier With Workbench Lamp



- 5 diopter (2.25X magnification) glass lens.
- Even, shadow-free light under the magnifying lens with 22-watt T5 circular fluorescent tube will make it easier for you to see .
- All metal housing mounted on a spring balanced arm that stays set in any position.
- Clamps easily and securely onto most flat surfaces up to 2.6" thick.
- Dust-proof cover for lens protection.




Lens material	Magnification	Lens size	Illumination	Voltage	Standard plug	Replacement bulb	Individual packing
Glass	5D(2.25X)	ø127mm (5")	22W/T5 G10q	AC 120V	A	Bulb-T5	Color Box



902-110 Gooseneck Magnifier Lamp



- Power supplied with electronic rectifier provides even more stable performance
- Even, shadow-free light will make it easier for you to see.
- The flexible gooseneck allows you to angle and point the light to where you need it most.
- Clamps easily and securely onto most flat surfaces up to 65mm/2.6" thick.

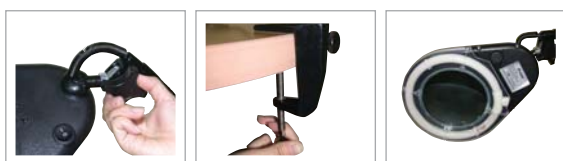

Lens material	Magnification	Lens size	Illumination	Voltage	Standard plug	Replacement bulb	Individual packing
Glass	5D(2.25X)	Ø 127mm (5")	22W/T5 G10q	AC 120V	A	Bulb-T5	Color Box



OptiVisor Series "OptiVisor" Binocular Magnifier

- Reduces eye strain
- Optical glass (not plastic) lenses
- Genuine leather comfort band



Complete OptiVisor	Magnification	Lense Plate Only
900-079	1.5X @ 20"	900-236
900-082	1.75X @ 14"	900-096
900-081	2X @ 10"	900-147A
900-075	2.5X @ 8"	900-075A
900-063	2.75X @ 6"	900-076
900-235	3.5X @ 4"	900-077

• Individual packing: Color box

900-142 OptiVisor with No Lens

900-064 "OptiLoupe" 2X Magnifier



- Bolts onto optivisor to double magnification
- Flips out of the way when not in use
- Individual packing: Blister card

900-125 Illuminated Magnifier

- Pb** Optical quality lighted magnifier with 2-1/2" round lens.




Lens material	Magnification	Lens size (mm/inch)	Light source	Battery	Replacement bulb	Individual packing
Glass	4X	Ø 62mm/Ø2.4	Bulb	1.5V AA x 2 pcs (Not included)	900-125B	Blister card

MA-016 Headband Magnifier



- Detachable LED light device.
- The angle of LED light is adjustable.
- Multiple lens provide better magnification.
- The belt size can be adjusted freely.

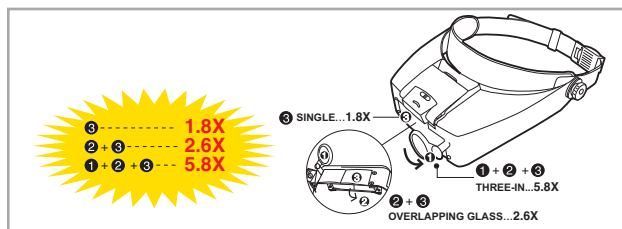

Materials	Acrylic	Light source	LED
Magnification	Single: 1.8X Overlapping: 2.6X Three-in: 5.8X	Battery	1.5V AAAx2 pcs (Not included)
Lens size	Round: Ø 29mm/Ø1.0" Square: 89x29mm/3.5"x1.1"	Individual packing	Color box

900-080/900-080B VisorLight


- Clips onto headband of Optivisor
- Xenon laser for illuminating close-up work



Model No.	Description	Individual packing
900-080	VisorLight (Headband shown but not included)	Blister card
900-080B	Replacement bulb for Visorlight	Blister card

900-126 Folding Lighted Magnifier

- Pb** Compact magnifier features a 2"x4" rectangular 2X lens, housed in the folding 4" handle.

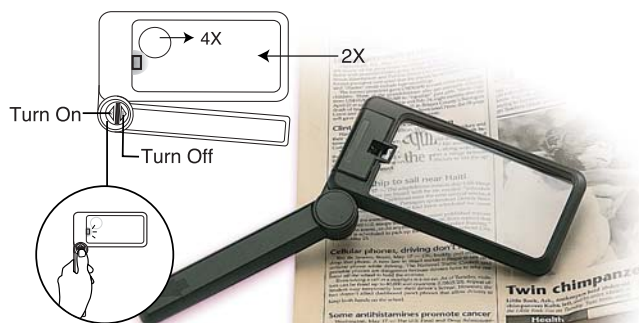

Lens material	Magnification	Lens size (mm/inch)	Light source	Battery	Individual packing
Acrylic	2X / 4X	96x49mm/3.8x1.9	Bulb	1.5V AAA x 2 pcs (Not included)	Blister card


900-123 Sliding Magnifier



3X (one lens)



900-124 Folding Magnifier



Lenses combined for higher magnification



902-239 8X LED Illuminated Magnifier



- Glass lens with hinged stainless cover.
- Great for very small objects, collection, and jewelry.



jewelry



Model No.	Lens material	Magnification	Lens size(mm/inch)	Light source	Battery	Individual packing
900-123	Acrylic	Single:8D (3X) Overlapping: 20D (6X)	22x35mm/ 0.87x1.4	-	-	Blister card
900-124		Single: 16D (5X) Overlapping: 36D (10X)	Ø 25mm/ Ø 1.0			
902-239	Glass	28D(8X)	Ø 21mm/ Ø0.82	LED	LR1130 (3AG12) x 3 (Included)	

MA-020 22X Handheld LED Light Magnifier



jewelry



- Comes with 2 LED lights
- Excellent for jewelry work

MA-021 3.5X Handheld LED Light Magnifier



PCB checking



- Comes with 2 LED lights
- Suitable for reading, PCB checking and more.

MA-022 7.5X Handheld LED Light Magnifier with Currency Detecting Function



Currency detection



jewelry



- Comes with 1 LED light
- Combine with UV light for currency or credit card detection

Model No.	Lens material	Magnification	Lens size(mm/inch)	Light source	Battery	Individual packing
MA-020	Glass	Object lens 11.5D; Eyepiece 19D, (22X)	Ø 19mm/ Ø0.74"	2 LEDS	1.5V AAA x3pcs (not included)	Blister card
MA-021		10D (3.5X)	Ø 46mm/ Ø1.8"			
MA-022		26D (7.5X)	Ø 27mm/ Ø1.1"	1+1LED (1UV LED)	CR2016 x 2 (not included)	

902-238 3X Magnifier



- Glass lens with plastic holding handle.
- Ideal for very small objects and documents reading.

Lens material	Magnification	Lens size(mm/inch)	Individual packing
Glass	8D (3X)	Ø 50mm / Ø2"	Blister card

MA-019 3X Handheld LED Light Magnifier with Currency Detecting Function




- Comes with 8 LEDs light
- With UV light for currency or credit card detection
- Ideal for reading, PCB checking, insect observation.etc



8 LEDS



Reading



Currency detection

Lens material	Magnification	Lens size (mm/inch)	Light source	Battery	Individual packing
Glass	8D (3X)	Ø 56mm Ø 2.2"	8+1 LEDS (1 UV LED)	1.5V AAA x3pcs (not included)	Blister card

902-108 Desk Type Magnifier Lamp



- The adjustable arm allows you to angle and point the light to where you need it most.
- The insert Lens allows partial magnification of object up to 12D for precision work.
- 12W fluorescent circular lamp
- Power supplied with electronic rectifier provides even more stable performance



902-221 Desk Type Magnifier Lamp



- Easy swivel lens that rotates 360° and tilts 280°
- Powerful 2X(5D) magnifying lens
- 12W fluorescent lamp
- Adjustable joint arm for easy positioning
- Energy efficient and super bright
- Lifiable lens-protection cover



902-240 Foldable Magnifier



- Glass lens with adjustable folding arms design.
- Sits on a desk or table and adjusts for varying height and angle.
- Great for working on hobbies, documents, and circuit boards, etc.



Model No.	Lens material	Magnification	Lens size	Light source	Illumination	Battery	Voltage	Standard plug	Replacement bulb	Individual packing
902-240	Acrylic	2D (1.5X)	Ø 130mm/Ø5"	LED	-	LRI30 (3AG12) x3 (Included)	-	-	-	Color box
902-108	Glass	3D/12D (1.75X/4X)	Ø 100mm/Ø3.9"	-	12W/T4 G10q	-	AC 110V~120V	A	Bulb-T4	Color box
902-221	Glass	2X (5D)	Ø 100mm/Ø3.9"	T4 12W circular fluorescent lamp Supplied with Electronic ballast	12W/T4	-	AC 120V 60Hz	A	Bulb-T4	Color box

900-182 6 LED's Technology Flashlight



Battery	OAL (mm/inch)	Individual packing
2 x AA (not included)	152/6	Blister card

902-068 LED Flashlight



- Rugged design aluminum body contoured for firm grip.
- Light weight and easy to carry.
- Operated using 2x AA cell batteries (not included).
- Switch on/off control on the bottom.
- Black color.



Battery	Replacement bulb	OAL (mm/inch)	Individual packing
2 x AA (not included)	902-068B	152/6	Blister card

900-239 Magnifier Sheet

- Hold over any subject matter to magnify 3X(8D)~4X(13D)




- Individual packing: Poly bag

900-167 Protective Glasses

- Ideal for use when cutting, grinding or boring to protect the eyes against flying particles.



- Individual packing: Blister Card

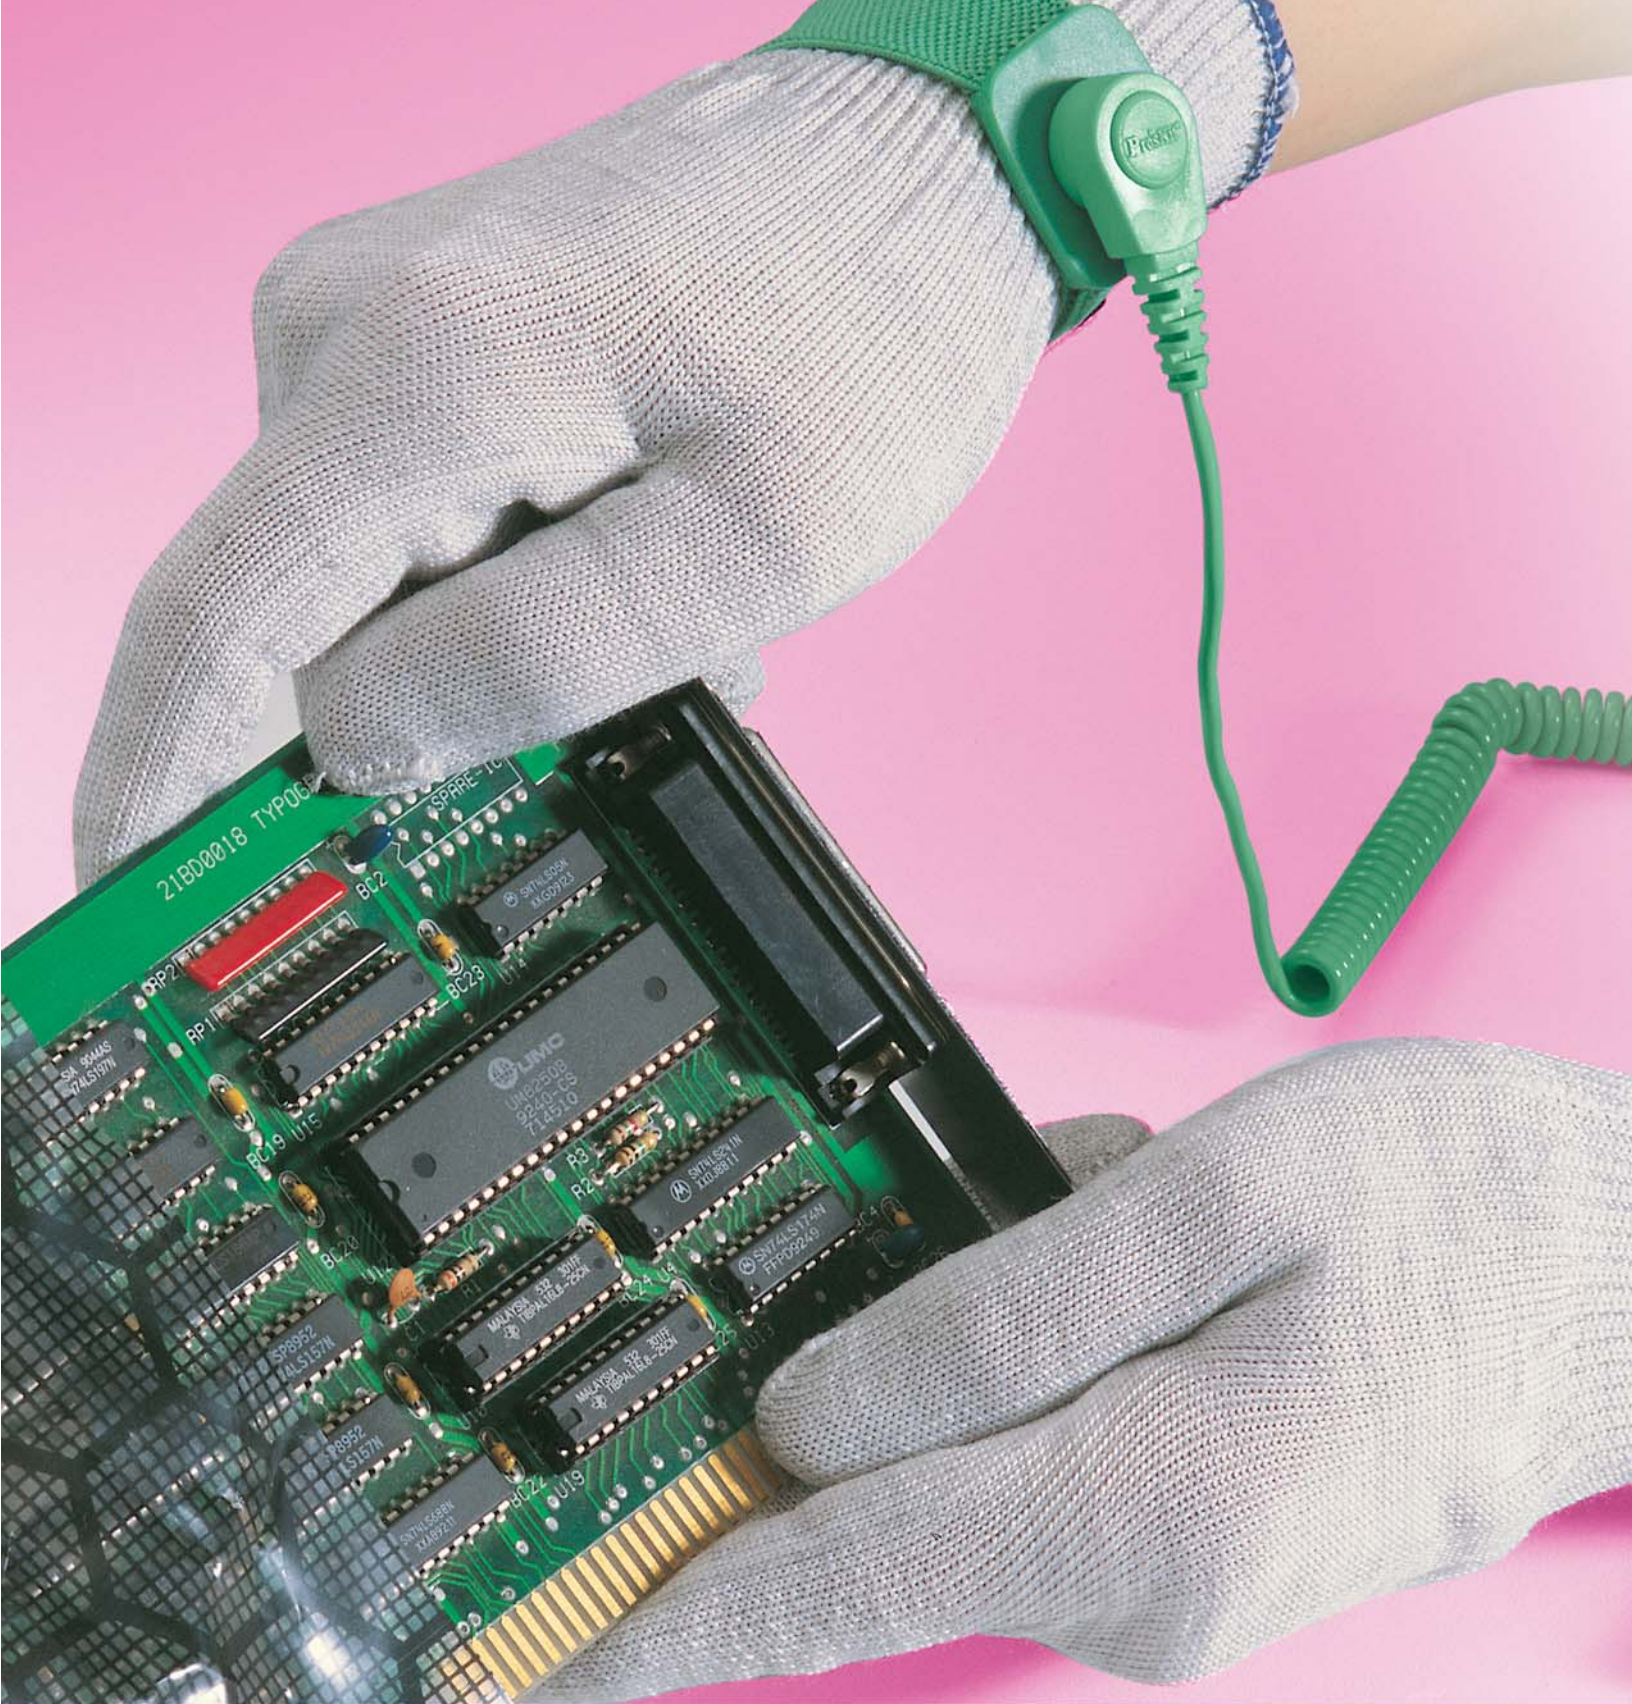

ESD STATIC PROTECTION



Pro'sKit® ESD Tools Solution

What is static electricity? How to prevent?

Static electricity is the imbalance of positive and negative electric charge caused by different materials rubbing together and building up a charge on the surfaces.

On production lines for electronic equipment, components such as IC's may be damaged by such static charges being discharged too quickly. For static control in work areas, use dissipative mats on floors and table surfaces and have personnel wear anti-static wrist straps and heel grounders.

Pro'sKit® ESD series of tools help to dissipate static charges and avoid potential costly problems.

The resistance and decay time of conductor, static control products and insulator

Conductor means the materials which have the electrons held loosely and the electrons can move easily, most of metals are good conductors.

Static control product means the product's designed for static control or elimination to protect electronic components and human body against injury.

Insulator means the materials which have the electrons held tightly and the electrons don't move well. Plastic, cloth, glass and dry air are good insulators.


	CONDUCTOR	STATIC CONTROL PRODUCT	INSULATOR
Resistance(Ω)	10^5	10^8	10^{12}
Decay time(SEC)	10^{-6}	10^{-3}	10^0

ESD Products Test Method

Pro'sKit® ESD series products are tested in accordance with ESD Association standard as following EPA (ESD protected areas) ESD Control Program

ESD Control Item	Product Qualification1	
	Test Method	Required Limit(s)2
Worksurface	ANSI/ESD S 4.1 and or ANSI/ESD STM 4.2	$< 1 \times 10^9 \Omega$ and/or < 200 volts
Wrist Strap Cord	ANSI/ESD S1.1	0.8×10^6 to $1.2 \times 10^6 \Omega$
Wrist Strap Cuff	ANSI/ESD S1.1	Interior $< 1 \times 10^5 \Omega$ Exterior $> 1 \times 10^7 \Omega$
Wrist Strap Cord Bending Life	ANSI/ESD S1.1	$> 16,000$ cycles
Foot Grounders	ESD SP9.2	$< 1 \times 10^9 \Omega$
Flooring	ANSI/ESD S7.1	$< 1 \times 10^9 \Omega$
Mobile Equipment (Working Surfaces)	ANSI/ESD S4.1	$< 1 \times 10^9 \Omega$

Pro'sKit® ESD products applications

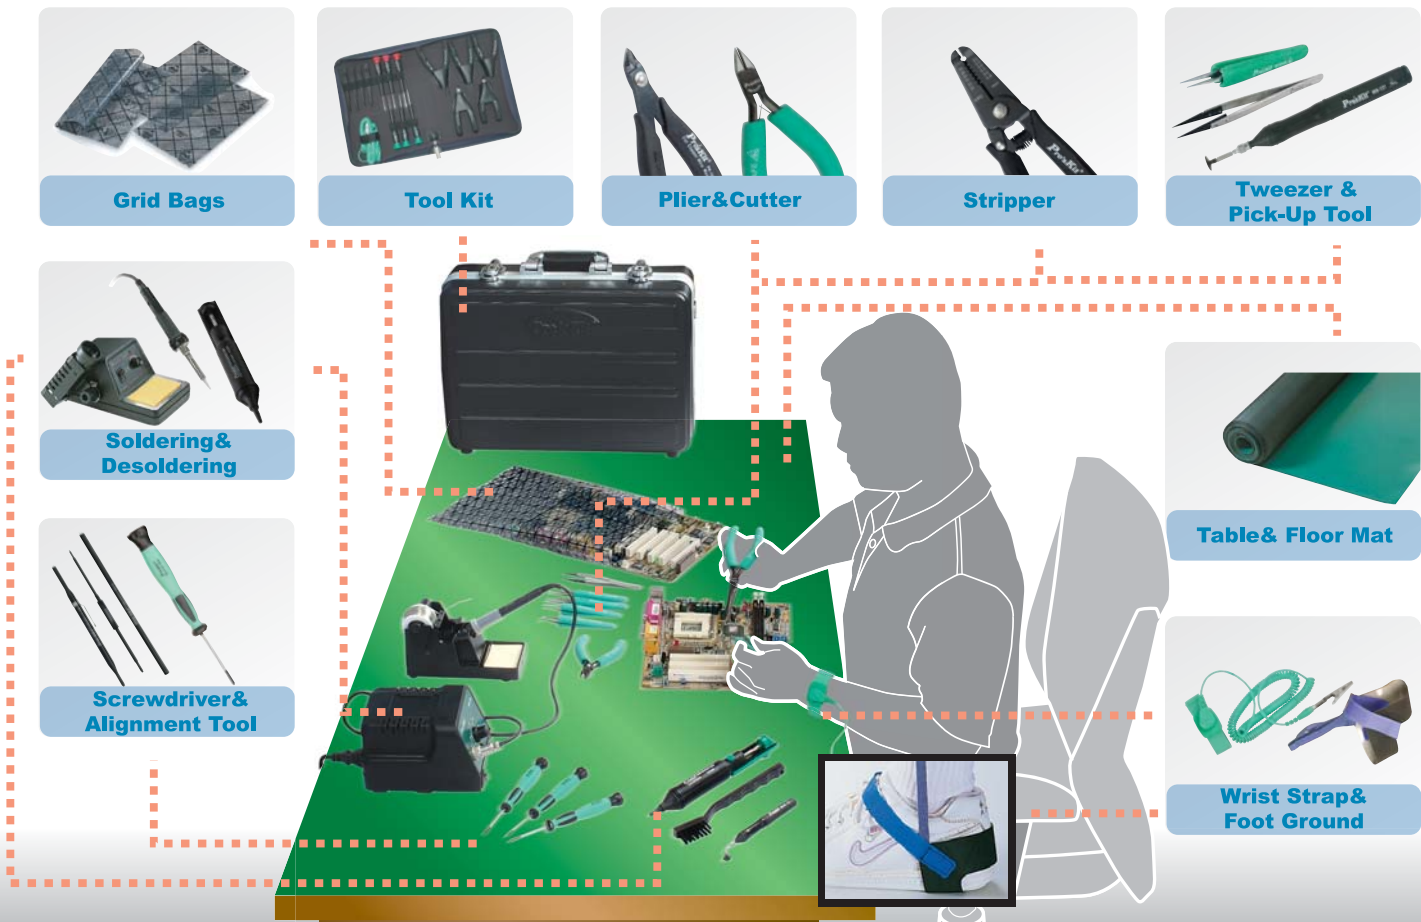

900-002/900-012 **Wrist Strap Series**

Model No.	Band resistivity	Wrist strap resistivity	Band Size	Cord Size (feet)	Individual packing
900-002	<50Ω	10°Ω	Fixed	10 (3M)	Blister card
900-012				6 (1.5M)	

900-132/900-133 **Wrist Strap Series**

Model No.	Band resistivity	Cord resistivity	Band size type	Cord Size (feet)	Individual packing
900-132	<50Ω	10°Ω	Adjustable	10 (3M)	Blister card
900-133				6 (1.5M)	

900-022/900-023 **Wrist Strap Series**

Model No.	Band resistivity	Cord resistivity	Band size type	Cord Size (feet)	Individual packing
900-022	<10°Ω	10°Ω	Adjustable	10 (3M)	Blister card
900-023				6 (1.5M)	

900-057 **Foot & Heel Ground**

These versatile heel grounders have a specially designed dual-layered cup construction for superior floor contact.



Polyester+
conductive fiber



Resistivity	Wrist belt	Individual packing
1-2 x 10°Ω	Adjustable	Blister card

900-056 **Field Service Kit**

Material	Conductive PVC
Resistivity	10°~10 ¹¹ Ω
Wrist belt	With 6ft wrist strap and 10ft grounding wire w/alligator clip
Size(mm/inch)	650x600/25.6x23.6
Individual packing	Color box

900-114/900-116 **Static-Dissipative Mat**

Model No.	900-114	900-116
Material	Face layer: 0.2mm laminated PVC Center, Layer: 2.7mm PVC foam, Bottom layer: 0.1mm laminated PVC, Combination layer: conductive treatment	
Resistivity	Face & Center & Bottom, Layers: 10M~1KMΩ/SQ Combination layer: 1K~1MΩ/SQ, Static decay time: less than 0.5sec	
Description	Static dissipative mat for keyboard & mouse & touch	Static dissipative mat for OA desk-top
Size(mm/inch)	600x1200/23.6x47.2	600x600/23.6x23.6
Individual packing	Color box	Color box





POWER TOOLS

PT-1441A Cordless Drill Driver 14.4V

- No-load speed 0-550rpm
- 21 adjustable torque settings for screwing, and extra position for drilling purpose
- Maximum output torque up to 7nm
- 3/8" (10mm) keyless chuck for driver bits or drills
- Magnetic strip on the back for convenient operation
- Removable battery pack for charging convenience
- Variable speed trigger for complete control



Main body	Model No.	PT-1441A
	Max. Drilling capacity	Steel: Ø6mm Concrete: ø8mm Wood: Ø10mm
	Torque setting	21+1 positions
	Rated no load speed	One Gear Speed: 0-550rpm
	Output torque	7 Nm (71.4 kgf-cm/62.0 lbf-in)
	Drive (Collet)	3/8" (10mm) Keyless Chuck
	Special function	Switch for forward or reverse rotation, with drill function
Battery	Overall length	225 x 245mm (8.9"x9.6")
	Model No.	5PT-1441-BAT
	Battery type	Ni-Cd
	Battery voltage	14.4V
	Battery capacity	1000MAH
Adapter	Charging time	3-5 hours
	Free running time	40min
	Model No.	5PT-1441-ADA
	Input voltage	120V AC 60Hz
Charger	Output voltage	DC 18V 400mA
	Adapter plug	A 
	Model No.	5PT-1441-CH
Standard Accessories	Voltage	DC 18V 400mAh
	Model No.	5PT-1080-P1(13 pcs/set)
	Bits set	6pcs drill: Ø 1.5, 2.5, 3, 4, 5, 6mm 6pcs 25mm Driver Bits: ⊕ 5.0, 6.0 ⊕ #1, #2 ⊕ PZ#1, PZ#2 1 pcs Magnetic insert bits holder 1 pcs 50mm double ends driver bits ⊕ #2, ⊕ 6.0
	Others	Adapter and Charger / Blow-molded case (380x280x95mm) / 15"x11"x3.7"
Individual packing Color sleeve shrink		



Variable speed trigger for complete control



Removable battery pack for charging convenience



21+1 Adjustable torque settings

PT-1201A Cordless Drill Driver 12V

- No-load speed 0-550rpm
- 16 adjustable torque settings for screwing, and extra position for drilling purpose
- Maximum output torque up to 6nm
- 3/8" (10mm) keyless chuck for driver bits or drills
- Removable battery pack for charging convenience
- Variable speed trigger for complete control



Main body	Model No.	PT-1201A
	Max. Drilling capacity	Steel: Ø6mm Concrete: ø8mm Wood: Ø10mm
	Torque setting	16+1 positions
	Rated no load speed	One Gear Speed: 0-550rpm
	Output torque	6Nm (61.2 kgf-cm / 53.11 lbf-in)
	Drive (Collet)	3/8" (10mm) Keyless Chuck
	Special function	Switch for forward or reverse rotation, with drill function
Battery	Overall length	225mm x 245mm (8.9"x9.6")
	Model No.	5PT-1201-BAT
	Battery type	Ni-Cd
	Battery voltage	12V
	Battery capacity	1000mAh
Adapter	Charging time	3-5 hours
	Free running time	35min
	Model No.	5PK-1201-ADA
	Input voltage	120V AC 60Hz
Charger	Output voltage	DC 15V 400mA
	Adapter plug	A 
	Model No.	5PT-1080-P1
Standard Accessories	Voltage	DC 15V 400mA
	Bits set	6pcs drill: Ø 1.5, 2.5, 3, 4, 5, 6mm 6pcs 25mm Driver Bits: ⊕ 5.0, 6.0 ⊕ #1, #2 ⊕ PZ#1, PZ#2 1 pcs Magnetic insert bits holder 1 pcs 45mm double ends driver bits ⊕ #2, ⊕ 6.0 1 pcs 45mm double ends driver bits ⊕ #1, ⊕ 5.0
	Others	Adapter and Charger / Blow carrying case
	Individual packing	Color sleeve shrink



Variable speed trigger for complete control



Removable battery pack for charging convenience



16+1 adjustable torque settings

PT-1080A Li-ion Cordless Drill Driver 10.8V



- No-Load speed 0-350/0-1100 rpm
- 21 Adjustable torque settings for screwing, and extra position for drilling purpose
- Maximum output torque up to 14Nm
- 3/8" (10mm) Keyless Chuck for driver bits or drills
- Removable battery pack for charging convenience
- Variable speed trigger for complete control

Model No.	PT-1080A
Main body	Max. Drilling capacity Steel: Ø6mm Wood: Ø16mm
	Torque setting 21+1 positions
	Rated no load speed two gear speed : 0-350/0-1100 rpm
	Output torque 14 Nm (142.8 kgf-cm/123.9 lbf-in)
	Drive (Collet) 3/8" (0.8~10mm) Keyless chuck
	Special function Switch for forward or reverse rotation, with drill function 2 gear-speed switch LED battery power indicator
Overall length 215 mm×210 mm/8.5"x8.3"	
Battery	Model No. 5PT-1080-BAT
	Battery type Li-ion
	Battery voltage 10.8V
	Battery capacity 1300mAh
	Charging time 3-5 hours
Adapter	Free running time 30min
	Model No. 5PT-1080-ADA
	Input voltage 120V AC 60Hz
	Output voltage DC 12V 500mA
Charger	Adapter plug A 
	Model No. 5PT-1080-CH
	Voltage DC 12V 500mA
Standard Accessories	Model No. 5PT-1080-P1(13 pcs/set)
	Bits set 6 pcs Drills: Ø 1.5/2.5/3/4/5/6mm 6 pcs 25mm Driver bits: ⊕ 5.0 · 6.0 ⊕ #1 · #2 1pcs Magnetic insert bits holder
	Others Adapter and Charger / Blow carrying case
Individual packing Color sleeve shrink	



LED light provides convenient work in dark

Battery power indication

21+1 adjustable torque setting

PT-0721A Li-ion Cordless Screwdriver-7.2V



- Two gear speed : 0-200rpm/0-400rpm
- 1300mAh Li-ion battery. Long life battery pack, anti-pollution.
- 15+1 Adjustable torque settings.
- Maximum output torque up to 5nm
- Quick release chuck
- Switch for forward or reverse rotation.
- Battery power indication
- LED light provides convenient work in dark
- Handy and easy to carry in a tool belt
- Over charging and discharging protection

Model No.	PT-0721A
Main body	Torque setting 15+1 Position
	Rated no load speed two gear speed:0-200rpm/0-400rpm
	Output torque 5Nm (51 kgf-cm / 44.26 lbf-in)
	Drive (collet) 1/4 quick release chuck
	Special function Switch for forward or reverse rotation, quick release chuck, LED light, battery power indicator
	Overall length: angled 160mm x 180mm/6.3"x7.1"
Battery	Battery type Li-ion
	Battery voltage 7.2V
	Battery capacity 1300mAh
	Charging time 3-5 hours
	Free running time >70 min
Adapter	Model No. 5PT-0721-ADA
	Input voltage 120V AC 60Hz
	Output voltage DC 9V 300 mA
	Adapter plug A 
Standard accessories	Bits set 4pcs 50mm Driver Bits: ⊕ 5.0, 6.0 ⊕ #1, #2
	Other Adapter ; Pouch bag
Individual packing Double blister card	



4pcs 50mm Driver Bits



LED light provides convenient work in dark

Battery power indication

15+1 adjustable torque settings

PT-1361A Li-ion Cordless Screwdriver 3.6V



- 1300mAh Li-ion Battery. Long life battery pack, anti-pollution.
- Dual angle adjustment allows straight and angle use
- 6+1 Adjustable torque settings, maximum output torque up to 3 Nm
- Quick release chuck, switch for forward or reverse rotation.
- Battery power indication
- LED light provides convenient work in dark
- Over charging and discharging protection

Model No.	PT-1361A
Main body	Torque setting
	6+1 positions
	Rated no load speed
	200 rpm
	Output torque
	3 Nm (30.6 kgf-cm/26.55 lbf-in)
Special function	Drive (Collet)
	Hex 1/4 (6.3mm) quick release chuck
	Switch for forward or reverse rotation, 2 different angle settings Includes LED Light.
	LED Battery Power Status Indicator
Overall length: straight	235mm (L)/9.3"
	Overall length: angled
	170(L)x145(H)mm /6.7"x5.7"
Battery	Battery type
	Li-ion
	Battery voltage
	3.6V
	Battery capacity
	1300mAh
Adapter	Charging time
	3-5 hours
	Free running time
	60 min
Model No.	5PT-1361-ADA
	Input voltage
	120V AC 60Hz
	Output voltage
	DC 6V 300mAh
Standard Accessories	Adapter plug
	A 
Model No.	5PT-1361-P1 (4 pcs/set)
	Bits set
	4pcs 50mm driver bits: ⊖ 5.0, 6.0 ⊕ #1, #2,
	Model No.
	5PT-1080-P1 (13 pcs/set)
Other	Adapter
	Double blister



4pcs 50mm Driver Bits



LED light provides convenient work in dark



Battery power indication



Dual Angle

PT-1136A Cordless Lighted Screwdriver 3.6V



- No-Load Speed: 200rpm.
- Maximum output torque up to 2.5Nm
- Switch for forward or reverse rotation.
- Soft grip handle can be used in 3 different positions
- LED light provides convenient work in dark
- Great in tight and difficult to reach spaces

Model No.	PT-1136A
Main body	Torque setting
	None
	Rated no load speed
	200 rpm
	Output torque
	2.5 Nm(25.5 kgf-cm/ 22.13 lbf-in)
Special function	Drive (collet)
	6.35mm (1/4") Hex Bit Shank
	Switch forward or reverse rotation, LED light
	Handle can be used in 3 different position
Overall length: straight	270mm (10-13/16")
	Overall length: angled
	210x140mm (7-23/32")
Battery	Battery type
	Ni-Mh
	Battery voltage
	3.6V
	Battery capacity
	1000mAh
Adapter	Charging time
	5-7 hours
	Free running time
	30-35 min. (unload speed)
Standard accessories	Input voltage
	120V AC 60Hz
Other	Output voltage
	DC 6V 300mA
Model No.	Adapter plug
	A 
2 pcs magnetic insert bits holder	11 pcs 25mm driver bits: ⊖ 3.0, 4.0, 5.0, 6.0, 7.0 ⊕ #1, #2, #3 ⊕ T10, T15, T20
	Adapter
	Double blister card



PT-5721A Mini Grinder Set



- 1000mAh Li-ion Battery. Long life battery pack, anti-pollution.
- Low vibration, high torque and lightweight ergonomically designed
- Adjustable speed settings
- Quick Release Chuck
- Battery Power Indication
- LED light provides convenient work in dark
- Ideal for lightweight grinding, drilling, cutting, polishing, sanding, milling, sharpening, engraving and many other uses



Standard accessories: 9PT-5721-P2



LED light provides convenient work in dark



Battery power indication




On/Off speed adjustable controller

Max. diameter	Ø3.2mm
Rated no load speed	5000rpm~18000rpm
Battery Type	7.2V, 1000mAh, rechargeable Li-ion battery
Charging Time	3-5 hours
Free running time	60 min
Charger / Adaptor	Model No: 9PT-5721-CA Input voltage: 120V 60Hz Output voltage: DC 9V 300mA Adaptor plug: A ()
Standard accessories	9PT-5721-P2 • 2pcs brass collet (Ø2.4x1, Ø3.2x1) • 3pcs high speed drills (3/32" Ø2.4x 2, 1/8" Ø3.2 x1) • 2pcs Engraving bits (Ø2.4x 2) • 2pcs diamond bits (Ø3.2 x 2) • 2pcs nylon brush (Ø2.4, Ø3.2) • 4pcs grinding stones (Ø2.4x 2, Ø3.2 x2) • 1pcs sanding band (Ø2.4 x1)
Individual packing	Double blister card

PT-5201A Mini Grinder



- Low vibration, high torque and lightweight ergonomically designed.
- Natural and comfortable operation body shape.
- The quick-change chuck is ideal for drilling, polishing, engraving, routing, shaping, sanding and milling.

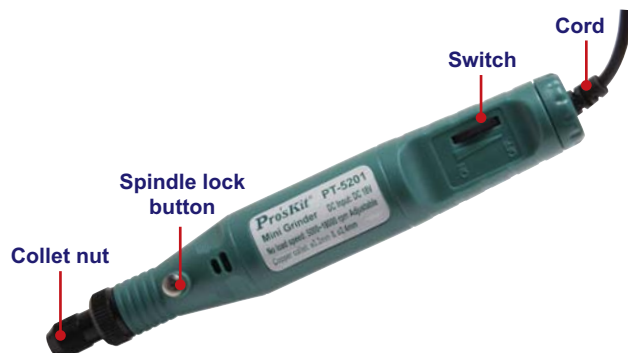

Replacement accessories: 9PT-5201-P2

Max. diameter	Ø3.2mm
Rated no load speed	5000~14000 rpm adjustable
Adaptor	9PT-5201A-P Output: DC 18V 400mA Input: AC 120V 60Hz Adaptor plug: A ()
Replacement accessories	9PT-5201-P2 • 2 pcs diamond bits • 2 pcs grinding stones • 2 pcs sanding bands • 1 pc collet (Ø 2.4/ Ø 3.2 mm) • 1 pc nylon brush • 1 pc engraving bit • 1 pc connective post for sanding band
Individual packing	Double blister card





FIBER OPTICS


Fiber Optic Tools Technical Basics

Pro'sKit® is a leading supplier of fiber optic tools and accessories. The **Pro'sKit®** one-stop shop provides complete solutions for fiber optic termination tools such as strippers, Kevlar cutters, viewing scope, testers, fiber scribes, and cleaning kit.

Fiber Optic Connectors:

ST connector	SC connector	LC connector	MTRJ connector
			
For datacom and telecom, widely used	For multimode, rarely single mode, APC not possible	For high-density connections, SFP transceivers	For duplex multimode connections

• Please refer to our LAN category to find above products. You will also see many LAN Cat5e/6 accessories, including Patch Panel, Keystone Jack, Patch cord, Modular Plug, Flush Plate & Back Box, Inline coupler and Fiber Optic accessories. please explore it and find what you are looking for!

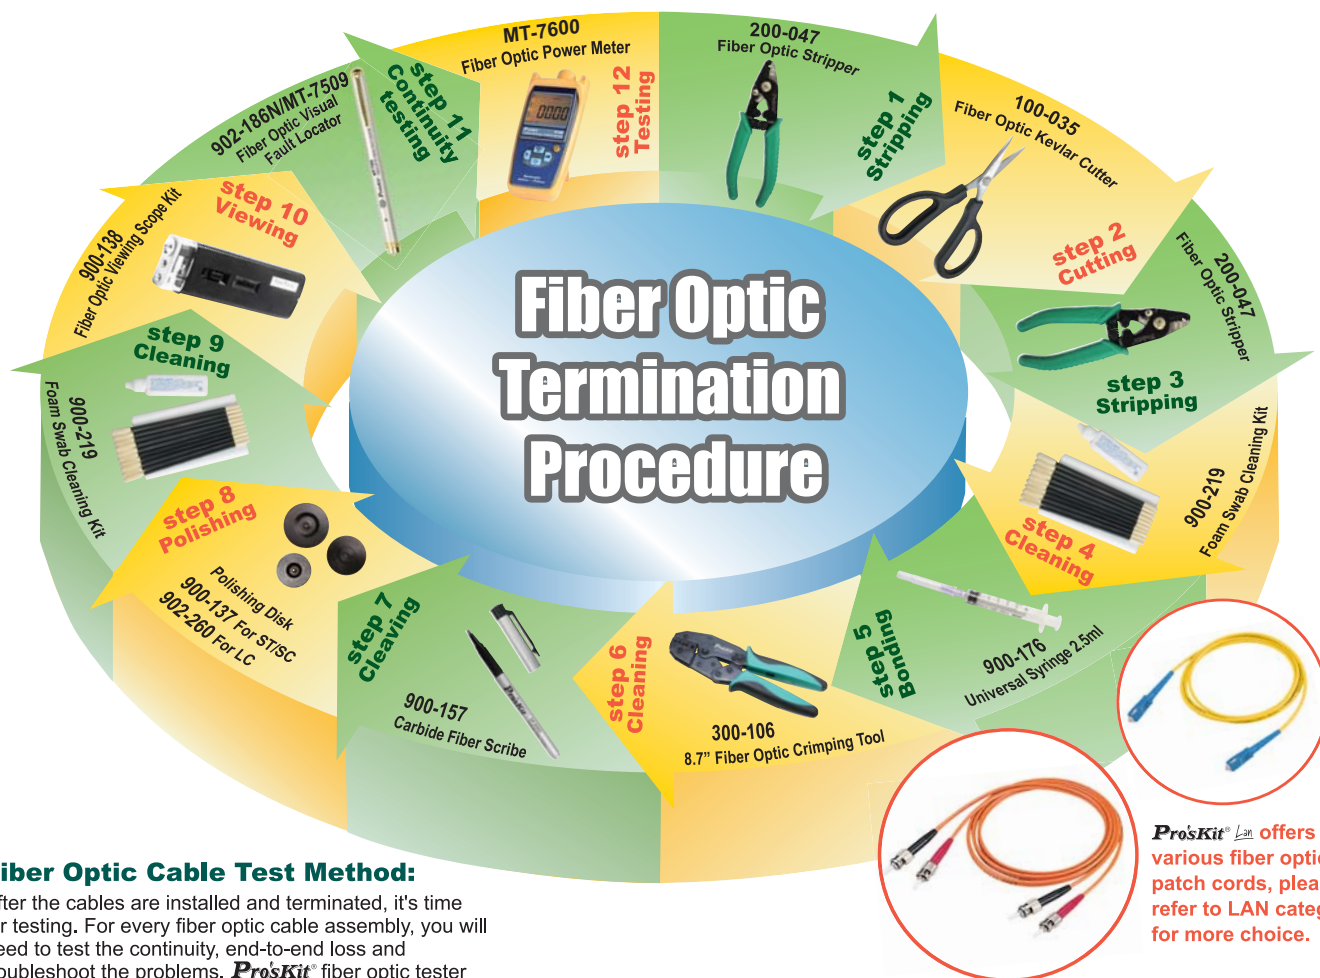


Fiber Optic Cable Test Method:

After the cables are installed and terminated, it's time for testing. For every fiber optic cable assembly, you will need to test the continuity, end-to-end loss and troubleshoot the problems. **Pro'sKit®** fiber optic tester will help to do this step more efficiently.

Continuity test by 902-186N/MT-7509



Continuity test



Break in fiber

End-to-end loss test by MT-7600



▶ MT-7600 Fiber Optic Power Meter




Comes with ST/FC/multi connector for measuring wavelength 850/1300/1310/1550 nm

Perfect for installation & maintenance of fiber optic networks in Datacom, Telecom, FTTH, CATV, CCTV, LAN and manufacturer of fiber optic equipment and cable.

Features:

- Use of InGaAs photodiode and flat response curve.
- Function: dBm, dB, W.
- Extra function, low battery indication, overload indication, auto power off, LCD backlight.

Specification	
Measurement range	+3dBm ~ -55dBm, 2mW ~ 4nW
Accuracy	±0.3dBm
Display resolution	0.01
Photo diode	InGaAs
Measurement wavelength	850nm, 1300nm, 1310nm, 1550nm
Connector type	Multi (for ST, SC, FC, connectors)
Power source	Alkaline battery DC 1.5V x4 pcs (LR03/ AAA/ UM-4) (not included)
Size	185×84×42 mm / 7.3"×3.3"×1.7"
Weight	420 g
Accessories	Carrying case x 1pcs (209×190×65mm) / 8.2"×7.5"×2.6" Patchcord: SCx1 pc LC adaptor (optional part# 5MT-7600-LC)
Individual packing	Sleeve with white box



Fiber optic power test



▶ 902-186N/MT-7509 Fiber Optic Visual Fault Locator



Measuring distance : 8KM



902-186N



MT-7509



Model No.	Connector type	Light source	Nominal wavelength	Battery	OAL(mm/inch)	Individual packing
902-186N	2.5mm/0.1" (FC/SC/ST)	Class 3A laser diode	650±10nm	1.5V AAA x2pcs (Not included)	Ø13.5x155mm/ Ø0.53"x6.1"	Color box with black EVA inner case
MT-7509	1.25mm/0.05" (LC)	Class 3A laser diode	650±10nm			

▶ 900-168 **Fiber Continuity Tester**

Light source	Battery	OAL(mm/inch)	Individual packing
Bulb	1.5V AAx2pcs (Not included)	Ø 18x160mm Ø0.71"x6.3"	Blister card

▶ 900-138 **Fiber Optic Viewing Scope Kit**

This fiber optic viewing scope kit makes it simple to view ST/SC Pre-encapsulated FDDI, and the ends of fiber before and after cleaving operations.



Made in USA



Magnification	Light source	Battery	OAL (mm/inch)	Individual packing
100X Adjustable	Bulb 2.25V/0.25A	1.5V AAx2pcs (not included)	148x46x25mm/ 5.8"x1.8"x0.98"	Blister card

▶ 100-035 **Fiber Optic Kevlar Cutter**

For cutting Kevlar
fiber optic cable



Micro serrated

Handle material	Blade HRC	Hardness (Cutting edge)	OAL (mm/inch)	Individual packing
TPR	60°-62°	HV1200	160/6.3"	Blister card

▶ 900-157 **Carbide Fiber Scribe**

OAL(mm/inch)	Individual packing
Ø12x130mm Ø0.47"x5.12"	Blister card

▶ 200-047 **Fiber Optic Stripper**

Strips 125 micron glass fiber with 250 micron buffer coating without scratching or nicking glass fiber.



Material	HRC	OAL(mm/inch)	Individual packing
S50C	48°±2°	148/5.8"	Blister card

▶ 900-176 **Syringe Pack**

Individual packing
Poly bag+Header card (3pcs/pack)

PK-6940 / PK-6942 Fiber Optic Tool Kit

The tool kit contains a complete set of fiber optic termination tools such as strippers, crimpers, kevlar cutters, viewing scope and testers, also available are fiber scribes, and cleaning kit for easy and quick termination.

PK-6940	PK-6942
Fiber optic visual locator (For LC connector)	(None)
Fiber optic visual fault locator (For FC/SC/ST connector)	
Foam swabs cleaning kit	
Fiber optic viewing scope kit (SC/PC/FC)	
Fiber optic viewing scope disk (LC)	
Fiber optical stripper	
Carbide fiber scribe	
LC/SC/ST Fiber polishing disk	
Universal syringe 2.5ml	
8.7" fiber optic crimping tool	
Fiber optic kevlar cutter	
Utility component storage box	
Deluxe compact tool case (250x210x90mm/9.8"x8.3"x3.5")	
Individual packing	
Color Box	



500-023 Fiber Optic Tool Kit

Contents	
Crimper - with additional die for more connector types (.100"/.213"/.218"/.190" and .042/.068/.151/.178/.213)	
Nick-free strippers	
Ergonomic wire cutters	
Kevlar cutting scissors	
TrueView fiber scope kt	
SC/ST/FC polishing disks	
Double-sided component box	
Swabs	
Alcohol bottle	
Syringe	
Tweezers	
Chisel tip scribe	
Zippered case	
Individual packing	
Inner box + Color label shrink	



900-219 Foam Swabs Cleaning Kit



For clean up of organic & inorganic residue in clean room and other areas. Ideal for fiber optic clean work



Individual packing
Blister card

900-137/902-260 SC/ST/LC Polishing Disk



- Insert connector into polishing disk.
- Polish using a figure 8 motion on sandpaper sheet (not included)



900-137
(For SC/ST)



902-260
(For LC)



Model No.	OAL (mm/inch)	Individual packing
900-137	32.8/1.3"	Blister card
902-260	37.8/1.5"	



MISCELLANEOUS

FL-603 LED Flexible Flashlight

- Sturdy anodized aluminum construction, 13.6" hands free flexible arm attachment
- Flexible cable extension that can be bent and twisted into any shape or angle
- White light brightly illuminates even the tightest work areas
- Two-way tail cap switch allows for twist on/off capability or push and hold functionality
- Ideal for auto repair, workshop or home DIY use and more

New

LED Light



Auto repair



Electrical check



White light illuminates the tightest work areas


Light source	Illumination	Cable size	Handle size	Battery
White LED	11000mcd	Ø5mm x 13.6"	Ø15mm x 6.9"	1.5V AAA x 3pcs (not included)

- Individual packing: Blister card



CE-027 Pin Extractors

- Designed for use with various connectors such as MOLEX, AMP, TYCO, etc
- 5 different size insertion tools
- Available individually or as a set of 5 in a pouch



New



Put the pin extractor into housing



Push the plunger of pin extractor



Extract the pin

Model No.	L	DØ	dØ	(D-d)/2	Remark
902-394	0.45"	0.150"	0.122"	0.014"	-
902-395	0.57"	0.106"	0.085"	0.011"	Inter-locking
902-396	0.50"	0.157"	0.110"	0.023"	-
902-397	0.79"	0.126"	0.102"	0.012"	V.35 male
902-398	0.67"	0.130"	0.110"	0.008"	V.35 female
Individual packing				Blister card	


- CE-0275 Contents: One each of five extractors above.
Comes in plastic carrying pouch.



900-150/900-151/900-202 Measuring Tape



- Blade with Nylon coating for easy scale reading and avoiding light reflection.
- Magnetic end-hook for convenient measuring.
- Anti-slip and shockproof rubber case.
- Hi-rel power tape.



900-150



900-151



900-202

Model No.	L (Max.)	W (Max.)	Individual packing
900-150	5M/16ft	23.0mm/0.91"	Blister card
900-151	7.5M/25ft	24.5mm/0.96"	Blister card
900-202	7.5M/25ft	32.0mm/1.26"	Blister card

400-044 6" Digital Caliper

- Hardened stainless steel.
- High quality 6"(150mm), thumb wheel for accuracy and ease with 4 measurement: inside, outside, depth and step.
- Precision-ground and lapped measuring surface.



Depth diameter measurement



Inside diameter measurement



Outside diameter measurement

Material	Range	Accuracy	Individual packing
AISI430	0~150mm/0~6"	±0.01mm/0.0005"	Plastic box + Color label sleeve


PD-155 9" Torpedo Level

- Lightweight and compact
- With magnet for hands-free work
- Provides accurate readings, including horizontal, vertical and 45-degree angles.
- Easy-to-read with fluorescent green gauges




Material	3 vials	OAL	Individual packing
ABS plastic construction	45°, 90° & 180°	220mm/9"	Blister card

900-019 5 PCS Needle File Set



Material	HRC	Cut length	Handle O.D.	OAL	Individual packing
SKS-8	60°	75mm/ 3.0"	Ø 5mm/ Ø 0.2"	170mm/ 6.7"	Pouch

900-216 5 PCS Needle File Set



Material	HRC	Cut length	Handle O.D.	OAL	Individual packing
SKS-8	60°	85mm/ 3.3"	Ø 7mm/ Ø 0.28"	180mm/ 7.1"	Pouch

900-247 Round Hole Bread Board



- 840 tie points
- Round hole designed for easy plug and pull
- Expandable by combining several boards together to meet your different requirement
- Wearproof material made of ABS & phosphor bronze with good flexibility and electric conductivity




Excellent expandability



Friendly graduations

Individual packing

Blister card

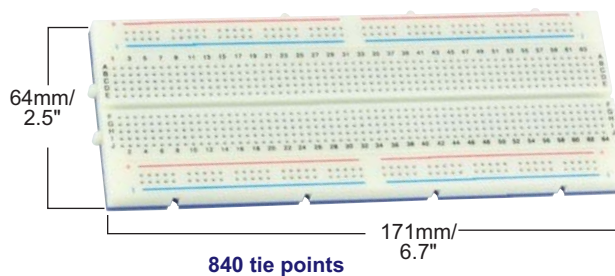

900-248/900-249 Round Hole Bread Board



Application:



Used as a simulated layout for R&D and students.

Features:

- Round hole designed for easy plug and pull
- Expandable by combining several boards together to meet your different requirement
- Wearproof material made of ABS & phosphor bronze with good flexibility and electric conductivity



Edge plate can easily fold up

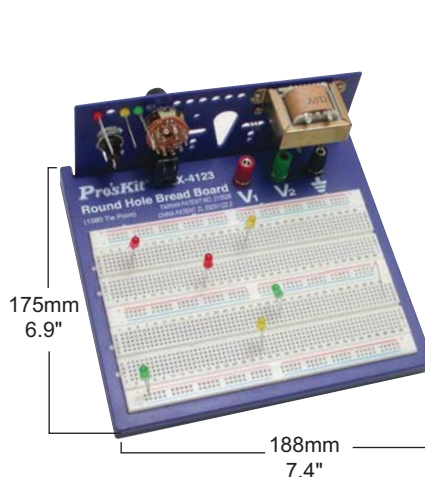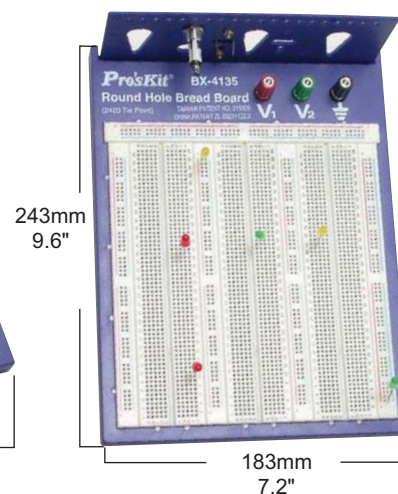
900-248 1580 tie points
(Demo only)

900-249 2420 tie points
(Demo only)

Model No.	Tie points	Individual packing
900-248	1580	Blister card
900-249	2420	

TAIWAN PATENT NO. 215526
CHINA PATENT ZL 03231122.2

900-271/900-272 Bread Board Accessory





- 70 pcs of 22 AWG solid wires
- Pre-cut, pre stripped and pre-formed on each end
- Variety of colors
- Completely reusable
- 14 lengths x 5 pcs each
- (2, 5, 7, 10, 12, 15, 17, 20, 22, 25, 50, 75, 100 and 125mm)

- 350pcs of 22 AWG solid wires
- Pre-cut, pre stripped and pre-formed on each end
- Variety of colors
- Completely reusable
- 14 lengths x 25 pcs each
- (2, 5, 7, 10, 12, 15, 17, 20, 22, 25, 50, 75, 100 and 125mm)

**900-271****900-272**

Case Size (mm/inch)	Individual packing
165x55x15/ 6.5x2.2x0.6	Poly bag + Hanger

Case Size (mm/inch)	Individual packing
178x90x28/ 7x3.5x1.1	Poly bag + Hanger

▶ **900-032 PLCC Extractor**

A spring assisted chip carrier extraction tool, specially designed for the safe removal of PLCC's from sockets without damage to component parts.


Material	OAL (mm/inch)	Individual packing
AISI 410 + POM	100x50/ 3.9"x2"	Blister card

▶ **902-224 PLCC Extractor**

Material	OAL (mm/inch)	Individual packing
AISI 210 + POM	145x76/ 5.7x3"	Blister card

▶ **900-094 3-Pronged Parts Grabber**

- Plunger opens prongs




Individual packing
Blister card

▶ **900-258 IC Extractor**

Stainless steel construction for removing dual in-line IC packages. (Insulated vinyl grip.)



Individual packing
Blister card

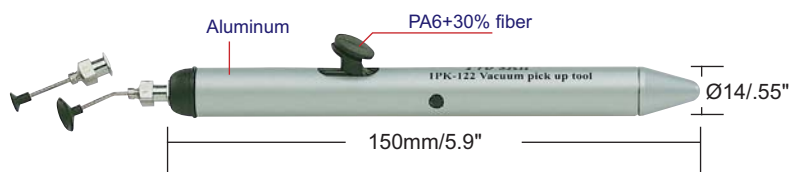▶ **900-238 Vacuum Pick-Up Tool**

- The hand-held SMD vacuum pick-up tool is ideal for picking up and moving electronic components, large or small. With fountain pen dimensions, it fits easily into your hand or pocket.
- The new high-power probes have longer holding action.

Function:

- Lightweight, portable and suitable for picking and placing small components weighing up to 50 grams and having a flat surface, dilly packages and surface mount components, etc.

Individual packing
Color box

▶ **902-115 Vacuum Pick-Up Tool**

Function:

- The hand-held SMD vacuum pick up tool is ideal for picking up and moving large or small electronic components.
- Lightweight, portable and suitable for the picking and placing small components weight to up 50 grams and having a flat surface, dilly packages and surface mount components, etc. The new high-power probes have longer holding action.



Individual packing
Blister card

900-103 Inspection Mirror



- All-angle ball joint mirror with stainless steel back.
- Visual inspection of hidden areas.
- Double ball joint links swivel mirrors for viewing to 360°.
- Made of tempered spring steel to move freely and hold desired position.
- Replaceable, plated, copper-backed, clear-view mirror.
- Non-rotating inner hex rods prevent mirror from swinging out of alignment.
- Insulating vinyl grip.



Lens size	OAL (mm/inch)	Individual packing
50x90mm (2"x3.5")	216 ~ 490 / 8.5"~19.3"	Blister card



360° double ball joint



900-255 Inspection Mirror

Brass tube with
chrome plating

360° double ball joint



Lens size	Extension length	Individual packing
Ø32mm (1.25")	178~505mm (7.9"~19.9")	Blister card

900-212 Telescoping Magnetic Pick-up Tool



- Strong pick up force of 9 lbs.
- Allows access to "hard-to-reach" parts.
- Telescopes from 6-1/2" to 25-5/8"



Individual packing
Blister card

MS-322 Telescopic Magnetic Pick-Up Tool



- A handy chrome plated telescopic magnetic retrieving tool.
- Ideal for hard-to-reach working.
- Extension length: max. 450mm(17.7")
- Maximum pick-up: 590g(1.3lb)



Individual packing
Blister card



800-070 Magnetizer Demagnetizer



- A convenient pocket sized tool, housed in a strong plastic case.
- Ideal for the general magnetizer demagnetizer of small hand tool i.e screwdriver, hexagon keys.



Individual packing
Blister card



800-039 20 in 1 Screwdriver With Telescoping Pick-Up Tool



- Regular screwdriver with 13-pcs. screw bits
5-pcs. sockets and 1-pcs socket adaptor fits
all kinds of job.
- Telescoping magnetic pick-up tool
(up to 17-1/2" long/440mm) stored inside the
tube pulling out to pick up small metal objects.

Individual packing
Blister card



Magnetic pick-up: 250g(Max.)

900-205 4 PCS Probe Set

Pb




- 4pcs stainless steel single-ended probe that can be used for all kinds of precision work in electronics.
- Hook, curved, straight and angle tips 4 types packed in a vinyl pouch.

Material	OAL (mm/inch)	Individual packing
AISI 410	Straight:145/5.7 Angled:140/5.5	Pouch

902-070/902-073 Spring Hook

Pb


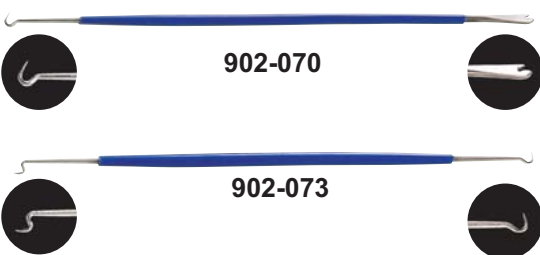


- Can grab small spring and wires.

Model No.	Material	OAL (mm/inch)	Individual packing
902-070	AISI 410	205/8	Blister card
902-073	+ PVC		

902-256/902-257 Push-button Pick-up Tool

Pb

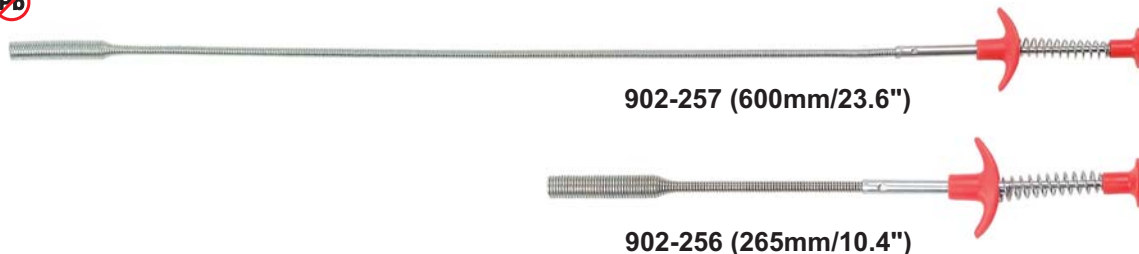

Open the jaws

Pick up the object easily

- 900-256: Push-Button Pick-Up Tool has a 265mm /10.4" flexible stem with a small set of jaws at one end.
- 900-257: Long Push-Button Pick-Up Tool has a 600mm /23.6" flexible stem with a small set of jaws at one end.
- Ideal for home, shop, garage, work place etc.

Individual packing

Blister card

902-255 Long Pick-up Tool with Magnet Tip

Pb



902-255 (620mm/24.4")



Pick up small metallic objects from inaccessible areas

- Long Pick-Up Tool with Magnet Tip is an extendable magnetic tool for picking up small metallic objects from inaccessible areas.
- This Pick-Up Tool has a 620mm/24.4" flexible stem with a strong magnet at one end.
- Powerful magnet lifts 1.5KG
- Ideal for home, shop, garage, work place etc.

Individual packing

Blister card

902-117 Multi-Angle Swivel-Actions Vacu-Vise



- Suction areas must be smooth, flat and clean.
- Adding a little water under vacuum base is recommended.

- Swivels 360° and tilts 90° to desired angle.
- 2.8" (70mm) metal jaws open to 2.7" (68mm).
- Equipped with slide-on rubber jaw for fragile work.
- 6 1/4" (158mm) triangular base.
- Aluminum die-cast construction.
- Light weight and durable.


Replacement Jaw	Individual packing
902-117-JAWS	Plain box+Color label



900-049 Hobby Vise



Individual packing
Blister card

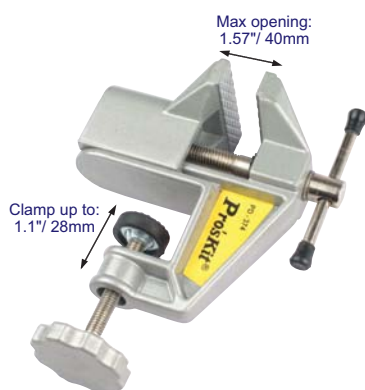

PD-372 Mini Vise



Individual packing
Blister card



902-116 6 In 1 Mini Hammer



- The 6 in 1 mini hammer with six different interchangeable heads:
two round steel, one flat brass, one flat plastic and one tinner's steel.

OAL(mm/inch)	Individual packing
185/7.3	Blister card

900-179 Heavy Duty Curved-Claw



Material	Weight	OAL (mm/inch)	Individual packing
Handle: Fiberglass, S45C	454g (16 oz/1 lb)	330/13	Tag

900-058/900-181/900-222 Stainless Steel Forceps



Model No.	Material	Type	OAL (mm/inch)	Individual packing
900-058	AISI 410	Straight	130/5"	Blister card
900-181			160/6"	
900-222		Curved	155/6"	



900-058
900-181



900-222

▶ **900-254 Blowing Brush**

- Clean blowing air effectively clears.
- Ideal for blowing hard-to-reach areas.



Material	OAL. (mm/inch)	Individual packing
Rubber + PC	ø62x130/ø2.4x5.1	Blister card

▶ **900-270 Mini Vacuum Cleaner**

Material	OAL (mm/inch)	Individual packing
polypropylene	128/5"	Blister card

▶ **900-251/900-252/900-253 Liquid Dispenser Bottles**

- Polyethylene bottles are not chemically reactive
- Purity pump to prevent backwash of contaminants into container

**900-253****900-252****900-251**

Model No.	Description	Individual packing
900-251	4 oz/114 ml	Poly bag + Hanger
900-252	6 oz/170 ml	Poly bag + Hanger
900-253	8 oz/227 ml	Poly bag + Hanger

▶ **900-230 Flux Bottle**

- Dispenses flux evenly with a fine tipped needle.



ø0.9x34mm

Material	OAL. (mm/inch)	Individual packing
PE	ø37x122/ø1.5x4.8	Poly bag + Hanger (2 pcs/pack)

▶ **900-158 Automatic Center Punch**

High speed steel (HSS)



Tip Material	OAL (mm/inch)	Individual packing
HSS	133/5.2	Blister card

▶ **900-177 Multi-Fuse Puller**

- Shock-proof durable plastic
- Serrated grip design to prevent slipping
- Safely removes 0~200A/250V and 0~100A/600V Cartridge fuses



Individual packing
Blister card



INSTRUMENT CASES


TC-265 / TC266 / TC-267 Heavy Duty Waterproof Case



water-tight seal for equipment protection



Comes with Pick and Pluck foam.





Model No.	Material	Loading Capacity	I.D.(LxWxH) (mm/inch)	O.D.(LxWxH) (mm/inch)	Individual Packing
TC-265	ABS	20 Kg/44Lb	430x290x163 17x11.4x6.4	455x340x175 18x13.3x7	Color label shrink
TC-266		15 Kg/33Lb	330x217x160 13x8.5x6.3	340x260x170 13.3x10.2x6.7	
TC-267		15 Kg/33Lb	300x180x153 11.8x7.1x6	328x232x170 13x9.1x6.7	

SB-3218 / SB-4121 Multi-Function Tool Box With Removable Tote Tray



- Impact resistant
- Lift out tray
- Easy organization, easy to find



Model No.	Material	Loading Capacity	Dimension (LxWxH) (mm/inch)	Individual packing
SB-3218	polypropylene	5Kg/11Lb	315x175x130/ 12.4x6.9x5.1	Color label shrink
SB-4121		10Kg/22Lb	410x210x185/ 16.1x8.2x7.2	




SB-4121

SB-3218

SB-2918 Multi-Function Tool Box With Storage Tray



- Made from high-impact resistant polypropylene.
- Heavy-duty tool box is ideal for home, office, auto or craft.
- Portable lift-out plastic storage box inside, great for keeping small items organized
- Comfortable and rugged handle for convenient carrying.



Material	Loading Capacity	Dimension (LxWxH) (mm/inch)	Individual packing
polypropylene	5Kg/11Lb	290x175x175/ 11.4x6.9x6.9	Color label shrink



SB-3428SB / SB-4536B Service Case



Double sided
opening




Demo only

SB-3428SB

- Double sided opening
- Adjustable dividers up to 15 compartments and 5 large and 5 small removable inserts in the other side for storage flexibility

Model No.	Material	Dimension (LxWxH) (mm/inch)
SB-3428SB	polypropylene	340x280x80 13.6x11.0x3.1
SB-4536B	+ polystyrene	450x355x75 17.7x14.0x3.0
Individual packing		
Color label shrink		



Unit: inch



Demo only

SB-4536B

- 6 large and 6 small removable inserts for storage flexibility

- Made from high impact resistant polypropylene and polystyrene, sturdy and durable
- Properly divided spaces reach the different needs of any small components
- Integrated handle and two locks for convenient carrying.
- Easy to store, easy to find


SB-2419 Storage Box




- Tight seal between top and compartments prevents small components from being mixed while closed.



Sliding lock



Demo only



Unit: inch


Material	Dimension (LxWxH) (mm/inch)	Individual packing
Polypropylene	238x192x42 9.4x7.6x1.7	Color label shrink

9BX-3018B Blow Molded Case-Black

This rugged molded case features storage for either Lunar or Crimpro frames and up to five of our standard dies (including one in the frame). This small, compact design is excellent for use in the field.



Demo only




Unit: inch

Material	Dimension (LxWxH) (mm/inch)	Individual packing
HDPE	256x156x46 10.08x6.14x1.81	Color label shrink

▶ 900-040 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	275x177x42.5/10.8x7.0x1.7	Shrink packing

▶ 900-039 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	260x115x43.5/10.2x4.5x1.7	Shrink packing

▶ 902-112 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	210x119x32/8.3x4.7x1.3	Poly bag

▶ 902-113 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	76x61x21/3.0x2.4x0.83	Shrink packing

▶ 900-041 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	200x135x39/7.9x5.3x1.5	Shrink packing

▶ 900-043 Utility Component Storage Box



Demo only




Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP/PE	165x95x45/6.5x3.7x1.8	Shrink packing

▶ 902-114 Utility Component Storage Box



Demo only



Unit: inch

Material	Dimension (mm/inch)	Individual packing
PP	187.5x117x22/7.4x4.6x0.87	Poly Bag

▶ 900-091A Parts Tubes




Material	Dimension (mm/inch)	Individual packing
PP	Ø20x130/Ø0.79x5.1	Clamshell (3pcs/pack)

900-164A/900-164B Instrument Cases




- The durable ABS plastic cases allow for various PCB mounting positions. Adhesive feet and screws are included, choose from 2 sizes. 900-164B has ventilation slots and speaker recess.

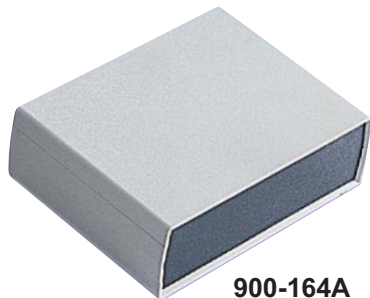


900-164A



900-164B



Demo only



Model No.	Material	L(mm/inch)		W(mm/inch)		H(mm/inch)		Individual packing
		OD	ID	OD	ID	OD	ID	
900-164A	ABS	200/7.9	197/7.8	158/6.2	146/5.7	64/2.5	58/2.3	Poly bag
900-164B		253/10.0	250/9.8	190/7.2	176/6.9	82/3.2	76/3.0	

900-162A/900-162B/900-162C Die Cast Aluminum Enclosures



- The heavy-duty enclosures are made of high quality die-cast aluminum and have channeled walls for easy PCB mounting.
- These enclosures act as excellent heat sink.
- Easy assembly screws included.




900-162A




900-162B



900-162C




Demo only



Model No.	Material	L(mm/inch)		W(mm/inch)		H(mm/inch)		Individual packing
		OD	ID	OD	ID	OD	ID	
900-162A	Aluminum	101/4.0	97/3.8	50.6/2.0	46.6/1.8	20.7/0.81	18.8/0.74	Shrink packing
900-162B		121/4.8	116.9/4.6	66.1/2.6	62/2.4	35.4/1.4	33.5/1.3	
900-162C		193.5/7.6	187.5/7.4	112.4/4.4	106.5/4.2	56.2/2.2	54/2.1	

Width of inside grooves:
2.95mm/0.16"

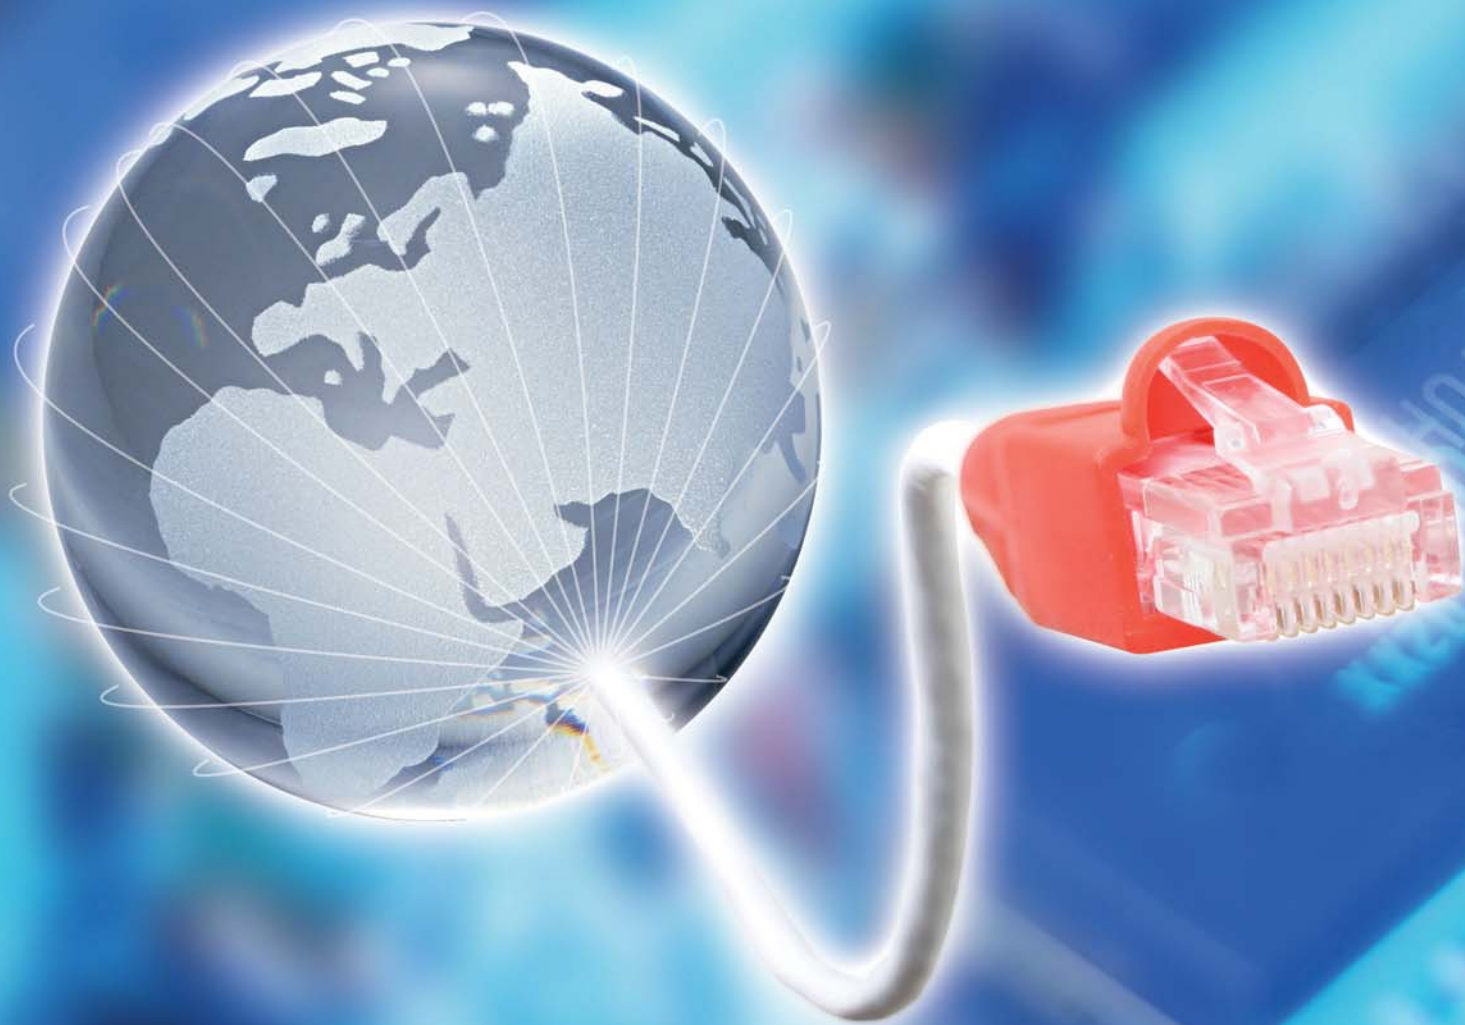

LAN/DATACOMM

Cat.6/5e UTP Patch Panels with 45° Jack






Our Cat.6/5e patch panels are used for high speed LAN's transmission. These panels were developed with a proprietary printed circuit board technology which results in performance to meet EIA/TIA 568A Category 5e Enhanced & Category 6 specifications. The new version of 110D terminal block can be used for both Krone & 110 tool, and has 568A and 568B color codes both on the top of new version 110D IDC for easy installation.

Features

- Can be used with 110 and Krone punch down tools
- Accept 22-26 AWG solid and stranded UTP cables.
- Meets T568A & T568B standards
- Standard 19" Rack Mount

Specification

- Panel: 1.5mm thick metal, black paint
- Jack: RJ45 8P8C, PBT UL94V-0 Ivory color, 50 micro inches gold plating over nickel plating
- Terminal Block: New version 110D connector, PC UL94V-0, white color
- Jack Bracket Set: ABS UL94V-0

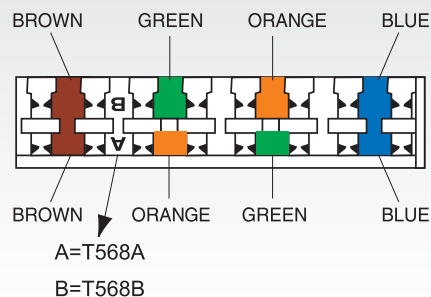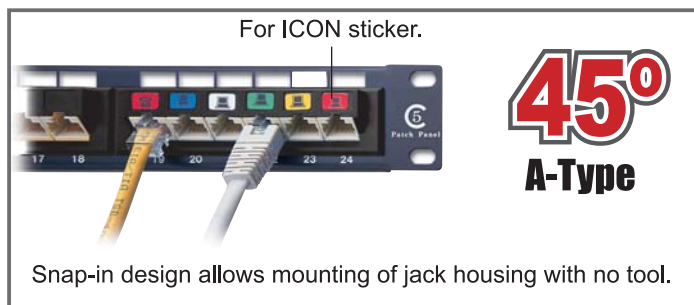

New Version 110D Terminal Block

Can be used for both krone & 110 style impact tool


Remark:

Cable tie and cable holder are included for 45 degree angle and top entry type unshielded patch included panel.

Model No.	Description	Individual packing
7P-12AK11CEC-BK	12 Ports CAT.5e UTP Patch Panel	Color box
7P-24AK11CEC-BK	24 Ports CAT.5e UTP Patch Panel	Color box
7P-48AK11CEC-BK	48 Ports CAT.5e UTP Patch Panel	Color box




Cat.6/5e UTP Patch Panel with Top Entry Type



Old IDC Block

When one core wire is installed into one old IDC pin, it is pierced with two parallel blades




New IDC Block

New IDC is similar to one pair of scissors. When one core wire is installed into one new IDC pin, the wire is pricked first with two sharp blades and then clipped.


By simulating one pair of scissors, new IDC guarantees more precise puncture of wire core after clipping with two sharp blades.

port indication UL Certified

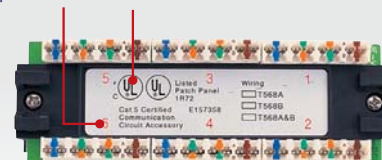


New 110D terminal block can be used for both "Krone & 110 style" impact tool

CABLE HOLDER



New design of the cable holder can directly plug and lock onto P.C.B. It is more convenient for cable management. Each module comes with one cable holder.

CABLE TIE



Every module comes with a built-in jacket bracket with cable tie holders which use cable ties to hold the cable securely and to prevent pull-away.

Model No.	Description	Individual packing
7P-12TK11CEC-BK	12 Ports CAT.5e UTP Patch Panel	Color box
7P-12TK11C6C-BK	12 Ports CAT.6 UTP Patch Panel	Color box
7P-24TK11CEC-BK	24 Ports CAT.5e UTP Patch Panel	Color box
7P-24TK11C6C-BK	24 Ports CAT.6 UTP Patch Panel	Color box
7P-32TK11CEC-BK	32 Ports CAT.5e UTP Patch Panel	Color box
7P-48TK11CEC-BK	48 Ports CAT.5e UTP Patch Panel	Color box
7P-48TK11C6C-BK	48 Ports CAT.6 UTP Patch Panel	Color box

ESD STATIC
PROTECTION

MAGNIFICATION &
LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT
CASES

LAN/DATACOMM

CONNECTORS


WIRING
INSTALLATION

TOOL CASES

TOOL KITS

Index

Cat.6/5e Mini 12 Port Patch Panels

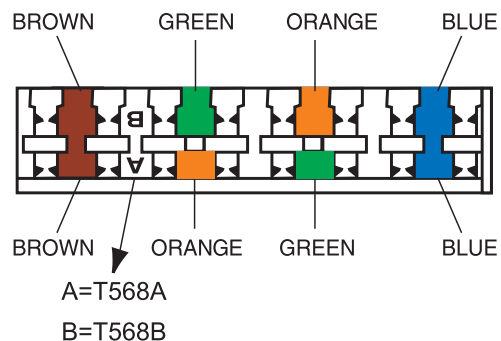

Color Coding Information

IDC Terminals		T568A Pair/Wire Color		T568B Pair/Wire Color
PIN5 PIN4	1	White/Blue Blue	1	White/Blue Blue
PIN1 PIN2	3	White/Green Green	2	White/Orange Orange
PIN3 PIN6	2	White/Orange Orange	3	White/Green Green
PIN7 PIN8	4	White/Brown Brown	4	White/Brown Brown


Our Cat.6/5e patch panels are used for high speed LAN's transmission. These panels were developed with a proprietary printed circuit board technology which results in performance to meet EIA/TIA 568A Category 5e Enhanced & Category 6 specifications. The new version of 110D terminal block can be used for both Krone & 110 tools, and has 568A and 568B color codes both on the top of new version 110D IDC for easy installation.

Features

- Can be used with 110 and Krone punch down tools
- Meets T568A & T568B standards
- Supplied w/mtg bracket
- Great for home use

Specification


- Panel: 1.5mm thick metal, black paint
- Jack: RJ45 8P8C, PBT UL94V-0 black color, 50 micro inches gold plating over nickel plating
- Terminal Block: New version 110D connector, PC UL94V-0, white color
- Jack Bracket Set: ABS UL94V-0

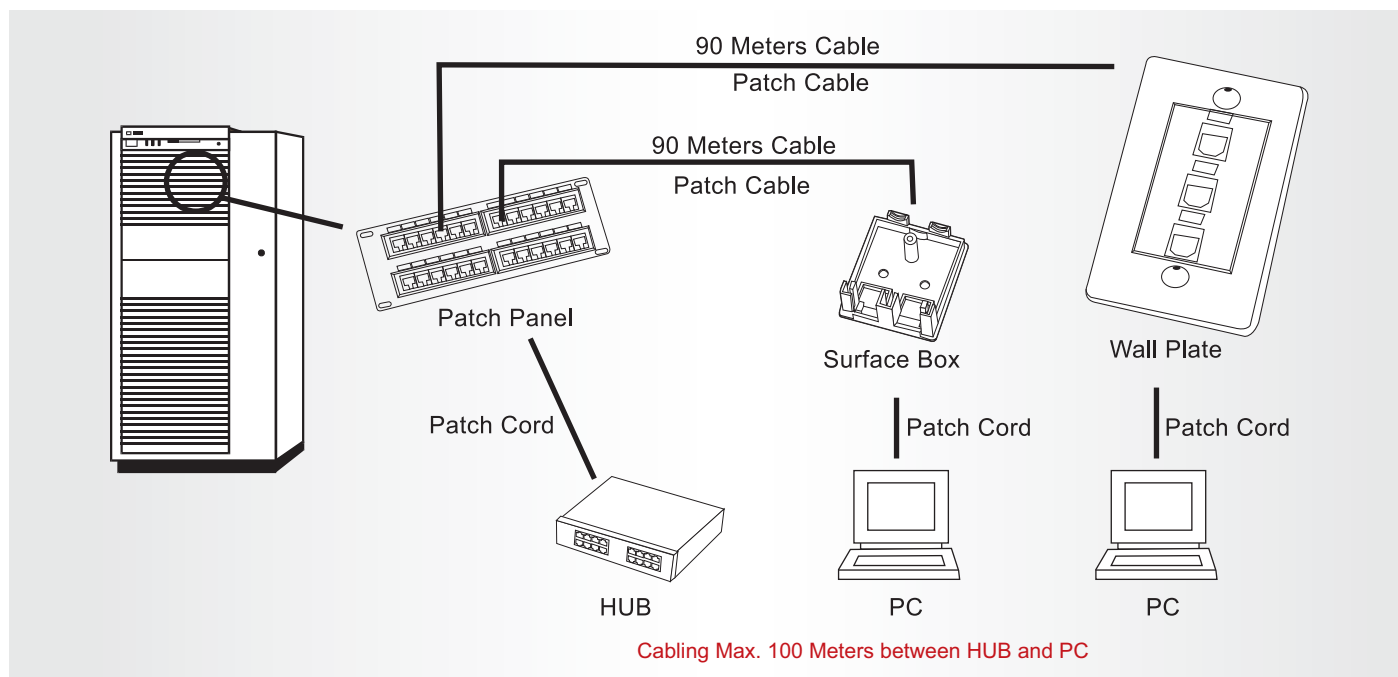

Model No.	Description	Individual packing
7PMV12T-K11-CEC/BK	CAT.5e Mini-Vertical 12 Ports Patch Panel	Inner box+Color label
7PMV12T-K11-C6C/BK	CAT.6 Mini-Vertical 12 Ports Patch Panel	Inner box+Color label

7KJ-P24-M 24 PORT KEYSTONE JACK PANEL-BLANK

24 Port blank keystone panel is versatile, allowing all snap-in Keystone Jacks, such as Cat5e, Cat6, RJ11 keystone jacks or, BNC, F, RCA, fiber type keystone inserts. Making it perfect for ethernet, voice or audio/video applications

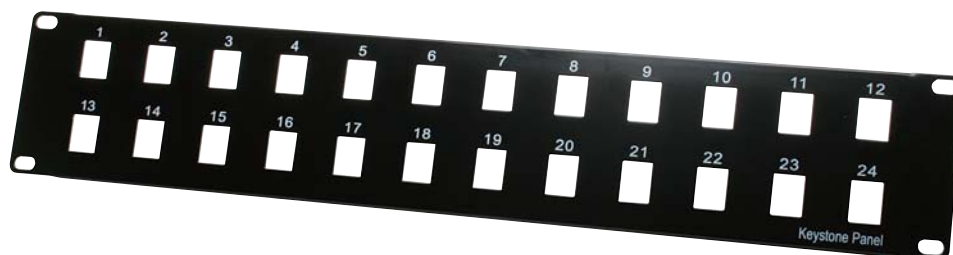

Features

- Made from Cold Rolled Carbon Steel (SPCC)
- Clearly numbered 1-24 on the front for easy cable runs identification
- Mounts on any standard 19" Relay Rack, Cabinet, or wall Bracket.
- Blank patch panel for easy use in any combination of keystone jacks or inserts
- Dimensions: 3.5"(H) x 19"(W), keystone opening dimensions: 0.76"(H)x0.57"(W)



Demo only

Tool-less Keystone Jack





Application

Suitable for 23-24 AWG Wires



Unshielded Version

Our keystone jack has our advanced design IDC terminals with plastic lid. Tool-less design makes installation and maintenance of your T568A and B wiring system easy. The keystone jacks are available in EIA/TIA 568A Cat.5e & Cat.6 specification.

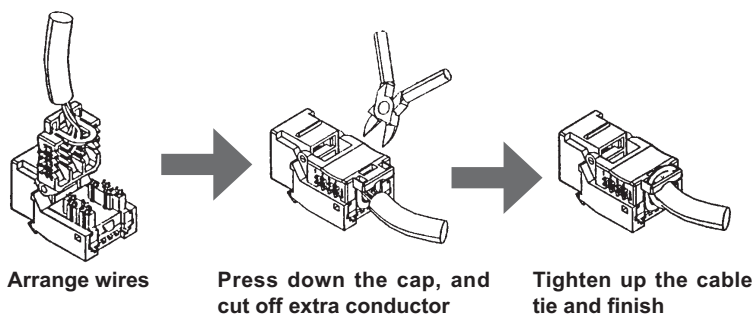

It can be used for fastening the cable.

US Type


Model No.	Category	Description	Color	Individual packing
7KJ15-CEUSBL	Unshielded CAT.5e	Tool-less Keystone Jack	Blue	Poly Bag
7KJ15-CEUSWH	Unshielded CAT.5e	Tool-less Keystone Jack	White	Poly Bag
7KJ15-C6USBL	Unshielded CAT.6	Tool-less Keystone Jack	Blue	Poly Bag
7KJ15-C6USWH	Unshielded CAT.6	Tool-less Keystone Jack	White	Poly Bag

110 Style Punch Down Keystone Jack



Specification

- Jack: RJ45 jack, ABS UL94V-0
- Contact: Phosphor bronze, 50u" gold plating over nickel plating in contact area and tinned lead on soldering area
- 110 IDC: PC UL 94V-0, terminal phosphor bronze, and tinned Color code sticker that can combine two T568A & B wiring to save stock and easy installation

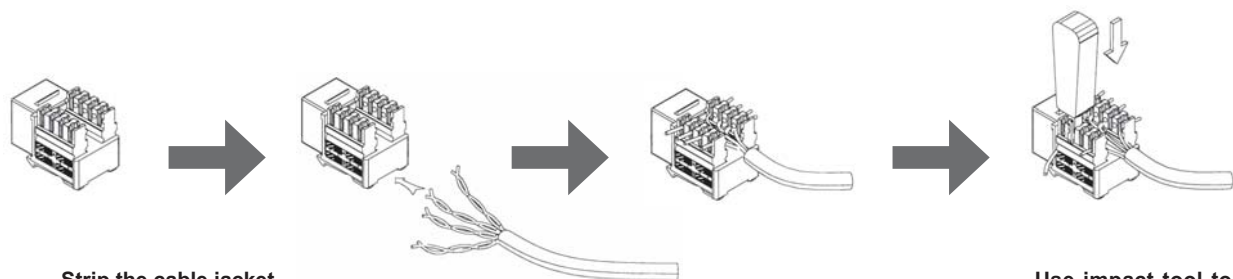

Strip the cable jacket
to separate into 4 pairs.

Follow the direction on the
color coding sticker to position
T568A or B wiring.

Use impact tool to crimp
and connect the wires.

Model No.	Category	Description	Color	Individual packing
7KJ8-CEUSBK-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Black	Poly Bag
7KJ8-CEUSBL-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Blue	Poly Bag
7KJ8-CEUSGN-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Green	Poly Bag
7KJ8-CEUSGY-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Gray	Poly Bag
7KJ8-CEUSRD-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Red	Poly Bag
7KJ8-CEUSWH-Y	Unshielded CAT.5e	Punch Down Keystone Jack	White	Poly Bag
7KJ8-CEUSYL-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Yellow	Poly Bag
7KJ8-CEUSIV-Y	Unshielded CAT.5e	Punch Down Keystone Jack	Ivory	Poly Bag
7KJ8-C6USBK-Y	Unshielded CAT.6	Punch Down Keystone Jack	Black	Poly Bag
7KJ8-C6USBL-Y	Unshielded CAT.6	Punch Down Keystone Jack	Blue	Poly Bag
7KJ8-C6USGN-Y	Unshielded CAT.6	Punch Down Keystone Jack	Green	Poly Bag
7KJ8-C6USGY-Y	Unshielded CAT.6	Punch Down Keystone Jack	Gray	Poly Bag
7KJ8-C6USRD-Y	Unshielded CAT.6	Punch Down Keystone Jack	Red	Poly Bag
7KJ8-C6USWH-Y	Unshielded CAT.6	Punch Down Keystone Jack	White	Poly Bag
7KJ8-C6USYL-Y	Unshielded CAT.6	Punch Down Keystone Jack	Yellow	Poly Bag
7KJ8-C6USIV-Y	Unshielded CAT.6	Punch Down Keystone Jack	Ivory	Poly Bag
7KJ3-C3-66WH	CAT. 3	Punch Down Keystone Jack RJ12 6P6C	White	Poly Bag
7KJ3-C3-66IV	CAT. 3	Punch Down Keystone Jack RJ12 6P6C	Ivory	Poly Bag



Flush Plate with ICON Slot

The flush plate combines high capacity with multiple connectors, fits all types of standard keystone jacks or connectors with keystone jack mounted devices. The screw cap design provides a more finished look.

Specification


- Mounting Plate
- Dimension: 70x 115mm (4.5" x 2.75")
- Connector Module insert
- Material: ABS UL94V-0
- Keystone Jack: Fit with all standard keystone jacks

Model No.	Description	Color	Individual packing
7PK-317H1-IV	Horizontal 1 Port Flush Plate	Ivory	Poly Bag
7PK-317H1-WH	Horizontal 1 Port Flush Plate	White	Poly Bag
7PK-317H2-IV	Horizontal 2 Port Flush Plate	Ivory	Poly Bag
7PK-317H2-WH	Horizontal 2 Port Flush Plate	White	Poly Bag
7PK-317H3-IV	Horizontal 3 Port Flush Plate	Ivory	Poly Bag
7PK-317H3-WH	Horizontal 3 Port Flush Plate	White	Poly Bag
7PK-317V1-IV	Vertical 1 Port Flush Plate	Ivory	Poly Bag
7PK-317V1-WH	Vertical 1 Port Flush Plate	White	Poly Bag
7PK-317V2-IV	Vertical 2 Port Flush Plate	Ivory	Poly Bag
7PK-317V2-WH	Vertical 2 Port Flush Plate	White	Poly Bag
7PK-317V3-IV	Vertical 3 Port Flush Plate	Ivory	Poly Bag
7PK-317V3-WH	Vertical 3 Port Flush Plate	White	Poly Bag
7PK-317V4-IV	Vertical 4 Port Flush Plate	Ivory	Poly Bag
7PK-317V4-WH	Vertical 4 Port Flush Plate	White	Poly Bag
7PK-317V6-IV	Vertical 6 Port Flush Plate	Ivory	Poly Bag
7PK-317V6-WH	Vertical 6 Port Flush Plate	White	Poly Bag

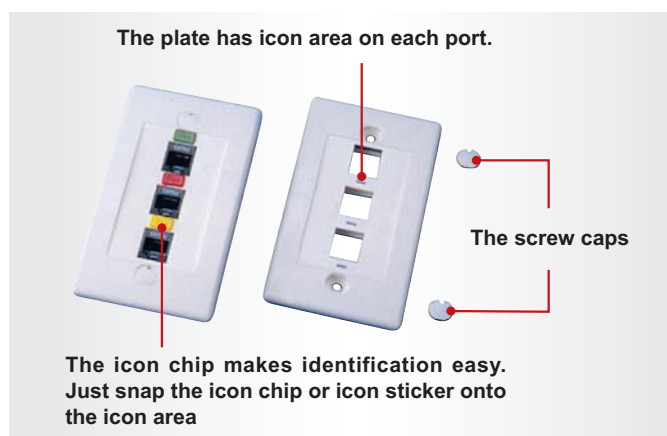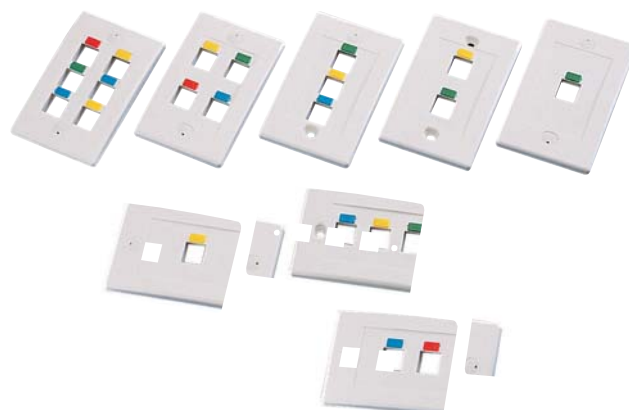

7PK-317ICON Plastic ICON Chip

- Mixed colors: Ivory, White, Red, Blue, Yellow, Green

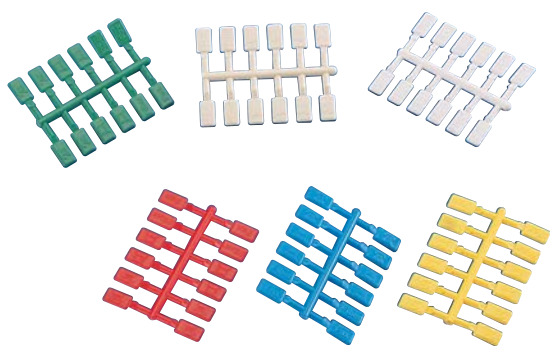

Individual packing

Poly Bag

Flush Plate without ICON Slot



Model No.	Description	Color	Individual packing
7PK-300-1IV	1 Port Flush Plate	Ivory	Poly Bag
7PK-300-1WH	1 Port Flush Plate	White	Poly Bag
7PK-300-2IV	2 Port Flush Plate	Ivory	Poly Bag
7PK-300-2WH	2 Port Flush Plate	White	Poly Bag
7PK-300-3IV	3 Port Flush Plate	Ivory	Poly Bag
7PK-300-3WH	3 Port Flush Plate	White	Poly Bag
7PK-300-4IV	4 Port Flush Plate	Ivory	Poly Bag
7PK-300-4WH	4 Port Flush Plate	White	Poly Bag
7PK-300-6IV	6 Port Flush Plate	Ivory	Poly Bag
7PK-300-6WH	6 Port Flush Plate	White	Poly Bag



Wall Plate Modules



7MU5-B




7MU5-F



7MU5-BNC



7MU5-ST

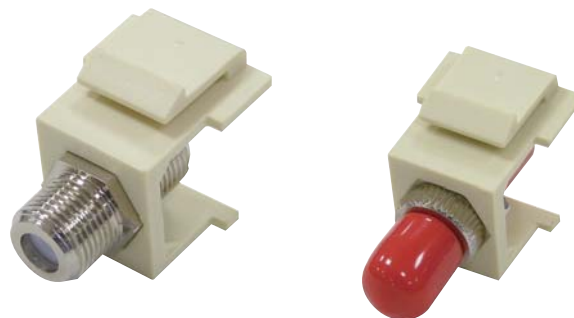

These Keystone Inserts can be fitted into a wide range of plates, such as the flush mounted wall plate in the range of Discrete Snap-In Outlet, unloaded plates in the range of Multimedia Outlet, Unloaded Patch Panel, to meet various requirements exactly in the communication or multimedia wirings.

Model No.	Category	Description	Color	Individual packing
7MU5-BNC-IV	BNC	Feed Thru Modular Insert	Ivory	Poly Bag
7MU5-BNC-WH	BNC	Feed Thru Modular Insert	White	Poly Bag
7MU5-F-IV	F	Feed Thru Modular Insert	Ivory	Poly Bag
7MU5-F-WH	F	Feed Thru Modular Insert	White	Poly Bag
7MU5-ST-IV	ST	Feed Thru Modular Insert	Ivory	Poly Bag
7MU5-ST-WH	ST	Feed Thru Modular Insert	White	Poly Bag
7MU5-B-IV	Blank	Modular Insert	Ivory	Poly Bag
7MU5-B-WH	Blank	Modular Insert	White	Poly Bag




7PK-318 Back Box

The back box has just the right space for 6pcs of keystone jacks cabling, also accepts the fiber optics adaptors and jumper connections.

The mounted box can be applied with all standard USA flush plates.

Specification


- Material: ABS UL94V-0
- Dimension: (L) 115 x (W) 70 x (H) 47mm /(L) 4.50" x (W) 2.76" x (H) 1.85"

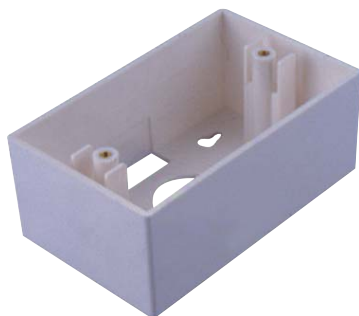

Model No.	Description	Color	Individual packing
7PK-318-IV	Back Box	Ivory	Poly Bag
7PK-318-WH	Back Box	White	Poly Bag



Cat.6/5e Surface Mounted Box

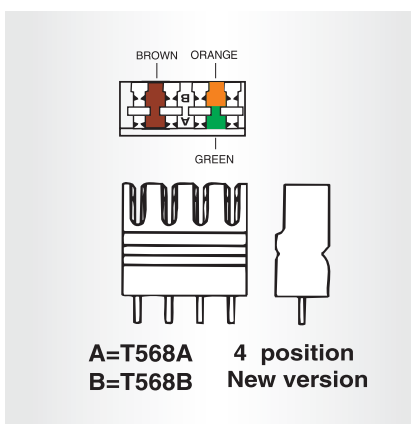

Color Coding Information


IDC Terminals		T568A Pair/Wire Color		T568B Pair/Wire Color
PIN5 PIN4	1	White/Blue Blue	1	White/Blue Blue
PIN1 PIN2	3	White/Green Green	2	White/Orange Orange
PIN3 PIN6	2	White/Orange Orange	3	White/Green Green
PIN7 PIN8	4	White/Brown Brown	4	White/Brown Brown

Material:

- Surface Box: ABS UL94V-0
- Jack: RJ45 jack, PBT UL94V-0. Black color, unshielded or shielded jack
- Terminal Block: New version 110, PC UL94V-0
- Color: White

Cable Tie Chassis

Use cable tie to hold cable jacket tightly to avoid the cable knocking off or pulling away.

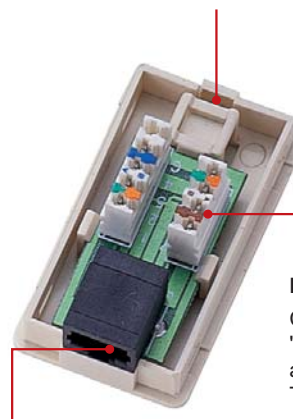

Unshielded RJ45 jack

New 110 Terminal Block


Can be used for both of "Krone & 110" impact tool and combine with wiring of T568A & B to save stock.

Model No.	Category	Description	Individual packing
7PK-342RCEUS-MWH	Unshielded CAT.5e	Single Port Surface Mounted Box	Poly Bag
7PK-342RCEUS-DWH	Unshielded CAT.5e	Dual Port Surface Mounted Box	Poly Bag
7PK-342RC6US-MWH	Unshielded CAT.6	Single Port Surface Mounted Box	Poly Bag
7PK-342RC6US-DWH	Unshielded CAT.6	Dual Port Surface Mounted Box	Poly Bag

Keystone Jack Surface Mounted Box

Specification

- Materials: ABS UL94V-0, ivory or white color
- Mounted Box: Double L50 x W50 x H30 mm (1.97" x 1.97" x 1.19")
- Single : L50 x W30 x H30 mm (1.97" x 1.19" x 1.19")
- Keystone Jack: Fit with all standard keystone jacks

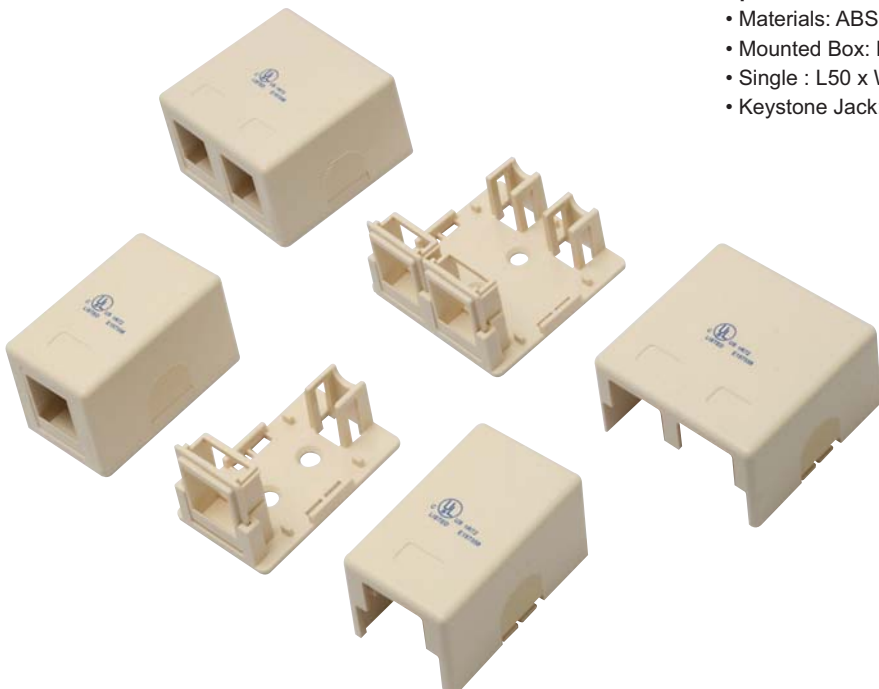

Jack sold separately

Model No.	Description	Color	Individual packing
7PK-301AIV	Single Port Keystone Jack Surface Mounted Box	Ivory	Poly Bag
7PK-301AWH	Single Port Keystone Jack Surface Mounted Box	White	Poly Bag
7PK-302AIV	Dual Port Keystone Jack Surface Mounted Box	Ivory	Poly Bag
7PK-302AWH	Dual Port Keystone Jack Surface Mounted Box	White	Poly Bag

Inline Coupler

Our inline coupler is ideal to use if you are trying to link to a networking cable run or simply extend your patch cables. Capable of handling LAN speeds up to CAT.5e 100Mbps. The coupler meets TIA/EIA 568A 11801 Category 5e Enhanced & Cat.6 specifications, and available for unshielded and shielded version.



Specification

- Housing: ABS UL 94V-0, black or white color
- Jack: RJ45, 50u" gold
- Shielded: Phosphor bronze with tin plating
- Dimension: 35(L) x 21(W) x 17(H)mm / 1.38"(L)x 0.83" (W)x 0.67"(H)

Model No.	Category	Description	Color	Individual packing
7PK-315A-CE/BK	Unshielded CAT.5e	Inline Coupler	Black	Poly Bag
7PK-315A-CE/WH	Unshielded CAT.5e	Inline Coupler	White	Poly Bag
7PK-315A-C6/BK	Unshielded CAT.6	Inline Coupler	Black	Poly Bag
7PK-315A-C6/WH	Unshielded CAT.6	Inline Coupler	White	Poly Bag
7PK-315AS-CE	Full Shielded CAT.5e	Inline Coupler	-	Poly Bag
7PK-315AS-C6	Full Shielded CAT.6	Inline Coupler	-	Poly Bag


ST Connector



Model No.	Description	Individual packing
711-AM-1-9	ST MM, 3.0 mm, Black boot	Poly Bag
711-AS-1-9	ST SM, 3.0 mm, Yellow boot	Poly Bag

Parameter	Condition	Multi mode	Single mode
Insertion Loss	$\lambda = 1300\text{nm}$	<0.5dB	<0.3dB
Return Loss	PC Polish	NA	>35dB
	SPC Polish	NA	>40dB
	UPC Polish	NA	>50dB
	APC Polish	NA	>65dB
Operation Temperature	-20°C to 70°C	0.2dB	0.2dB
Durability	500 cycles	0.2dB	0.2dB
Vibration	10 to 55Hz 1.5mm double amplitude	0.2dB	0.2dB
Temperature Cycle	-20°C to 80°C	0.2dB	0.2dB
Tensile Strength	10kgf	0.2dB	0.2dB

SC Connector-One Piece Type

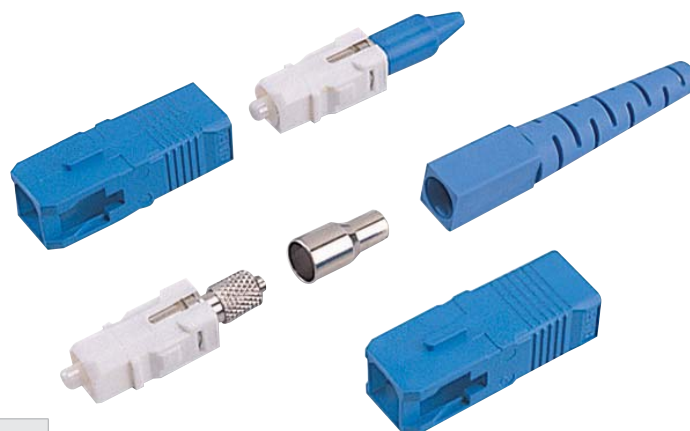

Model No.	Description	Individual packing
711-FM-1-5	SC MM, Ivory housing with 3.0 mm Black boot	Poly Bag
711-FS-1-2	SC SM, Blue housing with 3.0 mm Blue boot	Poly Bag

▶

SC Duplex Connector - One Piece Type



711-HM-1-5



711-HS-1-2

Model No.	Description	Individual packing
711-HM-1-5	SC MM, Duplex, Ivory housing with 3.0 mm Black & Red boot	Poly Bag
711-HS-1-2	SC SM, Duplex, Blue housing, with 3.0 mm Blue boot	Poly Bag

▶


LC Simplex Connector



Model No.	Description	Individual packing
711-LM-1-1	LC MM, Ivory housing, with 3.0 mm White boot	Poly Bag
711-LS-1-1	LC SM , Blue housing, with 3.0 mm White boot	Poly Bag

▶

LC Duplex Connector

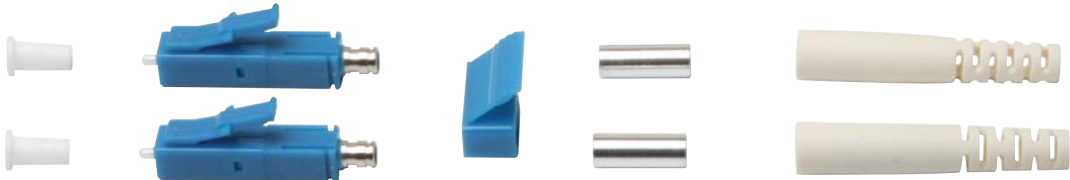

Model No.	Description	Individual packing
711-PM-1-1	LC MM, Ivory housing, with 3.0 mm White boot	Poly Bag
711-PS-1-1	LC SM, Blue housing, with 3.0 mm White boot	Poly Bag

▶

MTRJ Connector



Model No.	Description	Individual packing
711-MM-1-1	MT-RJ MM, Black housing, with 3.0 mm Black boot (for Round cable)	Poly Bag
711-MS-1-1	MT-RJ SM, Black housing, with 3.0 mm Black boot (for Round cable)	Poly Bag

ST Adaptor - Thread Type




Model No.	Description	Individual packing
715-01S1-1	ST SM Adaptor with Zirconia sleeve (Thread type)	Poly Bag

ST Adaptor- Flange Type




Model No.	Description	Individual packing
715-02S1-1	ST SM Adaptor Blue housing with Zirconia sleeve (Flange type)	Poly Bag

SC Adaptor- Duplex Type

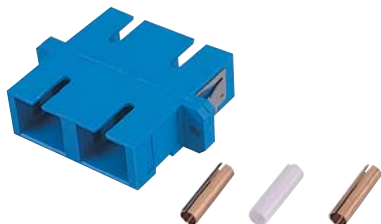


Model No.	Description	Individual packing
715-08M1-3	SC MM Duplex Adaptor, Ivory housing with Phosphor Bronze sleeve (Flange type)	Poly Bag
715-08S1-1	SC SM Duplex Adaptor, Blue housing with Zirconia sleeve (Flange type)	Poly Bag

ST to SC Duplex Adaptor

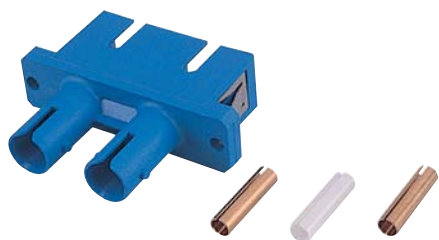


Model No.	Description	Individual packing
715-12M1-3	ST to SC Duplex Adaptor, Ivory housing with Phosphor Bronze sleeve (Flange type)	Poly Bag
715-12S1-1	ST to SC Duplex Adaptor, Blue housing with Zirconia sleeve (Flange type)	Poly Bag

SC Adaptor-Simplex Type



Model No.	Description	Individual packing
715-07S1-1	SC SM Adaptor Blue housing with Zirconia sleeve (Flange type)	Poly Bag

ST Adaptor- Duplex Type

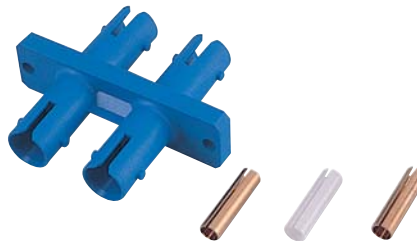


Model No.	Description	Individual packing
715-03M1-3	ST MM Duplex Adaptor, Ivory housing with Phosphor Bronze sleeve (Flange type)	Poly Bag
715-03S1-1	ST SM Duplex Adaptor, Blue housing with Zirconia sleeve (Flange type)	Poly Bag

ST to SC Adaptor



Model No.	Description	Individual packing
715-10M1-3	ST to SC MM Adaptor, Ivory housing with Phosphor Bronze sleeve (Flange type)	Poly Bag
715-10S1-1	ST to SC SM Adaptor, Blue housing with Zirconia sleeve (Flange type)	Poly Bag

LC Adaptor

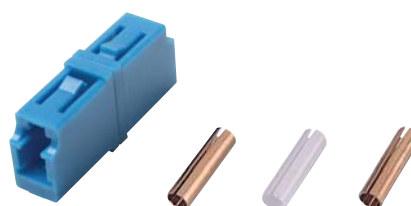

Model No.	Description	Individual packing
715-15M1-3	LC MM Simplex Adaptor, Ivory housing with Phosphor Bronze sleeve	Poly Bag
715-15S1-1	LC SM Simplex Adaptor, Blue housing with Zirconia sleeve	Poly Bag



CONNECTORS

CAT 6-100

RJ45 Cat.6 Plug w/Inserter 100pk

CAT6-100 connectors can be used for both CAT5 and CAT6 stranded RJ45 Cables. These connectors come with insertion guide for ease of use.

weight: 0.3 lbs




Stranded Wire



Strip away outer shielding from the RJ45 cable. Cut away the exposed spine found inside CAT6 cables.

Recommended Tool:
902-229
Universal Stripper



Cut the arranged wires on a sharp angle and feed through the insertion guide.

Recommended Tool:
100-035
Kevlar Cutting Scissors



Feed the insertion guide all the way to the end of the connector. While using the 568-B method keep the clip facing down and the brown wire to the right.



Arrange wires according to chart below. (568-B method)



Cut the excess wires flush with the end of the insertion guide.



To Finish, crimp your connector onto your CAT6 cable.

Recommended Tool:
300-063
Modular Plug Crimper



Other Modular Plugs

To Select Proper Plug	Step 1 Pick the number of positions in block and number of pins loaded in block.
	Step 2 Choose flat or round cable
	Step 3 Choose Stranded or Solid conductors (wire)
	Step 4 Choose Premium Grade or Economy Grade - Gold thickness is only difference
	Step 5 Choose Pack Quantity (retail pack of 50 pcs or Bulk bag of 1,000 pcs.)

Pos/Contacts	Cable Type	Wire Type	Premium Grade 50 uin Gold		Economy Grade Thin Gold Flash	
			Clamshell (50pcs)	Poly bag (1000pcs)	Clamshell (50pcs)	Poly bag (1000pcs)
4P4C	Flat	Stranded	702-001	744-FA50	702-059	744-FA03
6P4C	Round	Stranded	-	-	702-063	764-RA03
	Round	Solid	702-018	764-RX50	-	-
8P8C	Flat	Stranded	702-008	788-FA50	702-066	788-FA03
	Round	Stranded	702-009	788-RA50	702-067	788-RA03
	Flat	Solid	702-021	788-FX50	702-079	788-FX15
	Round	Solid	702-022	788-RX50	702-080	788-RX15
10P10C	Round	Stranded	702-013	700-RA50	-	-

Telecom Splices

- Use Crimp Tool P/N 100-008



UR AWG
26~20

UG AWG
19~26

UY AWG
26~22

Individual
packing

Poly Bag

- Silicone gel filled for protection from elements

Model No.	Description	Package Quantity
703-001	UY Connectors	1,000 Pc. Outer box with ten 100pc box
703-003	UY Connectors	100 Pc. Clamshell
703-005	UY Connectors	25 Pc. Clamshell

Model No.	Description	Package Quantity
703-002	UR Connectors	1,000 Pc. Outer box with ten 100pc box
703-004	UR Connectors	100 Pc. Clamshell
703-006	UR Connectors	25 Pc. Clamshell

Model No.	Description	Package Quantity
703-007	UG Connectors	1,000 Pc. Outer box with ten 100pc box
703-008	UG Connectors	100 Pc. Clamshell
703-009	UG Connectors	25 Pc. Clamshell



WIRING INSTALLATION

900-147/900-148/900-149 Fish Tape

P6



900-147



900-148



900-149

Model No.	Steel tape size	Individual packing
900-147	50 Feet	PE shrink
900-148	100 Feet	PE shrink
900-149	200 Feet	PE shrink

- Made from flexible spring steel and black finish.
- Equipped with durable plastic container and slide handle.
- Easy to thread through the pipe and pull out the electric cable.

902-197 Fiberglass Fish Tape



Fiberglass tape size	Individual packing
150 Feet	PE shrink

DK-2053A Fiberglass Push/Pull Rod Set (10 Pcs/set)



Ceiling ducts



Under floorboards



Trunking




Wall cavities



Hook



Ring



Flexible Extender

Replacement Parts: 9DK-2053A-B
(3pcs/set Includes: Hook, Ring & Extender)



Description	Individual packing
3.28 feet, 10pcs/set	PVC tube


- Ideal for running multi-purpose cable in hard-to-reach area such as behind walls, up through crawl spaces, and under floors.
- 10 pcs, 1M/3.28Ft each
- Diameter 5mm±0.2mm (13/64"±0.008")

CP-391 All In One Cable Tacker




Interchangeable staple guide plate

CP-391-1



- Round Cable
Height: 4mm~6mm (0.16\"~0.24\")
- Flat Wire
Height: 2.5mm~4.0mm
Width: Below 8.0mm

CP-391-2



- Round Cable
Height: 6mm~8mm(0.24\"~0.31\")
- Flat Wire
Height: 4.5mm~6.3mm(0.18\"~0.25\")
Width: Below 10.3mm(0.41\")



STEP 1
Press the staple
feeder downward
and remove from its
channel.



STEP 2
Load a strip of staples
into the channel.




STEP 3
Slide in the staple
feeder and push it
upward to its locked
position.



- All in one cable tacker can work with different kinds of round cables and flat wires.
- Easy way to change different staple guide plates to match different staples (CP-391-1 or CP-391-2)

Material	OAL. (mm/inch)	Replacement staples	Individual packing
Body			
ABS	180x30x148 7.1x1.2x5.8	CP-391-1 (200pcs/pack) CP-391-2 (200pcs/pack)	Blister card

CP-392 Heavy Duty 3 In 1 Tacker




- 1.Flat crown staples 4-14mm(5/32\"~9/16\")
200pcs
- 2.Round crown staples 10-12mm(3/8\"~1/2\")
200pcs
- 3.Brad Nails 10-14mm(3/8\"~9/16\") 200pcs

- Easy-squeeze product works overtime as a staple gun, brad nailer, cable tacker and wire tacker
- Fastens 3 different types of staples: flat crown staples, round crown staples and brad nails
- Ideal for upholstery, wood working, ceiling tiles, rack & roofing
- Adjustable punch force to match different material hardness.
- Less force to squeeze and more driving power
- Non-slip grip and quick jam release
- Made of all carbon steel construction.

CP-392-3


Flat Crown Staples



500pcs/box

CP-392-4


Round Crown Staples



500pcs/box

CP-392-5

Brad Nail



1000pcs/box

Material	OAL. (mm/inch)	Replacement staples	Individual packing
Body			
Carbon steel	160x23x140 6.3x0.9x5.5	CP-392-3 (500pcs/box) CP-392-4 (500pcs/box) CP-392-5 (1000pcs/box)	Blister card

▶ CP-382 Cable Tie Gun



- Neatly cuts end of cable tie off
- Adjustable tension control



Material		HRC	Application	OAL. (mm/inch)	Individual packing
Body	Blade				
Aluminum	S45C	Cutter 48°±2°	Cable tie from 3/32"~3/16"(2.2~4.8mm) and thickness up to 1.6mm	160/6.3	Blister card

▶ CP-383 Cable Tie Gun



Features:

- Adjustable tension control can be used for a variety of style cable ties
- Consistent flush cut with each use
- Durable die-cast steel construction

Cable Tie:

- Thickness up to 1.3mm(0.05")
- Width up to 4.6mm(0.18")



Material	O.A.L (mm/inch)	Individual packing
Steel	168/6.6	Blister card

▶ CP-385 Cable Tie Fasten Tool



- Tension adjustment allows the user to adapt the tool to the size of the tie
- Cutting lever design to cut-off the excess tie for easy operation



Tension



Cutting

Material		Application	OAL. (mm/inch)	Individual packing
Body	Blade			
Aluminum	S45C	cable ties thickness 3 mm and width 12mm	191/7.5	Blister card

▶ 902-321 Stainless Steel Cable Tie Gun

- Ideal for tensioning and cutting off stainless steel cable ties both in ball lock and ladder types.
- Heavy duty, two stage manual tensioning tool for easy operation
- OAL: 8.2"

Ideal for Stainless Steel Cable Ties

Cable tie holder is specially made of SKD11 steel and CNC ground

Cutting blade is made of SKD11 and CNC ground

Cable control bar

Self return spring design

Made of Carbon Steel

Non-slip TPR handles



Tensioning and cutting off stainless steel cable ties



Suitable for most application fields of stainless steel cable ties. And up to 12mm wide.

Individual packing
Blister Card



TOOL CASES

100% CH2F2

900-262 Heavy-Duty ABS Case With Wheels And Telescoping Handle

- Heavy-duty black scuff resistant molded ABS thermoplastic forms the tough shell of this case.
- Extruded aluminum rim, drawbolt key locks and strong molded handle.
- Complete with one removable pallet and removable interior dividers.
- Locking telescoping handle extends to 1000mm.
- Loading capacity : max 12kg/26Lb
- Rotationally molded heavy-duty polythylene shell.



Rugged and comfortable grip handle






Key locks for maximum security



Standard equipment for easy opening and closing.

Assemble



Material	Loading Capacity	Dimension (mm/inch)	Individual Packing
ABS	12Kg/26Lb	456x190x335/18.3x7.5x13.2	Color Box

TC-131 Heavy Duty Luggage Cart

- Fold flat for easy storage.
- Open quickly to hold up to 150lbs/68kg.
- Soft comfortable grip hand.
- Extra sturdy and lightweight construction.
- 125mm/4.9" large heavy duty wheels to go up and down stairs and curbs easily.
- Includes 2pcs on 100cm/3.9" stretch band.



Loading Capacity	Material		
68Kg (150lbs)	Body: Metal Platform: Aluminum steel Wheel: PP+TPU		
Dimension (mm/inch)		Weight (kg)	Individual Packing
Fold: 385x 64x 763/15.2x2.5x30 Open: 385x 420x 1010/15.2x16.5x39.8 Platform: 385x280x6/15.2x11x0.24		3.5	Bulk


TC-765 Aluminum Frame Drawer Case



- Made of rugged plastic for strength and durability .
- Sturdy aluminum frame construction.
- The drawer locks automatically when lid is closed to prevent slide out for easy mobility.
- Ball-bearing slides make drawer easy to open and close tightly.
- Non-slip lining helps you to keep tools in place.
- Cushioned carrying handle for user comfort.
- Comes with drawers at the bottom perfect to store small gadgets and tiny tools.

Cushioned
Carrying handleHeavy duty metal
protective cornersBall-bearing slides make
drawer easy to open
and close tightlyDrawer auto-locking
design when lid is closed
to prevent slide outKey locks for
maximum security

Size	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	A	Individual packing
O.D	430/16.9	300/11.8	163/6.4	57/2.2	90°	Color box
I.D	410/16.1	280/11.0	70/2.8	49/1.9		
I.D(Drawer)	337/13.3	255/10.0	40/1.6	-		





Unit: mm/inch

900-048 Aluminum Frame Tool Case W/1 Pallet



- Complete with one removable pallet and removable interior dividers
- Lining and partitions: EVA

3 hinges reinforce
constructionRugged and comfortable
grip handleHeavy duty metal
protective cornersBag with rivet design,
more durable

Unit: mm/inch

Material	Size	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	A	Second Pallet	Individual packing
Frame: Aluminum	O.D	458/18.0	330/13.0	90/3.5	60/2.4	97°	900-045	Plain box + Color box
	I.D	434/17.1	308/12.1	82/3.2	53/2.1			


900-141 ABS Carrying Tool Case W/2 Pallet



- Complete with two removable pallets and removable interior dividers.

Deluxe die-cast chrome
golf grip handleKey locks for
maximum securityBag with rivet design,
more durable

Material	Size	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	A	Individual packing
ABS	O.D	435/17.1	310/12.2	80/3.14	65/2.6	105°	Color box
	I.D	420/16.5	293/11.5	70/2.8	60/2.4		




Unit: mm/inch

900-203 Aluminum Frame Tool Case



- With removable interior dividers
- Lining and partitions: EVA



Unit: mm/inch

Size	Material	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	Individual packing
O.D	Frame:	360/14.2	220/8.7	120/4.7	110/4.3	Plain box +
I.D	Aluminum	335/13.2	200/7.9	110/4.3	85/3.3	Color label



Double-decked

900-199 ABS Carrying Tool Case W/1 Pallet



Attractive and functional multipurpose cases


- Functional for both personal and professional business.
- Complete with one removable pallet and removable interior dividers
- Both the tool pallet and dividers are removable.
- Injection molding tool case stands.
- Aluminium corner frames to protect tools.
- Lining and partitions: EVA



Key locks for maximum security



Rugged and comfortable grip handle



Unit: mm/inch

Size	Material	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	A	Individual packing
O.D	ABS	463/18.2	331/13.0	96/3.8	75/3.0	98"	Color box
I.D		453/17.8	323/12.7	90/3.5	67/2.6		



Heavy duty metal protective corners

900-011 Aluminum Frame Tool Case W/1 Pallet


- Complete with one removable pallet and removable interior dividers
- Lining and partitions: EVA



Bag with rivet design, more durable



Rugged and comfortable grip handle



Unit: mm/inch

Size	Material	L (mm/inch)	W (mm/inch)	H1 (mm/inch)	H2 (mm/inch)	A	Second Pallet	Individual packing
O.D	Frame:	458/18.0	330/13.0	101/4.0	49/1.9	97"	900-045	Color box
I.D	Aluminum	438/17.2	312/12.3	95/3.7	41/1.6			



Key locks for maximum security

900-054 2 In 1 Zipper Bag W/2 Pallet


Pb



Front Side



Back Side



Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
PVC leather	400/15.7	300/12	120/4.7	Poly bag

900-052 Heavy Duty Zipper Bag


Pb



Front Side



Back Side




Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	A	Individual packing
PVC leather	435/17.1	325/12.8	90/3.5	93°	Color box

900-225 Blow Molded Case With Pre-Cut Soft Foam

- Material: H.D.P.E



Demo only



Inside dimensions:
Base 15-5/8" X 8-3/4" at the top, 15-1/4" X 8-1/2"
at the bottom, 2-1/2" deep
Top 16-1/2" X 9-5/8" , 3/4" deep

L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
442/17.4	279/11.0	89/3.5	Color Label

▶ 902-118 Zipper Bag W/2 Pallets




Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
PVC leather	390/15.4	280/11.0	70/2.8	Color box



▶ 902-119 Tool Bag

- Intensive structure for strap, zipper and handle designed to enhance the durability, ideal for student market.

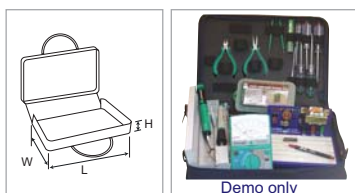

Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
600D polyester	390/15.4	260/10.2	110/4.3	Poly bag



Water repellent

Convenient • Portable • Durable

▶ 900-260 Tool Bag

- Multi function bag with 4 inner layers ideal for storing tools, books, mobile computers, clothes, etc.



Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
600D polyester	400/15.7	275/10.8	90/3.5	Poly bag



Water repellent

Convenient • Portable • Durable

ESD STATIC
PROTECTION

MAGNIFICATION &
LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS
CASES

INSTRUMENT
CASES

LAN/DATACOMM

CONNECTORS

WIRING
INSTALLATION


TOOL CASES

TOOL KITS

Index

▶ MTB-1 Mechanic's Tool Bag


- Material: 600D Polyester
- Rugged construction
- Heavy-duty zipper
- Sturdy padded handles
- Hard bottom to maintain shape
- Soft sides to allow flexibility
- 13 pocket holes for versatility



Demo only

Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
600D Polyester	305/12.0	152/6.0	165/6.5	Poly bag

▶ 9ST-902



Demo only

Material	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
PVC leather	260/10.24	170/6.69	38/1.5	Poly bag

▶ 900-246 Soft Sided Tool Pouch



- Keep your tools and supplies handy.
- Made from strong durable fabric.
- complete with universal tool belt system.



Demo only

Dual purpose belt for easy carrying on shoulder or waist

Size	L (mm/inch)	W (mm/inch)	H (mm/inch)	Individual packing
O.D	305/12.0	235/9.3	95/3.7	Poly bag + Hanger

▶ ST-5601 Magnetic Wrist Band



Powerful magnet lifts: 1kg



Water repellent



Demo only

Material	Dimension (mm/inch)	Individual packing
600DX600D Polyester	Width: 5cm / Length: 30cm (Width: 2.0" / Length: 11.8")	Poly bag+Hanger

▶ 902-314 25 Pocket Electrical & Maintenance Tool Carrier

- Made of 600D polyester
- With a padded carrying handle
- With multi-pocket for versatility
- A space in the bottom for storage box



Square design enables standing with stability



Material	Dimension (mm/inch)	Individual packing
600D Polyester	216x216x406mm/8.5"x8.5"x16"	Poly bag+Hanger

▶ 902-311 Master Tool Belt

- Made of 600D polyester
- Leather waist belt with 13 adjustment holes (from 32" to 44")
- With roller metal double-tongue buckle
- With multi-pocket for versatility



Demo only

Material	Dimension (mm/inch)	Individual packing
600D Polyester	356x330mm/14.0"x13.0" (Individual bag size)	Poly bag+Hanger

▶ 902-312 4 Pocket Pouch

- Made of 600D polyester
- 3 mesh pockets for light tools
- Ideal for packing pliers with a padded & reinforced pouch design



Demo only



Material	Dimension (mm/inch)	Individual packing
600D Polyester	229x102mm/9.4"x4.0"	Poly bag+Hanger

▶ ST-5203 Power Tool Holster

- Made of lightweight and durable polyester
- Provides extra strength and carrying comfort



Water repellent



Demo only



Material	Loading capacity	Dimension (mm/inch)	Individual packing
600DX600D Polyester	3kg	280x180x50/11.0x7.1x2.0	Poly bag+Hanger



TOOL KITS

902-121 8 Pc Compact Tool Kit



902-121 contents

Dual color long nose plier 136mm (5.4")

Dual color diagonal cutting Plier 125mm (4.9")

⊕ Precision screwdriver #0x20mm (#0x0.79")

⊕ Precision screwdriver #00x20mm (#00x0.79")

⊖ Precision screwdriver 2.0x20mm (2.0x0.79")

⊖ Precision screwdriver 3.0x20mm (3.0x2.79")

⊕ Double-end reversible screwdriver #2/6 mm

Fine tip straight tweezers

Zippered carrying bag

• Case size: 121x206x35mm (4.8"x8.1"x1.4")

• Individual packing: Color sleeve shrink

500-025 10 Pc Compact Tool Kit



500-025 contents

Long nose plier 135mm (5.3")

Diagonal cutting plier 110mm (4.3")

Fine tip straight tweezers

⊖ Pro-soft s/d 3.2x75mm (3.2x3.0")

⊕ Pro-soft s/d #0x75mm (#0x3.0")

Precision screwdriver 2.4mm

Precision screwdriver #0

Needle file flat

Needle file round

Utility knife (3 blades self loading)

Zippered carrying bag

• Case size: 205x144x32mm (8.1"x5.7"x1.3")

• Individual packing: Inner box & Color label shrink

PK-ST902 4 Pc Ergonomic ESD Safe Plier And Cutter Kit



PK-ST902 contents

5" Bent nose

4 1/2" Diagonal cutting

4 1/2" Pointed diagonal pliers

5" Flat nose pliers

• Case size: 260x170x38 mm (11.4"x8.7"x2.6")

• Individual packing: Color label+Shrink

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

500-047 13 Pc Basic Electronics Kit

500-047 contents

Lineman's plier 165mm (6.5")

Side cutting plier 165mm (6.5")

Long nose plier 165mm (6.5")

6" Adjustable wrench

Desoldering braid

Solder core 63%, SN

⊖ Pro-soft screwdriver 3.0x100mm (3.0x4.0")

⊕ Pro-soft screwdriver #0x100mm (#0x4.0")

⊕ Pro-soft screwdriver #2x100mm (#2x4.0")

⊖ Pro-soft screwdriver 5.0x100mm (5.0x4.0")

⊕ Pro-soft screwdriver #1x100mm (#1x4.0")

Convertible soldering iron/gun 110V

Fine tip straight tweezer

Zippered carrying bag

• Case size: 195x305x50mm (7.7"x12.0"x2.0")

• Individual packing: Color sleeve shrink



500-003 28 Pc Computer Service Tool Kit

500-003 contents

Long nose plier 135mm(5.3")

Diagonal cutting plier 110mm(4.3")

Fine tip straight tweezer

3 pcs Soldering aid tools

6" Adjustable wrench

Quick heat ceramic soldering iron 110V

Screwdriver handle

⊖ Pro-soft s/d 5.0x75mm(3.0")

⊕ Pro-soft s/d #1x75mm(3.0")

Desoldering braid

Crimping tool (inch)

Desoldering pump

IC extractor

3 prong holder

IC insert tool

Solder core 63%, SN

Parts tube

Heat sink

8 pcs bits pack

Zippered carrying bag

• Case size: 325x195x48mm(12.8"x7.7"x1.9")

• Individual packing: Inner box & Color label shrink



500-042 16 Pc ESD Precision Tool Kit



500-042 contents

Long nose plier

Flat nose plier

Bent nose plier

Clean cut micro nipper

Micro cutting plier 125mm (4.9")

4 pcs conductive tweezer set

Wrist strap 10FT

⊕ ESD safe precision screwdriver #00

⊕ ESD safe precision screwdriver #0

⊕ ESD safe precision screwdriver #1

⊖ ESD safe precision screwdriver 2.0mm

⊖ ESD safe precision screwdriver 2.4mm

⊖ ESD safe precision screwdriver 3.0mm

Tool bag

• Case size: 288x203x40mm (11.3"x8.0"x1.6")

• Individual packing: Inner box & Color label shrink



This precision plier series is made of high quality SK7, accurately machined design.



• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

500-016 18 Pc School Tool Kit



500-016 contents

Utility component storage box

Fine tip straight tweezer

Side Cutter 125mm (4.9")

Long nose plier 138mm (5.4")

Quick heat ceramic soldering iron 110V

⊕ Pro-soft s/d 3.2x75mm (3.0")

⊕ Pro-soft s/d #0x75mm (3.0")

⊕ Pro-soft s/d 5.0x75mm (3.0")

⊕ Pro-soft s/d #1x75mm (3.0")

⊕ Pro-soft s/d 6.0x100mm (4.0")

⊕ Pro-soft s/d #2x100mm (4.0")

Brush

Mini soldering stand with sponge

Desoldering pump

IC extractor

7 pcs folding type hex key set (inch)

Solder core 63%, SN

Utility knife (3 blades self loading)

Zippered carrying bag

• Case size: 330x220x48mm (13.0"x8.7"x1.9")

• Individual packing: Inner box & Color label shrink

PK-2096AI 43 Pc Computer & Notebook Service Kit



PK-2096AI contents

Long Nose Plier 135mm (5.3")

Diagonal Cutting Plier 110mm (4.3")

Needle Nose Plier 150mm (5.9")

Super Fine Tip Straight Tweezer 120mm (4.7")

Soldering Iron 12W (110V)

IC Extractor

Square scraper/Stainless steel brush

Slotted shaft/Split 45 lever

Tapered reamer/Tapered needle

Offset chip holder/45 chip holder

3 Prong Holder

Screwdriver handle

4pcs 1/4"x50mm(2.0") bits:

⊕ #1, #2, ⊕ 5.0, 6.0mm

Extension blade 1/4"x30mm (1.18")

9pcs 1/4"x25mm (0.98") socket set:

⊕ 3/16", 7/32", 1/4", 9/32", 5/16", 11/32", 3/8", 7/16", 1/2"

Wrist Strap 10FT

Desoldering Pump

3.6V Cordless Screwdriver (110V)

Zippered carrying bag

• Case size: 320x233x60mm (12.6"x9.2"x2.4")

• Individual packing: Color box

500-032 24 Pc Professional Electronic Tool Kit



500-032 contents

Lineman's plier 165mm (6.5")

Side cutter 125mm (4.9")

Long nose plier 165mm (6.5")

Soldering iron stand with sponge

Desoldering pump

Quick heat ceramic soldering iron 110V

⊕ Line color screwdriver 3.2x75mm (3.0")

⊕ Line color screwdriver #0x75mm (3.0")

⊕ Line color screwdriver 5.0x75mm (3.0")

⊕ Line color screwdriver #1x75mm (3.0")

⊕ Line color screwdriver 6.0x100mm (4.0")

⊕ Line color screwdriver #2x100mm (4.0")

⊕ Line color screwdriver nut 3/16"

⊕ Line color screwdriver nut 1/4"

6 pcs electronic screwdriver set

3-1/2 compact digital multimeter

7 pcs folding type hex key set (inch)

PVC insulated tape

Solder core 63%, SN

Zippered carrying bag

• Case size: 375x250x60mm (14.8"x9.8"x2.4")

• Individual packing: Inner box & Color label shrink

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

PK-2061 Solar MC3 & MC4 Crimping tool kit



This is a complete tool kit to install MC3 & MC4 solar connectors easily and accurately.



280×197×70(mm)

To open the locking device

To secure

To tighten the cable gland

Includes 2 pcs MC4 and MC4 PLUS open-end spanner and unlocking tool help you opening the locking device, securing and tightening the cable gland.



Universal solar cable stripper comes with adjustable length stop for reliable stripping of the double layer insulated cables (2.5 - 6.0 mm²)



New

Contents:

Parallel Action Crimper frame

Die set for MC 3 solar connector (Multi-Contact) & 2.5/4/6mm² (AWG 14/12/10) solar cable.

Die set for MC 4 solar connector (Multi-Contact) & 2.5/4/6mm² (AWG 14/12/10) solar cable.

Universal solar cable stripper, for 2.5/4/6mm² (AWG 14/12/10) solar cable

Forged cable cutter (160mm), for copper cable: 25mm² flexible

2 Pcs Open-end spanner and unlocking tool (MC4 and MC4 PLUS)

Pro-soft screwdriver 5x75mm

Pro-soft screwdriver #2 x100mm

Zippered carrying bag-280×197×70(mm)/11"x7.8"x2.8"



The Parallel action crimper features consistent and accurate performance

Heavy duty Forged Cable Cutter with high leverage Jaw and shear blade for clean cut without damage.

Prosoft screwdrivers for PV junction box installation

902-215 8 Pc 1000V Insulated Screwdriver & Plier Set

Contents

0.4x2.5x75mm (3")

0.5x3.0x100mm (4")

1.0x5.5x125mm (5")

PH1x80mm (3.1")

PH2x100mm (4")

6.3" Insulated wire stripping plier

6.3" Insulated side cutter

6.3" Insulated long nose plier

Zippered carrying bag

• Case size: 255x175x50/10.0x6.9x2.0 (mm/inch)

• Individual packing: Inner box & Color label shrink



902-218 11 Pc 1000V Insulated Plier & Screwdriver Set

Contents

0.4x2.5x75mm (3")

0.8x4.0x100mm (4")

1.0x5.5x125mm (5")

1.2x6.5x150mm (6")

PH0x60mm (2.4")

PH1x80mm (3.1")

PH2x100mm (4")

7.9" Insulated combination plier

6.3" Insulated side cutter

7.9" Insulated long nose plier

6.3" Insulated long nose plier

Zippered carrying bag

• Case size: 294x240x50/11.6x9.4x2.0 (mm/inch)

• Individual packing: Inner box & Color label shrink



• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

500-026 35 Pc Computer Maintenance Kit



8 In 1 Reversible ratchet screwdriver set with storage chamber in handle.



500-026 contents

Fine tip straight tweezer
Side cutter 125mm (4.9")
Long nose plier 138mm (5.4")
Spring hook
6" Adjustable wrench
Quick heat ceramic soldering iron 110V
Desoldering braid
Micro cutting plier 130mm (5.1")
Wire stripper/cutter
PLCC extractor
Field service kit
Mini flash light
7 pcs folding type hex key set (inch)
Blowing brush
IC extractor
Extension blade 7" (175mm)
⊕ Nut blade 1/4", 3/8", 3/16", 5/16", 7/16", 11/32"
⊕ Driver blade T6
⊕ Driver blade T7
⊕ Driver blade T8
⊕ Driver blade T9
Super torque ratchet handle
8 pcs screwdriver blades:
⊕ #0, #1, #2
⊕ 3, 5, 6mm
⊕ T10, T15
Inspection mirror
2 pcs pallets
Empty tool bag

- Case size: 400x300x70mm (15.8"x11.8"x2.8")
- Individual packing: Color box

500-017 48 Pc Technician's Tool Kit



500-017 contents

Reverse action tweezer
Fine tip straight tweezer
Brush
7 in 1 crimping tool
IC extractor
PLCC extractor
Screwdriver handle
⊕ Pro-soft s/d 5.0x75mm (3.0")
⊕ Pro-soft s/d #1x75mm (3.0")
⊕ Pro-soft s/d 3/16"(inch)
Wrist strap 10FT
Utility knife (3 blades self loading)
LED Flash light
7 pcs folding type hex key set (inch)
3 prong holder
8"Adjustable wrench
Mini hammer set (including 6 parts)
5 pcs needle file set
Long nose plier 135mm (5.3")
Diagonal cutting plier 110mm (4.3")
Lineman's plier 210mm (8.3")
Flat nose plier 135mm (5.3")
Bent nose plier 130mm (5.1")
6 pcs electronic screwdriver set
Desoldering pump
Quick heat ceramic soldering iron 110V
Solder core 63%, SN
3 pcs soldering aid tools
Heat sink
⊕ / ⊕ Double-end blade 175mm length 4mm/T6
⊕ / ⊕ Double-end blade 175mm length #1/#2
⊕ / ⊕ Double-end blade 175mm length 6mm/T8
⊕ / ⊕ Double-end blade 175mm length T10/T15
Extension blade 175mm (7")
Heavy duty zipper bag

- Case size: 435x325x90mm (17.1"x12.8"x3.5")
- Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

PK-2015 13 Pc Deluxe Basic Tool Kit

PK-2015 contents

8" Adjustable wrench
LED Flash Light
Long nose plier 165mm (6.5")
Utility Knife (3 Blades self loading)
Lineman's plier 165mm (6.5")
Screwdriver Probe Voltage Tester
Measuring tape 3M/10FT
Double-End Reversible Screwdriver #2 / 6.0x100mm (4.0")
8PCS Aluminum Case Folding Hex Key
9 in 1 Aluminum Handle Precision Screwdriver Set
PVC Insulated Tape
Junior Multi-Purpose Saw
8 oz curved claw Hammer
Pallet for PK-2015 x2
Plastic Tool Box

- Case size: 320x260x60mm (12.6"x10.2"x2.4")
- Individual packing: Color sleeve shrink



500-029 18 Pc Deluxe Education Tool Kit



500-029 contents

Utility component storage box
Desoldering pump
Cutting plier 125mm (4.9")
Long nose plier 140mm (5.5")
Soldering iron 30W 110V
IC extractor
⊖ PVC screwdriver 3.2x75mm (3.0")
⊕ PVC screwdriver #0x75mm (3.0")
⊖ PVC screwdriver 5.0x75mm (3.0")
⊕ PVC screwdriver #1x75mm (3.0")
⊖ PVC screwdriver 6.0x100mm (4.0")
⊕ PVC screwdriver #2x100mm (4.0")
Solder core 63%, SN
Round hole bread board (1580 tie points)
Protective function analog multimeter
2 pcs soldering aid kit
Soldering iron box
Tool bag

- Case size: 400x275x90mm (15.7"x10.8"x3.5")
- Individual packing: Poly bag + Color label



Protective Function Analog Multimeter Wtth Null DCV, Capacitance measurement

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

ESD STATIC PROTECTION

MAGNIFICATION & LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT CASES

LAN/DATACOMM

CONNECTORS

WIRING INSTALLATION

TOOL CASES

TOOL KITS

Index

PK-15307EI 54 Pc Electronics Tool Kit



Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance, and new ceramic soldering iron features energy saving of 60%.



Comes with ceramic heating element, fast thermal recovery and energy saving



Dual color TPR handles with better plating, provide excellent performance and long service life



High quality blade with improved TPR handle



Compact 3-1/2 DMM, special with Transistor hFE test and backlight.



Heavy duty Hobby Vise for clamping up to 28mm and max.opening:40mm

PK-15307EI contents

Long nose plier 135mm (5.3")
Diagonal cutting plier 110mm (4.3")
Dual color lineman's plier 210mm (8.3")
Dual color long nose plier 165mm (6.5")
6" Adjustable wrench
Dual color side cutting plier 165mm (6.5")
5 pcs needle file set
Ceramic Soldering Iron 110V
3-1/2 compact digital multimeter
Measuring tape (3M/10FT)
Solder core 63%, SN
7 pcs hex key set (inch)
Wire stripper cutter
Utility knife (3 blades self loading)
All Purpose Snip
Solder aid tools
Desoldering pump
10 pcs electronic combination wrench (inch)
Flux bottle (2 pcs/pack)
Blow brush (Ø62mm/Ø2.4")
IC extractor
Slip joint plier 154mm (6")
⊖ Pro-soft screwdriver 3.0x75mm (3.0")
⊕ Pro-soft screwdriver #0x75mm (3.0")
⊕ Pro-soft screwdriver 5.0x75mm (3.0")
⊕ Pro-soft screwdriver #1x75mm (3.0")
⊖ Pro-soft screwdriver 6.0x100mm (4.0")
⊕ Pro-soft screwdriver #2x100mm (4.0")
⊕ Pro-soft screwdriver #2x250mm (10")
⊖ Pro-soft screwdriver 6.0x40mm (1.6")
⊕ Pro-soft screwdriver #2x40mm (1.6")
⊖ ProSoft Precision Screwdriver 2.0x50mm (2.0")
⊖ ProSoft Precision Screwdriver 2.4x75mm (3.0")
⊖ ProSoft Precision Screwdriver 3.0x100mm (4.0")
⊕ ProSoft Precision Screwdriver #00x50mm (2.0")
⊕ ProSoft Precision Screwdriver #0x75mm (3.0")
⊕ ProSoft Precision Screwdriver #1x150mm (6.0")
Soldering tip cleaner
Fine tip straight tweezer
Utility component storage box
Hobby vise
2 pcs pallets
Aluminum frame tool case

- Case size (O.D): 458x330x150mm (18"x13"x5.9")
- Individual packing: Color box

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

1PK-1900NA 68 Pc Pro's Electronic Tool Kit



Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance, and new ceramic soldering iron features energy saving of 60%.



1PK-1900NA contents

Utility component storage box

Long nose plier 135mm (5.3")

Diagonal cutting plier 110mm (4.3")

Flat nose plier 135mm (5.3")

Bent nose plier 130mm (5.1")

Dual Color Lineman's Plier

Reverse action tweezer

Super drill set w/adaptor 110V

3 pcs soldering aid tools

Soldering iron stand with sponge

6" Adjustable wrench

Ceramic Soldering Iron 110V

Screwdriver handle

Pro-soft s/d 3/16" (inch)

Pro-soft s/d 1/4" (inch)

Pro-soft s/d 3.2x75mm (3.0")

Pro-soft s/d #0x75mm (3.0")

Pro-soft s/d 5.0x75mm (3.0")

Pro-soft s/d #1x75mm (3.0")

Pro-soft s/d 6.0x57mm (2.2")

Pro-soft s/d #2x57mm (2.2")

Pro-soft s/d #2x157mm (6.2")

Pro-soft s/d #1x150mm (6.0")

Pro-soft screwdriver 6.0x40mm (1.6")

Pro-soft screwdriver #2x40mm (1.6")

Brush

Crimping tool (inch)

Desoldering pump

Precision s/d set 6 pcs

5 pcs needle file set

Mini-vacuum cleaner

Cleaning fluid, head (60cc)

Cleaning fluid, head (18cc)

3-1/2 compact digital multimeter

Testing screwdriver

IC extractor

LED Flash light

7 pcs folding type hex key set (inch)

3 prong holder

PVC insulated tape

6" Stainless scissors

Solder core 63%, SN

Bit T10x30mm (1.2")

Bit T15x30mm (1.2")

Wrist strap 10FT

Utility knife (3 blades self loading)

10 pcs electronic combination wrench (inch)

Hobby vise (Jaw opening 40mm/1.6", width 60mm/2.4")

2pcs pallets

Aluminum frame tool case

• Case size (O.D): 458x330x150mm (18"x13"x5.9")

• Individual packing: Color box



Soldering stand with durable spring holder and nonslip base, easy of use



Compact 3-1/2 DMM, special with Transistor hFE test and backlight.



Super drill set contains 15pcs drills, brass collets, grind stones and super thin grinding wheel for multi purpose use.



• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

ESD STATIC PROTECTION

MAGNIFICATION & LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT CASES

LAN/DATACOMM

CONNECTORS

WIRING INSTALLATION

TOOL CASES

TOOL KITS

Index

1PK-1700NA 57 Pc Electronics Master Kit



Pro'sKit upgrade tool kits include new pliers and screwdrivers that provide better performance, and new ceramic soldering iron features energy saving of 60%.



Comes with ceramic heating element, fast thermal recovery and energy saving



Dual color TPR handles with better plating, provide excellent performance and long service life



Soldering stand with durable spring holder and non-slip base, easy of use



1PK-1700NA contents

Utility component storage box

Long nose plier 135mm (5.3")

Diagonal cutting plier 110mm (4.3")

Dual Color Lineman's Plier

Bent nose plier 130mm (5.1")

Side cutting plier 150mm (5.9")

Dual color long nose plier

Reverse action tweezer

3 pcs soldering aid tools

Soldering iron stand with sponge

Adjustable wrench 6"

Ceramic Soldering Iron 110V

● Pro-soft s/d 3/16"(inch)

● Pro-soft s/d 1/4"(inch)

⊖ Pro-soft s/d 3.2x75mm (3.0")

⊕ Pro-soft s/d #0x75mm (3.0")

⊖ Pro-soft s/d 5.0x75mm (3.0")

⊕ Pro-soft s/d #1x75mm (3.0")

⊖ Pro-soft s/d 6.0x100mm (4.0")

⊕ Pro-soft s/d #2x100mm (4.0")

⊖ Pro-soft screwdriver 6.0x40mm (1.6")

⊕ Pro-soft screwdriver #2x40mm (1.6")

Desoldering braid

Brush

6 pcs electronic screwdriver set

Crimping tool (inch)

Desoldering pump

5 pcs needle file set

Testing screwdriver

Alignment tool 2.0mmx200mm (2.0mmx7.9")

IC extractor

Oil can

LED Flash light

7 pcs folding type hex key set (inch)

3 prong holder

6 pcs open-end wrench set

Heavy duty curved-claw hammer

PVC insulated tape

Stainless scissors 6"

Solder core 63%, SN

Parts tube

Heat sink

Utility knife (3 blades self loading)

Measuring tape 3M/10FT

Inspection mirror

Slip-channel pump pliers 254mm (10")

2 pcs pallets

Carrying tool case

• Case size (O.D): 450x325x132mm (17.7"x12.8"x5.2")

• Individual packing: Color box

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

1PK-1990A 105 Pc Jumbo Tool Kit



Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance, and new ceramic soldering iron features energy saving of 60%.

New



1PK-1990A contents
Utility computer storage box
Flat nose plier 135mm (5.3")
Bent nose plier 130mm (5.1")
Lineman's plier 210mm (8.3")
Side cutting plier 165mm (6.5")
Fine tip straight tweezer
Spring hook
3 pcs soldering aid tools
Desoldering pump
Super drill set w/adaptor 110V or 220V
3 pcs anti-static alignment tool kit
Diagonal cutting nipper
Long nose plier
Long nose plier 165mm (6.5")
Adjustable wrench 6"
Ceramic Soldering Iron 110V
Straight forceps 6"
⦿ Pro-soft s/d 3/16"(inch) or 5mm(metric)
⦿ Pro-soft s/d 1/4"(inch) or 6mm(metric)
⦿ Pro-soft s/d 3.2x75mm (3.0")
⦿ Pro-soft s/d #0x75mm (3.0")
⦿ Pro-soft s/d 5.0x75mm (3.0")
⦿ Pro-soft s/d #1x75mm (3.0")
⦿ Pro-soft s/d 6.0x100mm (4.0")
⦿ Pro-soft s/d #2x100mm (4.0")
⦿ Pro-soft s/d #2x157mm (6.2")
Desoldering wick
Brush
6 pcs electronic screwdriver set
40 pcs socket & screwdriver set
Precision wire stripper
Crimping tool (inch) or (metric)
5 pcs needle file set
IC extractor
Mini flash light
7 pcs folding type hex key set (inch) or (metric)
3 prong holder
Heavy duty curved-claw hammer
PVC insulated tape
Solder core 63%, SN
Heat sink
Wrist strap 10FT
Measuring tape 3M/10FT
10 pcs electronic combination wrench (inch) or (metric)
Inspection mirror
Slip joint plier 154mm (6.1")
Pallet for 1PK-1990
Top pallet for 1PK-1990
Aluminum frame tool case

- Case size (O.D): 461x331x156mm (18.1"x13"x6.1")
- Individual packing: Color box



Super drill set contains 15pcs drills, brass collets, grind stones and super thin grinding wheel for multi purpose use.



Comes with ceramic heating element, fast thermal recovery and energy saving



40pcs high quality 1/2" socket set with ratcheting handle



• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

ESD STATIC PROTECTION

MAGNIFICATION & LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT CASES

LAN/DATACOMM

CONNECTORS

WIRING INSTALLATION

TOOL CASES

TOOL KITS

Index

500-030 99 Pc Service Technician's Tool Kit



8 In 1 Reversible ratchet screwdriver set with storage chamber in handle.



3-1/2 DMM with mechanical mistaken operation prevention, special with frequency and capacitance function.



500-030 contents

Utility component storage box
Reverse action tweezer
3 pcs anti-static alignment tool kit
Micro cutting plier
Long nose plier
Diagonal cutting nipper
Long nose plier
Long nose plier 165mm (6.5")
Cabling splicing knife
4" Adjustable wrench
8" Adjustable wrench
Solder aid tool
Quick heat ceramic soldering iron 110V
DMM with mechanical mistake prevention operation
⊖ Line color screwdriver 3.2x75mm (3.0")
⊕ Line color screwdriver #0x75mm (3.0")
⊖ Line color screwdriver 5.0x75mm (3.0")
⊕ Line color screwdriver #1x75mm (3.0")
⊖ Line color screwdriver 3.2x100mm (4.0")
⊕ Line color screwdriver 6.0x100mm (4.0")
⊖ Line color screwdriver #2x100mm (4.0")
⊕ Line color screwdriver 3.2x200mm (8.0")
⊖ Line color screwdriver 6.0x38mm (1.5")
⊕ Line color screwdriver #2x38mm (1.5")
⊖ Line color screwdriver 8.0x150mm (6.0")
Brush
6 pcs electronic screwdriver set
Snap ring plier set
Precision wire stripper
Multi-purpose crimping tool (inch)
23 pcs 1/4" socket set
Oil can
Mini flash light
7 pcs folding type hex key set (inch)
Center punch tool
Feeler gauge
Ball peen hammer with fiberglass handle
Spring hook
Spring hook
6" Steel ruler
3 pcs soldering aid tools
Super torque ratchet handle
4 pcs hex driver blades: 1/16", 5/64", 3/32", 1/8"
7 pcs nut driver blades:
1/4", 3/8", 3/16", 5/16", 7/16", 11/32", 1/2"
⊖ Double ended screwdriver 3mm/#0
⊕
Electrician's scissors
10 pcs electronic combination wrench (inch)
Inspection mirror
Slip-channel pump pliers 254mm (10")
ABS tool carrying case with second pallet
• Case size (O.D): 463x331x171mm (18.2"x13.0"x6.7")
• Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.



PK-4027AI 43 Pc Master Electrical Tool Kit



PK-4027AI contents

Utility knife (3 blades self loading)

Electrician's scissors

LED flash light

8" Adjustable wrench

PVC insulated tape

Contact voltage tester

Lineman's plier

Side cutting plier

Long nose plier 165mm (6.5")

Quick heat ceramic soldering iron 110V

6" Slip joint plier

8" Slip-channel pump plier

Pen solder 63%

Pro-soft screwdriver 3.0x75mm (3.0")

Pro-soft screwdriver #0x75mm (3.0")

Pro-soft screwdriver 5x75mm (3.0")

Pro-soft screwdriver #1x75mm (3.0")

Pro-soft screwdriver 6x100mm (4.0")

Pro-soft screwdriver #2x100mm (4.0")

Pro-soft screwdriver #2x200mm (8.0")

Heavy duty wire strippers/crimpers 206mm (8.1")

Measuring tape (5m/16ft)

9pcs ball point long arm hex key set:
1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"

Flex head gear wrench:
5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4"

3-3/4 autorange digital multimeter

Ball peen hammer with fiberglass handle

Utility component storage box

Plastic pipe cutter Ø6mm~25mm (Ø0.24"~1.4")

All purpose snip

Aluminum frame tool case w/2 pallets

- Case size (O.D): 486x325x159mm (19.1"x12.8"x6.3")
- Individual packing: Color box



3-3/4 Auto range DMM, special with frequency, capacitance, temperature measurement, thermocouple probe included.



The 7pcs flex head gear wrench set made of stainless steel, one side comes with ratcheting box end, the other open end at 15°



Heavy duty stainless steel blade with safety lock for cutting cable, carpet, leather, cardboard and so on.



• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

ESD STATIC
PROTECTION

MAGNIFICATION &
LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS
CASES

INSTRUMENT
CASES

LAN/DATACOMM

CONNECTORS

WIRING
INSTALLATION

TOOL CASES

TOOL KITS

Index

PK-15308EM 97 Pc Field and Maintenance Service Kit



Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance, and new ceramic soldering iron features energy saving of 60%.



PK-15308EM contents

3-3/4" autorange digital multimeter
23 pcs 1/4" driver socket set
Heavy duty curved-claw hammer W/fiberglass handle
8" Adjustable wrench
IC extractor
Hobby vise
Slip-channel pump pliers 254mm (10")
⊖ ProSoft Precision Screwdriver 2.0x50mm (2.0")
⊖ ProSoft Precision Screwdriver 2.4x75mm (3.0")
⊖ ProSoft Precision Screwdriver 3.0x100mm (4.0")
⊕ ProSoft Precision Screwdriver #00x50mm (2.0")
⊕ ProSoft Precision Screwdriver #0x75mm (3.0")
⊕ ProSoft Precision Screwdriver #1x150mm (6.0")
Wire Stripper Cutter
⊖ Pro-Soft Screwdriver 5.0x75mm (3.0")
⊕ Pro-Soft Screwdriver #1x75mm (3.0")
⊖ Pro-Soft Screwdriver 5.0X100mm (4.0")
⊕ Pro-Soft Screwdriver #1x100mm (4.0")
⊖ Pro-Soft Screwdriver 6.0X100mm (4.0")
⊕ Pro-Soft Screwdriver #2X100mm (4.0")
⊖ Pro-Soft Screwdriver 6.0x40mm (1.6")
⊕ Pro-Soft Screwdriver #5x40mm (1.6")
⊕ Pro-Soft Screwdriver #2x250mm (9.8")
⊖ Pro-soft screwdriver 5.0x75mm (3.0")
⊕ Pro-soft screwdriver #1x75mm (3.0")
⊖ Pro-soft screwdriver 5.0x100mm (4.0")
⊕ Pro-soft screwdriver #1x100mm (4.0")
⊖ Pro-soft screwdriver 6.0x100mm (4.0")
⊕ Pro-soft screwdriver #2x100mm (4.0")
⊕ Pro-soft screwdriver #2x250mm (9.8")
⊖ Pro-soft screwdriver 6.0x40mm (1.6")
⊕ Pro-soft screwdriver #2x40mm (1.6")
Fine tip straight tweezer
Utility component storage box
Long nose plier 135mm (5.3")
Diagonal cutting plier 110mm (4.3")
Lineman's plier 165mm (6.5")
Dual color cutting plier
Dual color long nose plier
9 pcs ball point long arm hex key set
10 pcs electronic combination wrench (inch)
5 pcs needle file set
Ceramic Soldering Iron 110W
Desoldering braid
Solder core 63%, SN
PVC insulated tape
Utility knife (3 blades self loading)
Measuring tape 3M/10FT
All Purpose Snip
Desoldering pump
Flux bottle (2 pcs/pack)
Blow brush (Ø62mm/Ø2.4")
Telescopic magnetic pick up tool
Inspection mirror
1pc Pallet
Heavy-duty ABS cases with wheels and telescoping handle



Heavy duty Hobby Vise for clamping up to 1.1" and max.opening:1.6"



23pcs 1/4" driver socket set with ratcheting handle.



Comes with ceramic heating element, thermal recovery fast and energy saving



High quality blade with improved TPR handle



Dual color TPR handles with better plating, provide excellent performance and long service life



- Case size (O.D): 465x335x190mm (18.3"x13.2"x7.5")
- Individual packing: Color box
- Not designed to be checked as airline baggage.

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

PK-9102 110 Punch Down Tool Bundle



- Combines Pro'sKit prime selections, providing expert quality and durability
- For 110/88-style jacks and patch panels use

PK-9102 contents

Wire Stripper Tool
UTP/STP Multiconductor cable from 3.2~9mm(0.13"~0.35")max.

Punch Down Tool 110/88

- Individual packing: Double blister card



PK-9103 DIY Crimp Bundle for Phone & Computer



- Great value for money
- Varied selections of tools for easy operation

PK-9103 contents

Wire Stripper Tool
UTP/STP Multiconductor cable from 3.2~9mm(0.13"~0.35")max.

Modular Crimping Tool
8P8C, 6P6C, 6P4C, 6P2C

RJ-45 Connector (10 pcs / bag)

RJ-11 Connector (10 pcs / bag)

- Individual packing: Double blister card



PK-9104 Weatherproof Compression Tool Bundle



- Excellent durability and flexibility
- Combines varied selections of tools for easy operation
- Made of high quality materials with longer product life

PK-9104 contents

All Purpose Snip

Coaxial Stripping Tool For RG-58, 59, 62 & 6 type

Compression Connector Crimping Tool For RG-59 & 6, Compressed distance: 0.8"x0.06" (Inch/Metric)

F Type Connector for RG6 Quad Coaxial (10 pcs / bag)

- Individual packing: Double blister card



PK-9105 Network Tool Bundle



- Highly integrated combinations of network tools offers great convenience
- Total solution for cutting, stripping and crimping jobs.
- Structured of high quality materials with outstanding mechanism design for comfort and easy operation

PK-9105 contents

Wire Stripper Tool
UTP/STP Multiconductor cable from 3.2~9mm(0.13"~0.35")max.

Modular Crimping Tool
8P8C, 6P6C, 6P4C, 6P2C

Punch Down Tool 110/88

RJ-45 Connector (10 pcs / bag)

RJ-11 Connector (10 pcs / bag)

- Individual packing: Double blister card



500-045 Modular Crimp Tool Bundle



500-045 contents

Modular plug crimping tool

Economy UTP stripper

Modular plug 50pcs

• Individual packing: Blister card

500-001 Coaxial Crimping Tool Kit



500-001 contents

Crimper tool

Rotary coaxial cable stripper

Round cable cutter

Screwdriver #1x125

DIES:

.255", .213", .187", .068" (Hex)
.319", .256", .213", .068" (Hex)
.043" (SQ), .100", .213", .068", .137", .255" (Hex)
.042" (SQ), .078", .151", .068", .128", .178" (Hex)
.10", .128", .429" (Hex)

Carrying case

• Case size: 305x210x58mm (12.0"x8.3"x2.3")

• Individual packing: Color label shrink

500-031 Professional Twisted Pair Installer Kit



500-031 contents

RJ-45 die set

RJ-11 die set

RJ-11 DEC die set

AMP RJ-45 die set

RJ-22 die set

Supercrimp crimp tool frame

Punch down tool with 110/66 blades

Multi-function wire strippers

6-position 4 contact flat stranded (50 pcs/bag)

8-position 8 contact round stranded (25 pcs/bag)

Blowing case

• Case size: 340x250x65mm (13.4"x9.8"x2.6")

• Individual packing: Color label shrink

500-021 Category 5e/6 Termination Kit



500-021 contents

Multi-network cable tester

Punch down tool with 110/66 blades

Modular crimping tool

UTP/STP cable stripper

4-position 4 contact flat stranded (50 pcs/bag)

8-position 8 contact round stranded (25 pcs/bag)

RJ-45 protection cap. (20 pcs/bag)

Zippered carrying bag

• Case size: 280x197x70mm (13.4"x9.8"x2.6")

• Individual packing: Inner box & Color label shrink

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

902-297 DataGo Kit

902-297 contents

Modular plug 8P8C round cable, solid wire, 50u"(unit:10 pcs/bag)

Pro-crimper modular tool

Punch down tool with 110/66 blades

Multi-modular cable tester

Wire stripper tool

Spare pocket and tool holders allow user to expand the tool kit usage as they learn new applications


Zipper bag

- Case size: 305x255x75mm (12"x10"x3")
- Individual packing: Color label shrink



MT-7810 Satellite Finder Kit

- 950-2400 MHz bandwidth, high sensitivity, and perfect for setting up satellite dishes anywhere you want.
- Pocket size and lightweight, built-in light for night dish adjustment
- Audible tune-in signal makes it easy and quick to find the best signal reception by changing the antenna direction.

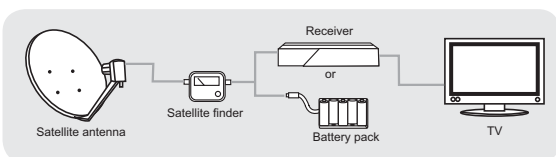

MT-7810 Contents

Satellite Finder

Lensatic Compass

15V DC battery pack (Battery not included)

6ft RF jumper cable

- Individual packing: Plain box+Color label



For Satellite test



PK-2097 Satellite Installation Tool Kit

PK-2097 contents

Pro-Crimper For CATV F Connectors RG59,6

Rotary Coaxial Cable Stripper (RG-58/59/62/ 3C2V/4C/5C)

Dual Color Side Cutting Plier 165mm (6.5")

Electronic Hex Nut Driver Set

8Pcs Bits Pack

⊖ 6.0 ⊕ #1 ⊕ T10,T15,T8 ⊕ M5,M6,M7

8" Adjustable Wrench

Electrician's Knife 190mm (7.5")

Satellite Finder Kit

Zippered carrying bag

- Case size: 311x216x60mm (12.2"x8.5"x2.4")
- Individual packing: Color box



• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

902-301 Professional Satellite and Cable TV Compression Kit



902-301 contents

Coax flaring tool

Round cable cutter (165mm/6.5")

Universal stripping tool(UTP/STP/RG-59/6/7/11)

Compression tool for RG59/RG6/RG11 type waterproof connectors

Pocket cable tone tester

Zippered carrying bag with room for expansion

- Case size: 305x255x75mm (12"x10"x3")
- Individual packing: Color label shrink

902-300 Satellite and Cable TV Compression Kit



902-300 contents

Universal stripping tool(UTP/STP/RG-59/6/7/11)

Coax flaring tool

Waterproof connector crimping tool for RG-59(4c),RG-6(5c)

Pocket cable tone tester

Zipper bag

- Case size: 305x152x165mm (12"x6"x6.5")
- Individual packing: Color label shrink

902-310 Universal Compression Kit



902-310 contents

Coax flaring tool

Round cable cutter (165mm/6.5")

Universal stripping tool(UTP/STP/RG-59/6/7/11)

Compression tool for RG59/RG6/RG11 Type waterproof connectors

Zipper bag

- Case size: 305x152x165mm (12"x6"x6.5")
- Individual packing: Color label shrink

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

500-006 Network Maintenance Kit

500-006 contents

Diagonal cutting nipper

Long nose plier

6" Adjustable wrench

Quick heat ceramic soldering iron 110V

6" Straight forceps

For crimping coax connectors

Rotary coaxial cable stripper

Pro-soft s/d 3/16"(inch)

Pro-soft s/d 1/4"(inch)

Pro-soft s/d T10

Pro-soft s/d T15

Pro-soft s/d T20

Pro-soft s/d 3.2x75mm (3.0")

Pro-soft s/d #0x75mm (3.0")

Pro-soft s/d 5.0x75mm (3.0")

Pro-soft s/d #1x75mm (3.0")

Pro-soft s/d 6.0x100mm (4.0")

Pro-soft s/d #2x100mm (4.0")

Precision wire stripper

Desoldering pump

Pro-crimper modular tool

IC extractor

Mini flash light

7 pcs folding type hex key set (inch)

Inspection mirror

Zippered carrying bag

• Case size: 375x250x60mm (14.8"x9.8"x2.4")

• Individual packing: Inner box & Color label shrink



500-018 Master Network Installation Kit

500-018 contents

RJ-45 die set

RJ-11 die set

RG-58, RG-59/62, BNC/TNC die set

Supercrimp crimp tool frame

Multi-network cable tester

Round cable cutter

Rotary coaxial stripper

Precision wire stripper

Punch down tool with 110/66 blades

Mini flash light

7 pcs folding type hex key set (inch)

Extension blade 7" (175mm)

Nut blade:
1/4", 3/8", 3/16", 7/16", 11/32", 5/16" (inch)

Driver blade T6

Driver blade T7

Driver blade T8

Driver blade T9

Super torque ratchet handle

8 pcs screwdriver blades:
#0, #1, #2 3, 5, 6mm T10, T15

Inspection mirror

Zippered carrying bag

• Case size: 375x250x60mm (14.8"x9.8"x2.4")

• Individual packing: Inner box & Color label shrink



Multi-network cable tester for auto scanning the wires continuity, mis-wiring and polarization of network cables.



Pro-Crimper Ratcheting Crimper features 40-50% force saving.



Ergonomic punch down tool increased HI/LOW forces.

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

▶ 900-241 Cable Service Kit



902-241 contents

All-in-one toner & probe kit
Pro-crimper modular tool
Impact & punch down tool
Universal stripping tool (UTP/STP, RG-59/6/7/11)
6-in-1 magnetic quick change screwdriver
All purpose snip
Zippered carrying bag

- Case size: 333x210x50mm (13.1"x8.3"x2.0")
- Individual packing: Inner box & Color label shrink



Copper cabling detecting, including shielded (STP) and UTP cable



10 Base-T or 10/100 Base-T datacom networks



Locates and isolates cables quickly and easily



Accessories:
1 zipper bag,
2 RJ-45 cables,
2 BNC connectors, and
2 RCA connectors

▶ 902-298 DataTel Pro Kit



- Detects 10Mb and 100Mb Ethernet signals
- Tone, trace and test all telephone, and data cables with the Universal Cable Tester including USB, and Modular Plug cables
- Tap into data and telephone lines for monitoring and testing using the 8-way modular adaptor with all patch cables included

902-298 contents

Wire stripper tool
In-line modular adapters 4/6/8 pin 3in1
All-in-one toner & probe kit
Punch down tool with 110/66 blades
Modular crimping tool
Zippered carrying bag

- Case size: 305x255x75mm (12"x10"x3")
- Individual packing: Color label shrink

▶ PK-4012 HDTV Video RF Coaxial Cable Tool Kit



PK-4012 contents

Die Set (SQ.041",HEX.068",.178",.255",.278")
Die Set (SQ.042",HEX.197",.278")
Die Set (SQ.042",HEX.068",.275",.278")
Die Set (SQ.042",.052", HEX.068",.255",.324")
Die Set (SQ.042",HEX.178",.275")
Die Set (SQ.042", HEX.068",.0178",.197",.255")
Supercrimp Crimp Tool Frame
Rotary Coaxial Cable Stripper(RG-58/59/62/3C/4C)
Rotary Coaxial Cable Stripper(RG-58/59/62/3C2V/4C/5C)
Forged Cable Cutter 160mm(6.3")
All-in-one Toner & Probe Kit
Zippered carrying bag

- Case size: 311x216x60mm (12.2"x8.5"x2.4")
- Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

902-296 Premise Pro Kit

902-296 contents

4P/6P/8P telcom crimping tool
Punch down tool with 110/66 blades
All-in-one toner & probe kit
In-line modular adapters 4/6/8 pin 3 in 1
Compression tool for RG59/RG6/RG11 type waterproof connectors
Universal stripping tool(UTP/STP/RG-59/6/7/11)
Zipper bag

- Case size: 305x255x75mm (12"x10"x3")
- Individual packing: Color label shrink



Copper cabling detecting, including shielded (STP) and UTP cable



10 Base-T or 10/100 Base-T datacom networks



Locates and isolates cables quickly and easily



Accessories:
1 Zipper bag,
2 RJ-45 cables,
2 BNC connectors, and
2 RCA connectors

PK-4302AI PC Networking Tool Kit

PK-4302AI contents

Dual Color Side Cutting Plier 165mm (6.5")
Dual Color Long Nose Plier 165mm (6.5")
Soldering Iron 30W (110V)
Die Set for RJ45/8P8C
Die Set for RG 58,59,62,6
Die Set for RG 59, 6, F Type
Die Set for Fiber optic connector
Supercrimp Crimp Tool Frame
Wire Stripper Tool
Pen Solder 63%
Pro-Soft Screwdriver $\odot$ 3/16"(inch)
Pro-Soft Screwdriver $\odot$ 1/4"(inch)
Pro-Soft Screwdriver $\odot$ 3.0x75mm (3.0x3.0")
Pro-Soft Screwdriver $\odot$ #0x75mm (#0x3.0")
Pro-Soft Screwdriver $\odot$ 5.0x100mm (5.0x4.0")
Pro-Soft Screwdriver $\odot$ #1x100mm (#1x4.0")
Pouch Down Tool with 110 Blades
Ball Peen Hammer
Wire Stripping Tool for 0.5, 1.2,1.6,2.0mm
Utility Knife (3 Blades Self Loading)
Measuring Tape (3M/10FT)
Desoldering Pump
7 pcs Folding Type Hex Key Set (inch)
3 1/2 Compact Digital Multimeter
Multi-Modular Cable Tester
Utility Component Storage Box
All Purpose Snip
Aluminum Frame Tool Case W/1 Pallet

- Case size: 458x330x150mm (18.0"x13.0"x5.9")
- Individual packing: Color box



Pro-Crimper Interchangeable Ratcheting Crimper, force saving up to 30%

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

500-027 Master Network Installation Tool Kit



Pro-Crimper Ratcheting Crimper features 40-50% force saving.



Multi-network cable tester for auto scanning the wires continuity, mis-wiring and polarization of network cables.



Ergonomic punch down tool increased HI/LOW forces.



500-027 contents
Network cable tester(patch cord not included)
Side cutter 125mm (4.92")
Long nose plier 138mm (5.43")
RJ-45 die set
RJ-11 die set
AMP RJ-45 die set
RG-58, RG-59/62, BNC/TNC die set
Supercrimp crimp tool frame
Multi-network cable tester
Round cable cutter
Rotary coaxial stripper
Wire stripper tool
Precision wire stripper
Punch down tool with 110/66 blades
7 pcs folding type hex key set (inch)
A roll of Cat.5 STP24x4P (7/0.2) length: 10M
A roll of Cat.5 UTP24x4P (7/0.2) length: 10M
1pc pallet
ABS tool carrying case w/1 pallet
• Case size: 435x310x153mm (17.13"x12.2"x6.02")
• Individual packing: Color box

500-020 Master Network Installation Tool Kit



3-3/4 Auto range DMM, special with frequency, capacitance, temperature measurement.



8 In 1 Reversible ratchet screwdriver set with storage chamber in handle.



Multi-network cable tester for auto scanning the wires continuity, mis-wiring and polarization of network cables.

500-020 contents
Network cable tester (patch cord not included)
Side cutter 125mm (4.92")
Long nose plier 138mm (5.43")
RJ-45 die set
RJ-11 die set
RG-58, RG-59/62, BNC/TNC die set
RJ-22 die set
RG-58, RG-59/62 AU BNC/TNC die set
Supercrimp crimp tool frame
Desoldering pump
Quick heat ceramic soldering iron 110V
6" Curved forceps
Multi-network cable tester
Round cable cutter
Rotary coaxial stripper
Desoldering braid
Precision wire stripper
Punch down tool with 110/66 blades
Mini flash light
7 pcs folding type hex key set (inch)
Blowing brush
Extension blade 7" (175mm)
• Nut blade: 1/4", 3/8", 3/16", 7/16", 11/32", 5/16"
Super torque ratchet handle
8 pcs screwdriver blades:
• #0, #1, #2 • 3, 5, 6mm • T10, T15
• Driver blade T6
• Driver blade T7
• Driver blade T8
• Driver blade T9
Wrist strap 10FT
Inspection mirror
3- 3/4 autorange digital multimeter
2pcs pallets
ABS tool carrying case w/1 pallet
• Case size: 435x310x153mm (17.1"x12.2"x6")
• Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

902-299 VoIP Kit

902-299 contents

6" Long nose plier
6" Side cutting plier
Utility component storage box
Probe-pic spudger
6 In 1 magnetic quick change screwdriver
Telecom mini-test set
Connector-crimping plier
Double end socket can wrench
3 in 1 Wire stripper tool
In-line modular adapters 4/6/8 pin
All-in-one toner & probe kit
Punch down tool with 110/66 blades
4P/6P/8P telcom crimping tool
Deluxe portable tool bag

- Case size: 390x250x245mm (15.4"x9.8"x9.6")
- Individual packing: Color label+shink



PK-4022EI Deluxe Telecom Installer's Kit

Ideal for installing, maintaining, and troubleshooting voice networks, A convenient way for carrying tools inside the PVC handbag provides handy and compact usage to installers. PK-4022EI is a good choice for communication installers, telecom installers, and telephone linesmen.

PK-4022EI contents

Telecom test set
6" straight forceps
Electrician's knife
5" cutting plier
5.5" long nose plier
6" long nose plier 170mm (6.7")
Probe-pic spudger
Electrician scissors
Double-end screwdriver
⊕ Pro-soft screwdriver #1x75mm (3.0")
⊕ Pro-soft screwdriver #2 6x100mm (4.0")
⊖ Pro-soft screwdriver 8x150mm (6.0")
⊖ Pro-soft screwdriver 6x150mm (6.0")
Precision wire stripper (AWG 30/28/26/24/22/20)
Punch down tool with 110/66 blades
Tone probe kit (battery not include)
In-line modular adapters 4/6/8 pin 3 in 1
8 pcs folding hex key set
Soldering iron 110V
Double end socket can wrench
2 pcs pallets
Deluxe carry bag with 2 pallets

- Case size: 435x325x90mm (17.1"x12.8"x3.5")
- Individual packing: Color box



The telecom test set with LCD display, features line polarity test, line continuity test and NET service & speed detection.



The basic Tone and Probe Kit features locating de-energized AC wire, telephone/twisted pair wire and all voice and data category rated cables

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

PK-12012H Telecom Installation Kit

Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance and long service life.



PK-12012H contents

Dual color long nose plier 136mm (5.4")
Dual color diagonal cutting plier 125mm (4.9")
Professional modular plug tool crimps strips & cuts
Punch down tool 110 blade and 66 blade
Multi-modular cable tester
Butt set
pro-soft screwdriver 5x75mm (3.0")
pro-soft screwdriver 6x100mm (4.0")
pro-soft screwdriver #2x100mm (4.0")
pro-soft screwdriver #2x40mm (1.6")
Soft side tool pouch

- Case size: 305x235x95mm (12"x9.3"x3.7")
- Individual packing: Color box



Dual purpose belt for easy carrying on shoulder or waist



For 4P/6P/8P modular plug better crimping in parallel action.

500-043 Communication Maintenance Kit



500-043 contents

Reverse action tweezer
Spring hook
3 pcs anti-static alignment tool kit
Micro cutting plier
Diagonal cutting nipper
Long nose plier
Long nose plier 165mm (6.5")
6" Adjustable wrench
Probe-pic spudger
5" Straight forceps
Tone probe kit
Replacement blade-110
6 pcs electronic screwdriver set
Precision wire stripper
Insertion/extraction tool
Mini flash light
7 pcs folding type hex key set (inch)
Impact & punch down tool w/o blade
6" Steel ruler
Extension blade 7" (175mm)
Super torque ratchet handle
8 pcs screwdriver blades:
⊕ #0, #1, #2 ⊖ 3, 5, 6mm ⊕ T10, T15
7 pcs nut driver blades:
⊕ 1/4", 3/8", 3/16", 5/16", 7/16", 11/32", 1/2" (inch)
Double ended screwdriver ⊖ 3mm/⊕ #0
Wrist strap 10FT
Measuring tape 3M/10FT
Electrician's scissors
Inspection mirror
Butt set
Dual telephone line tester
Electrician's knife
Slip-channel pump pliers 204mm (8.03")
2 pallets
Deluxe carrying bag

- Case size: 435x325x90mm (17.1"x12.8"x3.5")
- Individual packing: Plain box + Color label



The heavy duty butt set complies with weatherproofing allowing use in toughest environments, features high impedance monitor for data safe operation



The basic Tone and Probe Kit features locating de-energized AC wire, telephone/twisted pair wire and all voice and data category rated cables



8 In 1 Reversible ratchet screwdriver set with storage chamber in handle.

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

PK-14019A Communication Maintenance Kit



Pro'sKit® upgrade tool kits include new pliers and screwdrivers that provide better performance and long service life.

New



The basic Tone and Probe Kit features locating de-energized AC wire, telephone/twisted pair wire and all voice and data category rated cables



PK-14019A contents

Long nose plier 135mm (5.3")

Diagonal cutting plier 113mm (4.4")

Dual color side cutting plier 165mm (6.5")

Dual color long nose plier 165mm (6.5")

Adjustable wrench 6"

3 3/4 Autorange digital multimeter

Tone probe kit

7 pcs hex key set (inch) or (metric)

Punch down tool 110 blade

All Purpose Snip

Butt set

In-line modular adapters 4/6/8 pin 3 in 1

Electrician's knife

Pro-soft screwdriver 3.0 x75mm (3.0")

Pro-soft screwdriver #0 x75mm (3.0")

Pro-soft screwdriver 6.0 x100mm (4.0")

Pro-soft screwdriver #2 x100mm (4.0")

Pro-soft screwdriver 5.0 x100mm (4.0")

Pro-soft screwdriver #1 x100mm (4.0")

Pro-soft screwdriver 3/16" (inch) or 5mm (metric)

Pro-soft screwdriver 1/4" (inch) or 6mm (metric)

Deluxe aluminum frame tool case

• Case size(O.D): 440x340x165mm (17.3"x13.4"x6.5")

• Individual packing: Plain box + Color label



3-3/4 Auto range DMM, special with frequency, capacitance, temperature measurement, thermocouple probe included.



Dual color TPR handles with better plating, provide excellent performance and long service life



Heavy duty stainless steel blade with safety lock



The heavy duty butt set complies with weatherproofing allowing use in toughest environments, features high impedance monitor for data safe operation

• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

ESD STATIC PROTECTION

MAGNIFICATION & LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT CASES

LAN/DATACOMM

CONNECTORS

WIRING INSTALLATION

TOOL CASES

TOOL KITS

Index

902-242 Deluxe Telecom Installation Kit



23pcs 1/4" driver socket set with ratcheting handle.



Pro-Crimper Interchangeable Ratcheting Crimper, force saving up to 30%



The All-in-one Toner & Probe Kit features locating cable or hidden cable quickly, verifying conductor continuity with cable map and identify and troubleshoot cable services.



902-242 contents

All purpose snip
Double end socket can wrench
8 pcs folding hex key set
Electrician's knife
6" Long nose plier black oxide finish
Dual color diagonal cutting plier (110mm/4.33")
Micro cutting plier
6" Adjustable wrench
Probe-pic spudder
Electrician's scissors
Pro-soft screwdriver 6.0x100mm (4.0")
Pro-soft screwdriver #2x100mm (4.0")
Pro-soft screwdriver 5.0x100mm (4.0")
Pro-soft screwdriver #1x100mm (4.0")
Double-end screwdriver
Precision hand drill
23 pcs 1/4" driver socket set
All-in-one toner & probe kit
In-line modular adapters 4/6/8 pin 3 in 1
Punch down tool with 110/66 blades
Heavy duty curved-claw hammer W/Fiberglass handle
Fish tape (50FT)
Velcro cable tie-5" assortment (15 pcs/pack)
10 pcs electronic combination wrench (Inch)
Utility component storage box
Pro-crimper (frame only)
Die set for CP-372G 8P8C/RJ45 plug & cable O/D around 5.2ø
Die set for CP-372O RG 58, 59, 62, 174
Die set for CP-372T CATV F connectors RG 59, 6
Hi-reliability tape measure 3M/10Ft
6" straight forceps
2 pallets
Aluminum frame tool case with second pallet
• Case size: 461x331x156mm (18.2"x13"x6.1")
• Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

PK-4023EI Master Telecom Installation and Service Kit



Designed specially for telecom installers, network and cable television engineers. A convenient way for carrying tools inside the rugged ABS tool case provides convenience to installers.

PK-4023EI contents	
Desoldering braid with 2.0mm	
Blowing brush	
Rotary Coaxial Stripper	
2 pallets	
7" Extension blade (175mm)	
Driver blade T6	
Driver blade T7	
Driver blade T8	
Driver blade T9	
8 pcs screwdriver blades	
⊕ #0, #1, #2 ⊖ 3, 5, 6mm ⚙ T10, T15	
Wrist strap 10FT	
⚙ Nut blade: 1/4", 3/8", 3/16", 7/16", 11/32", 5/16"(inch)	
Super torque ratchet handle	
5" cutting pliers	
5.5" long nose pliers	
8" lineman's pliers (215mm/8.46") black oxide finish	
Professional 3 3/4 auto-ranging digital multimeter	
All purpose snip	
6" Adjustable wrench	
8.7" fiber optic crimping tool	
8 pcs folding hex key set	
10" Adjustable wrenches	
Double end socket can wrench	
Utility knife(3 blades self loading)	
Punch down tool with 110/66 blades	
4P/6P/8P Telecom crimping tool	
Testing screwdriver	
Utility component storage box	
Soldering iron 110V	
Precision wire stripper (AWG22/20/18/16/14/12/10)	
All-in-one toner & probe kit	
Telecom test set	
Tool case W/1 pallet	

- Case size (O.D): 463x331x171mm (18.2"x13.0"x6.7")
- Individual packing: Color box



3-3/4 Auto range DMM, special with frequency, capacitance, temperature measurement, thermocouple probe included.



The All-in-one Toner & Probe Kit features locating cable or hidden cable quickly, verifying conductor continuity with cable map and identify and troubleshoot cable services.



The telecom test set with LCD display, features line polarity test, line continuity test and NET service & speed detection.



• NOTE : For quality reason, we reserve the right to change the above specifications without notice.

ESD STATIC
PROTECTION

MAGNIFICATION &
LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT
CASES

LAN/DATACOMM

CONNECTORS

WIRING
INSTALLATION

TOOL CASES

TOOL KITS

Index

PK-4028AI Telecom & Networking Installation Tool Kit



The cable sniffer remote includes RJ-45, RJ-11, USB and BNC connects. Only one button, easy to detects open, short, miswired and cross-connected wire.



The voltage detector comes with LED display for testing 70 to 250VAC and up to 12, 36, 55 VDC



Electricians Scissors with double stripping notches for stripping wire AWG 18~ 22.



Pro-Crimper Interchangeable Ratcheting Crimper, force saving up to 30%

PK-4028AI contents

5 PCS Needle File Set
Pro-Crimper (Frame only)
Die Set, RJ11
Die Set, RJ45 modular plugs 8 position (Standard plugs, not AMP)
Punch down tool (with 110 blades)
Replacement Blade for CP-3140 with 66 Type
Die Set for CP-372T CATV F Connectors RG 59,6
Die Set for CP-372S RG 58,59,62,6
Utility Knife (3 Blades Self Loading)
Electrician's Scissors
Desoldering Pump
LED Flash Light
6" Adjustable wrenches
PVC Insulated tape
Contact Voltage Tester
8" Combination Plier
6" Side Cutting Plier
6" Long Nose Plier
Quick Heat Ceramic Soldering Iron 110V
8" Groove Joint Plier
⊖ Pro-Soft Screwdriver 5x75mm (3.0")
⊕ Pro-Soft Screwdriver #1x75mm (3.0")
⊖ Pro-Soft Screwdriver 6x100mm (4.0")
⊕ Pro-Soft Screwdriver #2x100mm (4.0")
⊖ Pro-Soft Screwdriver 6x40mm (1.6")
⊕ Pro-Soft Screwdriver #2x40mm (1.6")
Wire Stripper Tool
Measuring Tape (3M/10FT)
9pcs Ball Point Long Arm Hex Key Set: 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 1/4", 5/16", 3/8"
Cable Sniffer-Remote
In-Line Modular Adapters 4/6/8 Pin 3 In 1
Ball Peen Hammer with Fiberglass Handle
All Purpose Snip
Soft Side Tool Pouch
2 pallets for PK-4028 Series
Aluminum Frame Tool Case W/2 Pallets

- Case size: 486x325x159mm (19.1"x12.8"x6.3")
- Individual packing: Color box

• NOTE : For quality reason. we reserve the right to change the above specifications without notice.

Cat.#	Page
1	
100-002	66
100-003	30
100-004	30
100-006	25
100-007	31
100-008	57
100-009	46
100-011	24
100-012	24
100-013	24
100-014	25
100-015	25
100-016	25
100-017	25
100-021	38
100-022	39
100-025	25
100-033	38
100-035	46;126
100-039	39
100-040	30
100-042	30
100-044	30
100-046	26
100-049	46
1PK	
1PK-125T	111
1PK-1700NA	188
1PK-1900NA	187
1PK-1990A	189
1PK-3003D30	52
1PK-3003D31	52
1PK-3003D32	52
1PK-3003D33	52
1PK-3003D34	52
1PK-3003D7	52
1PK-3003FD27	53
1PK-9402	94
2	
200-002	32
200-003	68
200-004	70
200-005	70
200-006	41
200-007	67
200-007W	67
200-009	67
200-013	40
200-015	40
200-016	69
200-032	132
200-033	132
200-034	41
200-035	41
200-036	67
200-037	30
200-038	38
200-039	39
200-040	31
200-041	31
200-042	67
200-042-100	67
200-043	42
200-045	39
200-046	40

Cat.#	Page
200-047	65;126
200-048	67
200-050	70
200-051	70
200-053	57
200-056	24
200-057	24
200-058	24
200-059	24
200-060	25
200-063	39
200-064	69
200-065	69
200-067	25
200-068	40
200-069	40
200-070	68
200-071	32
200-072	68
200-080	32
200-081	70
200-082	31
200-083	31
200-084	70
200-085	67
200-087	30
200-088	32
200-090	69
200-091	68
200-092	26
3	
300-001	54
300-002	53
300-003	52
300-004	56
300-004B	56;57
300-005	53
300-007	52
300-009	54
300-010	54
300-011	60
300-015	61
300-016	61
300-018	57
300-019	52
300-021	53
300-022	52
300-023	52
300-024	53
300-028	57
300-035	60
300-037	57
300-038	52
300-039	53
300-041	52
300-045	52
300-047	53
300-048	52
300-049	52
300-050	53
300-054	51
300-055	62
300-056	50;51
300-058	53
300-063	56
300-064	56

Cat.#	Page
300-070	53
300-071	53
300-072	53
300-073	53
300-074	58
300-075	60
300-077	54
300-077D	54
300-078	57
300-086	54
300-087	54
300-088	57
300-089	57
300-090	57
300-091	58
300-092	58
300-095	53
300-096	51
300-097	54
300-101	53
300-102	53
300-103	54
300-104	53
300-105	54
300-106	53
300-107	62
300-108	53
300-109	52
300-112	52
300-115	53
300-116	52
300-117	52
300-118	53
300-119	52
300-120	53
300-130	53
300-131	53
300-132	53
300-133	53
300-134	54
300-141	53
300-142	53
300-143	53
300-144	54
300-145	54
300-146	53
300-147	53
300-149	60
300-151	39
300-156	59
300-157	52
300-158	52
300-159	52
300-160	54
300-161	52
300-162	52
300-163	52
300-164	53
300-165	54
300-166	54
300-167	53
300-168	52
300-169	53
300-170	54
300-171	54
300-172	53

Cat.#	Page
300-173	52
300-174	53
300-175	54
300-176	54
300-177	53
300-178	52
300-179	52
300-180	52
300-181	52
300-182	52
300-183	52
300-184	52
300-185	52
300-186	52
300-187	52
300-188	52
300-189	52
300-190	52
300-191	52
300-192	52
300-193	52
300-194	52
300-195	52
4	
400-001	9
400-004	9
400-007	10
400-011	8
400-017	7
400-026	9
400-028	7
400-029	20
400-030	20
400-042	6
400-044	134
5	
500-001	194
500-003	181
500-006	197
500-016	182
500-017	184
500-018	197
500-020	200
500-021	194
500-023	127
500-024	89
500-025	180
500-026	184
500-027	200
500-029	185
500-030	190
500-031	194
500-032	182
500-037	60
500-041	89
500-042	181
500-043	202
500-045	194
500-047	181
508-351N-IRON	78
5CP-16A	72
5DP-366D-T	82
5DP-366P-T	82
5MT-7600-LC	125
5PT-0721-ADA	130
5PT-1080-BAT	130

INDEX

Cat.#	Page
5PT-1080-CH	130
5PT-1080-P1	129,130
5PT-1201-ADA	129
5PT-1201-BAT	129
5PT-1201-CH	129
5PT-1361-ADA	131
5PT-1361-P1	131
5PT-1441A-ADA	129
5PT-1441-BAT	129
5PT-1441-CH	129
5S	
5SI-125T-B	80
5SI-125T-D	80
5SI-125T-SB	80
5SI-216N-0.8D	77
5SI-216N-1.2D	77
5SI-216N-1.6D	77
5SI-216N-1C	77
5SI-216N-2.4D	77
5SI-216N-2C	77
5SI-216N-3.2D	77
5SI-216N-3C	77
5SI-216N-4C	77
5SI-216N-B	77
5SI-216N-B1.0	77
5SI-216N-BC	77
5SI-216N-I	77
5SI-216N-K	77
5SR-538-FB	41
5SR-538-RB	41
6	
600-006	132
600-010	132
6HP-9060	20
6HP-9100	20
6HP-9150	20
6HP-9250	20
6S-2	83
700	
700-007	72
700-008	72
700-009	72
700-010	72
700-011	72
700-012	72
700-014	73
700-015	72
700-016	73
700-017	72
700-018	73
700-020	72
700-021	72
700-022	72
700-023	72
700-024	73
700-024-25	73
700-025	73
700-025-25	73
700-026	72
700-027	72
700-028	72
700-029	73
700-RA50	163
701	
701-001	165
701-002	165

Cat.#	Page
701-003	165
701-004	165
701-005	165
701-006	165
701-007	165
701-008	165
701-009	165
701-010	165
701-011	165
701-012	165
701-013	165
701-014	165
701-015	165
701-016	165
701-017	165
701-018	165
701-019	165
701-020	165
701-021	165
701-022	165
701-023	165
701-024	165
701-025	165
701-026	165
701-027	165
701-028	165
701-029	165
701-030	165
701-031	165
701-032	165
701-033	165
701-034	165
701-035	165
701-036	165
701-037	165
701-038	165
701-039	165
701-040	165
701-041	165
701-042	165
701-043	165
701-044	165
701-045	165
701-046	165
701-047	165
701-048	165
701-049	165
701-050	165
701-051	165
701-052	165
701-053	165
701-054	165
701-055	165
701-056	165
701-057	165
701-058	165
701-059	165
701-060	165
701-061	165
701-062	165
701-063	165
701-064	165
701-065	165
701-066	165
701-067	165
701-068	165

Cat.#	Page
701-069	165
701-070	165
701-071	165
701-072	165
701-073	165
701-074	165
701-075	165
701-076	165
701-077	165
701-078	165
701-079	165
701-080	165
701-081	165
701-082	165
701-083	165
701-084	165
701-085	165
701-086	165
701-087	165
701-088	165
701-089	165
701-090	165
701-091	165
701-097	165
701-099	165
701-100	165
701-101	165
701-102	165
701-104	165
701-111	165
701-112	165
701-113	165
701-114	165
701-115	165
701-116	165
701-117	165
701-120	165
701-121	165
701-122	165
701-130	165
701-131	165
701-132	165
701-133	165
701-998	165
702	
702-001	163
702-008	163
702-009	163
702-013	163
702-018	163
702-021	163
702-022	163
702-059	163
702-063	163
702-066	163
702-067	163
702-079	163
702-080	163
703	
703-001	164
703-002	164
703-003	164
703-004	164
703-005	164
703-006	164
703-007	164

Cat.#	Page
703-008	164
703-009	164
705	
705-001-BK	164
705-001-BK-25	164
705-001-BK-50	164
705-002-BU	164
705-002-BU-25	164
705-002-BU-50	164
705-003-BK	164
705-003-BK-25	164
705-003-BK-50	164
705-004-BK	164
705-004-BK-25	164
705-004-BK-50	164
705-004-BU	164
705-004-BU-25	164
705-004-BU-50	164
705-004-GN	164
705-004-GN-25	164
705-004-GN-50	164
705-004-RD	164
705-004-RD-25	164
705-004-RD-50	164
705-004-WH	164
705-004-WH-25	164
705-004-WH-50	164
705-004-YL	164
705-004-YL-25	164
705-004-YL-50	164
705-005-BK	164
705-005-BK-25	164
705-005-BK-50	164
705-006-BK	164
705-006-BK-25	164
705-006-BK-50	164
705-007-BU	164
705-007-BU-25	164
705-007-BU-50	164
705-008-BK	164
705-008-BK-25	164
705-008-BK-50	164
71	
711-AM-1-9	158
711-AS-1-9	158
711-FM-1-5	158
711-FS-1-2	158
711-HM-1-5	159
711-HS-1-2	159
711-LM-1-1	159
711-LS-1-1	159
711-MM-1-1	159
711-MS-1-1	159
711-PM-1-1	159
711-PS-1-1	159
712-AAM101-03M	161
712-AAS104-03M	161
712-FFM101-03M	161
712-FFS104-03M	161
712-LLM1F01-03M	161
712-LLS1F04-03M	161
713-AAM107-03M	161
713-AAS108-03M	161
713-HHM107-03M	161
713-HHS108-03M	161
713-PPM1F07-03M	161

Cat.#	Page
713-PPS1F08-03M	161
715-01S1-1	160
715-02S1-1	160
715-03M1-3	160
715-03S1-1	160
715-07S1-1	160
715-08M1-3	160
715-08S1-1	160
715-10M1-3	160
715-10S1-1	160
715-12M1-3	160
715-12S1-1	160
715-15M1-3	160
715-15S1-1	160
74	
744-FA03	163
744-FA50	163
76	
764-RA03	163
764-RX50	163
78	
788-FA03	163
788-FA50	163
788-FX15	163
788-FX50	163
788-RA03	163
788-RA50	163
788-RX15	163
788-RX50	163
7K	
7KJ15-C6USBL	151
7KJ15-C6USWH	151
7KJ15-CEUSBL	151
7KJ15-CEUSWH	151
7KJ3-C3-66IV	152
7KJ3-C3-66WH	152
7KJ8-C6USBK-Y	152
7KJ8-C6USBL-Y	152
7KJ8-C6USGN-Y	152
7KJ8-C6USGY-Y	152
7KJ8-C6USIV-Y	152
7KJ8-C6USRD-Y	152
7KJ8-C6USWH-Y	152
7KJ8-C6USYL-Y	152
7KJ8-CEUSBK-Y	152
7KJ8-CEUSBL-Y	152
7KJ8-CEUSGN-Y	152
7KJ8-CEUSGY-Y	152
7KJ8-CEUSIV-Y	152
7KJ8-CEUSRD-Y	152
7KJ8-CEUSWH-Y	152
7KJ8-CEUSYL-Y	152
7KJ-P24-M	151
7M	
7MU5-B-IV	155
7MU5-BNC-IV	155
7MU5-BNC-WH	155
7MU5-B-WH	155
7MU5-F-IV	155
7MU5-F-WH	155
7MU5-ST-IV	155
7MU5-ST-WH	155
7P	
7P-12AK11CEC-BK	148
7P-12TK11C6C-BK	149
7P-12TK11CEC-BK	149

Cat.#	Page
7P-24AK11CEC-BK	148
7P-24TK11C6C-BK	149
7P-24TK11CEC-BK	149
7P-32TK11CEC-BK	149
7P-48AK11CEC-BK	148
7P-48TK11C6C-BK	149
7P-48TK11CEC-BK	149
7PK-300-1IV	154
7PK-300-1WH	154
7PK-300-2IV	154
7PK-300-2WH	154
7PK-300-3IV	154
7PK-300-3WH	154
7PK-300-4IV	154
7PK-300-4WH	154
7PK-300-6IV	154
7PK-300-6WH	154
7PK-301AIV	157
7PK-301AWH	157
7PK-302AIV	157
7PK-302AWH	157
7PK-315A-C6/BK	157
7PK-315A-C6/WH	157
7PK-315A-CE/BK	157
7PK-315A-CE/WH	157
7PK-315AS-C6	157
7PK-315AS-CE	157
7PK-317BN-IV	154
7PK-317BN-WH	154
7PK-317H1-IV	154
7PK-317H1-WH	154
7PK-317H2-IV	154
7PK-317H2-WH	154
7PK-317H3-IV	154
7PK-317H3-WH	154
7PK-317ICON	154
7PK-317V1-IV	154
7PK-317V1-WH	154
7PK-317V2-IV	154
7PK-317V2-WH	154
7PK-317V3-IV	154
7PK-317V3-WH	154
7PK-317V4-IV	154
7PK-317V4-WH	154
7PK-317V6-IV	154
7PK-317V6-WH	154
7PK-318-IV	155
7PK-318-WH	155
7PK-342RC6US-DWH	156
7PK-342RC6US-MWH	156
7PK-342RCEUS-DWH	156
7PK-342RCEUS-MWH	156
7PMV12T-K11-C6C/BK	150
7PMV12T-K11-CEC/BK	150
7U	
7URT-46F4U01M-4B6	153
7URT-46F4U01M-4B8	153
7URT-46F4U02M-4B6	153
7URT-46F4U02M-4B8	153
7URT-46F4U50C-4B6	153
7URT-46F4U50C-4B8	153
7URT-4EF4N01M-4B6	153
7URT-4EF4N01M-4B8	153
7URT-4EF4N02M-4B6	153
7URT-4EF4N02M-4B8	153
7URT-4EF4N50C-4B6	153

Cat.#	Page
7URT-4EF4N50C-4B8	153
8	
800-001	94
800-002	94
800-003	94
800-004	94
800-005	94
800-006	94
800-007	91
800-009	91
800-010	94
800-011	94
800-012	94
800-013	94
800-014	94
800-015	94
800-016	94
800-017	94
800-018	94
800-019	94
800-020	94
800-021	94
800-022	94
800-023	94
800-024	94
800-025	94
800-026	94
800-027	94
800-028	95
800-029	95
800-030	94
800-032	94
800-033	94
800-034	94
800-035	94
800-036	94
800-037	94
800-038	94
800-039	137
800-040	92
800-041	98
800-042	98
800-043	94
800-044	94
800-045	94
800-046	94
800-047	94
800-048	98
800-048E	98
800-049	59
800-050	59
800-052	104
800-060	90
800-065	105
800-066	104
800-067	105
800-068	99
800-070	137
800-072	59
800-073	90
800-074	98
800-076	99
800-077	91
800-078	99
800-079	59
800-080	98

Cat.#	Page
800-081	100
800-091	105
800-092	93
800-092-50	93
800-114	86
800-115	86
800-116	86
800-117	86
800-118	86
800-119	86
800-120	86
800-121	86
800-122	86
800-123	94
800-124	104
800-129	88
800-130	86
800-148	98
800-149	91
800-150	91
900	
900-002	115
900-004	82
900-008	82
900-011	174
900-012	115
900-015	82
900-016	83
900-018N	80
900-019	134
900-020N	80
900-022	115
900-023	115
900-026	70
900-027	70
900-032	136
900-033	138
900-035	79
900-036	79
900-037	82
900-038	104
900-039	145
900-040	145
900-041	145
900-043	145
900-044	80
900-045	173;174
900-048	173
900-049	139
900-050	80
900-052	175
900-054	175
900-055	57
900-056	115
900-057	115
900-058	139
900-061	119
900-061-3X	119
900-061B	119
900-061-CLAMP	119
900-063	120
900-064	120
900-065	61
900-066N	78
900-067	107
900-068	107

ESD STATIC PROTECTION

MAGNIFICATION & LIGHTING

FIBER OPTICS

POWER TOOLS

MISCELLANEOUS

INSTRUMENT CASES

LAN/DATACOMM

CONNECTORS

WIRING INSTALLATION

TOOL CASES

TOOL KITS

Index

INDEX

ESD STATIC PROTECTION
MAGNIFICATION & LIGHTING
FIBER OPTICS
POWER TOOLS
MISCELLANEOUS
INSTRUMENT CASES
LAN/DATACOMM
CONNECTORS
WIRING INSTALLATION
TOOL CASES
TOOL KITS
Index

Cat.#	Page
900-069	107
900-070	107
900-071	111
900-072	111
900-073N	78
900-074N	78
900-075	120
900-075A	120
900-076	120
900-077	120
900-078	56
900-079	120
900-080	120
900-080B	120
900-081	120
900-082	120
900-091A	145
900-094	136
900-096	120
900-098-BK	170
900-098-BU	170
900-098-GN	170
900-098-OR	170
900-098-RD	170
900-098-WH	170
900-098-YL	170
900-099	83
900-100	83
900-103	137
900-106	177
900-112	45
900-112B	45
900-113	45
900-113B	45
900-114	115
900-115	80
900-116	115
900-117	57;69
900-118A	80
900-123	121
900-124	121
900-125	120
900-125B	120
900-126	120
900-132	115
900-133	115
900-135	45
900-137	127
900-138	126
900-140	73
900-141	173
900-142	120
900-146	79
900-147	167
900-147A	120
900-148	167
900-149	167
900-150	134
900-151	134
900-157	126
900-158	140
900-162A	146
900-162B	146
900-162C	146
900-164A	146
900-164B	146

Cat.#	Page
900-167	122
900-168	126
900-169	45
900-169B	45
900-176	126
900-177	140
900-179	139
900-181	139
900-182	122
900-194	108
900-199	174
900-202	134
900-203	174
900-204	111
900-205	138
900-206	82
900-212	137
900-215	47
900-216	134
900-217	107
900-219	127
900-222	139
900-223	107
900-224	107
900-225	175
900-229	47
900-230	140
900-235	120
900-236	120
900-238	136
900-239	122
900-242	83
900-243	83
900-244	6
900-245	79
900-246	177
900-247	135
900-248	135
900-249	135
900-250	83
900-251	140
900-252	140
900-253	140
900-254	140
900-255	137
900-257	45
900-257B	45
900-258	136
900-259	79
900-260	176
900-262	172
900-263	112
900-264	112
900-265	112
900-266	112
900-267	112
900-268	112
900-269	112
900-270	140
900-271	135
900-272	135
902	
902-011	32
902-012	168
902-013	168
902-014	168

Cat.#	Page
902-015	168
902-016	168
902-017	168
902-018	168
902-019	168
902-020	168
902-021	168
902-022	168
902-023	168
902-024	168
902-025	168
902-035	170
902-049	38
902-054	52
902-068	122
902-068B	122
902-069	99
902-070	138
902-071	112
902-072	111
902-073	138
902-075	32
902-076	32
902-077	32
902-078	28
902-079	28
902-082	46
902-083	46
902-084	46
902-085	50
902-086	56
902-087	58
902-088	66
902-090	65
902-091	78
902-092	78
902-094	82
902-095	83
902-096	95
902-097	95
902-099	97
902-100	104
902-101	104
902-108	122
902-109	119
902-110	119
902-112	145
902-113	145
902-114	145
902-115	136
902-116	139
902-117	139
902-117-JAWS	139
902-118	176
902-119	176
902-121	180
902-127	78
902-128	78
902-129	78
902-130	78
902-131	78
902-132	78
902-133	78
902-134	78
902-135	78
902-137	52

Cat.#	Page
902-138	53
902-139	52
902-143	52
902-145	53
902-146	52
902-147	52
902-148	53
902-152	53
902-158	53
902-159	53
902-160	54
902-161	53
902-162	54
902-166	53
902-167	53
902-168	54
902-169	53
902-171	52
902-172	52
902-173	78
902-174	78
902-186N	125
902-189	47
902-197	167
902-201	52
902-202	35
902-203	35
902-204	35
902-205	35
902-206	35
902-207	35
902-208	35
902-209	96
902-210	96
902-211	96
902-212	96
902-213	96
902-214	96
902-215	97,183
902-216	96
902-217	96
902-218	97,183
902-219	90
902-220	96
902-221	122
902-222	90
902-224	136
902-225	136
902-226	104
902-227	82
902-228	8
902-229	69
902-230	47
902-238	121
902-239	121
902-240	122
902-241	198
902-242	204
902-245	59
902-246	38
902-247	66
902-253	44
902-254	177
902-255	138
902-256	138
902-257	138

Cat.#	Page
902-260	127
902-261	44
902-265	59
902-267	7
902-268	69
902-269	69
902-270	58
902-275	54
902-276	54
902-277	52
902-278	52
902-279	52
902-296	199
902-297	195
902-298	198
902-299	201
902-300	196
902-301	196
902-303	42
902-305	170
902-306	41
902-307	38
902-309	47
902-310	196
902-311	178
902-312	178
902-314	178
902-317	44
902-318	44
902-319	44
902-321	169
902-322	45
902-323	70
902-324	70
902-325	70
902-326	70
902-330	53
902-331	53
902-332	53
902-334	70
902-334-BLADES	70
902-335	83
902-337	54
902-338	81
902-339	81
9B	
9BX-3018B	144
9C	
9CP-336DF4	53
9D	
9DK-2053A-B	167
9P	
9PK-3003D26	54
9PK-3003D27	53
9PK-3003D29	52
9PK-3003D36	53,55
9PK-3003D42	53
9PT-5201-P2	132
9PT-5721-P2	132
9S	
9SS-900-A1	75
9SS-900-A2	75
9SS-900-A3	75
9SS-900-B	75
9SS-900-C	75
9SS-900-D	75

Cat.#	Page
9SS-900-E	75
9SS-900-F	75
9SS-900-H	75
9SS-900-I	75
9SS-900-J	75
9SS-900-K	75
9SS-900-L	75
9SS-900-M	75
9SS-900-N	75
9SS-900-O	75
9SS-969-A1	76
9SS-969-A2	76
9SS-969-A3	76
9ST-902	177
B	
BHX1/4X3-1/2	102
BHX1/8X3-1/2	102
BHX2.5X3-1/2	102
BHX2X3-1/2	102
BHX3/16X3-1/2	102
BHX3/32X3-1/2	102
BHX3X3-1/2	102
BHX4X3-1/2	102
BHX5/32X3-1/2	102
BHX5/64X3-1/2	102
BHX5X3-1/2	102
BHX6X3-1/2	102
BHX7/32X3-1/2	102
BHX7/64X3-1/2	102
BHX9/64X3-1/2	102
Bulb-T4	122
Bulb-T5	119
C	
CASE001	177
CAT6-100	163
CE-0275	140
CP-246	68
CP-251B	62
CP-3005F	50
CP-3006F	55
CP-3006FD2	55
CP-3006FD36	55
CP-3006FS1	55
CP-3006FS2	55
CP-301G	65
CP-302G	65
CP-313	59
CP-3145A	73
CP-3148	72
CP-315	59
CP-3150	72
CP-336FD27	53
CP-351B	62
CP-367A	68
CP-372FD27	53
CP-376M	56
CP-382	169
CP-383	169
CP-385	169
CP-391	168
CP-391-1	168
CP-391-2	168
CP-392	168
CP-392-3	168
CP-392-4	168
CP-392-5	168

Cat.#	Page
CP-412G	66
CP-413G	66
CP-415	66
CP-416	61
CP-463	61
CP-511A	67
CP-522	69
CP-5S1D	54,55
CP-5S2D	54,55
CP-808	58
D	
DK-2053A	167
DK-2112	44
DP-336D	82
DP-366P	82
G	
GS-200K	79
GS-210	79
GS-520	79
H	
HW-229B	105
HW-312B	107
HW-312S	107
HW-5912E	107
HW-928	105
HX1.5X1	102
HX1/16X1	102
HX1/16X1-15/16	102
HX1/4X1	102
HX1/8X1	102
HX1/8X1-15/16	102
HX2.5X1	102
HX2X1	102
HX3/16X1	102
HX3/16X1-15/16	102
HX3/32X1	102
HX3/32X1-15/16	102
HX3X1	102
HX4X1	102
HX5/32X1	102
HX5/32X1-15/16	102
HX5/64X1	102
HX5/64X1-15/16	102
HX5X1	102
HX6X1	102
HX7/32X1	102
HX7/32X1-15/16	102
HX7/64X1	102
HX7/64X1-15/16	102
HX7X1	102
HX9/32X1-15/16	102
HX9/64X1	102
HX9/64X1-15/16	102
M	
MA-016	120
MA-019	121
MA-020	121
MA-021	121
MA-022	121
MA-1205CA-B	119
MA-1209LA	118
MA-1503A	118
MS-3207	59
MS-322	137
MS-V308	170
MS-V350-BL	170

Cat.#	Page
MS-V350-WH	170
MS-V375-BL	170
MS-V375-RD	170
MT-1210	15
MT-1232	14
MT-1270	14
MT-1280	14
MT-1610	15
MT-1630	15
MT-1820	12
MT-1860	12
MT-2017	17
MT-2018	17
MT-3102	16
MT-3105	17
MT-3109	16
MT-3266	16
MT-4011	19
MT-4017	18
MT-4018	18
MT-5110	13
MT-5210	13
MT-7057	9
MT-7509	125
MT-7600	125
MT-7810	195
MT-8002	7
MT-8100	5
MTB-1	177
N	
NT-302	10
NT-306	20
NT-311	18
NT-312	18
NT-3200	10
NT-6352	19
NT-6556	19
P	
PD-155	134
PD-372	139
PD-395A	45
PD-998	44
PH0X1	101
PH0X1-15/16	101
PH1X1	101
PH1X1-15/16	101
PH2X1	101
PH2X1-15/16	101
PH3X1	101
PH3X1-15/16	101
PK-12012H	202
PK-14019A	203
PK-15307EI	186
PK-15308EM	192
PK-2015	185
PK-2061	55;183
PK-2096AI	182
PK-2097	195
PK-4012	198
PK-4022EI	201
PK-4023EI	205
PK-4027AI	191
PK-4028AI	206
PK-4302AI	199
PK-6940	127
PK-6942	127

INDEX

Cat.#	Page
PK-9102	193
PK-9103	193
PK-9104	193
PK-9105	193
PK-9110	89
PK-ST902	29;180
PM-023CN	29
PM-029CN	29
PM-036CN	29
PM-037CN	29
PM-046CN	29
PM-053CN	29
PM-055CN	29
PM-251	31
PM-252	31
PM-254	31
PM-396F	26
PM-396G	26
PM-396H	26
PM-396I	26
PM-396J	26
PM-721	28
PM-723	28
PM-727	28
PM-728	28
PM-731	27
PM-736	27
PM-737	27
PM-746	27
PM-754	27
PM-755	27
PM-923	37
PM-924	38
PM-925	37
PM-931	36
PM-934	36
PM-936	36
PM-937	36
PM-938	36
PM-955	37
PM-956	37
PT-0721A	130
PT-1080A	130
PT-1136A	131
PT-1201A	129
PT-1361A	131
PT-1441A	129
PT-5201A	132
PT-5721A	132
PZ0X1-15/16	101
PZ1X1-15/16	101
PZ2X1-15/16	101
PZ3X1-15/16	101
PZ4X1-15/16	101
S	
SB-2419	144
SB-2918	143
SB-3218	143
SB-3428SB	144
SB-4121	143
SB-4536B	144
SD-081A	87
SD-081E	88
SD-081G	87
SD-08A1	87
SD-08A2	87

Cat.#	Page
SD-081-H1	87
SD-081-H2	87
SD-081-H3	87
SD-081-H4	87
SD-081-H5	87
SD-081-H6	87
SD-081-H7	87
SD-081-M3	87
SD-081-M3.5	87
SD-081-M4	87
SD-081-M4.5	87
SD-081-M5	87
SD-081-M5.5	87
SD-081-M6	87
SD-081-P1	87
SD-081-P2	87
SD-081-P3	87
SD-081-P4	87
SD-081-P5	87
SD-081-P6	87
SD-081-P7	87
SD-081-S1	87
SD-081-S2	87
SD-081-S3	87
SD-081-S4	87
SD-081-S5	87
SD-081-S6	87
SD-081-S7	87
SD-081-S8	87
SD-081-T1	87
SD-081-T10	87
SD-081-T10H	87
SD-081-T15	87
SD-081-T15H	87
SD-081-T2	87
SD-081-T20	87
SD-081-T20H	87
SD-081-T3	87
SD-081-T4	87
SD-081-T5	87
SD-081-T5H	87
SD-081-T6	87
SD-081-T6H	87
SD-081-T7	87
SD-081-T7H	87
SD-081-T8	87
SD-081-T8H	87
SD-081-T9	87
SD-081-T9H	87
SD-081-TA20	87
SD-081-TA23	87
SD-081-TA27	87
SD-081-TRI0	87
SD-081-TRI00	87
SD-081-TRI000	87
SD-081-TRI1	87
SD-081-TS1	87
SD-081-Z1	87
SD-081-Z2	87
SD-081-Z3	87
SD-081-Z4	87
SD-0839	86
SD-083-P2	86
SD-083-P3	86
SD-083-P4	86
SD-083-S3	86

Cat.#	Page
SD-083-S4	86
SD-083-S5	86
SD-083-T4	86
SD-083-T5H	86
SD-083-T6H	86
SD-2307M	100
SD-2308M	100
SD-2309	100
SD-2310	100
SD-2313	99
SD-2400-S10	95
SD-2400-S4	95
SD-2400-S6	95
SD-2400-S8	95
SD-2404	95
SD-3102	91
SD-7213A	95
SD-7213B	95
SD-7222A	95
SD-7222B	95
SD-800-S3.0	96
SD-800-S5.5	96
SD-804	93
SD-804-1	93
SD-807	96
SD-9312	88
SD-9313	89
SD-9314	89
SD-9701M	99
SD-9802	88
SD-9810A	93
SD-9810A-BC	93
SD-9811	92
SD-9812	92
SD-9813M	92
SD-9814	92
SD-9815	92
SD-9824	88
SI-125A-15	80
SI-125A-20	80
SK-22401M	108
SK-42601M	108
SL1012X1-15/16	101
SL1214X1-15/16	101
SL12X1-15/16	101
SL23X1-15/16	101
SL34X1-15/16	101
SL45X1-15/16	101
SL56X1-15/16	101
SL68X1-15/16	101
SL810X1-15/16	101
SR-008	39
SR-333	46
SR-363A	65
SR-363B	65
SR-538	41
SS-206E	77
SS-207E	77
SS-611A	76
SS-969E	76
SS-989A	75
SSP10X1	102
SSP4X1	102
SSP6X1	102
SSP8X1	102
ST-5203	178

Cat.#	Page
ST-5601	178
SW-9109D	98
T	
T10HX1	102
T10HX1-15/16	102
T10X1	101
T10X1-15/16	101
T15HX1	102
T15HX1-15/16	102
T15X1	101
T15X1-15/16	101
T20HX1	102
T20HX1-15/16	102
T20X1	101
T20X1-15/16	101
T25HX1	102
T25X1	101
T25X1-15/16	101
T27HX1	102
T27HX1-15/16	102
T27X1	101
T27X1-15/16	101
T30HX1	102
T30HX1-15/16	102
T30X1	101
T30X1-15/16	101
T5X1	101
T5X1-15/16	101
T6X1	101
T6X1-15/16	101
T7HX1	102
T7HX1-15/16	102
T7X1	101
T7X1-15/16	101
T8HX1	102
T8HX1-15/16	102
T8X1	101
T8X1-15/16	101
T9HX1	102
T9HX1-15/16	102
T9X1	101
T9X1-15/16	101
TC-131	172
TC-265	142
TC-266	142
TC-267	142
TC-765	173
TS10HX1	101
TS15HX1	101
TS20HX1	101
TZ-202N	110
TZ-204N	110
TZ-205N	110
TZ-212N	110
TZ-225N	110

▶ 900-016 Soldering Stand



Individual packing: Color box

▶ 900-099 Soldering Stand



Individual packing: Color box

▶ 900-242/ 900-243 Soldering Tip Cleaner Replacement Tip Cleaner




- No water necessary.
- Anti-slip pad.
- Made of low abrasive brass shavings.
- Cleans better than conventional sponges.
- No temperature drop as in conventional sponges.

Model No.	Description	Spec	Individual packing
900-242	Soldering tip cleaner	ø83 x 27mm/ 3.3" x 1.1	Blister card
900-243	Replacement tip cleaner	25g	Hanger (5 pcs/pack)

▶ 900-100 Solder Aid Tools



- This kit contains specialized tools you need for soldering: Assisting rods for P.C.board soldering work.

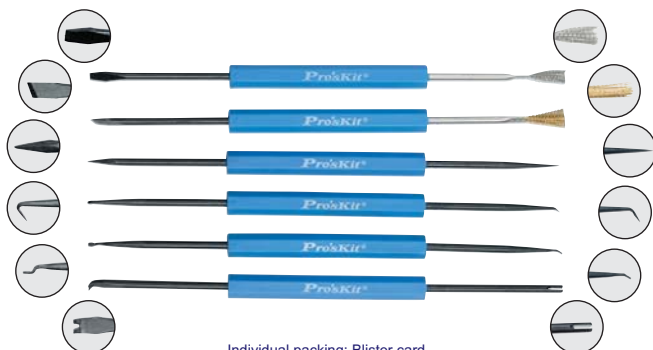

Individual packing: Blister card

▶ 6S-2 Soldering Stand



Individual packing: Color box

▶ 902-095 Mini Soldering Stand



- 2 position iron holder stand
- Built-in sponge tray



Individual packing: Color box(2pcs / pack)

▶ 902-335 Cut To Size Soldering Sponge



Material	Size(mm/inch)	Individual packing
Cellulose	100x110/3.9x7.8	Hanger (3 pcs/pack)

▶ 900-250 Solder Aid Tools



Individual packing: Blister card

TESTERS

PRECISION PLIERS
& CUTTERS

ELECTRICAL PLIERS
& CUTTERS

KNIVES, SCISSORS
& SAWS

CRIMPERS

STRIPPERS

PUNCHDOWN
TOOLS

SOLDERING /
ASSEMBLY

SCREWDRIVERS/
BITS

HEX KEY/
WRENCHES

SOCKET
WRENCHES

TWEEZERS



eclipseSM

Eclipse Enterprises, Inc.

13302 Chula Road, Amelia Court House, VA 23002

Phone: 804-561-2610 Fax: 804-561-2642 <http://www.eclipsetools.com>

