


Datasheet

Item No. 55.703.0553.0

Feed-through terminal WKF2,5/M/15

Feed-through DIN rail terminal block with spring clamp connection for mounting on TS 15, nominal cross section 2.5 mm², width 5 mm, color gray

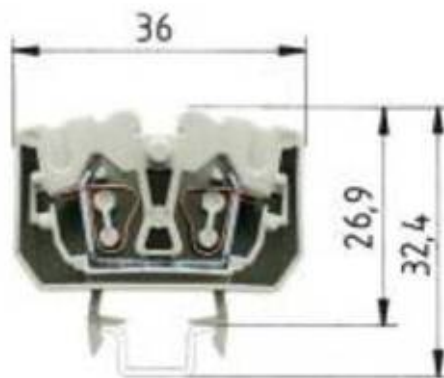

Item No.	55.703.0553.0
EAN	4015573379732
order unit	100 Piece(s)

Approvals



Technical data

General

Nominal cross section	2.5 mm ²
Colour	Grey
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	5 mm
Insulating housing	PA66
Inflammability class of insulation material acc. with UL94	V2
Explosion-tested version "EEEx e"	Yes
Mounting method	DIN rail (top hat rail) 15 mm
Terminal blocks for electrical installations	Yes

Technical data

Rated current	24 A
Rated voltage	800 V
Pollution degree	3
Closing plate required	Yes
Length	36 mm
Type of insulation material	Thermoplastic

Connection Data

Connection type 1	Tension clamp connection
Connection type 2	Tension clamp connection
Minimum cross section solid	0.13 mm ²

Maximum cross section solid	4 mm ²
Minimum cross section fine stranded	0.13 mm ²
Maximum cross section fine stranded	2.5 mm ²
Wire strip length	11 mm

Accessories

Item. No.	Typ:	Description:
98.090.0015.0	Mounting rail 15x5,5 EN60715 2000MM	Mounting rail TS 15, slotted, Höhe 5,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated

Drawings

