
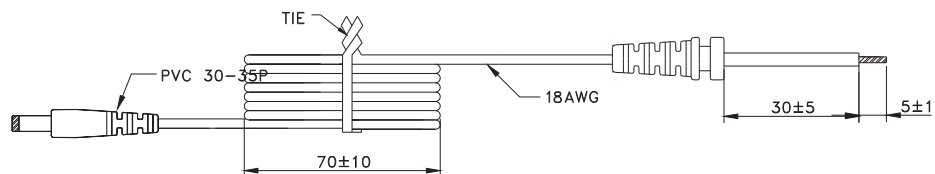
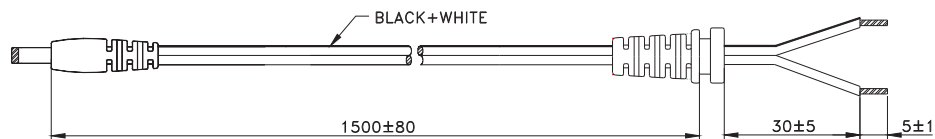
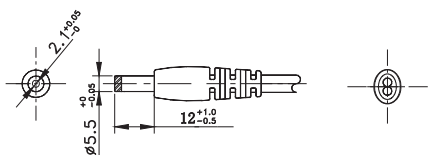


cULus
LISTED
E215890

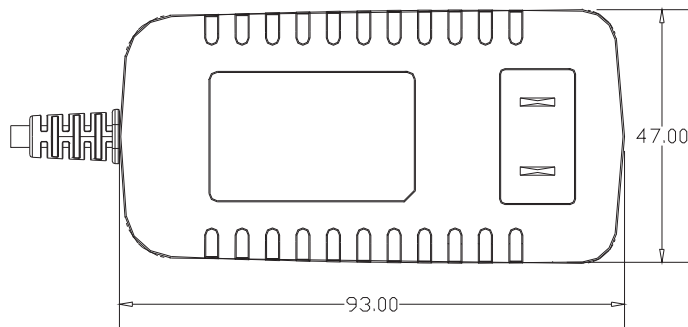

NOTE

- 1) WIRE TYPE: VW-1 2468 80°C 300V L=1500mm 2C 18AWG BLACK+WHITE
BLACK and WHITE - Positive BLACK - Negative
- 2) THE POLARITY:

NOTE:

- 1) Case cover & chassis material:
PPHOX (UL94V-1) BLACK (NO KTEC)
- 2) AC PIN MATERIAL: BRASS (Ni PLATED)
- 3) LEAD FREE

Electrical Specification

Input:

Rate Input Voltage:	100-240VAC
Operating Range:	90-264VAC
Rated Input Current:	0.8A Max.
Rated Input Frequency:	50/60Hz ± 3Hz
Maximum Input Power:	37.22W
Input Current (No Load):	≤ 15mA
Power Cons. (No Load):	Max. 0.5W

Output:

Voltage:	12VDC
Voltage Range:	Min. 11.4VDC Max. 12.6VDC
Current Range:	Min. 0.0A Max. 2.5A

Dimensions:	93 x 47 x 34.2 mm
Weight:	175 g (Max.)
Operating Temperature:	0°C ~ 35°C
Storage Temperature:	-20°C ~ 80°C
Operating Humidity:	5% ~ 90% (Non Condensing)

TITLE SWITCHING POWER SUPPLY		SCALE
12VDC / 2500mA		NTS
DRAWING NO. 68-1225PS		
		UNITS mm
FILE NAME 68-1225PS.pdf		SHEET 1/1



Mode Electronics Part Number 68-1225PS-1