

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
VB0B1N3BN12J1	17 lb (7.7 kg)


NOTES:

1. IDENTIFICATION: VERTICAL, (12) L6-20R
208V / 30A / THREE-PHASE DELTA POU



<u>PART NO.</u>	<u>COLOR</u>
VB0B1N3BN12J1	BLACK

2. ACCESSORY COMPONENTS:
 (4) #10-32 x 1/2" MOUNTING SCREWS
 (4) #12-24 x 1/2" MOUNTING SCREWS
 (2) #10-32 LOCKING COLLAR SCREWS
 (2) L-BRACKETS


3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. UL® & c-UL® LISTED 60950.
5. RoHS COMPLIANT.
6. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE POWER = 8.6 KW

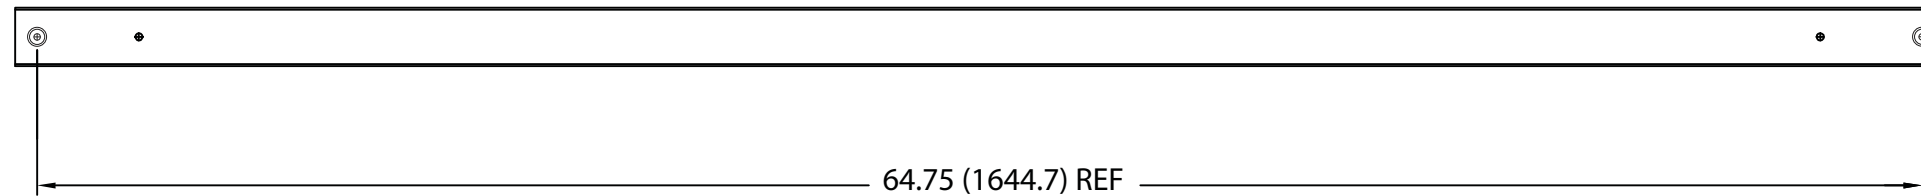


TOOLLESS MOUNTING BUTTON LOCATION

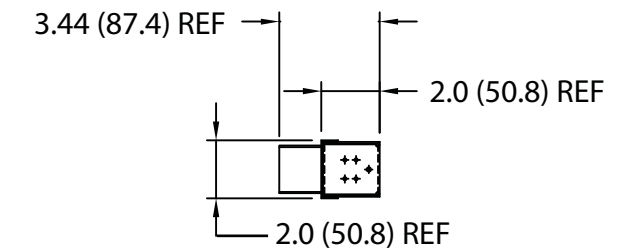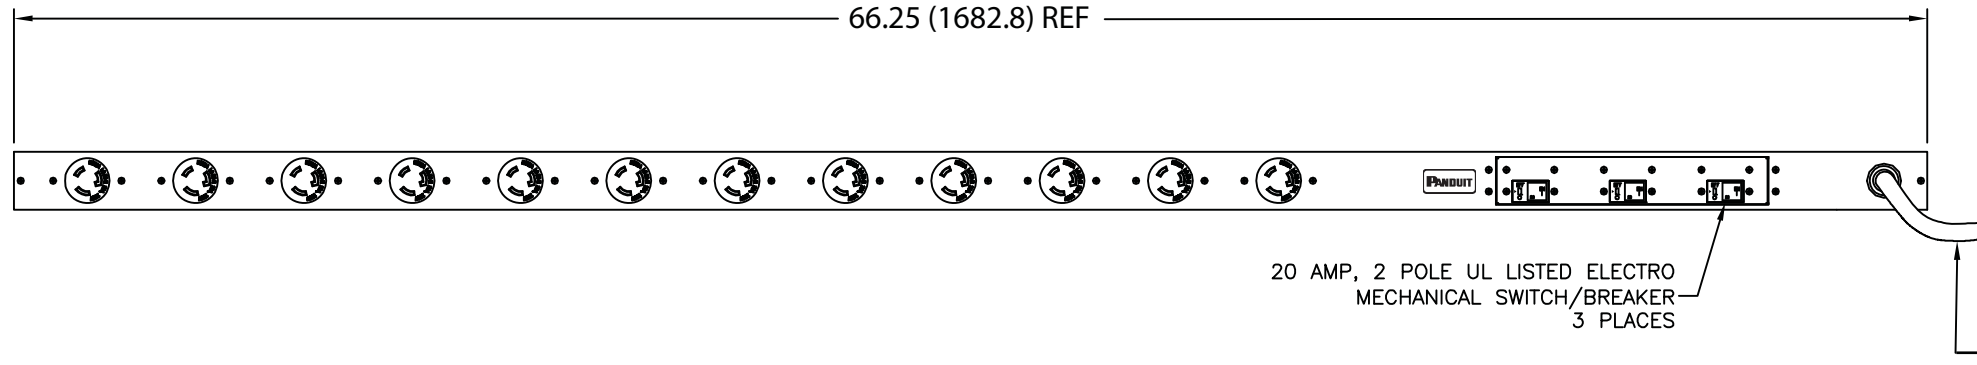

— 10 FOOT INLET POWER CORD



PLUG
30 AMP, 250V x 3~ DELTA
TWIST LOCK
NEMA L15-30P



TWELVE (12)
RECEPTACLES
20 AMP, 250V
TWIST LOCK
NEMA L6-20R

00B	1-31-11	MAV	KRKE	A. ADDED MAXIMUM AVAILABLE POWER	09V098EU				
00A	10-15-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098EU				
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OT	

MODEL FILENAME		09V098EU/00.PRT																	
CAD FILENAME/LAYERS		09V098EU_DC/00B.PRT																	
 PANDUIT CORP TINLEY PARK, ILLINOIS																			
VERTICAL, (12) L6-20R POWER OUTLET UNIT (VB0B1N3BN12J1) CUSTOMER DRAWING																			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: <table border="0"> <tr> <td>INCHES</td> <td></td> <td>[METRIC - MILLIMETER]</td> <td>ANGLE</td> </tr> <tr> <td>X.X</td> <td>+/- 0.03</td> <td>X.</td> <td>+/- 0.8</td> </tr> <tr> <td>X.XX</td> <td>+/- 0.015</td> <td>X.X</td> <td>+/- 0.4</td> </tr> <tr> <td>X.XXX</td> <td>+/- 0.005</td> <td>X.XX</td> <td>+/- 0.13</td> </tr> </table>		INCHES		[METRIC - MILLIMETER]	ANGLE	X.X	+/- 0.03	X.	+/- 0.8	X.XX	+/- 0.015	X.X	+/- 0.4	X.XXX	+/- 0.005	X.XX	+/- 0.13	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
INCHES		[METRIC - MILLIMETER]	ANGLE																
X.X	+/- 0.03	X.	+/- 0.8																
X.XX	+/- 0.015	X.X	+/- 0.4																
X.XXX	+/- 0.005	X.XX	+/- 0.13																
DRAWN BY MAV		SCALE NONE																	
DATE 10-15-10																			
CHK'D KRKE		DRAWING NO. 09V098EU																	
		DWG B																	