


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.


4-40thread(UNC)

4X THUMBSCREW

Amphenol Cables on Demand




D-SUB
15PIN Male

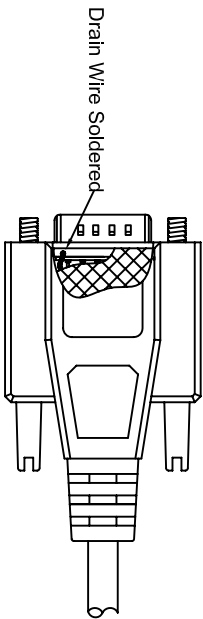

Drain Wire Soldered

LENGTH


0.256




DRAIN WIRE

JACKET

ALMY



D-SUB
15PIN Female

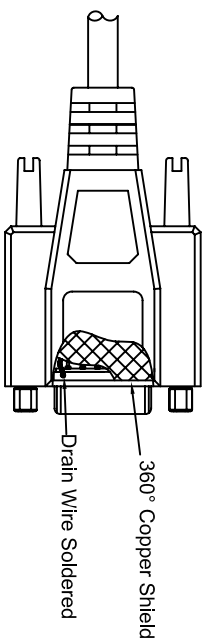

360° Copper Shield

Drain Wire Soldered

LENGTH & P/N Table

LENGTH	P/N	Cable Color
14" ±1 inch	CS-DSDHD15MF0-014IN	GREY
(18") 1.5FT ±1 inch	CS-DSDHD15MF0-001.5	GREY
2.5FT ±1 inch	CS-DSDHD15MF0-002.5	GREY
5FT ±2 inch	CS-DSDHD15MF0-005	GREY
7.5FT ±2 inch	CS-DSDHD15MF0-007.5	GREY
10FT ±3 inch	CS-DSDHD15MF0-010	GREY
15FT ±3 inch	CS-DSDHD15MF0-015	GREY
25FT ±4 inch	CS-DSDHD15MF0-025	GREY

PIN OUT:

Male	Female	Color
PIN1	PIN1	Black
PIN2	PIN2	Brown
PIN3	PIN3	Red
PIN4	PIN4	Orange
PIN5	PIN5	Yellow
PIN6	PIN6	Green
PIN7	PIN7	Blue
PIN8	PIN8	Purple
PIN9	PIN9	Gray
PIN10	PIN10	White
PIN11	PIN11	Pink
PIN12	PIN12	Light Green
PIN13	PIN13	Black/White
PIN14	PIN14	Brown/White
PIN15	PIN15	Red/White
SHIELD	SHIELD	Drain Wire



REV.	DESCRIPTION	REVISIONS	DATE	APPROVED
A	NEW RELEASE		07/02/2007	
A1	Add wiring color		13/JAN/2012	
A2	Add 18" Length		9/APR/2014	
A3	Add 14" Length		27/Feb/2020	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		E&A NO.		Amphenol Cables on Demand 20 VALELEY ST. ENDCOTT, NY 13760	
DRAWN	DATE	APPROVALS		LF	9/APR/2014
CHECKED		BA	9/APR/2014	RESP ENG	
THIRD ANGLE PROJECTION				SIZE	DWG. NO.
				A	CS-DSDHD15MF0-XXX

Deluxe High Density
15PIN D-Sub MF

NOTES: UNLESS OTHERWISE SPECIFIED

4

3

2

1

CAD FILE



MFG ENG

SCALE

SHEET

OF

REV.

A3