
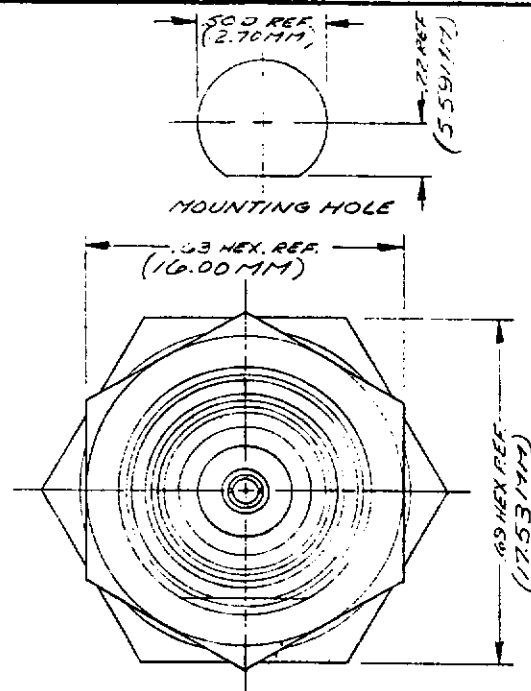


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

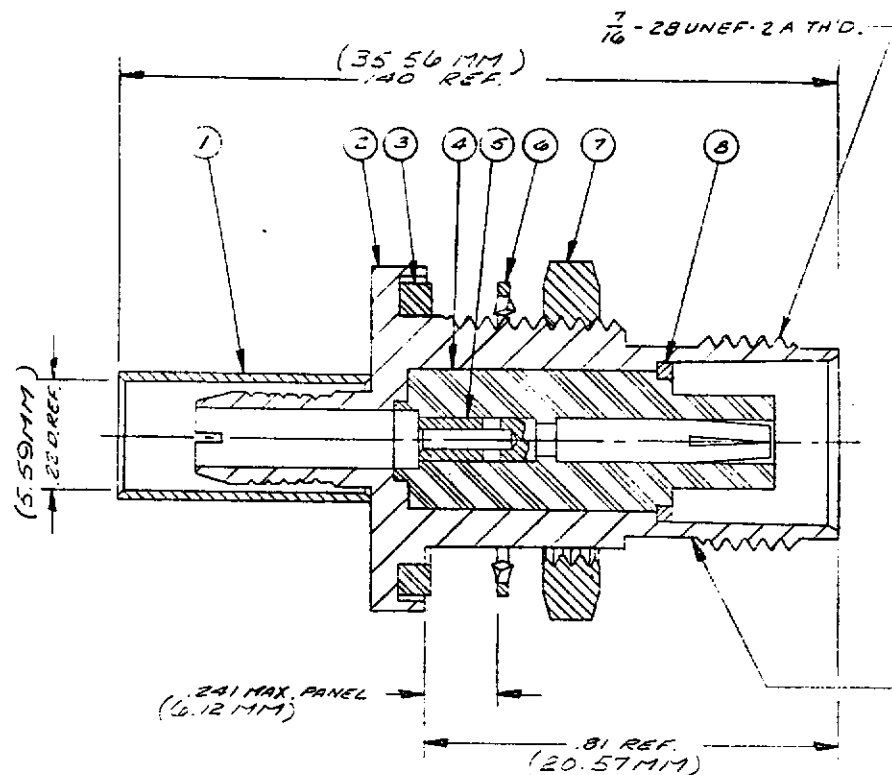

STAMP: 91836 M39012/28-0503
KA-15-152 XXXX

DATE CODE

NOTES:

1. FOR USE WITH RG-142, 223 & 400/1 CABLE GROUPS.
2. FOR CABLE TRIMMING USE KTY-113, KTD-166.
3. FOR FORMING USE CRIMP DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-465.

6. ITEM ⑤ TO BE SUPPLIED UNASSEMBLED.

S-D

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm$ 0.010
3 PLACE DECIMALS $\pm$ 0.004
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

9	1	CABLING INSTRUCTIONS	
8	1	RETAINING RING	
7	1	HEX NUT	492A-9-MC7
6	1	LOCKWASHER	492A-12-MC7
5	1	BNC CRIMP CAPTIVE CONTACT	1-507-34M9D
4	1	INSULATOR	
3	1	GASKET	492A-10-M9A
2	1	K-GRIP BODY	
1	1	K-GRIP SLEEVE	5-89-052MC7

ITEM	REQ'D	DESCRIPTION	PART NO.
------	-------	-------------	----------

REVISIONS

ISSUE	CHANGES
0	ER 13441 JL 22 JUL 74
1	CN 13689 A GA 5 AUG 74
2	CN 13841 A MJE 1 OCT 74
3	CN 21633 C PAS 23 FEB 81
4	CN 22767 E JEP 17 NOV 81
5	CN 25533 D MJB 15 DEC 83
6	CN 32302 A LNM 20 JUN 90

S-D

KA-15-152

USED ON:

REF:

FINISH

SPEC. KER 10009

MATL:

SPEC.

TNC BULK HEAD JACK

DRAWN JL DATE 23 MAY 74

APPR. LI DATE 22 JUL 74

KINGS ELECTRONICS

40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

M39012/28-0503