
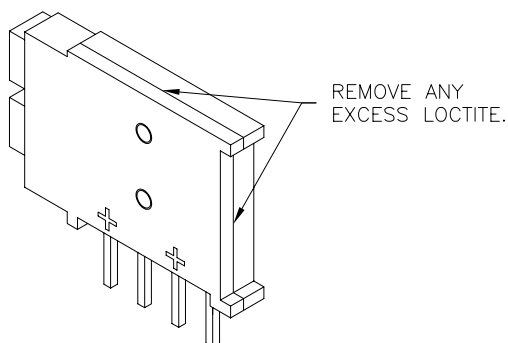
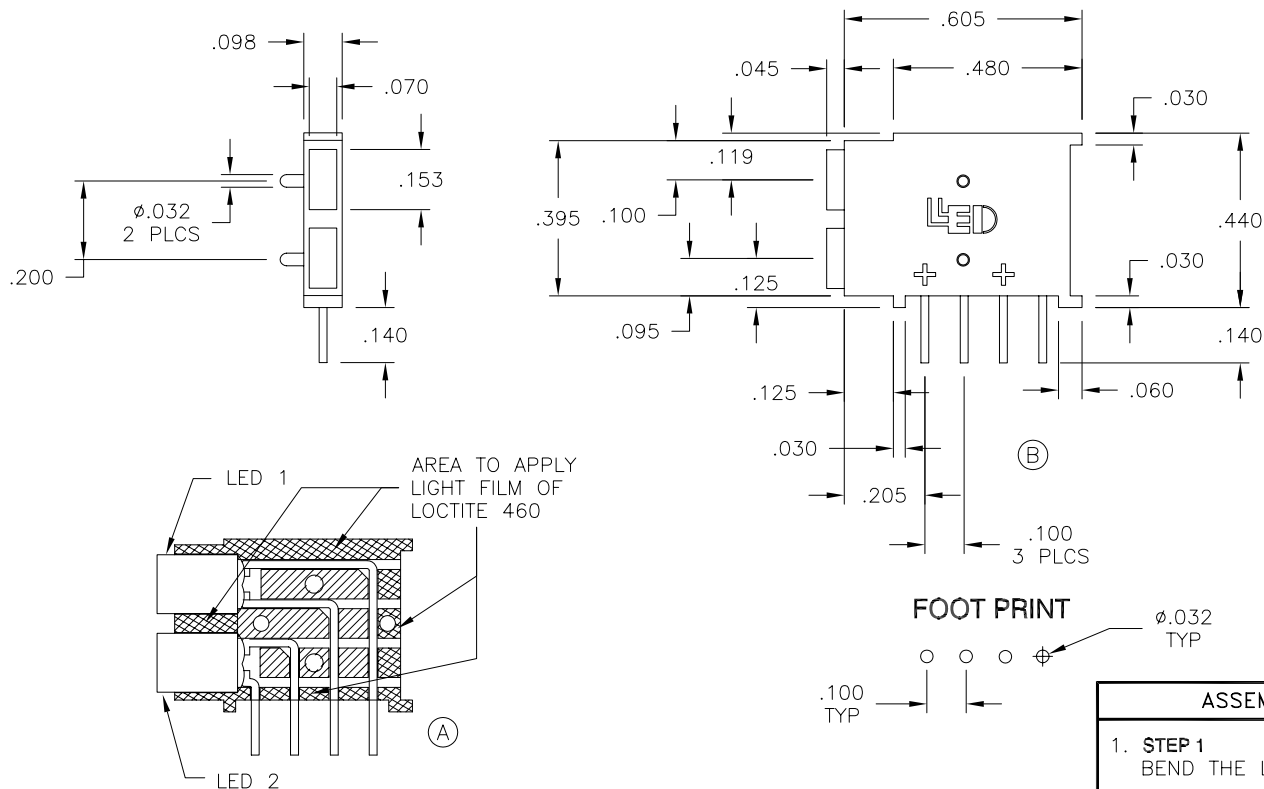


Actual Size

FORM 4.04-001A

LTR	REVISION	DATE	APPD
H	050306-RM02: ADDED ISO VIEW TO SHOW BONDING PLACEMENT, ADDED RoHS LOGO AND REMOVED 21RPV070TX3 PART#s	05-09-06	GP



NOTES

- LED SHALL SHOW NO SCRATCHES.
- INSPECT LEADS TO BE PARALLEL AND STRAIGHT WITH A STRAIGHT CUT
- TEST FOR COLOR AND POLARITY
- ELECTRICAL TEST IN ACCORDANCE WITH TEST TABLE.
- FINAL WEIGHT/COUNT OF ALL PARTS.

ASSEMBLY STEPS

- STEP 1**
BEND THE LEDS 1 & 2.
- STEP 2**
PLACE THE LEDS ON THE BASE WITH PINS AS SHOWN IN A.
- STEP 3**
APPLY LOCTITE 460 AS SHOWN IN A.
- STEP 4**
PLACE THE COVER AS SHOWN IN B.
- STEP 5**
CLAMP THE ASSY WITH THE BINDER CLIP.

RoHS
COMPLIANT
2002/95/EC

LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	LENS COLOR	ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)			
			If=mA typ	Iv mcd min/typ	Vf=V typ/max	λP nm
21RP070TG3	HI-EFF GREEN	DIFFUSED	10	0.5/1.2	2.1/2.8	565
21RP070TR3	HI-EFF RED	DIFFUSED	10	0.5/1.2	2.1/2.8	635
21RP070TY3	YELLOW	DIFFUSED	10	0.5/1.2	2.1/2.8	585

REVISION NOTIFICATION

☐ PMA
☐ UL
☐ CUSTOMER _____
☐ OTHER

LED[®]
LEDTRONICS, INC.[™]
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE

21RP070TX3

DWG NO

SDPC0171

SCALE

2:1

SHEET

1 OF 1

DATE

09-21-92

CODE
IDENT NO.
8Z410DWG BY
JCHCHK BY
PL
05-09-06QA
GZ
05-09-06

MNFG

CUSTOMER
GENERIC