




Actual Size



LTR	REVISION	DATE	APPD
-	RELEASED	-	
A	REVISED PER ECR 032101-RM01	11-20-02	WB

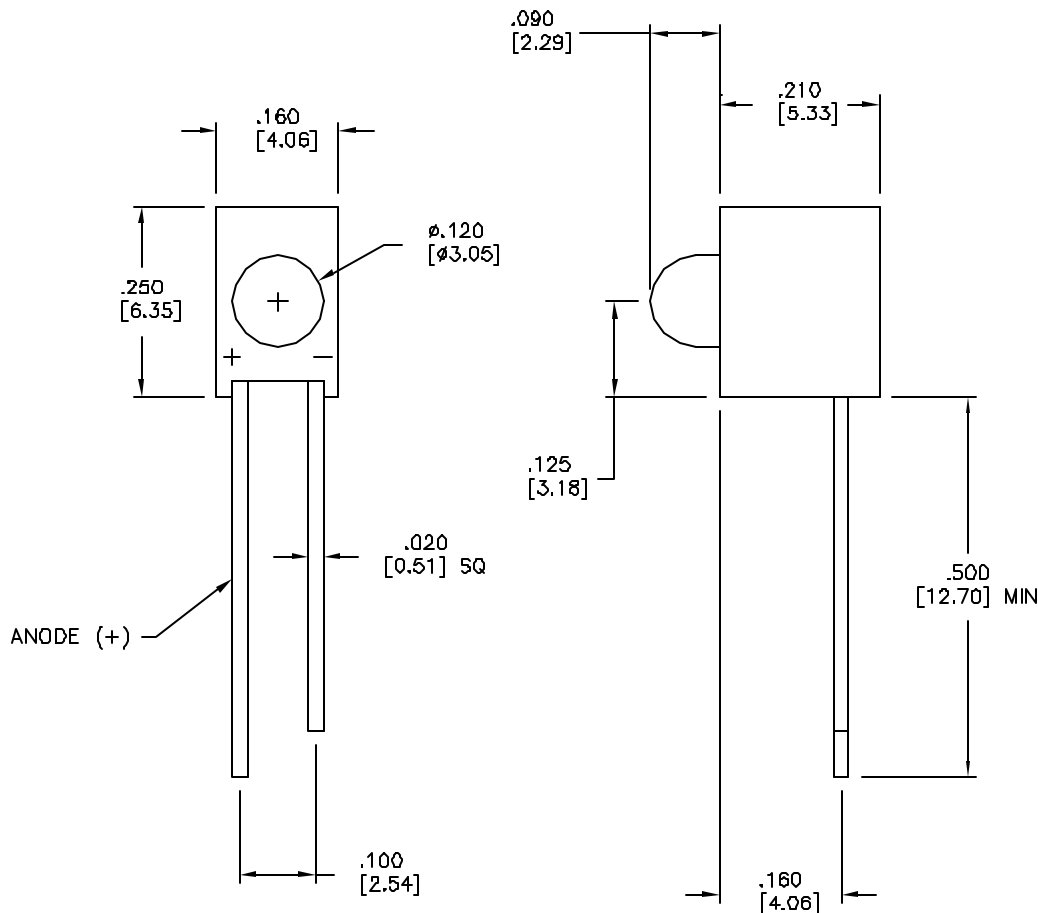

FOOT PRINT

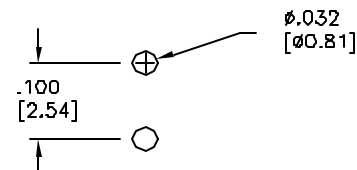

NOTES:

1. CUT OPTION ON LEAD LENGTH AVAILABLE OF .014.

LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	ABSOLUTE MAXIMUM RATINGS (Ta=25°C)					ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)					
		Pd mW	Ifp mA	If mA	Vr V	ToPr (°C)	If mA	Iv med typ	Vf=V typ/max	VIEW ANGLE	Ir max μA	λP nm
PC110TR6	ULTRA RED	60	150	30	5	-40°C TO +85°C	20	180	1.7/2.6	50	100	660

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.	TITLE PC110TR6				
	.XX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°.30° FRACT. ± 1/32	DWG NO SDPC0486		SCALE 4:1	SHEET 1 OF 1	DATE 09-19-91
		CODE IDENT NO. 8Z410	DWG BY JCH	CHK BY	QA JCH 11-22-02	MFG SB 11-21-02