



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: info@ledtronics.com
Website: <http://www.ledtronics.com>

TBL4520A-xxWxx-XPW-012W-WP (SERIES)

LED Low Profile Strip Light; Clear Lens
Waterproof (IP65); 12Vdc; Pure White (5000K)



DWG BY:
3W / HF
07-01-20

R&D:
UF
10-20-23

MFG:
PP
10-20-23

QA:
LUV
10-20-23

REVISION LTR: C
ECR#: 101823-GZ01
10-19-23





○ Features

Bar Material / Color	Aluminum / Silver
Lens Material / Color	Polycarbonate / Clear
LED Type	Samsung
LED	1 Chip / 30 pcs.
Protection Rating	IP65 (Waterproof)
Dimmable	No
Lifespan	>50,000 hrs.
Warranty	1 Year
Weight (9W6)	0.08 lb. / 0.036 kg.
Weight (18W12)	0.09 lb. / 0.04 kg.
Weight (36W24)	0.16 lb. / 0.07 kg.
Weight (72W48)	0.44 lb. / 0.20 kg.

○ Electro-Optical Characteristics

Part Number	TBL4520A-9W6-XPW-012W-WP	TBL4520A-18W12-XPW-012W-WP
Input Voltage, V	12Vdc	12Vdc
Number of LEDs	9 (3 x 3 in series)	18 (3 x 6 in series)
Watts per module	2 W	4.7 W
Current per module, A	0.17 A	0.396 A
Maximum Candela	71 cd	161.5 cd
Total Lumens	211 lm	408.1 lm
Efficacy (lm/W)	106	87
Color Temp (Kelvin)	5000K	5000K
LED Emitting Color	Pure White	Pure White
Angle of illumination	115° x 120°	105° x 110°
Part Number	TBL4520A-36W24-XPW-012W-WP	TBL4520A-72W48-XPW-012W-WP
Input Voltage, V	12Vdc	12Vdc
Number of LEDs	36 (3 x 12 in series)	72 (3 x 24 in series)
Watts per module	7.6 W - 7.8 W	14 W
Current per module, A	0.634 A - 0.660 A	1.17 A
Maximum Candela	288 cd	477 cd
Total Lumens	706 lm - 784 lm	1,314 lm
Efficacy (lm/W)	101	93
Color Temp (Kelvin)	5000K	5000K
LED Emitting Color	Pure White	Pure White
Angle of illumination	110° x 115°	100° x 125°

○ Dimensions

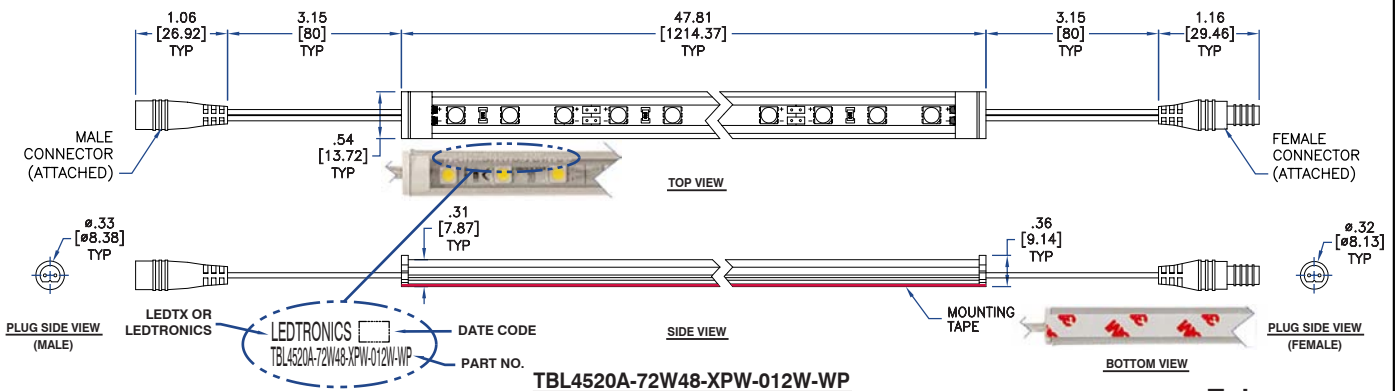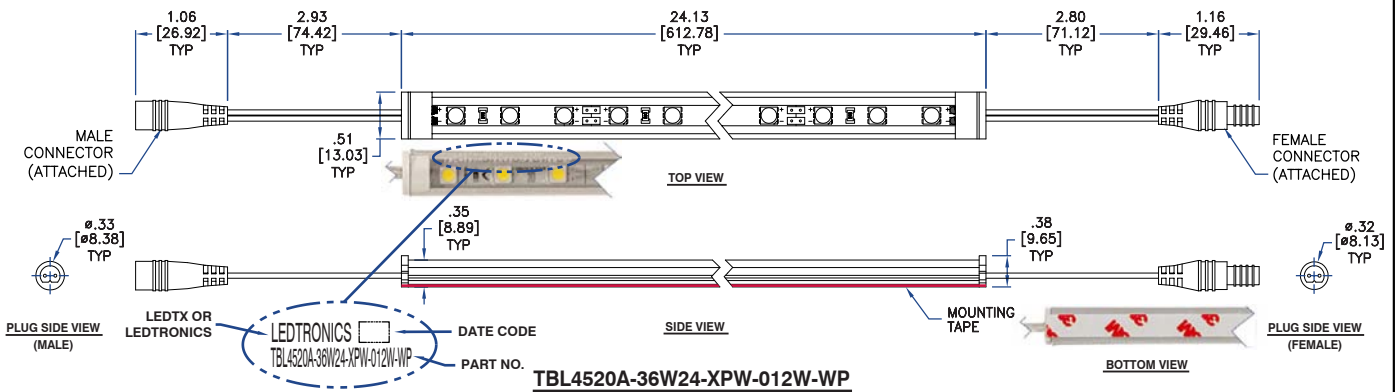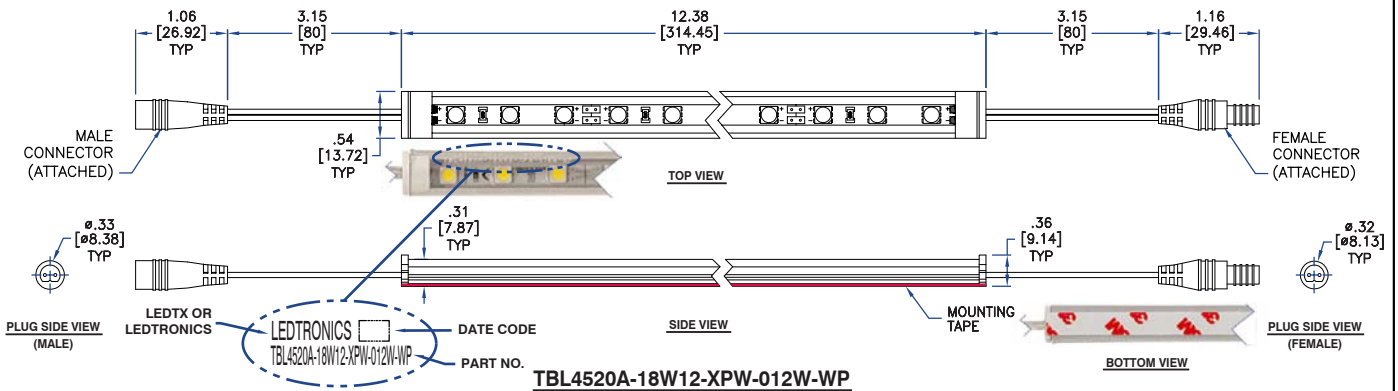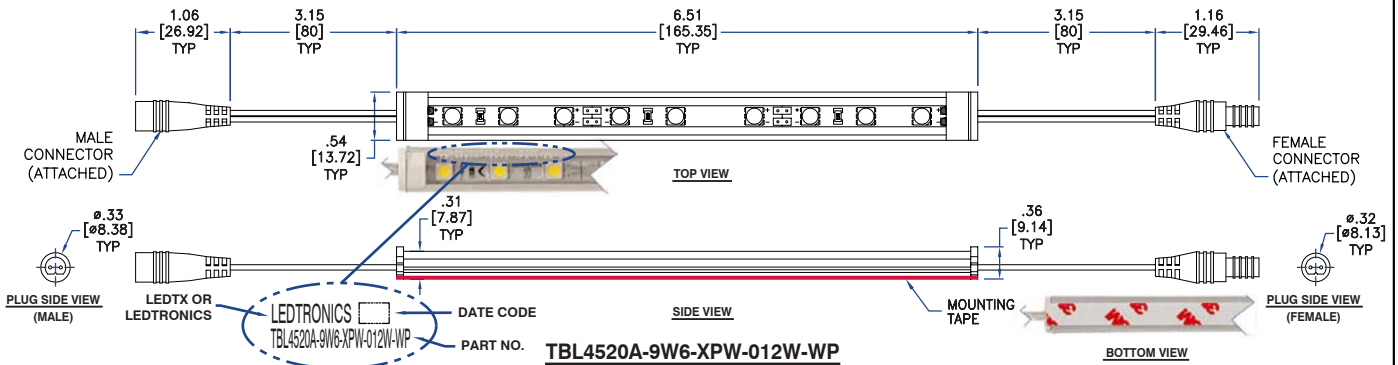

Note:

1. All Dimensions are in Inches [Millimeters].



Tolerance:

XXX +/- .010


XX +/- .025

○ Accessories (NOT INCLUDED)


CONNECTOR ACCESSORIES	Part Number: ADPT-TBL4520A-01-SMF	Quantity: 1 Set / 2 pcs.
-----------------------	-----------------------------------	--------------------------

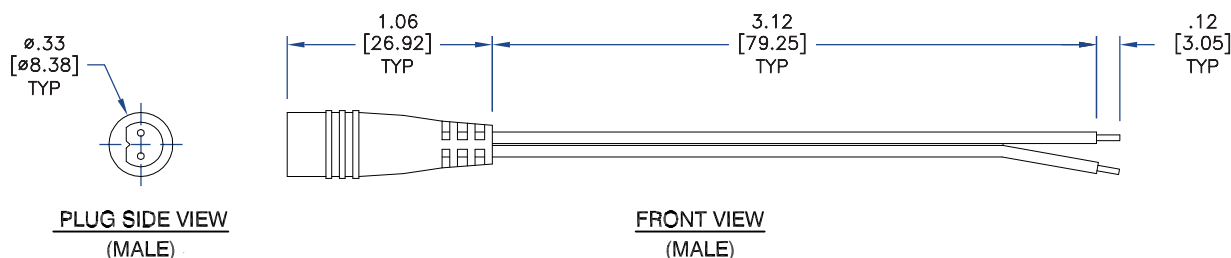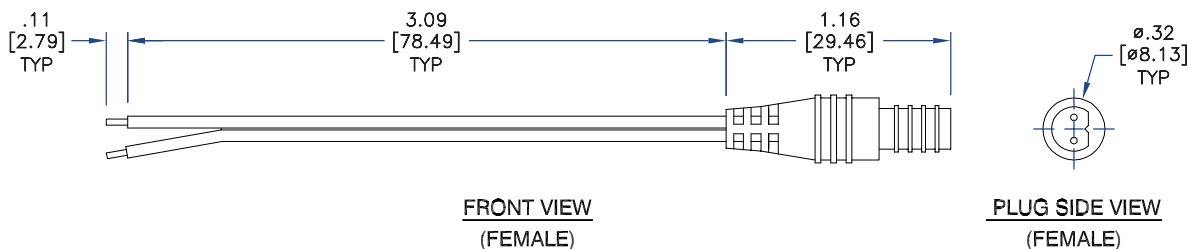


Fixed Angle Mounting Clip	Part Number: MTG-CLIP-TBL4520A-001	Application
---------------------------	------------------------------------	-------------



Length: 0.59 [14.99] TYP.
Screw Hole Ø: 0.16 [4.06] TYP.

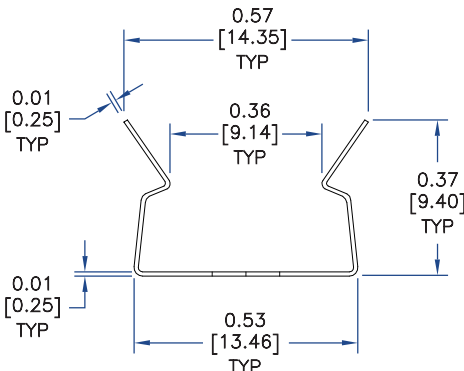

Adjustable Angle Mounting Clip	Part Number: MTG-CLIP-TBL4520A-002
--------------------------------	------------------------------------

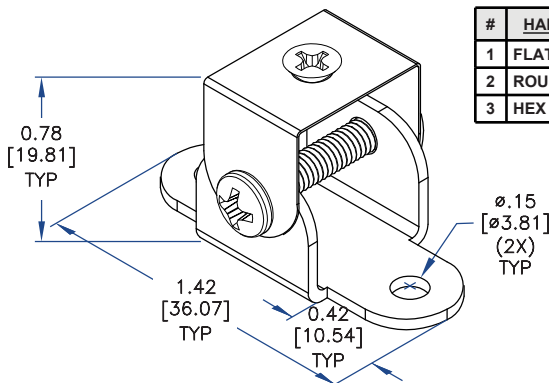

#	HARDWARE DESCRIPTION	QTY.
1	FLAT HEAD SCREW	1
2	ROUNDED HEAD SCREW	1
3	HEX NUT	2

Note:

1. All Dimensions are in Inches [Millimeters].


Tolerance:

XXX +/- .010

XX +/- .025

○ Wiring Method

-SERIES CONNECTION: WITHIN 3M (WHEN BAR LENGTH IS OVER 3M, IT CAN CAUSE DECLINING BRIGHTNESS AND SHORTEN LIFETIME.

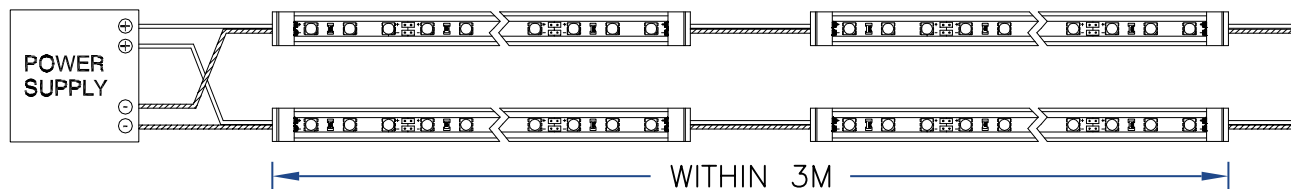

-PARALLEL CONNECTION: WIRING OVER 3M A/L LED BAR LENGTH.

