


Product data sheet

Specifications



Socket, SE Relays, 5A, 14 pins,
solder terminals, separate contact,
for 782H / 792 relays

70-378-1

 To be discontinued on: Sep 30, 2025

 To be discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Product Range	Harmony Electromechanical Relays
Product Type	Socket
Product Compatibility	relay 792XDX relay 782XDXH
Number of Terminals	14
Switch Function	4PDT
Contact Composition	4 C/O

Complementary

Rated Current	5 A
[Ue] rated operational voltage	120 V
Contact Terminal Arrangement	Mixed
Connections Terminals	Chassis solder terminal, clamping connection capacity:0.82 mm ² , AWG 18 solid for output Chassis solder terminal, clamping connection capacity:0.82 mm ² , AWG 18 stranded for output
Tightening Torque	Chassis 1 N.m, AWG 18, copper
Fixing Mode	By screw, M3.5 chassis
Product Weight	0.2 oz (6.2 g)
Width	0.9 in (21.8 mm)
Depth	2.2 in (57 mm)

Environment

Ambient Air Temperature for Storage	-40...221 °F (-40...105 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
Flame Retardance	UL94-V0
Product Certifications	UL CSA CE

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

GTIN	3606480277894
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.12 in (2.85 cm)
Package 1 Width	0.86 in (2.18 cm)
Package 1 Length	0.81 in (2.062 cm)
Package 1 Weight	0.2 oz (6.2 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	1.06 in (2.7 cm)
Package 2 Width	1.26 in (3.2 cm)
Package 2 Length	5.91 in (15 cm)
Package 2 Weight	2.2 oz (62.1 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	1000
Package 3 Height	8.27 in (21 cm)
Package 3 Width	11.42 in (29 cm)
Package 3 Length	12.99 in (33 cm)
Package 3 Weight	13.71 lb(US) (6.22 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings


Dimensions

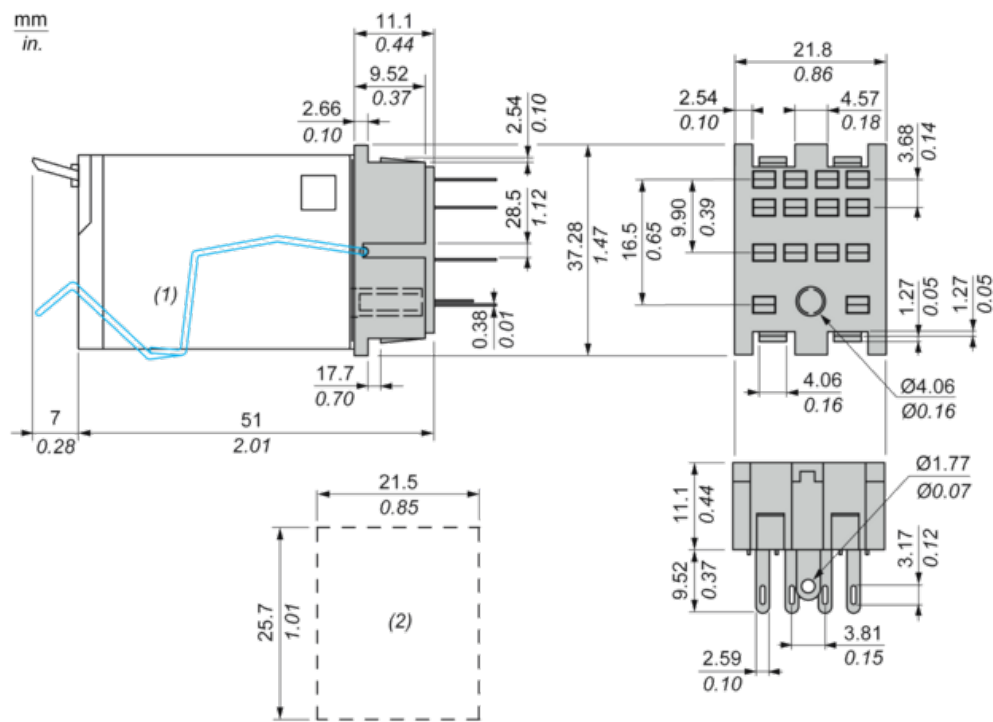

- (1) : Metal hold-down clip
(2) : Recommended chassis cutout top view

Connections and Schema

Wiring Diagram

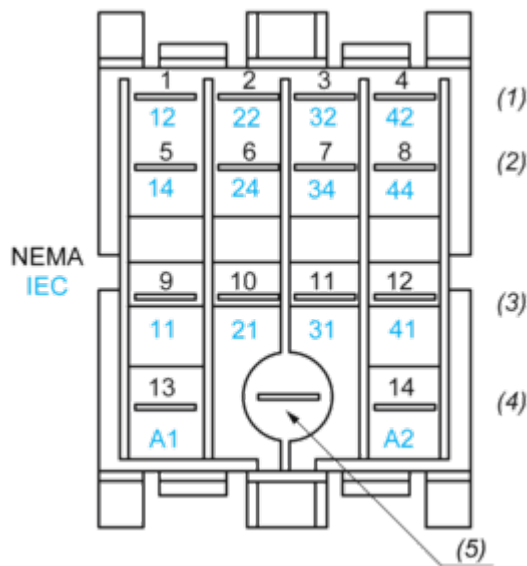

- (1) : N.C.
- (2) : N.O.
- (3) : COM
- (4) : Input
- (5) : Ground lug

Technical Illustration

Dimensions

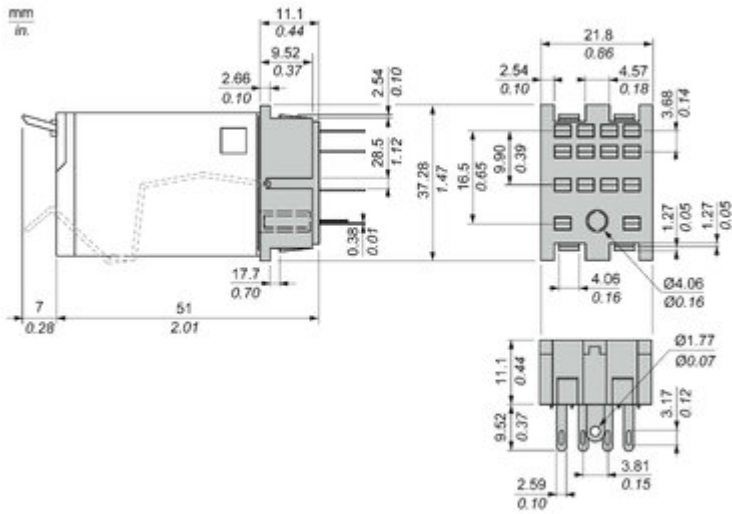


Image of product in real life situation

