


Catalog Number: MM0404L1400RLM

Features and Ratings



- Outdoor Enclosure (NEMA Type 3R)
- Ringless Type Meter Cover
- Device Rating: 400A Max
- 120/240V~ 1 Phase, 3 Wire
- 120/208V~ 1 Phase, 3 Wire w/5th Jaw Installed
- Meter Socket Rating: 400A (320A Continuous)
- 4 Jaw, Lever Operated Bypass with Jaw Tension Release
- Provisions for Field Installable Breakers
- UL Listed only for use as Service Entrance Equipment
- Overhead or Underground Service Entrance
- Surface Mounting

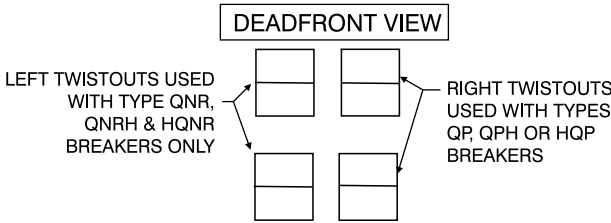


Accessories

ACCESSORIES
FILLER PLATE ECQF3
5TH JAW SHIELD . . . H35815-2



ORDER HUBS FROM "HD" SERIES
COVERPLATE EC56933S
3" HUB EC56856
3 1/2"HUB EC56857
4"HUB EC56858

HARDWARE TIGHTENING TORQUES:
3/8" NUTS 250-300 LB.-IN.

Schematic

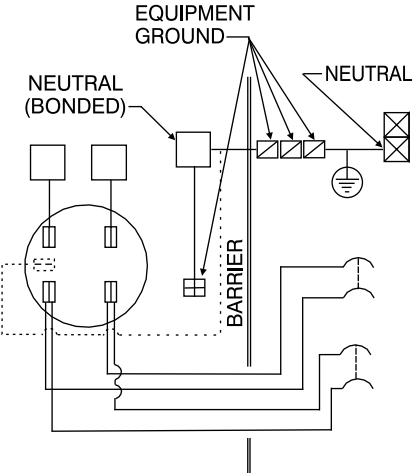

TERMINAL RANGES		TORQUE
kcmil OR AWG; CU/AL		LB.-IN.
☐	(1)600kcmil-#4 OR (2)350kcmil-1/0	500 500
☐	Alt. Lugs H56732-2 (2) 350kcmil-#4	275
☐	(1)2/0-#12	50
☒	(1)250kcmil-4	250
☒	(1)2/0-#6	275

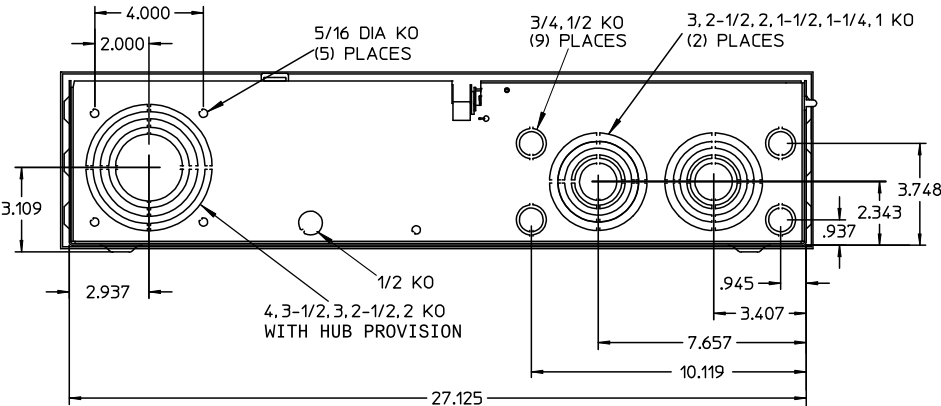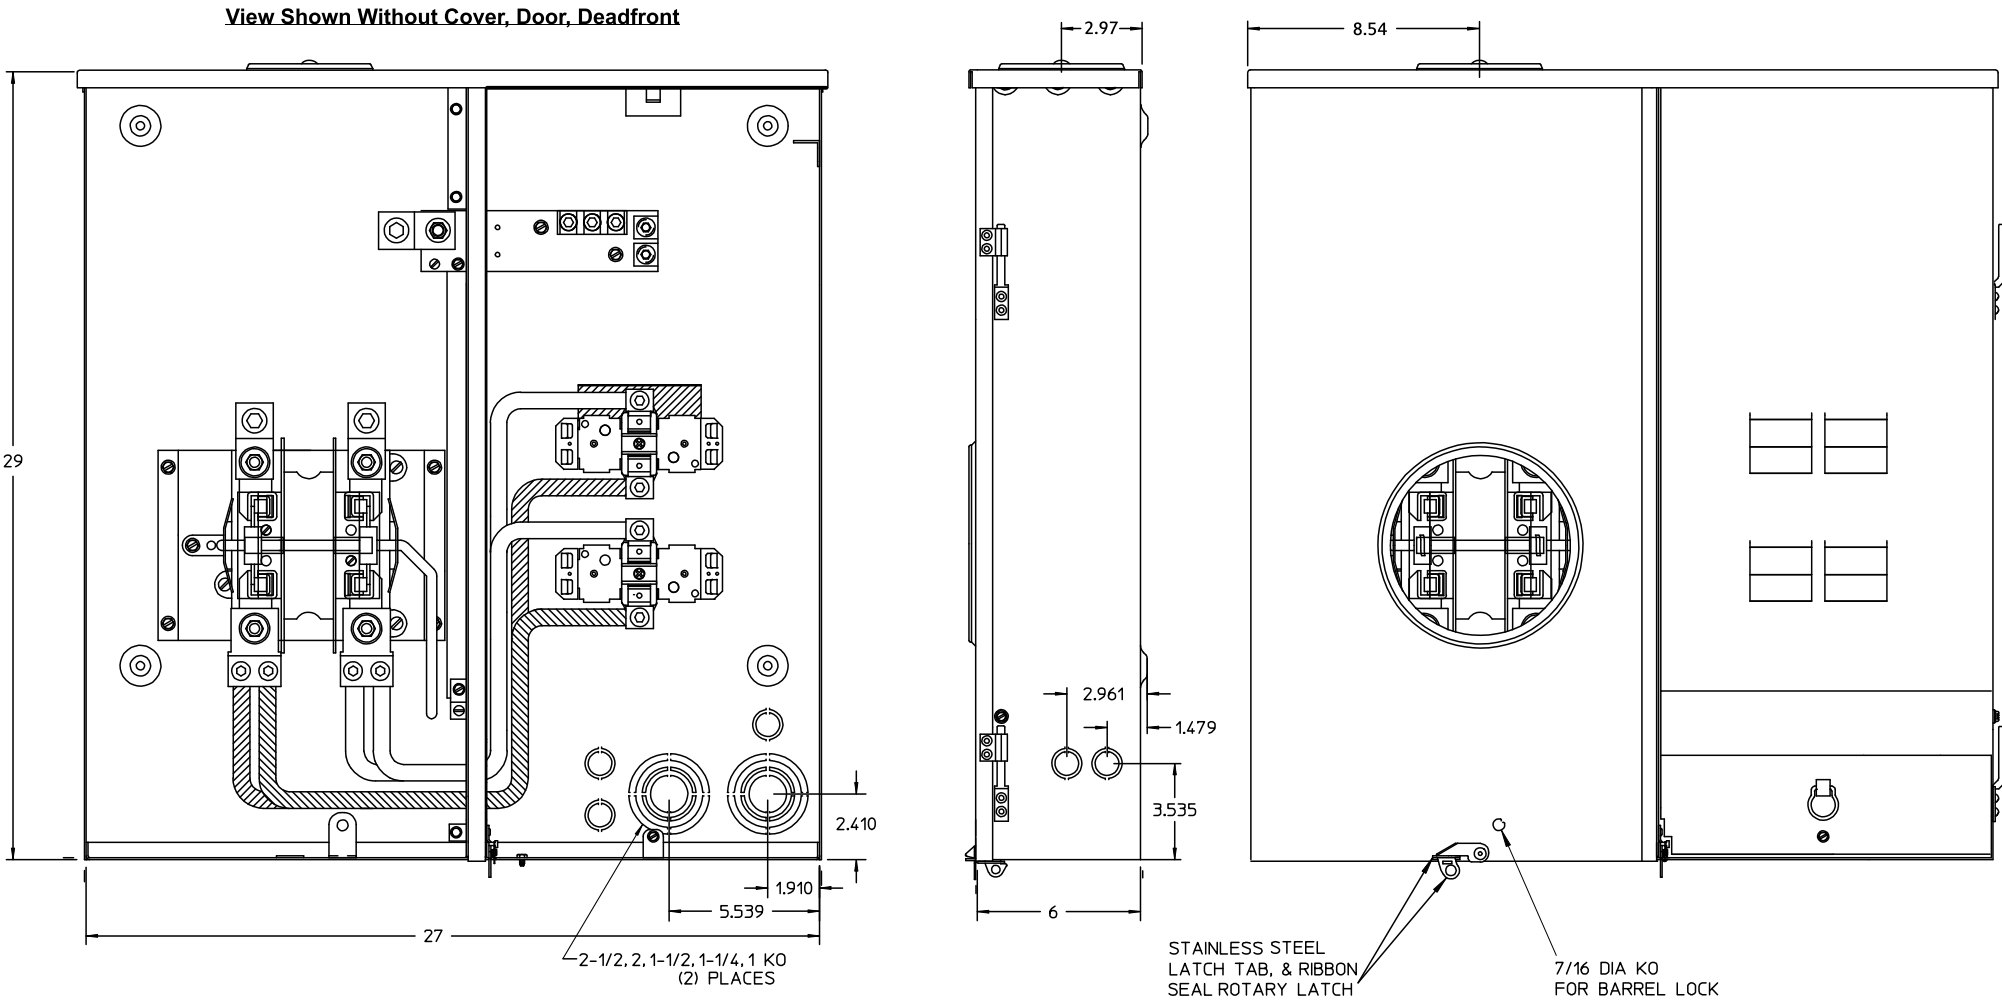

SIEMENS

Siemens Industry, Inc.

Outdoor Combination Meter Main

Description:
400A, 1ph, Ringless, OH/UG, w/o Breakers

KAM
7/8/14

Fam
M

DO NOT SCALE
DRAWING

Dwg. No.
MM0404L1400RLM