



Measure with Extech

MultiMeters I Clamp Meters

Thermometers | Airflow Meters

Light Meters I Sound Meters

Water Quality Meters I Tachometers

Humidity Meters | Moisture Meters

Video Borescopes and More!

www.extech.com

Celebrating Our Anniversary



As Extech celebrates our 45th anniversary, I can't help but think about the journey we've been on for almost five decades. We take pride in making a difference in your world by providing you with the tools you need to get your job done right. We understand that minimizing down time and providing a safe work environment while controlling costs are challenges you face every day.

Our products have always offered unique functionality at affordable prices and we've grown significantly because we learned about your application needs and focused on delivering quality and innovative products for professionals like you.

We work hard to earn your trust by offering top quality tools, a comprehensive product selection and proactive customer support so that you always feel confident on the job with your Extech meter.

We ask the question "What do you need to measure today?" because we're all about test and measurement. Whether your measurement requirements are on the shop floor, in the electrical or HVAC department, the safety department, or the test lab, we've got the test equipment you need to get the job done.

Sepine

Arpineh Mullaney

VP Sales, Extech Instruments
A division of FLIR Systems



Committed To Customers

SINCE 1970, EXTECH HAS COME TO BE TRUSTED BY MILLIONS OF CUSTOMERS FOR OUR COMMITMENT TO QUALITY AND SERVICE.



Call or email: 877-4-EXTECH (877-439-8324) orders@extech.com Chat with us Online!

Dedicated Support and Service

As ambassadors of Extech, our Customer Service and Technical support teams are committed to helping Extech customers around the world with friendly, efficient service.

Have questions about how to use your instruments or how to solve challenging problems on the job? Turn to our support teams.


Our products are backed with a full warranty, up to 3 years, against defects. And when you need help or repairs, we stand by our products for warranty and non-warranty repairs.

Calibration Traceable to NIST

For demanding applications that require compliance with national standards, Certificates of Calibration are available for many Extech products. NISTtraceable calibration certificates come with full before-and-after data.

We know your Extech meters are needed on the job so fastturnarounds, global shipping, and convenient recertification reminders are hallmarks of our calibration services.

available for a product. (See pages 160-165 for a full listing.)

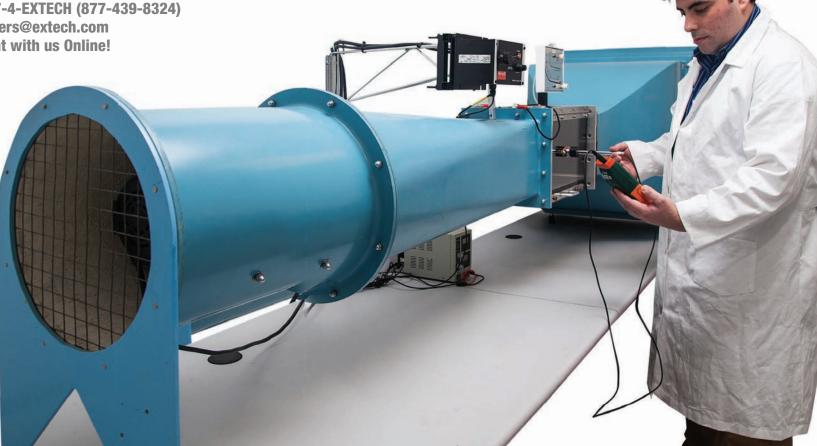



a growing market of test equipment, Extech stands out as a trusted, wellknown brand focused on building lifelong relationships with our customer community. Only Extech can achieve that with a dedicated team of customer support and service, as well as a relentless pursuit of quality.

Trusted By The Pros

TRADESMEN AND INDUSTRIAL MAINTENANCE PROFESSIONALS TURN TO EXTECH TO HELP THEM GET THE JOB DONE.



Electrical and Facilities Maintenance

Manufacturing and processing plants can represent the most diverse array of systems under one roof. From process equipment requiring calibration, to pumps, motors and compressors at risk for vibration and electrical issues, to wastewater treatment, to sensitive facility environmental factors such as temperature and humidity, Extech has you covered.



HVAC/R Mechanical

Extech tools help you perform simpler residential air conditioning repairs as well as more complex maintenance at a large hospital with a cogeneration plant for example. Extech meters identify problems related to electrical, air and water temperature, humidity, airflow, filtration effectiveness, superheat and subcooling, boiler tube corrosion, occupant comfort and so much more.



Safety and Health

Workplace safety and health programs not only improve and protect employee health, they can also boost productivity.

Extech meters and dataloggers for effective "industrial hygiene" programs cover air monitoring/ exposure assessments, health and safety audits, noise surveys, indoor air quality (IAQ) and respiratory protection and task lighting compliance tests.



Innovation That Gets The Job Done

EXTECH DELIVERS THE TOOLS YOU NEED TO INSTALL EQUIPMENT, SOLVE PROBLEMS AND TROUBLESHOOT MORE EFFICIENTLY.

Unlock Your Datalogging

Troubleshoot for extended periods with 3-channel voltage or current dataloggers that record in MS Excel® format on an SD card.

SD900/ SD910 p.35

GRT350

p.53



Ground Control

4-wire earth ground resistance/ resistivity tester ensures effective grounding installations.

Anywhere Access

For current testing challenges large and small, Extech introduces CAT IV rated flex clamp meters to wrap around large conductors, an open jaw clamp meter for quick testing, and a mini jaw clamp to access the tightest spots.







Cut Through the Noise

Extech introduces meters equipped with LoZ and available Low Pass Filter to tackle electrical diagnostics prone to errors from ghost voltages or noisy signals.



EX650/

EX655





Comprehensive Condition Monitoring

If you're the eyes and ears of your plant's MRO program, Extech can help you perform equipment inspections with tools like a compact, go-anywhere vibration meter or a highdefinition videoscope with articulating probe.



HDV450



Go In-Depth

Extech introduces advanced coating thickness testers for automotive, paint and industrial inspections for quality, wear and corrosion. Bluetooth® simplifies data transfer to your laptop.



VB450



CG304 p.143



Electro-Magnetic & RF Testing

From industrial induction and dielectric heaters to mobile devices, to transmitting antennas, Extech's AC/DC magnetic field meter and datalogger, as well as a multi-field EMF meter, help you measure environmental and occupational EMF exposure.






EMF450



Power On The Go

Never slow down with mobile devices that need a charge. Quickly recharge smartphones and tablets anytime, anywhere.



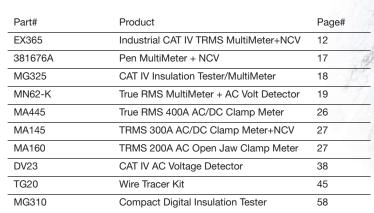



What's Your **Environmental Challenge?**

TACKLE ENVIRONMENTAL CHALLENGES: FROM HVAC/SICK BUILDING ISSUES TO OUTDOOR HEAT-STRESS WORK CONDITIONS, WATER QUALITY, UV HAZARDS & MORE.



Humidity & Temperature: Measure Your Way

Extech introduces several new hygrothermometer instruments for a wide range of applications. Focus on heat-stress; measure with your mobile device; add dataloggers to shipments; or use tabletop/wall-mount monitors that use graphical or numerical indicators.



HT200

p.89

















Options for Indoor Air Quality

For ongoing or on-the-spot air quality measurements, Extech's innovative multifunction meters track carbon dioxide, temperature, humidity as well as calculating dew point and wet bulb. Measure formaldehyde and volatile organic compounds (VOC) hazards from building materials.













PH210



D0210



Tackle Every Water Quality Challenge

New water quality meters from Extech designed to accurately measure and monitor factors essential to sustaining vibrant ecosystems, preserving public safety and responsibly managing water resources. Measure temperature as well as: Conductivity/TDS; DO; and pH/ORP.



Identify UV Hazards in the Workplace

Monitor UV-A and UV-C in industrial processes, commercial printing, foodservice, archives, as well as in medical practices. Record in MS Excel® format on an SD card.



Check Moisture in Building Materials Compact go-anywhere moisture meter.



Part#	Product	Page#
IR267	IR Thermometer + Type K	65
IR300UV	IR Thermometer with Leak Detector	69
MO55	Combination Pin/Pinless Moisture Meter	93
45168CP	Mini Thermo-Anemometer with Compass	96
45170CM	Environmental Meter	97
CO30	Carbon Monoxide (CO) Monitor	104
SL400	Noise Dosimeter/Datalogger	124
407790A	Octave Band Sound Analyzer	125
RPM40	Combination Contact/Laser Photo Tachometer	128
PH90	Waterproof pH Meter	148



Digital MultiMeter (DMM) Index Guide

Pick the right Clamp Meter for your application



MN Series Compact and affordable Digital MultiMeters with choice of Manual Ranging or Autoranging models Perfect for DIYers, students, hobbyists, mechanics and p. 10 technicians. p. 16



EX300 Series Mini Digital DMMs with built-in Non-contact Voltage Detector and numerous electrical functions and



EX350 Series These professional True RMS DMMs are loaded with advanced features and functions. Low Impedance (LoZ) mode eliminates false voltages. Low Pass Filter (LPF) attenuates high frequencies to reduce noise for accurate readings.



EX360 Series Professional CAT IV True RMS MultiMeters designed for Electrical, HVAC, or Industrial Applications Advanced LoZ feature eliminates readings caused by ghost false readings caused by ghost voltages. CAT IV safety rating ensures the highest level of protection.



EX400 Series

Professional Full

Size Series Digital

MultiMeters. Features

include Large Digits.

EX500 Series Industrial Series Digital DMMs are accurate and rugged. Waterproof, dustproof, drop tested to 2m (6.5"), and CAT IV True RMS or Averaging. and Type K and/or built-in safety rated for higher voltage applications. Wireless datalogging model or built-in IR Thermometer p. 14-15



MG300 Series Combines a 1000V Insulation Resistance Tester with a True RMS CAT-IV Digital MultiMeter plus wireless connectivity to a PC for safer monitoring, data recording and diagnostics

p. 18

Look for this symbol: 🛮 indicating products that are available with optional calibration traceable to NIST. See complete listing on p. 160-165.

EX300 Series Mini Digital MultiMeters + Voltage Detector

p. 11







ntegrated Non-contact /oltage Detector for quickly checking the presence of live wires before testing.

Combination MultiMeter with non-contact AC Voltage Detector

- Built-in non-contact AC Voltage Detector with red LED indicator and audible beeper
- Large 1" digits makes display easy to read
- Dimensions: 5.7x2.9x1.6" (147x76x42mm); Weight: 9oz (260g)
- 1 year warranty
- Complete with stand, test leads, protective holster, batteries, general purpose Type K bead wire temperature probe (EX330 only)

Model EX310 (Manual Ranging)

Battery test 1.5V and 9V

Model EX320 (Autoranging)

• Max Hold, Data Hold, and Auto Power Off

Model EX330 (Autoranging)

- Data Hold and Auto Power Off
- Advanced functions include Type K Temperature, Capacitance, and Frequency

SPECIFICATIONS	EX310	EX320	EX330
Display Counts	2000 counts	2000 counts	4000 counts
Basic Accuracy	0.50%	0.50%	0.50%
NCV Detector	100 to 600VAC	100 to 600VAC	100 to 600VAC
DC Voltage	0.1mV to 600V	0.1mV to 600V	0.1mV to 600V
AC Voltage	0.1V to 600V	0.1mV to 600V	0.1mV to 600V
DC/AC Current	0.1mA to 10A	0.1μA to 10A	0.1μA to 10A
Resistance	0.1Ω to $2000 k\Omega$	0.1Ω to $20M\Omega$	0.1Ω to $40M\Omega$
Capacitance	_	_	0.001nF to 200μF
Frequency	-	-	0.001Hz to 10MHz
Temperature	_	_	-4 to 1382°F (-20 to 750°C)
Duty Cycle	-	-	0.1 to 99.9%
Diode/Continuity	Yes	Yes	Yes
Category Rating	CAT III-600V, CAT II-1000V	CAT III-600V, CAT II-1000V	CAT III-600V, CAT II-1000V

ORDERING	
EX310 N	Manual Ranging 9 Function Mini MultiMeter + Non-Contact Voltage Detector
EX320 N	Autoranging 8 Function Mini MultiMeter + Non-Contact Voltage Detector
EX330 N	Autoranging 12 Function Mini MultiMeter + Non-Contact Voltage Detector
409996	Vinyl soft case
TP873	Replacement Bead wire Temperature Probe (-22 to 572°F/-30 to 300°C)
TL803	Replacement Test Leads

EX350 Series True RMS MultiMeters with LPF and LoZ



FX355 with Temperature



Low Past Filter (LPF) ensures accurate AC Voltage measurements on a variable frequency drive.



Verify Temperature output on HVAC units using Model EX355

Professional meters loaded with advanced features and functions including Low Pass Filter (LPF) and Low Impedance (LoZ)

- True RMS for accurate AC measurements
- 0.5% basic accuracy
- Low Pass Filter (LPF) for accurate measurement of variable frequency drive signals
- LoZ prevents false readings caused by ghost voltages
- Built-in Non-contact AC Voltage Detector (NCV) with LED indicator
- Data Hold freezes the reading on the display
- Min/Max/Max-Min captures highest and lowest readings and the difference between them
- Relative Mode for Capacitance Zero and offset adjustment
- Continuity and Diode Test
- Auto Power Off conserves battery life
- CAT III-600V rating

Model EX350

- 4000 count backlit LCD display
- · Complete with test leads and two AA batteries

Model EX355

- 6000 count backlit LCD display
- Type K Temperature
- · Complete with test leads, two AA batteries, and general purpose bead wire temperature probe

SPECIFICATIONS	EX350	EX355
Display counts	4000	6000
Basic DCV Accuracy	±0.5%	±0.5%
NCV Detector	Yes	Yes
DC/AC Voltage	0.01mV to 600V	0.01mV to 600V
DC/AC Current	0.1μA to 10.00A	0.1μA to 10.00A
Resistance	0.1Ω to $40.00M\Omega$	0.1Ω to $60.00M\Omega$
Capacitance	1pF to 60.00mF	1pF to 60.00mF
Frequency	0.001Hz to 10MHz	0.001Hz to 10MHz
Temperature (Type K)	_	-40 to 1832°F (-40 to 1000°C)
Duty Cycle	0.1 to 99.9%	0.1 to 99.9%
Diode Test	3.2V	3.2V
Continuity	Audible	Audible
Dimensions/ Weight	6.7x3.2x1.9" (175x81x48.5mm)/ 13.1oz (370g)	
Warranty	3 years	3 years

UKDEKING	
EX350 N	True RMS MultiMeter + NCV
EX355 N	True RMS MultiMeter + NCV + Temperature
TL810	Electrical Test Lead Kit
TL803	Standard Test Leads
TP200	Type K Clamp Probe (212°F/100°C)



Calibration Traceable to NIST

A NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol next to product part numbers.







EX360 Series CAT IV True RMS MultiMeters + NCV + LoZ



Model EX365 Industrial DMM



Includes test leads, 9V battery, holster with tilt stand and built-in magnet, and general purpose bead wire temperature probe (Model EX363); 1 year warranty

Choose a CAT IV-600V multimeter designed for Electrical, HVAC, or Industrial Applications with LoZ function for accurate Voltage readings

- True RMS for accurate AC measurements
- LoZ prevents false readings caused by ghost voltages
- Built-in Non-contact AC Voltage Detector (NCV) with LED indicator
- Smart Data Hold freezes the displayed reading and automatically updates the reading and alerts user (audibly and visually) if the measurement changes ±50 counts
- Large white LED backlit display with 60-segment analog bargraph for viewing trends
- Peak Hold captures the highest reading
- Relative Mode for Capacitance Zero and offset adjustment
- Continuity beeper with visual alert; Auto Power off with disable

Model EX360 — for Electrical applications

- Frequency and Capacitance measurement

Model EX363 — for HVAC applications


- µA function for HVAC flame rod measurements
- Type K Temperature
- Frequency and Capacitance measurement

Model EX365 - for Industrial/Commercial applications

- 10A AC/DC Current measurement with 11A/1000V high energy fuse
- Frequency and Capacitance measurement

SPECIFICATIONS	EX360	EX363	EX365
Basic Accuracy (DCV)	0.5%	0.5%	0.5%
NCV Detector	Yes	Yes	Yes
DC/AC Voltage	0.1mV to 1000V	0.1mV to 1000V	0.1mV to 1000V
DC/AC Current	_	_	1mA to 10A
DC/AC µA Current	_	600μΑ	_
Resistance	0.1Ω to $40M\Omega$	0.1Ω to $40M\Omega$	0.1Ω to $40M\Omega$
Capacitance	1nF to 10mF	1nF to 10mF	1nF to 10mF
Frequency	0.01Hz to 100kHz	0.01Hz to 100kHz	0.01Hz to 100kHz
Temperature (Type K)	_	-40 to 742°F (-40 to 394°C)	_
Diode Test/Continuity	Yes	Yes	Yes
Dimensions/ Weight	6.5x3.2x1.7" (164x82X44mm)/ 5.9oz (450g)		

ORDERING	
EX360 N	Electrical CAT IV True RMS MultiMeter + NCV
EX363 N	HVAC CAT IV True RMS MultiMeter + NCV
EX365 N	Industrial CAT IV True RMS MultiMeter + NCV

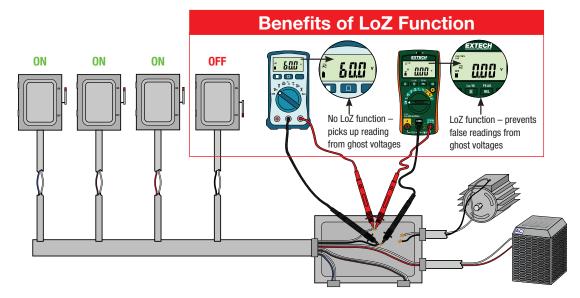

IN Indicates products that are available with optional calibration traceable to NIST. See page 160 for a complete listing.

EX400 Series Professional MultiMeters





EX470 DMM+IR Thermometer





Models with or without the built-in Infrared Thermometer, auto or manual ranging, True RMS or averaging

- Large backlit LCD display with easy-to-read 1" digits
- Type K thermometer built-in for temperature measurements
- Low current capability: measure down to 0.1µA
- Input fuse protection and mis-connection warnings
- CAT III-600V, CAT II-1000V rating
- Complete with CAT III test leads, multi-position tilt stand and velcro strap for hanging, protective holster with test lead holder, bead wire temperature probe, and 9V battery

Model EX410 (Manual Ranging)

Averaging multimeter

Model EX430 (Autoranging)


- True RMS for accurate AC measurements
- · Relative function

Model EX470 (Autoranging)

- Built-in non-contact Infrared (IR) Thermometer
- True RMS for accurate AC measurements
- · Relative function

CDECIFICATIONS	EV440	EV400	EV470
SPECIFICATIONS	EX410	EX430	EX470
Temperature (IR)	-	-	58 to 518°F (-50 to 270°C)
Averaging/True RMS	Averaging	True RMS	True RMS
Basic Accuracy (VDC)	±0.5%	±0.3%	±0.3%
AC Voltage	1mV to 750V	0.1mV to 750V	0.1mV to 750V
DC Voltage	0.1mV to 1000V	0.1mV to 1000V	0.1mV to 1000V
AC Current	0.1μA to 20A	0.1µA to 20A	0.1μA to 20A
DC Current	0.1μA to 20A	0.1μA to 20A	0.1μA to 20A
Resistance	0.1Ω to $20M\Omega$	0.1Ω to $40M\Omega$	0.1Ω to $40M\Omega$
Capacitance	_	0.01nF to 100μF	0.01nF to 100μF
Frequency	_	0.001Hz to 10MHz	0.001Hz to 10MHz
Temperature (Type K)	-4 to 1382°F (-20 to 750°C)	-4 to 1382°F (-20 to 750°C)	-4 to 1382°F (-20 to 750°C)
Duty Cycle	_	0.1% to 99.9%	0.1% to 99.9%
Diode Test/Continuity	Yes	Yes	Yes
Dimensions/ Weight	7.4x3.2x2" (187x81x50mm)/ 0.75lbs (342g)		
Warranty	1 year	3 years	3 years

ORDERING EX410 Manual Ranging MultiMeter EX430 Manual Ranging MultiMeter EX470 Manual Ranging Mu

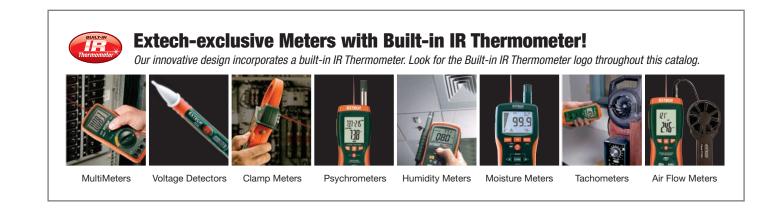





















Waterproof (IP67) rugged double molded design for heavy duty application use

Waterproof (IP67)/drop proof (6.5ft/2m) rugged design for heavy duty use

- True RMS for accurate AC measurements
- 1000V input protection on all functions
- Dual sensitivity frequency functions
- Large backlit LCD
- Diode open circuit voltage of 2.8V DC
- Auto power off with disable feature
- CAT IV-600V safety rating
- Complete with double molded test leads, magnetic hanging strap, general purpose Type K bead wire temperature probe, soft case, and one 9V battery

Model EX505

- 4,000 count
- 0.5% basic accuracy
- Data Hold and Relative
- 10A max current

Model EX520

- 6000 count-high resolution
- 0.09% basic accuracy
- Min/Max/Relative/Data Hold
- 20A max current

Model EX530

- 40,000 count-highest resolution
- 0.06% basic accuracy
- Min/Max/Relative/Data Hold
- 20A max current
- Peak Hold (AC only)

PECIFICATIONS	EX505	EX520	EX530
True RMS	True RMS	True RMS	True RMS
Basic Accuracy	±0.5%	±0.09%	±0.06%
DC Voltage	0.1mV to 1000VDC	0.1mV to 1000VDC	0.01mV to 1000VDC
AC Voltage	0.1mV to 1000VAC	1mV to 1000VAC	0.01mV to 1000VAC
DC/AC Current	0.1μA to 10A	0.1μA to 20A	0.01µA to 20A
Resistance	0.1Ω to $40 M\Omega$	0.1Ω to $40M\Omega$	0.01Ω to $40M\Omega$
Capacitance	0.01nF to 100μF	0.01nF to 1000μF	0.001nF to 40mF
Frequency (electrical)	5Hz to 1kHz	10Hz to 400Hz	40Hz to 400Hz
Frequency (electronic)	0.001Hz to 10MHz	0.001Hz to 40MHz	0.001Hz to 100MHz
Temperature (Type K)	-4 to 1382°F (-20 to 750°C)	-4 to 1382°F (-20 to 750°C)	-4 to 1382°F (-20 to 750°C)
Duty Cycle	0.1 to 99.9%	0.1 to 99.9%	0.1 to 99.90%
Diode (2.8V)/Continuity	Yes	Yes	Yes
Category Rating	CAT IV-600V, CAT III-1000V	CAT IV-600V, CAT III-1000V	CAT IV-600V, CAT III-1000V
Waterproof / Drop proof	IP67 / 6.5ft (2m)	IP67 / 6.5ft (2m)	IP67 / 6.5ft (2m)
Dimensions	7.25x3.25x2.25" (184x83x57mm)	7.25x3.25x2.25" (184x83x57mm)	7.25x3.25x2.25" (184x83x57mm)
Weight	12.3oz (349g)	12.3oz (349g)	12.3oz (349g)
Warranty	3 years	3 years	3 years

ORDERING	
EX505 N	True RMS Industrial MultiMeter (4000 count)
EX520 N	True RMS Industrial MultiMeter (6000 count)
EX530 N	True RMS Industrial MultiMeter (40,000 count)
TL810	Electrical Test Lead Kit
TL805	Double Injected Test Leads
TP200	Type K Clamp Probe (212°F/100°C)
HG500	Magnetic Hanging Strap

EX570 CAT IV MultiMeter + IR Thermometer





quickly locates hot spots on electrical panels and HVAC vents without contact.





Built-in IR Thermometer quickly identifies hot spots without contact

- Built-in non-contact IR Thermometer design with laser pointer
- True RMS CAT III-1000V, CAT IV-600V rated with 0.06% basic DCV accuracy
- Diode open circuit voltage of 2.8V DC
- Heavy duty Double molded, water resistant package
- Large backlit 40,000 count LCD with 40-segment bargraph; Auto off with disable feature
- Memory for storage and recall of three measurements
- 1000V input protection on all functions
- Type K thermocouple contact temperature measurements
- Features Hold, Relative and Peak Hold, Min, Max and Average recording
- Complete with double molded test leads, magnetic hanging strap, general purpose Type K bead wire probe, case, and 9V battery; 3 year warranty

SPECIFICATIONS	
Basic Accuracy	±0.06%
DC/AC Voltage	0.01mV to 1000V
DC/AC Current	0.01µA to 20A
Resistance	0.01Ω to $40M\Omega$
Capacitance	0.001nF to 10,000μF
Frequency	0.0001Hz to 40MHz
Temperature (Type K/ non-contact IR)	Type K: -50 to 1382°F (-45 to 750°C) / IR: -22 to 1022°F (-30 to 550°C)
Field of View	30:1 ratio
Duty Cycle	0.01 to 99.99%
Diode (2.8V)/Continuity	Yes
Dimensions/ Weight	7.25x3.25x2.25" (184x83x57mm)/ 12.3oz (349g)

ORDERING

CAT IV Industrial MultiMeter + IR Thermomete

EX540/EX542 CAT IV Datalogging MultiMeter with Real Time Streaming







Meter features include continuous wireless data streaming to a PC in real time, drop-proof tested to 6.5ft (2m), and waterproof design (IP67).





CAT IV True RMS MultiMeter datalogs up to 9,999 readings with wireless USB interface capability to transmit readings to your PC in real time

- Real time datalogging or wireless data transmission directly to your PC (30ft/10m)
- True RMS measurements for accurate AC Voltage and Current measurements
- Diode open circuit voltage of 2.8V DC and 1000V input protection on all functions
- Double molded construction for waterproof (IP67) protection
- CAT IV-600V safety rating for industrial applications
- Dual sensitivity frequency functions
- Large backlit triple LCD display with 40,000 counts; Auto off with disable feature
- Complete with double molded test leads, magnetic hanging strap, general purpose Type K bead wire temperature probe, remote receiver with USB cable, Windows® compatible software, 9V battery and carrying case; 3 year warranty

SPECIFICATIONS	
Basic Accuracy	±0.06%
DC/AC Voltage	0.01mV to 1000V
DC/AC Current	0.01µA to 20A
Resistance	0.01Ω to $40M\Omega$
Capacitance	0.001nF to 40mF
Frequency	40Hz to 4kHz (electrical) / 0.001Hz to 100MHz (electronic)
Temperature	-58 to 1382°F (-50 to 750°C)
Duty Cycle	0.1 to 99.90%
Diode (2.8V) / Continuity	Yes
Dimensions/ Weight	7.25x3.25x2.25" (184x83x57mm)/ 12.3oz (349g)

ORDERING	
EX540 N	CAT IV Datalogging MultiMeter with Real Time Streaming (915MHz)
EX542 N	CAT IV Datalogging MultiMeter with Real Time Streaming (433MHz)
(NOTE: USA, Mexico, and 0	Canada use 915MHz model and majority of other countries use 433MHz model)

MN15A/MN16A Digital Mini MultiMeters



Compact Autoranging or Manual ranging multimeters with Temperature

- Large easy to read digital display
- Complete with battery, Type K bead wire probe and test leads; 1 year warranty MN15A (Manual Ranging)
- 1.5V and 9V Battery tests under load

MN16A (Autoranging)

- Advanced functions include AC Current, Capacitance, Frequency, and Duty Cycle
- Auto power off with disable feature

SPECIFICATIONS	MN15A	MN15A Basic Accuracy	MN16A	MN16A Basic Accuracy
DC Voltage	600V (0.1mV)	±0.5%	600V (1mV)	±1.2%
AC Voltage	600V (0.1V)	±1.2%	600V (0.1mV)	±1.5%
DC Current	10A (0.1mA)	±1.2%	10A (0.1μA)	±1.5%
AC Current	_	_	10A (0.1μA)	±1.8%
Resistance	20ΜΩ (0.1Ω)	±0.8%	$40M\Omega$ (0.1Ω)	±1.2%
Capacitance	_	_	100μF (0.01nF)	±3.0%
Frequency	-	-	5MHz (0.001Hz)	±1.2%
Temperature	-4 to 1400°F (-20 to 750°C)	±(3%rdg+9°F/5°C)	-4 to 1400°F (-20 to 750°C)	±(3%rdg+9°F/5°C)
Duty Cycle	_	_	0.1 to 99.9%	±1.2%
Battery Test	9V & 1.5V Batteries	_		
Category rating	CAT III-600V		CAT III-600V	
Dimensions/Weight	5.43x2.83x1.5" (138x	x72x38mm)/ 5.4oz (153g)		

ORDERING	
MN15A	Manual Ranging MiniTec® MultiMeter with Temperature
MN16A	Autoranging MiniTec® MultiMeter with Temperature
TP873	Spare Type K Bead Wire Probe (-22 to 572°F/-30 to 300°C)
409992	Small Soft Case

MN35/MN36 Digital Mini MultiMeters



an outlet receptacle

Autoranging or Manual ranging multimeters with Temperature function

- Large easy to read digital display
- Type K Temperature measurements and Continuity and Diode tests
- 1 year warranty
- Includes holster with stand, Type K bead wire probe, battery, and test leads

MN35 (Manual Ranging/ 8 Functions)

• 1.5V and 9V Battery test

MN36 (Autoranging/ 10 Functions)

• AC Current, Capacitance and Frequency measurements

SPECIFICATIONS	Model MN35	Basic Accuracy	Model MN36	Basic Accuracy
DC Voltage	600V (0.1mV)	±0.5%	600V (0.1mV)	±0.5%
AC Voltage	600V (0.1V)	±1.2%	600V (0.1V)	±1.2%
DC Current	10A (0.1mA)	±1.5%	10A (0.1μA)	±1.2%
AC Current	_	_	10A (0.1μA)	±1.5%
Resistance	$20M\Omega$ (0.1 $\mu\Omega$)	±0.8%	40 Μ Ω $(0.1$ μ $\Omega)$	±1.2%
Capacitance	_	_	100μF (0.001nF)	±3.0%
Frequency	_	-	5MHz (0.01Hz)	±1.0%
Temperature	-4 to 1400°F (1°) -20 to 750°C	±(1%+4°)	-4 to 1400°F (1°) -20 to 750°C	±(1%+4°)
Battery Test	9V and 1.5V		_	
Power	one 9V battery		2 x AAA batteries	
Dimensions/Wt 5.43x2.83x1.5" (138x72x38mm)/5.4oz (153g)				

ORDERING		
MN35	Manual Ranging Mini Digital MultiMeter	
MN36	Autoranging Mini Digital MultiMeter	
TP873	Spare Type K Bead Wire Temperature Probe (-22 to 572°F/-30 to 300°C)	
409992	Vinyl pouch carrying case	

DM220 CAT IV Pocket MultiMeter + NCV



₩ (€

Includes test leads and two AAA batteries; 1 year

Autoranging DMM with 4000 count LCD display, NCV and Built-in Flashlight

- Non-Contact Voltage detection identifies live circuits
- Rugged double molded housing; CAT IV-600V, CAT III-1000V safety rating

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY (%RDG)
DC/AC Voltage	600V	0.1mVDC/1mVAC	±0.8%DC/±1.5% AC
DC/AC Current	200mA	0.1μΑ	±2.0%DC/±2.5%AC
NC Voltage	100 to 600VAC		
Resistance	40ΜΩ	0.1Ω	±0.8%
Frequency	10kHz	0.001Hz	±2.0%
Capacitance	200µF	0.001nF	±5.0%
Duty Cycle	0.5 to 99%	0.5%	±(2.0% reading + 5 digits)
Diode/Continuity	Yes		
Dimensions/Weight	4.72x2.2x1.6" (120x55x540	mm) / 5.12oz (145g)	

ORDERING	
DM220	CAT IV Pocket MultiMeter +

Vinyl pouch case

DM110 Mini Pocket MultiMeter

· Relative and Data Hold functions

409992



Includes test leads, protective holster, button battery, and case; 1 year

10 function Autoranging including Frequency, Capacitance, and Duty Cycle • Large 4000 count LCD display

- · Auto power off with disable feature
- Built-in storage compartment for integrated test leads
- CAT II 600V safety rating; Over-range and low battery indication

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY (%RDG)
AC/DC Voltage	500V	1mV	AC: ±2.3%; DC: ±1.3%
AC/DC Current	400mA	0.01mA	AC: ±2.5%; DC: ±2.0%
Resistance	400 to $40M\Omega$	0.1Ω	±2.0%
Capacitance	100μF	0.001nF	±3.0%
Frequency	5Hz to 10MHz	0.001Hz	±2%
Duty Cycle	0.1% to 99.9%	0.1%	±1.2%
Diode/Continuity	Yes		
Dimensions/Weight	4.25 x 2.2 x 0.5" (108 x 56 x 1	1.5mm)/ 1.7oz (50g)	

ORDERING	
DM110	Mini Pocket MultiMeter

381676A Pen DMM with Non-Contact Voltage Detector



 ϵ

Includes test leads, two alligator clips, two 1.5V AAA batteries, and soft case; 1 year warranty

Autoranging multimeter with non-contact voltage detection

- Large 2000 count LCD display
- Autoranging with Data Hold, Range Hold, and Maximum Hold features
- CAT III-600V; Auto power off, overload and low battery indication

SPECIFICATIONS			
Function	Range	Max Resolution	Basic Accuracy (%rdg)
Non-contact Voltage	>110VAC		
AC/DC Voltage	200mV, 2, 20, 200, 600V	0.1mV	AC: ±0.8%; DC: 0.7%
AC/DC Current	20mA, 200mA	0.01μΑ	AC: ±2%; DC: 0.1.5%
Resistance (Ω)	200, 2k, 20k, 200k, 2M, 20M	0.1Ω	±0.8%
Logic Test	0 to 1.5V (Green LED), 1.5 to 3.	5V (LED off), 3.5 to 5V (Re	ed LED)
Diode/Continuity	Yes		
Dimensions/Weight	8.2x1.5x1.1" (208x38x29mm)/4	.6oz (129g)	

ORDERING	
381676A	Pen DMM with Non-Contact Voltage Detector
55.57.57	1 on binin marrion contact rotage betoeter





MG325 CAT IV Insulation Tester/MultiMeter







Includes test leads, alligator clip, remote probe with built-in test button, 6 x AA batteries, and soft case; 1 year warranty



High Insulation Resistance range (200 $G\Omega$) and fully loaded DMM functions

- Polarization Index (PI) and Dielectric Absorption Ratio measurements (DAR)
- Low Resistance measurement with Zero function
- Programmable Timer feature sets the duration of test
- Comparison Mode allows user to set the Pass/Fail values
- Step Voltage (10% steps at 50% to 120% of range)
- Auto-discharge of voltage test signal
- Lock Power On Function for hands-free operation
- Manually store/recall up to 99 readings
- Backlit 10,000 count display with analog bargraph
- High voltage and overload indication
- Data Hold, Auto Power Off and Low battery indication
- CAT IV-600V safety category

SPECIFICATIONS	
Insulation Resistance	$50\text{M}\Omega,100\text{M}\Omega,200\text{M}\Omega,500\text{M}\Omega,2000\text{M}\Omega,1\text{G}\Omega,10\text{G}\Omega,20\text{G}\Omega,50\text{G}\Omega,100\text{G}\Omega,200\text{G}\Omega$
Insulation Test Voltages	50V, 100V, 250V, 500V, 1000V
AC/DC Voltage	600V
Leakage Current	2000μΑ
Resistance	10ΜΩ
Low Resistance	100Ω
Capacitance	500μF
Frequency	1kHZ
Continuity	Yes (audible)
Dimensions/ Weight	8.9 x 4.1 x 2.3" (225 x 103 x 59mm)/ 1.5lbs (0.7kg)
ORDERING	
MG325 N	CAT IV Insulation Tester/MultiMeter with Remote Test Probe

MG300/MG302 CAT IV Insulation Tester/MultiMeter with Wireless PC Interface



Transmitter





Includes remote receiver with USB cable, Windows® compatible software, heavy duty test leads, alligator clip test lead, Type K bead wire temperature probe, hard case, and 6 x AA batteries; 1yr warranty

Combines a 1000V Insulation Tester with a True RMS MultiMeter

- Wireless USB interface transmits measurement data to a PC
- Backlit large triple display and waterproof (IP67) rugged housing design
- Insulation Resistance from $0.001 M\Omega$ to $4000 M\Omega$
- Auto discharge of capacitive voltage
- Lock Power On Function for hands-free operation
- Min/Max, Relative mode, Data Hold, and Auto power off

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Insulation Resistance	4MΩ, 40MΩ, 400MΩ, 4000MΩ	0.001ΜΩ	±3%
Insulation Test Voltages	125V, 250V, 500V, 1000V		
AC/DC Voltage	1000V	0.1mVAC/ 0.01mVDC	AC: ±1%, DC: ±0.06%
AC/DC Current	10A	0.1µA AC/ 0.01µA DC	AC: ±1.5%, DC: ±1%
Resistance	40ΜΩ	0.01Ω	±0.3%
Capacitance	40mF	0.001nF	±3.5%
Frequency	100MHZ	0.001HZ	±0.1%
Duty Cycle	0.1 to 99.9%	0.01	±1.2%
Temperature	-58 to 1832°F (-50 to 1000°C)	0.1°F (0.1°C)	±1% + 4.5°F (2.5°C)
4-20mA%	-25 to 125%	0.01%	
Continuity/Diode	Yes		
Dimensions/ Weight 7.8 x 3.6 x 1.9" (200 x 92 x 50mm)/ 20.5oz (582g)			

ORDERING	NOTE: USA, Mexico, and Canada use 915MHz model MG300 and majority of other countries use 433MHz model MG302
MG300 N	CAT IV Insulation Tester/MultiMeter with Wireless PC Interface (915MHz)
MG302 N	CAT IV Insulation Tester/MultiMeter with Wireless PC Interface (433MHz)

MG300-ETK Electrical Troubleshooting Kit



Includes three compact tools that are indispensable at a customer site for electrical installation, troubleshooting, and repair

- Model MG300 or MG302: 13 Function, Wireless PC Interface, True RMS Multimeter/Insulation Tester (see p. 18)
- Model 42509: 12:1 Infrared Thermometer with high/low alarm and fast 2-color display for processes that require temperature control and monitoring; measures from -4 to 950°F/-20 to 510°C (see p. 66)
- Model MA430T: 400A True RMS AC Clamp Meter with built-in non-contact voltage detector and ideal for noisy or non-sinusoidal AC measurement
- 1.2" (30mm) jaw size for conductors up to 350MCM
- Supplied with test leads, Type K thermocouple bead wire probe, batteries, and case

ORDERING (VISIT	WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)	
MG300-ETK	Electrical Troubleshooting Kit (with MG300)	
MG302-FTK	Electrical Troubleshooting Kit (with MG302)	

MG300-MTK Motor & Drive Troubleshooting Kit



Includes three compact tools that are indispensable at a customer site for troubleshooting 3-phase motors and drives

- Model MG300 or MG302: 13 Function, Wireless PC Interface, True RMS Multimeter/Insulation Tester (see p. 18)
- Model 480403: Motor Rotation and 3-Phase Tester checks phase sequence and indicates rotation direction of the motor to help insure correct wiring (see p. 34)
- Model MA435T: 400A True RMS AC/DC Clamp Meter with built-in non-contact voltage detector and ideal for noisy or non-sinusoidal AC measurement
- 1.2" (30mm) jaw size for conductors up to 350MCM
- Supplied with test leads, 3 large color-coded alligator clips, Type K thermocouple bead wire probe, batteries, and case

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)		
MG300-MTK	Motor & Drive Troubleshooting Kit (with MG300)	
MG302-MTK	Motor & Drive Troubleshooting Kit (with MG302)	

MN62-K True RMS MultiMeter with AC Voltage Detector





Model MN62 True RMS MultiMeter:

- 9 functions including Frequency and Capacitance
- VFC Low pass filter for accurate measurement of variable frequency drive signals

Kit ideal for troubleshooting appliances, electrical wiring, automotive repair

- Built-in non-contact voltage detection with audible beeper indication
- CAT III-600V category safety rating
- Complete with test leads and two AA batteries

Model DV23 AC Voltage Detector:

- Safely determine if wires are hot or not
- 50 to 600V, 50/60Hz
- Audible and visual alerts

and electronic devices

- CAT IV-600V category safety rating
- Complete with two AAA batteries

	(VISIT WWW.EXTECH.COM FOR SPECIFICATIONS)	
MN62-K True RMS MultiMeter with AC Vo	tage Detector	



(₹) (€) (€)







Two kits to choose from providing all the electrical testing needs for installation & repair of electrical systems, HVAC equipment, and automotive

- Model ETK30 kit includes MA430: 400A AC Current Meter Model ETK35 kit includes MA435T: True RMS 400A AC/DC Current for troubleshooting large appliances, automotive and motor applications
- 1.2" (30mm) jaw size and built-in Non-Contact Voltage Detector with LED alert
- Both kits include EX205T: True RMS Multimeter with Max Hold
- Data Hold and Max Hold
- Exceptional Value Kit is supplied with test leads, batteries, and attractive storage case that provides protection and organization for the meters and accessories

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)		
ETK30	Electrical Test Kit with 400A AC Clamp Meter	
ETK35	Electrical Test Kit with True RMS 400A AC/DC Clamp Meter	

TK430 Electrical Test Kit



Meets plant maintenance, HVAC or electrical technician's needs

- Assembled to provide all the electrical testing needs for installation and repair of electrical systems, HVAC equipment and large appliances
- Kit contains an EX430 True RMS autoranging digital multimeter, MA200 400A clamp meter, 40130 Non-Contact voltage detector plus test leads and temperature probe
- Supplied in a soft carrying case that provides protection and organization for the meters and accessories
- Dimensions: 9.5x6.8x2.8" (241x173x71mm); Weight: 2.6lbs (1.2kg)

Model EX430: Autoranging True RMS MultiMeter with 11 functions including Capacitance, Frequency and Temperature. (see p. 13)

Model MA200: 400A Clamp Meter with basic AC

Current and 1mA resolution. (see p. 26)

Model 40130: Non-Contact Voltage Detector detects AC Voltage from 100VAC to 600VAC without touching the source. (see p. 38)

	Watch the Video	
www.extech.com/video		

ORDERING TK430

FK430 Electrical Test Kit 480172 AC Line Splitter

TK430-IR Industrial Troubleshooting Kit with IR



Meets plant maintenance, HVAC or electrical technician's needs

- Assembled to provide all the electrical testing needs for installation and repair of electrical systems, HVAC equipment and large appliances
- Non-contact InfraRed thermometer allows for quick surface temperature measurement
- Kit contains an EX430 True RMS autoranging digital multimeter, MA200 400A clamp meter, 42510 Mini IR Thermometer, 40130 Non-Contact voltage detector plus test leads and temperature probe
- Supplied in a heavy duty hard carrying case that provides protection and organization for the meters and accessories
- Dimensions: 14.5x11x4.5" (368x280x114mm); Weight: 4.5lbs (2kg)

Model EX430: Autoranging True RMS MultiMeter with 11 functions including Capacitance, Frequency and Temperature. (see p. 13)

Model MA200: 400A Clamp Meter with basic AC Current and 1mA resolution. (see p. 26)

Model 42510: Wide range mini IR Thermometer measures -58 to 1000°F (-50 to 538°C). Built-in laser identifies target area; 8:1 distance to target ratio

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)

TK430-IR Electrical Test Kit with



EX505-K Heavy Duty Industrial MultiMeter Kit



CAT IV MultiMeter and AC Voltage Detector With 8 piece test lead kit

- Kit includes EX505 True RMS waterproof (IP67)/drop-proof MultiMeter, DV25 Dual Range Non-contact AC Voltage Detector + Flashlight, TL808
 8-piece Professional Test Lead Kit, plus professional double-molded test leads, Type K thermocouple bead probe with banana input adaptor, and magnetic hanging strap
- Supplied in a soft carrying case that provides protection and organization for the meters and accessories
- Dimensions: 9.8x8x2" (248x203x51mm); Weight: 1.2lbs (544g)

Model EX505: Industrial grade, CAT IV-600V, 4000 count display, waterproof (IP67), CE/UL listed, drop-proof, rugged multimeter with True RMS functions (see p. 14)

Model DV25: Dual Range Non-contact voltage detector (24 to 1000VAC/100 to 1000VAC) + Flashlight with Audible/ Visual indication, and double-molded housing CAT IV-1000V, CE/UL (see p. 38)

Model TL808: 8-Piece Professional Test Lead Kit with CAT III-1000V rating

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)		
EXS	505-K	Heavy Duty Industrial MultiMeter Kit

MA620-K Industrial DMM/Clamp Meter Test Kit



CAT IV MultiMeter and True RMS Clamp Meter with integrated AC Voltage Detector

- Kit contains EX505 rugged, waterproof multimeter with 11 functions, MA620 600A True RMS AC Clamp-on MultiMeter with built-in noncontact AC Voltage Detector, test leads and Type K thermocouple bead probe with banana input adaptor, and magnetic hanging strap
- Supplied in a soft carrying case that provides protection and organization for the meters and accessories
- Dimensions: 9.8x8x2" (248x203x54mm); Weight: 1.5lbs (680g)

Model EX505: Industrial grade, CAT IV-600V, 4000 count display, waterproof (IP67), CE/UL listed, drop-proof, rugged multimeter with True RMS functions (see p. 14)

Model MA620: 600A True RMS 6000 count AC Clamp-on MultiMeter with built-in non-contact AC Voltage Detector, test leads and temperature probe; CE/ETL approved

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)

MA620-K Industrial DMM/Clamp Meter Test Kit

MA640-K Phase Rotation/Clamp Meter Test Kit



Ideal kit for plant maintenance — True RMS Clamp Meter with multimeter functions, 3-phase rotation tester, and CAT IV AC Voltage Detector

- MA640: 600A True RMS 6000 count AC/DC Clamp-on MultiMeter with built-in non-contact AC Voltage Detector
- 480400: 3-Phase Rotation Tester with multi-line LCD display, durable double-molded housing, and easy-to-open wide-jaw alligator clips (see p. 34 for specifications)
- DV25: Dual Range AC Voltage Detector (24 to 1000VAC/100 to 1000VAC)
 + Flashlight with Audible/ Visual indication, double-molded housing, and CAT IV-1000V safety rating (see p. 38 for specifications)
- Set of double molded professional test leads
- Type K thermocouple bead probe and Type K to Banana Input Adaptor
- Supplied in a heavy duty carrying case that provides protection and organization for the meters whenever they are needed
- Dimensions: 9.8x8x2" (248x203x54mm); Weight: 1.3lbs (590g)

MA640-K Phase Rotation/Clamp Meter Test Kit





Clamp Meter Index Guide

Pick the right Clamp Meter for your application







Mini Clamp Series Extra-small jaw size clamps and low-current sensitivity. breaking the circuit. RMS models p. 29-31



Open Jaw Clamps Open jaw design provides



EX600 HVAC Series Best-in-class multifunctional Clamp Meters. 400A AC/ DC True RMS with dual Type K thermocouple input for differential temperature measurements. Built-in IR Thermometer for surface p. 23

p. 25



EX800 Series Professional grade, 1000A True RMS AC or AC/DC Clamp Meters with built-in non-contact IR Thermometer. Models available with CAT IV rating for measurements in Non-Contact Voltage Detector high current/voltage areas, advanced model with built-in Android mobile devices



High Current Clamp Powerful clamp meters that measure high current with models that go up to 3000A Large jaw sizes from 2" (5cm) to 18" (45.7cm) flex clamps. Choose from AC or and multimeter functions plus plus Bluetooth connectivity to AC/DC measurements, power quality diagnostics, True RMS accuracy, and much more. p. 32-33

Look for this symbol: N indicating products that are available with optional calibration traceable to NIST. See complete listing on p. 160-165.



EX850 Monitor Readings via Bluetooth®

Clamp meter transmits readings to Android smartphones and tablets. Vew key electrical readings taken by the EX850 at a safe distance on your Android device. Power up equipment from remote switches or use your Android to show readings to a customer/manager. Download the Extech ExView™ EX850 App at play.google.com.



Android & Google Play are trademarks of Google Inc. The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License



Replacement Bead wire Temperature

probe (-22 to 572°F/-30 to 300°C)

Standard Test Leads





SPECIFICATIONS



EX820 1000A True RMS AC Clamp Meter + IR Thermometer

True RMS AC clamp-on multimeter gives you accurate readings of nonsinusoidal waveforms

- True RMS AC Voltage and Current measurements provide accurate readings regardless of waveforms
- Built-in non-contact IR Thermometer design with laser pointer for locating hot spots
- Diode open circuit voltage of 2.8V DC
- · Peak hold captures transients

EX820 N

- Data Hold, Min/Max, and Auto Power off
- Complete with test leads, 9V battery, general purpose Type K probe, and case



EX830 1000A True RMS AC/DC Clamp Meter + **IR Thermometer**

True RMS AC clamp-on multimeter and DC Current function

- DC Current function to 1000A
- True RMS AC Voltage and Current measurements provide accurate readings regardless of waveforms
- Built-in non-contact IR Thermometer design with laser pointer for locating hot spots
- Diode open circuit voltage of 2.8V DC
- Peak hold captures transients
- · Data Hold, Min/Max, and Auto Power off
- Complete with test leads, 9V battery, general purpose Type K probe, and case



EX840/EX850

CAT IV 1000A True RMS AC/DC Clamp Meters + IR and Bluetooth®

CAT IV 600V approval rating assures maximum safety and functionality

- AC/DC Voltage to 1000V and AC/DC Current to 1000A
- True RMS AC Voltage and Current measurements
- Built-in non-contact IR Thermometer with laser pointer
- Peak Hold, Data Hold, Min/ Max, and Auto Power off
- Includes CAT IV test leads, 9V battery, Professional test lead set, general purpose Type K probe, and case
- Model EX850 Integrated Bluetooth® connects with most Android devices to transmit readings for remote viewing; Works with free Android App; Download the Extech EX850 ExView[™] App at play.google.com

■ EX840 N | ▲ EX850

True RMS 4000 count backlit LCD Display counts 4000 count backlit LCD 4000 count backlit LCD Jaw size/Cable size 1.7" (43mm); 750MCM 1.7" (43mm); 750MCM 1.7" (43mm); 750MCM AC Current (Max Res.) 1000A (0.1A) 1000A (0.1A) 1000A (0.1A) DC Current (Max Res.) 1000A (0.1A) 1000A (0.1A) Basic ACA Accuracy (% rdg) ±2.5% (AC) ±2.5% (AC); ±2.5% (DC) ±2.5% (AC); ±2.5% (DC) AC/DC Voltage (Max Res.) 600V (0.1mV) 600V (0.1mV) 1000V (0.1mV) Resistance (Max Res.) $40M\Omega$ (0.1 Ω) $40M\Omega$ (0.1 Ω) $40M\Omega$ (0.1 Ω) Capacitance (Max Res.) 40mF (0.001nF) 40mF (0.001nF) 40mF (0.001nF) Frequency (Max Res.) 4kHz (1Hz) 4kHz (1Hz) 4kHz (1Hz) -4 to 1400°F (-20 to 760°C) -4 to 1400°F (-20 to 760°C) -4 to 1400°F (-20 to 760°C) Temperature (Type K) Temperature (IR)/ Field of View -58 to 518°F (-50 to 270°C)/ 8:1 ratio -58 to 518°F (-50 to 270°C)/ 8:1 ratio -58 to 518°F (-50 to 270°C)/ 8:1 ratio Diode (2.8V)/ Continuity Yes Yes Yes Wireless Communication ■ No | ▲ Bluetooth UL, ETL, CE, Category Rating UL, CE, CAT III-600V UL, CE, CAT III-600V ETL, CE, CAT IV-600V; CAT III-1000V Dimensions/Weight 10.6x4.3x2" (270x110x50mm)/ 13.6oz (386g) 10.6x4.3x2" (270x110x50mm)/ 13.6oz (386g) 10.6x4.3x2" (270x110x50mm)/ 13.6oz (386g) Warranty 1 year 1 vear 3 years

EX830 N



EXTECH INSTRUMENTS

EX650 Series True RMS 600A Clamp Meters





Troubleshoot current output on an electrical panel, verify Temperature output on HVAC units, and quickly detect live voltages with built-in Non-contact Voltage Detector.

Professional clamps featuring Low Impedance (LoZ) mode and choice of advanced model with Low Pass Filter (LPF) and Inrush functions

- True RMS for accurate AC measurements
- 1.18" (30mm) jaw size accommodates conductors up to 350MCM
- LoZ prevents false readings caused by ghost voltages
- µA function for HVAC flame rod Current measurements
- Built-in Non-contact AC Voltage Detector (NCV) with LED indicator
- 6000 count backlit LCD display
- Data Hold freezes the reading on the display
- Min/Max captures highest and lowest readings
- Relative function
- Convenient LED worklight for viewing in dimly lit area
- Auto Power Off conserves battery life
- 3 year warranty

Model EX650

- 9 Functions including AC Current
- Complete with test leads and 3 AAA batteries

Model EX655

- 12 Functions including AC/DC Current
- Frequency and Type K Temperature
- Low Pass Filter (LPF) for accurate measurement of variable frequency drive signals
- Inrush mode captures current surges during motor startup
- DC ZERO mode
- LCD trending bargraph
- Complete with test leads, general purpose bead wire Temperature probe and 3 AAA batteries

SPECIFICATIONS	EX650	EX655
AC Current (Max Res.)	6A, 60A, 600A (0.001A)	60A, 600A (0.01A)
DC Current	_	60A ,600A (0.01A)
Basic accuracy	ACA: ±2.5% of rdg	ACA: ±2.5% of rdg; DCA: ±2.5% of rdg
AC/DC μA Current (Max Res.)	600μΑ (0.1μΑ)	600μΑ (0.1μΑ)
DC Voltage (Max Res.)	1000V (0.1mV)	1000V (0.1mV)
AC Voltage (Max Res.)	750V (1mV)	750V (1mV)
Basic accuracy	ACV: ±1.2% of rdg; DCV: ±0.8% of rdg	ACV: $\pm 1.2\%$ of rdg; DCV: $\pm 0.8\%$ of rdg
Non-Contact Voltage (NCV)	100 to 1000V	100 to 1000V
Resistance (Max Res.)	60ΜΩ (0.1Ω)	60ΜΩ (0.1Ω)
Capacitance (Max Res.)	60mF (0.01nF)	60mF (0.01nF)
Frequency (Max Res.)	_	10Hz to 1MHz (0.01Hz)
Temperature (Max Res.)	_	-40 to 1832°F (1°F) -40 to 1000°C (1°C)
Continuity Beeper	Yes	Yes
Diode Test	Yes	Yes
Dimensions	9x3x1.6" (228x77x41mm)	9x3x1.6" (228x77x41mm)
Weight	9.4oz (265g)	9.4oz (265g)

ORDERING	
EX650 N	True RMS 600A AC Clamp Meter
EX655 N	True RMS 600A AC/DC Clamp Meter
TL810	Electrical Test Lead Kit
TL803	Standard Test Leads
TP200	Type K Clamp Probe (212°F/100°C)
480172	AC Line Splitter

EX600 Series True RMS 400A Dual Input Clamp Meters + NCV





Dual Type K Inputs for taking differential temperature readings needed for superheat measurements.


Built-in dual Type K thermocouple inputs for T1, T2, and T1-T2 differential temperature measurement

- True RMS for accurate AC measurements
- 1.25" (32mm) jaw opening for conductors up to 500MCM
- Built-in non-contact Voltage detector with LED alert
- DC μA multimeter function for HVAC flame rod Current measurements
- DC Current function ideal for automotive, heavy equipment and marine applications
- Built-in non-contact IR Thermometer (model EX623) with laser pointer for locating hot spots with 8 to 1 distance to target ratio
- 40,000 count multimeter functions for DC Voltage, Resistance, Capacitance, and Frequency for high resolution over wider ranges
- Data Hold plus fast Peak Hold of current surges during motor startup
- Measures motor capacitors to 40,000µF
- Rugged double molded housing
- Auto power off with audible alert and disable function
- Autoranging with manual override
- 1 year warranty
- Complete with CAT III-600V, double molded test leads, 9V battery, two general purpose Type K bead wire probes and case

SPECIFICATIONS	EX613	EX623
AC/DC Current (Max Res.)	400.0A AC/DC (10mA)	400.0A AC/DC (10mA)
Basic ACA accuracy	±1.5%	±1.5%
AC/DC Voltage (Max Res.)	600V (0.1mV)/600V (0.01mV)	600V (0.1mV)/600V (0.01mV)
DC µA Current (Max Res.)	4000μΑ (0.01μΑ)	4000μΑ (0.01μΑ)
Resistance (Max Res.)	40.000 Μ Ω (0.01Ω)	40.000 Μ Ω (0.01Ω)
Capacitance (Max Res.)	40mF (0.01nF)	40mF (0.01nF)
Frequency (Max Res.)	40MHz (0.001Hz)	40MHz (0.001Hz)
Temperature - Type K	-58 to 1832°F (-50 to 1000°C)	-58 to 1832°F (-50 to 1000°C)
Temperature - IR	_	-58 to 518°F (-50 to 270°C)
Diode (2.8V)/ Continuity	Yes	Yes
Duty Cycle	0.5 to 99.0%	0.5 to 99.0%
Dimensions	9x3.1x1.9" (229x80x49mm)	9x3.1x1.9" (229x80x49mm)
Weight	10.7oz (303g)	10.7oz (303g)

ORDERING EX613 N True RMS 400A 400AC/DC Clamp Meter EX623 N True RMS 400A AC/DC Clamp Meter + IR TL810 Electrical Test Lead Kit TL803 Standard Test Leads TP200 Type K Clamp Probe (212°F/100°C) 480172 AC Line Splitter








Non-Contact Voltage Detection.

MA443/MA445 True RMS 400A Clamp Meters + NCV





Pocket-sized meter with built-in Non-Contact Voltage detector and choice of AC or AC/DC Current model

- 1.2" (30mm) jaw size accommodates conductors up to 500MCM
- Model MA443 with True RMS AC Current function Model MA445 with True RMS AC/DC Current functions
- Type K Temperature function with probe included
- 4000 count backlit LCD display
- · Built-in flashlight illuminates work area
- Relative mode for Capacitance Zero and Offset Adjustment
- Min/Max, Data Hold, Auto Power Off and Low battery indicator
- CAT III-600V category rating

SPECIFICATIONS	Model MA443	Model MA445
AC Current	4.000A, 40.00A, 400.0A (1mA)	40.00A, 400.0A (10mA)
DC Current	_	40.00A, 400.0A (10mA)
Current accuracy	AC: ±1.8%	AC: ±2.5%, DC: ±2.0%
DC Voltage	400.0mV, 4V, 40, 400V 600V (0.1mV)	400.0mV, 4V, 40, 400V 600V (0.1mV)
AC Voltage	4V, 40V, 400V 600V(0.1mV)	4V, 40V, 400V 600V(0.1mV)
Basic accuracy	AC: ±1.2% DC: ±0.8%	AC: ±1.2% DC: ±0.8%
Resistance (Ω)	400, 4k, 40k, 400k, 4M, 40M (0.1Ω)	400, 4k, 40k, 400k, 4M, 40M (0.1Ω)
Capacitance	40nF, 400nF, 4μF, 40μF, 400μF, 4mF, 40mF (0.01nF)	40nF, 400nF, 4μF, 40μF, 400μF, 4mF, 40mF (0.01nF)
Frequency	10Hz to 1MHz (0.01Hz)	10Hz to 1MHz (0.01Hz)
Temperature	-40° to 1832°F/-40° to 1000°C (1°F/°C)	-40° to 1832°F/-40° to 1000°C (1°F/°C)
Dimensions/ Weight	9x3x1.6" (228x77x41mm)/ 9.3oz (265g)	9x3x1.6" (228x77x41mm)/ 9.3oz (265g)

ORDERING	
MA443 N	True RMS 400A AC Clamp Meter
MA445 N	True RMS 400A AC/DC Clamp Meter

MA200 Series 400A Clamp Meters



Includes test leads, case, and two AAA batteries; MA220 also includes general purpose Type K bead wire probe; 1 year warranty

Easy-to-use, economical clamp meters

- Compact size allows measurements in tight locations
- 0.9" (23mm) jaw size accommodates conductors up to 300MCM
- Data Hold, Auto Power Off
- Overload protection, Overrange and low battery indicators

Model MA200 (AC Current)

Max Hold

Model MA220 (AC/DC Current)

- One touch "Auto Zero"
- Functions include Capacitance, Frequency, Temperature, and Duty Cycle

400A AC/DC Clamp Meter

SPECIFICATIONS	MA200	MA220
AC Current	2, 20, 200, 400A (0.001A)	40, 400A (0.01A)
DC Current	_	40, 400A (0.01A)
Basic accuracy	±2.5%	AC: ±3%, DC: ±2.5%
AC/DC Voltage	200mV, 2V, 20, 200V, 600V (0.1mV)	400mV, 4V, 40V, 400V, 600V (0.1mV)
Basic accuracy	AC:±1.5% DC:±1.2%	AC:2%,DC:±1.5%
Resistance	200, 2k, 20k, 200k, 2M, 20M (0.1Ω)	400, 4k, 40k, 400k, 4M, 40M Ω (0.1 Ω)
Capacitance	_	40nF, 400nF, 4μF, 40μF, 100μF (0.01nF)
Frequency	_	5Hz, 50Hz, 500Hz, 5kHz, 150kHz (0.001Hz)
Temperature	_	-58 to 1830°F (-50 to 1000°C) (1°)
Duty Cycle	_	0.5 to 99.0% (0.1%)
Continuity Beeper	≤30Ω Beeper ≤30Ω	≤30Ω Beeper ≤30Ω
Dims/Wt.	7.9x2x1.4" (200x50x35mm)/ 7oz (200g)	7.9x2x1.4" (200x50x35mm)/ 7oz (200g)
ORDERING		
MA200 N	400A AC Clamp Meter	

Pocket-sized meter with

MA140 Series True RMS 300A Mini Clamp Meters + NCV





Smart Auto Sense feature enables the meter to recognize the input (within a given function) and automatically switch to the correct mode of operation (i.e. AC to DC Current measurement)

Choice of AC Current or AC/DC Current model with high accuracy

- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- Model MA140 AC Current
- Model MA145 AC/DC Current and Zero function for accurate DC measurements
- Compact 0.8" (22mm) jaw size accommodates conductors up to 300MCM
- Unique Smart Auto Sense feature
- Low Pass Filter (LPF) for accurate measurement of variable frequency drive signals
- Built-in Non-Contact Voltage (NCV) detector
- · Inrush current measurement
- · 6000 count backlit LCD display
- Smart Data Hold: Audiovisual alert when a new reading exceeds 50 digits of a held reading
- Low battery indicator and Auto Power Off feature
- CAT III-600V safety rating
- Complete with carrying case and two LR44 batteries; 1 year warranty

SPECIFICATIONS	MA140	MA145
AC Current (max resolution)	60A, 300A (0.01A)	60A, 300A (0.01A)
DC Current (max resolution)	_	60A, 300A (0.01A)
Basic accuracy	±2.0%	AC: ±1.5%, DC: ±1.5%
Non-Contact Voltage (NCV)	80 to 600V	80 to 600V
Dimensions/ Weight	5.8x2.4x1.2" (147x60x31mm)/ 4.9oz (140g)	

ORDERING	
MA140 N	True RMS 300A AC Mini Clamp Meter+NCV
MA145 N	True RMS 300A AC/DC Mini Clamp Meter+NCV

MA160/MA260 True RMS 200A AC Open Jaw Clamp Meters







Convenient Open jaw design provides quick measurements in tight locations

0.6" (16mm) Open jaw design provides quick current measurements in tight locations without breaking the circuit

- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- Built-in Non-Contact Voltage (NCV) detector with audible alert and LED indicator
- Auto Power Off with disable

Model MA160 (CAT III-600V rating; ETL listed)

- 2000 count 2-level backlit LCD display
- Convenient LED worklight for viewing in dimly lit area
- Relative Mode for Capacitance Zero and offset adjustment
- Complete with test leads, two AA batteries, and pouch

Model MA260 (CAT IV-600V rating, UL Listed)

- Smart Auto Sensing technology enables the meter to recognize the input and automatically switch to the correct mode of operation
- For AC Voltage, Auto Sense feature evaluates input signal and adjusts Input Impedance to eliminate effects of ghost voltages
- 10,000 count backlit LCD display with Smart Data Hold feature
- Complete with test leads and two AAA batteries; 1 year warranty

SPECIFICATIONS	MA160	MA260
AC Current (max res.)	200A (0.1A)	200A (0.1A)
DC Current (max res.)	200A (0.1A)	_
AC/DC Voltage (max res.)	AC: 750V (1mV); DC: 1000V (1mV)	1000V (0.1V)
Non-contact Voltage	100 to 750V	80 to 1000V AC (50 to 60Hz)
Resistance (max res.)	60ΜΩ (0.1Ω)	10k $Ω$ (1 Ω)
Capacitance (max res.)	60mF (0.01nF)	_
Diode/ Continuity	Yes	Yes
Dimensions/ Weight	8.3x2.1x1.4" (210x53x35mm)/ 5.8oz (164g)	7.6x2.1x1.2" (193x54x31mm)/ 9.9oz (280g)

ORI	DER	RING

MA 160 N	True Rivis 200A AC/DC Open Jaw Clamp Weter
MA260	CAT IV True RMS 200A AC Open Jaw Clamp Met



MA220 N



EXTERN MINIS ACCROCAMB WITHIN

MA120 200A AC/DC Mini Clamp Meter+ Voltage Detector

Clamp meter with built-in AC Voltage detector + flashlight

- Compact 0.7" (17mm) jaw size allows measurements in tight locations
- DC Current and Zero Function
- Non-Contact AC Voltage (NCV) detector via clamp tip
- Built-in white LED flashlight
- Data Hold freezes reading on display
- Backlit LCD
- Auto Power Off
- Complete with pouch case and two AAA batteries



MA250 200A AC Clamp Meter + NCV

20A and 200A Current ranges pluss built-in Non-Contact Voltage (NCV) detector with LED alert

- 1.2" (30mm) jaw size for conductors up to 350MCM
- Relative Mode for Capacitance Zero and Offset Adjustment
- Type K temperature function
- Data Hold freezes reading on display
- Auto Power Off
- Complete with test leads, general purpose Type K bead wire probe, two AAA batteries, and carrying case



380941 200A AC/DC Mini Clamp Meter

High resolution mini clamp with Voltage, Frequency, and Resistance

- High resolution to 10mA AC/DC
- Fast 40 segment bargraph
- One touch Auto Zero for DC Current measurements
- Complete with test leads, wrist strap,
 2 AA batteries and carrying case



380947 400A AC/DC True RMS Mini Clamp Meter

True RMS mini-clamp with high 1mA AC current resolution

- Non-contact Frequency measurements to 10kHz through the clamp jaws
- Fast 40 segment bargraph
- One touch Auto Zero
- Complete with wrist strap,
 2 AA batteries and carrying case

ACCESSORIES (SEE P. 36-37 FOR TEST LEADS)

Troubleshooting low energy current

measurements

SPECIFICATIONS	MA120 💶	MA250 N	380941 N	380947 N
True RMS	_	_	_	True RMS
Display counts	2000 count backlit LCD	4000 count LCD	4000 count LCD	4000 count LCD
Jaw size/Cable size	0.7" (18mm); 300MCM	1.2" (30mm); 350MCM	0.9" (23mm); 4/0 AWG	0.9" (23mm); 4/0 AWG
AC Current	200A	20A, 200A	40A, 200A	4A, 40A, 100A, 400A
DC Current	200A	_	40A, 200A	40A, 400A
Max Resolution	0.1A	0.01A (AC)	0.01A AC/DC	AC: 0.001A, DC: 0.01A
Basic ACA Accuracy (% rdg)	±3%	±2.5%	±1.0%	AC: ±1.5%, DC: ±1.0%
AC Voltage (Max Res.)	NCV	600V (0.1mV)	400V (0.1V)	_
DC Voltage (Max Res.)	_	600V (0.1mV)	400V (0.1V)	_
Resistance (Max Res.)	-	40.00 Μ Ω (0.1Ω)	400Ω (0.1 Ω)	_
Capacitance (Max Res.)	_	100μF (0.01nF)	_	_
Frequency (Max Res.)	1kHz (0.01Hz)	10kHz (1Hz)	100kHz (0.001Hz)	10kHz (0.01Hz)
Temperature	_	-4 to 1400°F (-20 to 760°C)	_	_
Duty Cycle	-	0.1 to 99.9%	-	_
Diode/Continuity	_	Yes	Continuity	_
Data Hold	Yes	Yes	Yes	Yes
Min/Max	_	Min/Max	Min/Max	Min/Max
UL, ETL, CE, Category Rating	CE, CAT III-300V	ETL, CE, CAT III-600V	UL, CE, CAT III-300V	UL, CE, CAT III-300V
Dimensions/Weight	6.5x2.6x1.3" (164x65x32mm) /6.2oz (176g)	7.9x2.6x1.5" (200x66x37mm)/ 7.2oz (205g)	7x1.75x1.25" (178x45x32mm)/ 8oz (225g)	7x1.8x1.3" (178x45x32mm)/ 8oz (225g)



480172 AC Line Splitter (120V/15A)



Small Size, Big Performance

Performs essential troubleshooting tasks in plant maintenance, electrical, HVAC, and telecom work



380942 30A AC/ **40A DC True RMS Mini Clamp Meter with** 0.1mA Resolution

Highest resolution and accuracy at low currents

- Low AC/DC Current measurements with high resolution to 0.1mA AC and 1mA DC
- Fast 40 segment bargraph
- One touch Auto Zero for DC Current measurements
- Auto power off with disable feature
- Data Hold
- · Complete with test leads, wrist strap, 2 AA batteries and case



380950 80A **AC/DC Mini Clamp** Meter

Small jaw size (0.5"/12mm) fits into tight spaces

- 1mA resolution
- Voltage, Resistance, Frequency and Duty Cycle measurement
- Auto power off
- CAT III-600V
- · Complete with test leads, carrying case and two 1.5V AAA batteries



MA61 True RMS 60A AC Clamp Meters + NCV

AC Current meter with high accuracy

- Compact 0.7" (17mm) jaw size allows measurements in tight locations
- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- Relative function
- Variable Frequency Control (VFC): Low pass filter for accurate measurement of variable frequency drive signals
- Built-in Non-Contact Voltage (NCV) detector
- Full range overload protection
- Backlit LCD display
- Data Hold freezes reading on display
- Low battery indicator and Auto Power Off feature
- Complete with test leads, carrying case, and two AAA batteries



MA63 True RMS 60A **AC/DC Clamp Meters +** NCV

AC and DC Current meter with high accuracy

- Compact 0.7" (17mm) jaw size allows measurements in tight locations
- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- DC Current and DC Zero function
- Variable Frequency Control (VFC): Low pass filter for accurate measurement of variable frequency drive signals
- Built-in Non-Contact Voltage (NCV) detector
- Full range overload protection
- · Backlit LCD display
- Data Hold freezes reading on display

6M, 60M (0.1Ω)

- Low battery indicator and Auto Power Off feature
- · Complete with test leads, carrying case, and two AAA batteries



480172 AC Line Splitter:

- Enables users of a clamp meter to measure AC current on a 2-wire or 3-wire power cord to 15A
- Fits clamp jaw size 0.75" (19mm) and above
- Plugging the power connector into the Line Splitter separates the hot/live conductor from the neutral (and ground)
- Dims: 5.25x2x1" (133x51x25mm), Wt: 5.8oz (164.4g)

ACCESSORIES (SEE P. 36-37 FOR TEST LEADS)

480172 AC Line Splitter (120V/15A)

SPECIFICATIONS	380942 🕦	380950	MA61 N	MA63 N
True RMS	True RMS	_	True RMS	True RMS
Display counts	4000 count LCD	4000 count LCD	6000 count backlit LCD	6000 count backlit LCD
Jaw size/Cable size	0.9" (23mm); 4/0 AWG	0.5" (12mm); 3/0 AWG	0.7" (18mm); 300MCM	0.7" (18mm); 300MCM
AC Current	400mA, 4A, 30A	4.000A, 80.0A	600mA, 6000mA, 60A	600mA, 6000mA, 60A
DC Current	4A, 40A	4A, 80A	_	6000mA, 60A
Max Resolution	AC: 0.1mA, DC: 0.001A	1mA	0.1mA (AC)	0.1mA (AC), 1mA (DC)
Basic ACA Accuracy (% rdg)	±1.5%	±2.5%	±2.0%	AC: ±2.0%, DC: ±2.0%
AC Voltage (Max Res.)	400V (0.1V)	600V (0.1mV)	6V, 60V, 600V (1mV)	6V, 60V, 600V (1mV)
DC Voltage (Max Res.)	400V (0.1V)	600V (0.1mV)	600mV, 6V, 60V, 600V (0.1mV)	600mV, 6V, 60V, 600V (0.1mV)
Resistance (Max Res.)	-	40 Μ Ω (0.1Ω)	600, 6k, 60k, 600k, 6M, 60M (0.1Ω)	600, 6k, 60k, 600k, 6M, 60M (0.1Ω
Capacitance (Max Res.)	_	_	6.2nF, 620μF, 62mF (1pF)	6.2nF, 620µF, 62mF (1pF)
Frequency (Max Res.)	_	10MHz (0.001Hz)	10Hz to 60kHz (0.001Hz)	10Hz to 60kHz (0.001Hz)
Diode/Continuity	_	Continuity	Yes	Yes
Data Hold	Yes	Yes	Yes	Yes
Min/Max	Min/Max	Max	_	_
UL, ETL, CE, Category Rating	UL, CE, CAT III-300V	CE, CAT III-600V	ETL, CE, CAT III-300V, CAT II-600V	ETL, CE, CAT III-300V, CAT II-600V
Dimensions	7x1.8x1.3" (178x45x32mm)	8.2x2.7x1.4" (210x70x37mm)	6.9x2.4x1.3" (175x60x33.5mm)	6.9x2.4x1.3" (175x60x33.5mm)
Weight	8oz (225g)	7oz (200g)	6oz (170g)	6oz (170g)
Warranty	1 year	1 year	1 year	1 year





spaces and large conductors

Flexible Clamps easily wrap around bus bars and cable bundles.



MA1500 CAT IV 1500A AC/DC True **RMS Clamp Meter** + NCV

Integrated Non-Contact Voltage Detector to quickly check for the presence of live wires before testing

- True RMS for accurate readings of non-sinusoidal waveforms
- Includes Multimeter functions
- Inrush function captures motor startups • Relative Mode for Capacitance
- Zero and Offset Adjustment • Data Hold, Peak Hold, MIN/ MAX, and Auto Power Off
- · Complete with test leads, general purpose Type K bead wire temperature probe, 9V battery and carrying case



380926 CAT IV **2000A AC/DC Clamp Meter**

Full range MultiMeter functions with high resolution to 0.1µA/0.1mV and CAT IV-600V Safety

- AC/DC Current via clamp with 0.1A resolution
- Large 2" jaw size fits 750MCM conductor size
- Data Hold

380926 N

- · Push button Zero adjust improves DC accuracy
- Complete with built-in stand, test leads and 9V battery



MA3000 Series CAT IV True RMS 3000A AC Flex Clamp Meters

Flexible clamp jaw easily wraps around bus bars and cable bundles that may be difficult to access with regular clamp meters

- True RMS for accurate readings
- Flexible clamp cable length: Model MA3010 - 10" (25.4cm) Model MA3018 - 18" (45.7cm)
- 0.3" (7.5mm) cable diameter; 0.51" (13mm) tip diameter
- · Autoranging AC Current
- Data Hold
- · Over range and Low battery indicator
- Auto Power Off with disable

■ MA3010 M I ▲ MA3018 M

· Complete with two AAA batteries



CA3000 Series* **3000A AC Flex Clamp Adaptors**

Expand your meter's capabilities to measure AC Current up to 3000A

- Flexible clamp cable length: Model CA3010 - 10" (25.4cm) Model CA3018 - 18" (45.7cm)
- 0.3" (7.5mm) cable diameter; 0.51" (13mm) tip diameter
- AC Current in three ranges
- Easy twist clamp cable closure to Lock or Open
- Compatible with most meters with standard sized banana plug inputs
- · Battery capacity indicator provides battery condition
- Complete with built-in flex clamp cable, 6.6ft (2m) lead with banana plugs, and two AAA batteries

■ CA3010 | ▲ CA3018



P02071 1-Phase and 3-Phase **CAT IV 1000A AC Power Clamp** Meter

Functions including Power and Current; USB interface

- True/Apparent/Reactive Power, plus Power Factor, Active Power and Phase Angle (see p. 61 for details)
- AC+DC uA Current with 10nA resolution for flame rod tests
- Built-in non-contact Voltage Detector with LED alert
- Store/recall up to 99 data sets
- Data Hold, Max/Min and Auto Power Off

P02071 N

- · Software for data analysis
- · Complete with test leads, USB cable, PC software, 9V battery, and carrying case

9999 count LCD with bargraph (bac

*CA3010 & CA 3018 adaptors are CAT III-1000V. CAT IV-600V and should only be used with multimeters and clamp meters that have equivalent CAT ratings

SPECIFICATIONS

True RMS

More Power Meters See Extech's complete line of power meters on



SPECIFICATIONS	MA1500 N
True RMS	Yes
Display counts	40,000/4000 count LCD w/bargraph (backlit)
Jaw size/Cable size	2.0" (52mm); 500MCM
AC Current	1500A
DC Current	1500A
Max resolution	0.01A
Basic ACA Accuracy (% rdg)	±2.8%
AC Voltage (Max Res.)	750V (0.01mV)
DC Voltage (Max Res.)	1000V (0.01mV)
Resistance (Max Res.)	40 M Ω (0.01 Ω)
Capacitance (Max Res.)	40mF (0.01nF)
Frequency (Max Res.)	40MHz (0.001Hz)
Temperature	-148 to 1832°F (-100 to 1000°C)
Diode/Continuity	Yes
Category Rating	CAT IV-600V
UL/CE	CE
Dimensions/ Weight	11.6x4.1x1.9" (294x105x47mm)/ 18.9oz (536g)
Warranty	1 year

300320
Yes
5000 count LCD (backlit)
2" (50mm); 750MCM
400.0A, 2000A (Clamp); 400mA (DMM)
400.0A, 2000A Clamp); 400mA (DMM)
0.1A (Clamp); 0.1μA (DMM)
±2%
1000V (1mV)
1000V (0.1mV)
40 Μ Ω (0.1 Ω)
50μF (10pF)
100kHz (0.001Hz)
-
Yes
CAT IV-600V
CE
10x2.9x1.5" (255x73x38mm)/ 14oz (380g)
1 year

3000 count LCD display (backlit)
■ 10" (25.4cm) ▲ 18" (45.7cm)
0 to 30.00A, 30.00 to 300.0A, 300.0 to 3000A
_
0.01A
±(3%+5 digits)
_
_
_
_
_
_
_
CAT IV-600V, CAT III-1000V
UL, CE
■ 11x4.7x1" (280x120x25mm)/ 6oz (170g); ▲ 13.8x5.1x1" (350x130x25mm)/ 7.1oz (200g)
1 year

_
_
■ 10" (25.4cm) ▲ 18" (45.7cm)
30.00A (100mV per Amp output); 300.0A (10mV per Amp output); 3000A (1mV per Amp output)
_
0.01A
±3%FS (45 to 500Hz)
-
_
_
_
-
_
_
*CAT IV-600V , CAT III-1000V
UL, CE
■ 11x4.7x1" (280x120x25mm)/ 6oz (170g); ▲ 13.8x5.1x1" (350x130x25mm)/ 7.1oz (200g)
4

	2.2" (55mm); 1000MCM
	1000A
	_
	100mA
	±3%rdg
	750V (0.1V)
	_
	_
	_
	50Hz to 200Hz (1Hz)
	_
	Yes
	CAT III-1000V; CAT IV-600V
	CE
1)	11.5x3.75x1.5" (292x95x38mm)/ (522a)

cklit)	Display counts
	Jaw size/Cable size
	AC Current
	DC Current
	Max resolution
	Basic ACA Accuracy (% rdg)
	AC Voltage (Max Res.)
	DC Voltage (Max Res.)
	Resistance (Max Res.)
	Capacitance (Max Res.)
	Frequency (Max Res.)
	Temperature
	Diode/Continuity
	Category Rating
	UL/CE
.4oz	Dimensions/ Weight
	Warranty



PRT200 Non-Contact Phase Rotation Tester



Checks phase sequence and phase status and tests up to 1000VAC with LED and audible indication

- Fully insulated non-contact alligator clips with wide jaws
- 75 to 1000VAC input voltage with 45 to 65Hz frequency range
- LEDs indicate phase orientation (clockwise or counterclockwise) and whether each phase is live
- Durable housing with mounting magnets
- Adjustable LED brightness switch for making measurements in dimly lit areas or sunlight
- Low battery warning
- Auto power off to save battery life when not in use
- CAT IV-600V safety rating
- Dimensions: 4.7 x 2.7 x 1.5" (118 x 69 x 38mm);
 Weight: 13oz (370g)
- 1 year warranty
- Complete with three built-in 30" (76cm) test leads with large color-coded alligator clips, four AA batteries, and pouch case

ORDERING		
PRT200	Non-Contact Phase Sequence Tester	

480400/480403 Motor Rotation and 3-Phase Testers





Check 3-phase sequence and motor rotation

- Tests phase orientation of 3-Phase power sources
- Indicates phase orientation (clockwise or counter-clockwise) and whether each of the 3-Phases is live
- · Easy to open alligator clips with wide jaws
- Durable double molded housing
- 1 year warranty
- Complete with cable and 3 large color-coded alligator clips, case, and 9V battery (for 480403)

480400 3-Phase Tester

• Multi-line LCD Displays; No battery required

480403 Motor Rotation and 3-Phase Tester

- · LEDs display motor rotation and phase status
- Indicates rotation direction of motor
- Determine rotation of a motor without contact

3-Phase Rotation Tester

Motor Rotation and 3-Phase Tester

SPECIFICATIONS	480400	480403	
Phase Sequence	Yes	Yes	
Voltage	40 to 600V	40 to 600V	
Frequency	15 to 400Hz	2 to 400Hz	
Motor Rotation	_	Yes	
CE/Category Rating	CE, CAT III-600V	CE, CAT III-600V	
Dimensions	5.1x2.7x1.25" (130x69x32r	nm)/ 4.5oz (130g)	
ORDERING			

SD900/SD910 3-Channel Dataloggers



Easily monitor and record DC mA or DC mV values from 3 external sensors, transducers, and other sources using one meter

- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- User can select the data sampling rate: 2, 5, 10, 30, 60, 120, 300, 600 seconds or Auto
- Complete with six AAA batteries, SD memory card, Universal AC Adaptor with multi-plugs (US, EU, UK, AUS), 3 input connect sockets, and mounting bracket

Model SD900 (DC Current)

- Triple LCD simultaneously displays three DC Current (mA) channels Model SD910 (DC Voltage)
- Triple LCD simultaneously displays three DC Voltage (mV) channels

SPECIFICATIONS	RANGE	RESOLUTION
DC mA Current (SD900)	0 to 20mA	0.01mA
DC mV Voltage (SD910)	300.0mV, 3000mV	0.1mV, 1mV
Memory	Approx. 2.7M readings using	g 4GB SD memory card
Dimensions	5.2 x 3.1 x 1.3" (132 x 80 x 32mm)	
Weight	7oz (199g)	

ORDERING		
SD900	3-Channel DC Current (mA) Datalogger	
SD910	3-Channel DC Voltage (m\/) Datalogger	

DL150/DL160 True RMS AC Voltage/Current Dataloggers





 ϵ



Model DL150 Model DL160

Choose model with single or dual inputs for datalogging

- Readings can be downloaded to your PC via the USB interface and analyzed using the included software or exported to a spreadsheet
- LCD indicates time/date, current readings, Min/Max, and whether alarm settings have been exceeded
- Auto Power off and battery check

Model DL150 (Single Input)

- Measure True RMS AC Voltage or Current
- Normal, Peak and Capture (user-specified trigger level) recording modes
- Complete with current clamp, test leads, alligator clips, USB cable, Windows® compatible software, universal AC adaptor, and 4 AAA batteries; 1 year warranty
 Model DL160 (Dual Input)

Model DE100 (Dual Input)

- Measures simultaneously:
- Two True RMS AC Voltage inputs or
- Two AC Current inputs or
- One AC Voltage and one AC Current input
- Complete with two Current sensor modules, two Voltage sensor modules, two sets of test leads, two sets of alligator clips, USB cable, Windows® compatible software, universal AC Adaptor, 4 AAA batteries and two 2032 button batteries

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
AC Current	10 to 200A	0.1A	±(2% rdg ± 1A)
AC Voltage	10 to 600V	0.1V	DL150: ±(1.5%rdg±1V); DL160: ±(2% rdg±1V)
Memory	DL150: 100,000 points; DL	.160: 262,000 poin	ts (single channel), 131,000 (dual channels)
Sampling Rate	1 second to 24 hours		
PC Interface	USB includes software		
Dimensions/ Weight	4.5 x 2.5 x 1.3" (114 x 63 x	34mm)/ 8.7oz (24	8g)

UKDEKING	
DL150	True RMS AC Voltage/Current Datalogger
DL160	Dual Input True RMS AC Voltage/Current Datalogger



480400

480403



TL809 Electronic Test Lead Kit



Ideal for testing digital circuitry

- Two 42" (1m) PVC lead extensions with shrouded banana plugs at both ends. CAT III-1000V rating, UL/CE
- Two modular 4" (102mm) Heavy Duty test probe handles with 0.16" (4mm) long banana plug tip with removable category control tip covers, CAT III-1000V, UL/CE
- Two plunger mini-hooks
- Two alligator clips with removable insulators: UL/CF
- Includes 3 compartment sealable nylon pouch to organize/protect your test leads

Double Insulated with CAT III-1000V

• Two 40" (1m) PVC lead extensions

banana plugs on both ends; CE

• Two very sharp 0.16" (4mm) long stainless

steel tipped plug-on test probes with

removable category control tip covers

• Two plunger activated retractable jaw clips

with a wide 0.75" (19mm) jaw opening; CE

(1000V rating) with shrouded

• Two stainless steel flat tip test

Electrical Test Lead Kit

probes (0.6"/15mm long)

Rating for your protection

ORDERING

 ϵ

Electronic Test Lead Kit

TL810 Electrical

Test Lead Kit

TL808-KIT Industrial NEW Test Lead Kit



8-Piece Kit — CAT III-1000V safety rating

- Two 42" (1m) PVC lead extensions with shrouded banana plugs at both ends,
- Two modular 4" (102mm) Heavy Duty test probe handles with 0.16" (4mm) banana plug tip, UL listed
- Two standard size, alligator clips with insulated rubber boot
- · Two extra large, double-insulated, alligator clips with sharp teeth for piercing insulated wire. Jaws open to 0.8" (20mm)
- Includes pouch that provides storage for the kit and additional space to hold your meter

ORDERING

TL808-KIT Industrial Test Lead Kit

TL900 SafeSense™ **CAT IV Fused Test Leads**



UL approved SafeSense[™] technology

- Intelligent SafeSense™ technology makes it easy for user to know if voltage is present on target area being measured, even with a blown fuse, for increased safety
- Two dual-lavered silicone test lead cables (5.3ft/1.6m), wear indication construction
- Standard 90° shrouded bananato-banana plug connectors
- Two CAT IV probes have built-in replaceable fuses (1000V, 11A, 20kA breaking capacity)
- CAT IV-600V, CAT III-1000V, 10A

TL803 Standard

Test Leads

• Each probe has 2mm probe tip and includes a 4mm brass caged bayonet threaded tip (removable) for connecting accessories

ORDERING

TI 900

SafeSense™ CAT IV Fused Test

Protective tip covers for safe storage

Compatible with most multimeters.

10A capacity. CAT III-1000V rating.

• Standard replacement test leads. Shrouded

banana connectors, molded strain reliefs.

• Two very sharp 0.16" (4mm) long tips with

removable category control tip covers

Alligator Clip (TL807C) shown above

Optional accessory — Insulated

Standard Test Leads

ORDERING

TL805 Double Injected **Test Leads**



Non-slip comfort grip

- Professional grade test leads. Double coated silicone lead wire with white inner layer. Heavy duty chromium plated brass tips, 0.16" (4mm) long with removable category control tip covers
- Shrouded, non-twist banana plugs for reduced socket wear. "Superflex" molded strain reliefs for improved cable flexibility. "D" shaped finger guards. Compatible with most multimeters. 10A capacity. CAT IV-1000V rating. UL listed
- Optional accessory Insulated Alligator Clip (TL807C), shown above

ORDERING

Double Injected Test Leads

TL806/TL807C Alligator **Clips for Test Lead Tips**

EXTECH



Add convenience to your test leads

- TL806 Extra large, double insulated, CAT III-1000V clips mate with banana plug patch cords. Jaw opens to 0.8" (20mm) with sharp teeth for piercing insulated wire. IEC1010 compliant. Optional accessory to TL810 or TL809
- TL807C Alligator clips with insulated rubber boot fit onto test leads, CAT IV-600V, CAT III-1000V; 10A UL listed .Compatible with TL803 and TL805 test leads

ORDERING

TL806 Extra Large Alligator Clips for

Insulated Alligator Clips for TL803

Tip Probes

Toothed jaws for solid gripping of fine wires **TL708 Heavy Duty Large Alligator Clips**

• 1000V, 6A, CAT IV-600V; CAT III-1000V

TL709 **(€**

• 1" (26mm) jaw length; 1.6" (40mm) jaw opening; 4.2" (107mm) overall length

TL708/TL709 Alligator

Clip Sets

TL709 Medium Alligator Clips

- 1000V, 10A, CAT III-1000V
- 1.4" (37mm) jaw length; 0.8" (20mm) opening; 3.9" (98mm) overall length

ORDERING

TL708 Large Heavy Duty Alligator Clips Medium Alligator Clips



Ideal for gripping a component lead or fine wire

- 1000V, 5A max
- 0.04" (1mm) gripping diameter
- 4.7" (120mm) overall length
- CAT IV-600V; CAT III-1000V

ORDERING

Spring Loaded Hook Tip Probes

TL748 Spring Loaded Hook TL740 Industrial Plunger Style Test Clip Set



Spring loaded clip with steel jaws

- 1000V, 10A
- 0.6" (15mm) jaw opening
- 6.1" (155mm) overall length
- CAT III-1000V

ORDERING

Industrial Plunger Style

PQ500/PQ1000 CAT IV Test Lead Kits



Set of Four Test Lead Kit for Power Quality Analyzers and set of 2 Test Lead Kit for other Test Equipment

- 10 ft test leads (Banana-to-Banana)
- · Test probes, Alligator clips, long reach spring loaded clips, and Ergonomic over mold grip
- CAT IV-600V/CAT III-1000V

PQ500 Test Lead Set

and Red ONLY)

PQ1000 Test Lead Set

• 3\psi 4-wire test lead kit (Black, Red, Blue, Yellow)

ORDERING

PQ500 2-Phase 2-Wire Test Lead Kit

3-Phase 4-Wire Test Lead Kit

TL726 Double Molded **Silicone Test Lead Set**



Right angle and straight end flexible leads with shrouded banana plugs

- 63" (1.6m) long
- · Protective collar and insulated sleeve
- 1000V. 10A
- CAT IV-600V; CAT III-1000V

ORDERING

Double Molded Silicone Test Lead Set

ORDERING

TL810



40130 AC Voltage **Detector with On/Off Audible Beeper Button**



Non-contact detection of AC Voltage up to 600VAC

- Detects AC Voltage from 100V to 600V
- For use on 50/60Hz circuits
- · Tip fits into outlets or against wire insulation
- Flashing red LED light and push button ON/OFF Audible beeper indicator
- · Locate breaks in power cables
- CAT III-600V
- Dimensions: 6x0.75x1" (152x19x25mm) Weight: 2oz (57g)
- 1 year warranty

Flashlight

· Complete with pocket clip and two AAA batteries

ORDERING

AC Voltage Detector

DV23 CAT IV AC Voltage Detector



DV25 CAT IV Dual Range AC Voltage Detector + Flashlight



CAT IV saftey rating with non-contact

- Detects AC Voltage from 50V to 600V
- CAT IV-600V safety rating
- · Suitable for outlets or again
- For use on 50/60Hz circuits
- Audible and Visual voltage indication
- Dimensions: 6.25 x 1" (159 x 25mm) Weight: 1.5oz (42g)
- 1 year warranty
- · Complete with pocket clip and two AAA batteries

ORDERING

AC Voltage Detector

detection of AC Voltage up to 600VAC

- st wire insulation testing

DV30 Adjustable **AC Voltage Detector with Sensitivity Adjustment**



Rugged CAT IV rated non-contact

DV26 CAT IV Non-Contact

AC Voltage Detector +

Voltage (NCV) Detector

- Detects AC Voltage from 100V to 1000V
- CAT IV-600V, CAT III-1000V safety rating
- Suitable for outlets or against wire insulation testing
- For use on 50/60Hz circuits
- Audible and Visual voltage indication
- · Green LED indicator lights up when powered on and ready to use
- Built-in bright flashlight with On/Off button
- Dimensions: 6.25 x 1" (159 x 25mm) Weight: 1.5oz (42g)
- 1 year warranty
- · Complete with pocket clip and two AAA batteries

ORDERING

CAT IV AC Voltage Detector



Non-contact detection of AC Voltage down to 12VAC

- Detects AC Voltage from 12V to 600V
- Audible and visible voltage indication
- Sensitivity adjustment increases or reduces sensor trigger threshold
- Self test function
- CAT III-600V
- Dimensions: 6.1x1.1x1" (155x28x25mm) Weight: 1.5oz (42g)
- 1 year warranty
- Complete with pocket clip and four LR44 button batteries

ORDERING

Adjustable AC Voltage Detector



Two selectable ranges for low and high non-contact AC Voltage detection

- 2 ranges: 24 to 1000VAC and 100 to 1000VAC
- · CAT IV-1000V safety rating
- Suitable for outlets or against wire insulation testing
- For use on 50/60Hz circuits
- Audible and Visual voltage indication
- Built-in bright flashlight with On/Off button
- Dimensions: 6.25 x 1" (159 x 25mm) Weight: 1.48oz (42g)
- 1 year warranty
- · Complete with pocket clip and two AAA batteries

ORDERING

Dual Range AC Voltage Detector

DV40 Non-Contact **AC Voltage Detector + IR Thermometer**



Non-contact Voltage detector that measures non-contact temperature

- Detects AC Voltage from 50V to 1000V
- Tip fits into outlets or against wire insulation
- · Low battery indicator and Auto power off feature
- CAT III-1000V
- Built-in InfraRed Thermometer function
- Range: -20 to 445°F (-30 to 230°C)
- Resolution: 0.1°
- Field of View: 1:1
- Emissivity: Fixed 0.95
- Dimensions: 6.25x1" (159x25mm); Weight: 1.48oz (42g)
- Complete with pocket clip and three LR44 batteries; 1 year warranty

ORDERING

AC Voltage Detector + IR

DVA30 Combination Non-Contact AC Voltage and Current Detector



Detects and pinpoints wide range **Voltage and Current with Sensitivity** Adjustment

- The only two-in-one AC Current (200mA to 1000A) and AC Voltage (12V to 600V) detector designed for electrical testing
- Loud audible and bright visible current and voltage detect indicators
- · Sensitivity adjustment increases or reduces sensor trigger threshold
- CAT III-600V
- Dimensions: 7.6x1.2x0.9" (192x31x24mm) Weight: 2.1oz (60g)
- UL and CE approved; 1 year warranty
- Complete with pocket clip and four LR44 button batteries

ORDERING

Non-Contact Voltage/Current

ET10 GFCI Receptacle Tester



Verifies GFCI operation and tests for faulty wiring in 3-wire receptacles

- Tests GFCI circuits
- Detects 5 wiring faults: Correct, Open Ground, Open Neutral, Open Hot, Hot/ Ground Reverse, and Hot/Neutral Reverse
- Standard North American 3-prong plug
- 1 year warranty

ORDERING

GFCI Receptacle Tester

ET15 Receptacle **Tester**



Tests for faulty wiring in 3-wire receptacles

- Detects 5 wiring faults: Correct. Open Ground, Open Neutral, Open Hot, Hot/ Ground Reverse, and Hot/Neutral Reverse • Standard North American 3-prong plug
- 1 year warranty

ORDERING

Receptacle Teste

VT30 Multi-function Voltage Tester



Voltage, Continuity and Phase Testers with Flashlight;

- Large LCD display with digital bargraph
- AC Voltage (0 to 480V) and DC Voltage (0 to 690V)
- Meets EN61010-1 CAT IV-600V and CAT III-600V safety ratings
- LED indication of AC/DC voltage
- DC Polarity LED indication; Continuity beeper; Low impedance; Double molded housing
- · Phase rotation test for motors
- Dimensions: 9.4x3x1.6" (240x78x40mm); Weight: 8.4oz (237g)
- Complete with 2 AAA batteries, protective cap, and soft case; 1 year warranty

ORDERING VT30

Digital Voltage Tester with bargraph





Multifunction Voltage Tester measure Voltage in outlets and conduct a 3-Phase sequence test. Features include a built-in flashlight.







CALIBRATION WST (uster use and CE approved DV40 is ETL and CE approved. DV40 is ETL and CE approved.







Quickly identify live voltages

- 100 to 250 Volts AC/DC
- · Probes snap on housing for easy one-handed testing of outlets
- · Large, high visibility neon indicators positively identify presence of voltage
- 1 year warranty

ORDERING

Dual Indicator Voltage Detector

ET25 Voltage Tester



Neon glows when voltage is present

- 90 to 300V AC/DC Voltage Tester
- Neon AC/DC Indicator
- · Pocket clip and insulated housing
- 1 year warranty

ORDERING

FT25 Voltage Tester

ET30A Automotive **Circuit Tester**



For auto, trailers, boats and other low voltage systems

- 6 to 24 Volts DC
- · Ideal for checking fuses, circuits, switches and wiring

ORDERING

Automotive Circuit Tester

ET40 Heavy Duty **Continuity Tester**



Check fuses, switches, relays and wiring

- · Test fuses, wires, light bulbs, ground connections
- 30" (76cm) test lead with alligator clip

ORDERING

ET40 Heavy Duty Continuity Tester

CA3000 Series 3000A AC **Flex Clamp Adaptors**



Expand your meter's capabilities to measure AC Current up to 3000A

- Flexible clamp cable length: Model CA3010 - 10" (25.4cm) Model CA3018 — 18" (45.7cm)
- 0.3" (7.5mm) cable diameter; 0.51" (13mm) tip diameter
- · Compatible with most meters with standard sized banana plug inputs
- Complete with built-in flex clamp cable, 6.6ft (2m) lead with banana plugs, and two AAA batteries

ORDERING (SEE P. 33 FOR SPECS)

3000A AC Clamp Adaptor (10"/25.4cm) 3000A AC Clamp Adaptor (18"/45.7cm)

CA250 400A AC/DC Clamp-on Adaptor + NCV



Built-in non-contact AC voltage detector

- 1.2" (30mm) clamp jaw
- Measures AC/DC Current in two ranges: 0 to 40A (10mV per Amp output) and 0 to 400A (1mV per Amp output)
- ±2.5% basic accuracy; CAT III-600V;
- DC zero adjust
- Optional CA250-NIST available
- Dims: 5.8x2.3x1.3" (146x60x32mm) Weight: 8oz (226g)
- Complete with built-in 3.8ft (1.1m) cable with banana plugs and two AAA batteries; one year warranty

ORDERING

400A AC/DC Clamp Adaptor + NCV

TP870/3/5 Type K **Temperature Probes**

EXTECH



Bead wire temperature probes for use with multimeters featuring Type K temperature functions

ORDERING	
ΓP870	Bead wire with Type K connector (-40 to 482°F/-40 to 250°C), 39"
	(4) 11

TP873 Bead wire with Type K connector and with banana adaptor (-22 to 572°F/-30 to 300°C), 36" (0.91m) cable; CE approved

TP873-5M TP873 probe with 16.4ft (5m) cable

High Temperature bead wire probe with Type K connector and banana adaptor: -58 to 1000°F (-50 to 538°C), 39" (1m) cable; CE approved

TP200 Type K Pipe Clamp Temperature Probe



Hands-free superheat/sub-cooling temperature measurement without the use of tape or Velcro®

- Spring-loaded jaw for secure grip on pipes; 0.25" (6.35mm) to 1.5" (38mm) diameter
- For use with any Thermometer or MultiMeter with a Type K input
- Measurement range: -4 to 200°F (-20 to 93°C)
- Basic accuracy of ±5%FS
- Complete with attached 36" (0.9mm) cable and Type K connector

ORDERING

Type K Temperature Pipe Clamp Probe

Protective Soft Cases









CA-EXTECHTB Professional Tool Bag





Rugged design with rubberized bottom and heavy duty fabric

- Large zippered storage compartment with ten internal side pockets
- Convenient nine small external pockets for small tools or accessories plus one medium size mesh pocket on the side
- Comfortable adjustable and removable shoulder strap (approx 4.4ft/1.3m including metal clips)
- Rubberized handle for comfortable grip
- Two front adjustable straps
- Dimensions: 17x9x11.5" (43.2x22.9x 29.2cm); Weight: 4.5lbs (2kg)

ORDERING	
CA-EXTECHTB	Professional Tool Bag





CA900

ORDERING 409992

409996

409997

CA899

Small carrying case 6.25x4.5x1" (159x114x25mm)

Medium carrying case 7.8x5.3x1.6" (197x133x41mm)

Large carrying case (243x178x51mm)

Case w/shoulder strap, CA500 side pockets 7.4x3.5x2.5" (188x89x64mm)

Large case with shoulder strap 10x5x3"

(254x127x76mm) Wide carrying case for

DMM Kits 9.8x8x2" (248x203x51mm)








CT70/CT80 AFCI, GFCI, and AC Circuit Analyzers



(AFCI/GFCI functions)









CT70 only

Check for correct wiring of AFCI/GFCI outlets and circuit breakers

- AC Load Tester
- Choose loads of 12, 15 and 20 Amps
- Measures loaded and unloaded AC Line Voltage (90.0 to 240.0V)
- Calculates and displays 0.1 to 99.9% Voltage Drop and Line Impedance
- Displays Peak Line Voltage (350.0V) and Frequency (45.0 to 65.0Hz)
- Outlet Tester functions
- AFCI (Model CT80 only)
- GFCI Trip Current
- GFCI Trip Time
- EPD Trip Current
- Neutral to Ground Voltage
- Hot, Neutral and Ground Impedance
- Open or Reversed wiring
- Available Short Circuit Current (ASCC)
- Over-Temperature protection
- Dimensions/Weight: 8 x 2.8 x 2" (203.2 x 71.1 x 50.8mm)/ 11.2oz (317.5g)
- Complete with AC test cord (standard North American 3-prong plug); 1 year warranty

ORDERING	
CT70	AC Circuit Analyzer with GFCI
CT80	AC Circuit Analyzer with GFCI and AFCI
CT70-AC	Replacement AC Power/Tester Cord

NOTE: Both models are supplied with a standard North American 3-prong plug

RT30 Wireless Remote AC Circuit Identifier





F© ((





Virtual electrician's helper remotely identifies/confirms correct circuit for mid-run wiring

- Simplify mid-run wiring jobs by easily identifying the correct circuit powering the cable to be spliced or repaired
- The innovative RT30 combines non-contact voltage detection with wireless signals to monitor and remotely report the presence of voltage on a wire
- Clamped onto a live wire, the transmitter signals the user at the breaker panel with LED and audible alerts on the receiver (up to 100m range); The alerts stop when the correct circuit breaker is switched and work can then be performed safely
- Eliminates the need for an assistant or back-and-forth trips to confirm the correct circuit is powered down
- Clamp-style probe accessory is ideal for wires that are hard to isolate or reach
- Easily identify lighting and outlet circuits
- 1 year warranty
- Includes transmitter, receiver, remote clamp-style probe, 4 "AAA" batteries and pouch case

ORDERING

Wireless AC Circuit Identifier (914MHz)

Indicates products that are available with optional calibration traceable to NIST. See page 160 for a complete listing.

(NOTE: USA, Mexico, and Canada use 914MHz



CB10-KIT Electrical Troubleshooting Kit



Handy Electrical Troubleshooting Kit Performs 5 Functions

- CB10 Circuit Breaker Finder (see below for details) quickly locate Circuit Breakers with audible and visual alert
- CT20 Continuity Tester/Wire Tracer (p. 44) Use Continuity Tester for local continuity or for remote wiring identification; Continuity testing via bright flashing LED and loud pulsating beeper
- **DV20** AC Voltage Detector/Flashlight Non-Contact Detection of AC Voltage from 100VAC to 600VAC
- Supplied in a soft carrying case that provides protection and organization for the meters and accessories; 1 year warranty

ORDERING (VISIT WWW.EXTECH.COM FOR PRODUCT SPECIFICATIONS)

Electrical Troubleshooting Kit

CB10 Circuit Breaker Finder/Receptacle Tester



3-in-1 tester to locate fuses, test receptacles and GFCI circuits

- Plug the Transmitter tester into an outlet and locate the correct breaker at the electrical box
- · Manual sensitivity adjustment to pinpoint correct circuit breaker
- Transmitter & Receiver snap together for storage
- Transmitter/Tester:
- Tests GFCI circuits
- Tests Reversed/Open Connections,
- LED indication of 2 test conditions and 6 wiring faults
- Lights indicating circuit condition
- Dims/Wt: Receiver: 6.4x2.2x1.5" (162x55x38mm)/ 4oz (113g); Transmitter: 3.25x1.75x1" (83x44x25mm)/1.6oz (45g)
- Complete with one Receiver, one Transmitter tester, and 9V battery for the Receiver; 1 year warranty

ORDERING

Circuit Breaker Finder

CB20 Circuit Breaker Finder/Receptacle Tester



3-in-1 tester to locate fuses, test receptacles and GFCI circuits

- Plug the Transmitter tester into an outlet and locate the correct breaker at the electrical box
- · Microprocesser-based automatic sensitivity adjustment
- Ergonomic design
- Audible/visual indication and Low battery indicator
- Transmitter/Tester:
- Tests GFCI circuits
- Tests Reversed/Open Connections,
- LED indication of 2 test conditions and 6 wiring faults
- Lights indicating circuit condition
- Dims/Wt: Receiver: 7.7x2.2x1.4" (196x55x36mm)/4.8oz (136g) ; Transmitter: 4.6x2.4x1.4" (118x60x35mm)/3.2oz (91q)
- Complete with one Receiver, one Transmitter tester, and 9V battery for the Receiver; 1 year warranty

١G
16

Circuit Breaker Finder/Receptacle Tester





CT20 Continuity Tester Pro/Wire Identifier



One person operation for wire and cable testing both local and remote

- Provides positive continuity checks with bright flashing LED and loud pulsating beeper
- Identify wire pairs and cables remotely using external probe
- Wire verification distance up to 10,000ft (3000m); cable size of 26AWG minimum
- Flashing remote probe two lead, bi-colored (red/ green) LED probe allows a single user to identify up to three wires or cables at a time for correct labeling with only one trip to the other end location
- Great for Electricians and Helpers, Cable TV and Audio System Installers, Alarm Technicians, HVAC Installers, and Auto Repair Technicians
- Dims: 3.6x2.2x1.14" (90x57x29mm); Wt: 9.2oz (260g)
- 1 year warranty
- Includes Remote probe with bi-colored LED for wire identification highlight

ORDERING	
CT20	Continuity Tester Pro

CT40 16-Line Cable Identifier/Tester Kit



Electrical/electronic circuits - identify up to 16 local or remote lines

- CAT III-600V MultiMeter with 7 functions
- Transmitter/Receiver enables one person to remotely identify up to 16 wires
- Transmitter displays two red LED lamps and Receiver two digit blue LED display
- Includes 17 built-in alligator clips with the Transmitter and 2 built-in alligator clips with the Receiver
- Cable resistance of 30kΩ max
- Wire voltage check from 5 to 16VDC
- Data Hold, Max Hold, Auto power off; Low battery indicator (transmitter/receiver)
- Complete with 16-line Transmitter, MultiMeter/Receiver, batteries, and case

MULTIMETER SPECIFICATIONS	
DC/AC Voltage (Basic DCV Accuracy)	0.1mV to 600VDC/ 1mV to 600VAC (±1.0% DCV)
DC/AC Current	0.1µA to 200mA
Resistance	0.1Ω to $20M\Omega$
Diode/Continuity	Yes
Dimensions/Wt	6.3x2.9x1.7" (162x74.5x44mm)/ 10.8oz (308g)

ORDERING		Ī
CT40	16-Line Cable Identifier/Tester Kit	

40180 Tone Generator and Amplifier Probe Kit



Heavy duty kit with audible tone easily identifies wires or cables

- Insulated inductive probe prevents shorting conductors
- Tests wire trace, continuity test, clear/busy/ringing line test and tip/ring identification
- Alligator clips for non-terminated cables and modular connectors for direct connections to telephone and internet wiring
- Built-in speaker with sensitivity control
- Dimensions: Probe 9x2.3x1" (228x57x25mm); Generator - 2.5x2.5x1.5" (64x64x38mm)/ Weight: 0.6lbs (272g)
- Complete with Amplifier probe and Tone Generator with alligator clips and modular RJ11 phone and RJ45 digital connector cables, 9V batteries and case

ORDERING		
40180	Tone Generator and Amplifier Probe Kit	

TG20 Wire Tracer Kit




Easily trace wires from source to termination

- Transmitter with output cables terminated in modular RJ11 phone connector
- Transmitter injects traceable signal into cables, checks telephone lines, and performs continuity checks
- Non-Contact probe audibly identifies selected wire or cable
- Test for properly operating phone lines
- Adjustable sensitivity control improves wire identification and eliminates false detection
- Continuity test visible indication
- Dimensions/Weight: Probe 8.7x2x1.3" (220x50x32mm)/ 3.2oz (91g); Transmitter - 2.6x2.7x1.1" (65x68x28mm)/ 3.2oz (91g)
- Complete with Wire Tracer Probe and Transmitter with RJ11 phone connector and pair of alligator clips, and two 9V batteries; 1 year warranty

ORDERING		
TG20	Wire Tracer Kit	

BT100 Battery Capacity Tester







AC milliohmmeter checks Battery Condition in seconds while the battery is in service

- On-line testing without disconnecting battery
- Datalogger stores up to 999 tests manually or 9600 sets in continuous mode and download readings to your PC with using software (included)
- Simultaneously measures DC Voltage and AC Milliohms
- Long battery life 7 hours; Auto power off to save battery

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Resistance	40m $Ω$, 400 m $Ω$, $4Ω$, $40Ω$	10μ Ω , 100μ Ω , 1m Ω , 10m Ω	±(1% rdg ± 10d)
Voltage	4V, 40V	1mV, 10mV	±(0.1% rdg ±6d)
Max Input Voltage	50VDC	50VDC	
Dimensions/ Wt	9.75 x 4 x 1.75" (250 x 100 x	45 mm)/ 17.5oz (500g)	

ORDERING	
BT100	Battery Capacity Tester
BT102	120V AC Adaptor

MD10 Non-contact Magnet Detector + Flashlight






Blue LED for visual indication of magnetic field and bright flashlight allows for viewing in dimly lit areas

Detects the presence of a magnetic field without contact

- Blue LED lights up for visual magnetic field detection including AC, DC, and permanent magnets
- Magnetic field detection range: 63H, 98H, 401H, 810H
- Ideal for testing audio speakers, troubleshooting solenoid valves in pneumatic and hydraulic control equipment and testing relays with coils and electrically controlled solenoid valves in vehicles and machinery
- Compact size with pocket clip and built-in bright flashlight with On/Off button
- Dimensions: 6.25 x 0.8x 1" (159 x 21 x 25mm); Weight: 1.7oz (48g)
- Complete with two AAA batteries; 1 year warranty

ORDERING		
MD10	Non-contact Magnet Detector + Flashlight	



;

LCR200 Passive Component LCR Meter





LCR203 — Optional SMD LCR205 — Optional SMD Tweezer for sorting out Component Fixture

L, C, R measurements with test Frequency up to 100kHz

- Simultaneous 20,000/2,000 count backlit display of the primary parameter (L, C or R) with the secondary parameter of Q (quality), D (dissipation) R (resistance), θ (phase), or ESR (equivalent series resistance)
- Auto Select measurement function with 1kHz default test frequency
- Five test frequencies
- Set Hi/Lo limits using absolute values or percentage limits
- Relative function, Auto power off with disable, Low battery and over-range indicators
- Parallel or Series equivalent circuit
- Built-in test fixture or use external test leads
- Open and Short calibration removes unwanted stray impedances from the measurement
- Complete with test leads and 9V battery; 1 year warranty
- Optional SMD Tweezer (LCR203) and plug-in SMD Component Fixture (LCR205)

SPECIFICATIONS	RANGE	BASIC ACCURACY
Inductance	20µH, 200µH, 2000.0µH, 20.000mH, 200.00mH, 2000.0mH, 20.000H, 200.00H, 2000.0H	±(0.5%rdg)
Capacitance	20pF, 200pF, 2000pF, 20.000nF, 200.00nF, 2000.0nF, 20.000μF, 200.00μF, 2.0000mF, 20.00mF	±(0.5%rdg)
Resistance	20.00Ω, 200.00Ω, 2.0000kΩ, 20.000kΩ, 200.00kΩ, 2.0000MΩ, 20.000MΩ, 200.00MΩ	±(0.5%rdg)
DF (with C)	0.000 to 999	
Q	0.000 to 999	
Phase	±90°	
Test Frequency	100Hz/120Hz/1kHz/10kHz/100kHz	
Dimensions/ Weight	7.6 x 3.5 x 1.6" (193 x 88 x 41mm)/ 14.8oz (420g)	

ORDERING	
LCR200	Passive Component LCR Meter
LCR203	SMD Tweezer for Model LCR200
LCR205	SMD Component Fixture for Model LCR200

380193 Passive Component LCR Meter





Complete with software, cable, test leads with alligator clip, 9V battery, and protective holster; 1yr warranty

C€

Measures Inductance, Capacitance, and Resistance with secondary parameter

- Simultaneous 20,000/10,000 count backlit display of the primary parameter (L, C or R) with the secondary parameter of Q (quality), D (dissipation) or R (resistance)
- Set Hi/Lo limits using absolute values or percentage limits
- Parallel or Series equivalent circuit
- Max/Min/Avg; Auto power off with disable; Automatic blown fuse indication
- Built-in test fixture or use external test leads
- Open and Short Zero removes unwanted stray impedances from the measurement
- Relative mode, zero, or supplied reference

SPECIFICATIONS	RANGE	BASIC ACCURACY
Inductance	2000.0µH, 20.000mH, 200.00mH, 2000.0mH 20.000H, 200.00H, 2000.0H, 10000H	±(0.7%rdg)
Capacitance	2000.0pF, 20.000nF, 200.00nF, 2000.0nF, 20.000µF, 200.00µF, 2000.0µF	±(0.7%rdg)
Resistance	20.000Ω, 200.00Ω, 2.0000kΩ, 20.000kΩ, 200.00kΩ, 2.0000MΩ, 20.000MΩ	±(0.5%rdg)
DF (with C)	0 to 0.9999	±(0.7%rdg)
Q	0 to 9999	±(1.2%rdg)
Test Freq.	120Hz and 1kHz	
Dimensions/Weight	7.56x3.58x2.1" (19.2x9.1x5.25cm) / 12.87oz (365g)	

ORDERING		
380193	Passive Component LCR Meter	
153117	117VAC adaptor	
153220	230VAC adaptor	

MS420 20MHz 2-Channel Digital Handheld Oscilloscope



3.8" (96mm) color LCD display simplifies viewing multiple waveforms 20MHz bandwidth Auto-set function optimizes the position, range, timebase, and triggering to assure a stable display of virtually any waveform

- Peak Detect function for 50ns glitch capture
- XY Mode
- Five Automatic Measurements: Frequency, Duty Cycle, Average, Peak to Peak, RMS
- Waveform Math: Add, Subtract, Multiply, and Divide
- Average Mode for smoothing waveforms
- Persistence Mode for observing dynamic signals
- Store and recall up to 4 waveform screens and setups
- USB interface and PC software for transferring waveforms and data

Display Size	3.8" (96mm) color LCD; 320 x 240 pixels
Bandwidth	20MHz
Real time sample rate	100MS/s
Risetime	17.5ns
Channels	2
Record Length	6K points per channel
Glitch Capture	50ns
Vertical Sensitivity	5mV to 5V/div
Vertical Resolution	8 bits
Timebase Range	5ns to 5s/div
Sample Mode	Sample, Average, Peak Detect
Trigger Modes	Free Run, Single Shot, Edge, Video
Trigger Source	CH1, CH2
Trigger Coupling	AC, DC
Input impedance	1MΩ/20pF
Max Input Voltage	400V (peak)
Cursor Measurement	Voltage and time
True RMS MultiMeter Fur	nctions
AC/DC Voltage	400mV, 4V, 40V, 400V
AC/DC Current	40mA, 300mA, 20A
Resistance	400Ω , 4 k Ω , 40 k Ω , 400 k Ω , 40 Μ Ω
Capacitance	51.2nF to 100μF
Diode and Continuity	Yes
PC Interface	USB cable
Power Supply	6 hours Li-ion rechargeable battery; AC Adaptor/charger
Dimensions/Weight	7x4.4x1.6" (180x113x40mm) / 24.3oz (690g)





Software PC screens display analog bargraph and graphical waveform

ORDERING

MS420	20MHz 2-Channel Oscilloscope
PWRCORD-MS420	European Power Cord for MS420



382200/382202 Digital Single Output DC Power Supplies



Adjustable 30V/1A and 18V/3A supplies with dual LCD displays

- Constant voltage or current
- Dual backlit LCD displays, Short circuit protection, Current limiting, High load/line regulation, Low noise/ripple, and Banana plug output terminals
- Complete with power cord; 1 year warranty

SPECIFICATIONS	MODEL 382200	MODEL 382202
Display Accuracy (V, A)	±(1.5%rdg); ±(2%rdg)	±(1.5%rdg); ±(2%rdg)
Voltage Output, DC	30.0 Volts	18.0 Volts
Current Output, DC	0 – 1.00 Amp	0 – 3.00 Amps
Ripple and Noise	<0.5mV/<3mA	<0.5mV/<3mA
Line Regulation	< 0.01% + 3mV/< 0.2% + 3mA	< 0.01% + 3mV/< 0.2% + 3mA
Load Regulation	< 0.01% + 2mV/< 0.2% + 3mA	< 0.01% + 2mV/< 0.2% + 3mA
Power	115V/230V; 50/60Hz	115V/230V; 50/60Hz
Dimensions/Weight	9.4x4.25x6" (240x108x154mm)/4.4lbs (2kg)	9.4x4.25x6" (240x108x154mm)/6.6lbs (3kg)

ORDERING		
382200	DC Power Supply 30V/1A	
382202	DC Power Supply 18V/3A	

382213 Digital Triple Output DC Power Supply



Adjustable to 30V/3A with fixed 5V and 12V outputs

• Adjustable Voltage and Current output

ORDERING
382213 N

IN Indicates products that are available with optional calibration traceable to NIST. See page 160 for a complete listing.

- Easy snap terminals for fixed 5V/0.5A and 12V/1A outputs
- Constant Voltage or Current, Current limiting indicator, Overload and short circuit protection, and Binding post terminals for variable supply

Digital DC Power Supply, 115/220 VAC

• Complete with power cord; 1 year warranty

SPECIFICATIONS	
Display	Digital (V&A),3 digit 0.1 res. LCD
DC Voltage/Current Output	0 to 30 Volts/ 0 to 3 Amps
Ripple and Noise	<5mV
Line/Load Regulation	<0.05%+10mV
Fixed Output Voltage	5V/0.5A (cont.), 1A(max); 12V/0.5A (cont.), 1A(max)
Power	110/220VAC 50/60Hz
Dimensions/ Weight	6 x 5.6 x 9.5" (152 x 142 x 242)/ 11lbs. (5kg)





Current limited DC supply for electronic repair and calibration



3 output ranges perform like 3 power supplies in one

- Constant voltage or current with 3 selectable ranges
- Compact, lightweight design with 4-Digit LED display & Front/Rear output terminals
- Remote sensing for accurate applied voltage at load point
- Complete with AC Power cord; 1 year warranty

SPECIFICATIONS	
Voltage Output (3 ranges)	0.10 to 16.40V, 0.10 to 27.60V, 0.10 to 36.80V
Current Output (3 ranges)	0.100 to 5.100A, 0.100 to 3.100A, 0.100 to 2.300A
Basic accuracy	±1%
Ripple & Noise	<30mVpp
Line Regulation/Load Regulation	<4mV/ <20mV
Power	90-264VAC; 47-63Hz
Dimensions/Weight	13 x 5 x 2" (330 x 127 x 53.5mm)/4.2lbs (1.9kg)

ORDERING

382260 80W Switching Mode DC Power Supply

382270 210 Watt Quad Output DC Power Supply



Two fully adjustable 30V/5A outputs combined with 2 auxiliary semi adjustable outputs

- Selectable Constant Voltage and Constant Current modes
- Two auxiliary outputs with variable voltage and fixed current
- Outputs up to 60V in series mode or 10A in parallel mode
- Includes 4 pairs of test leads (banana plug to alligator clip) & power cord; 1yr warranty

SPECIFICATIONS	
Output Voltage (4)/ Output Current (4)	0 to 30V, 0 to 30V, 3 to 6.5V, 8 to 15V/ 0 to 5A, 0 to 5A, 3A (fixed), 1A (fixed)
Basic Accuracy	±(0.5%+2 digits)
Load/ Line Voltage Regulation	≤0.02%+3mV
Ripple and Noise	<0.5mVrms
Power	100 to 240VAC,50/60Hz
Dimensions/ Weight	10.2x6.3x14.5" (260x160x370mm)/ 26.5lbs (12kg)

ORDERING
382270 Quad Output DC Power Supply

382280 200 Watt Triple Output Programmable DC Power Supply



40V/5A programmable supply with high resolution output and 200 test setup memories; 1 adjustable and 2 fixed outputs $\,$

- Selectable constant Voltage or Current modes
- 0 to 60 second programmable overload delay timer
- Forced air cooling fan and Dual output terminal for source and monitor connections
- Bi-directional PC interface commands allow setup and readback using Windows® HyperTerminal or similar PC communications programs
- Complete with power cord; 1 year warranty

SPECIFICATIONS		
Programmable Voltage/ Current Output	0 to 40V (1mV)/ 0 to 5A (1mA)	0.05% ±9mV/ 0.2% ±9mA
Fixed Outputs	5V/2A and 3.3V/3A	
Ripple & Noise	< 3mV	
Load Regulation	1mV/A	
Power Source	110 or 220VAC, 50/60Hz	
Dimensions/ Weight	12.2 x 9.9 x 5.3" (310 x 250 x 135	mm)/ 8.4lbs (3.8kg)

382280 Triple Output Programmable DC Power Su	pply	



382275/382276 600 Watt Single Output Laboratory Grade DC Power Supply



Dual Action Voltage/Current Controls—push knob for fine/coarse adjustments

- Remote Control for output Voltage/Current and On/Off
- Two user-defined Voltage and Current presets and one 13.8V/20A factory preset
- Automatic Constant Current crossover, High RFI immunity and excellent EMI
- Thermostatic Control Fan from zero to full speed
- 1 year warranty
- Complete with power cord

SPECIFICATIONS			
Output Voltage/Current (Res.)	0 to 30V (100mV)/ 0 to 20A (100mA)		
Basic accuracy	±(0.5%+2 digits)		
Load/Line Voltage Regulation	50mV/ 20mV		
Load/Line Current Regulation	100mA min/ 50mA min		
Ripple and Noise	<5mVrms		
Dimensions/ Weight	7.9 x 3.5 x 8.5" (200 x 90 x 215mm)/ 5.7lbs (2.6kg)		

	ORDERING	
ĺ	382275	

382275	Laboratory Grade Switching Mode DC Power Supply (120V)
382276	Laboratory Grade Switching Mode DC Power Supply (230V)

DCP60 600W Single Output Lab Grade Switching Power Supply



High efficiency switching power supply with low ripple and noise is ideal for demanding laboratory applications

- 60V/10A output
- Maximum current can be limited to 5A using front panel auxiliary output on the front panel (10A main output is on the back panel)
- Three user-defined Voltage and Current presets
- Dual action rotary encoder control with push knob for fine and coarse tuning
- Remote control for Output Voltage/Current and On/Off
- USB port for programming and running ramp/soak cycles with 20 programmable sets of Voltage/Current and varying test durations (up to 999 cycles)
- 1 year warranty
- · Complete with power cord and software

SPECIFICATIONS	
Output Voltage	1 to 60V
Output Current	1 to 10A
Basic Accuracy	±(0.2%+3 digits)
Load Voltage Regulation	50mV
Line Voltage Regulation	20mV
Load Current Regulation	100mA
Line Current regulation	50mA
Ripple and Noise	≤5m Vrms, ≤100m Vp-p
Dimensions/ Weight	7.9 x 3.5 x 8.5" (200 x 90 x 215mm)/ 5.7lbs (2.6kgs)

U	KL	JEF	IING

DCP60	600W Single Output Lab Grade Switching Power Supply (120V)
DCP60-220	600W Single Output Lab Grade Switching Power Supply (220V)

DT500 Laser Distance Meter with Bluetooth®





Transmits readings to most* Apple® iPhones® and iPads® using free Apple® App up to 30ft (10m) away. Download the Extech DT500 ExView™ app at itunes.apple.com

Laser Distance meter transmits readings to Apple® iPhone® and iPad® devices

- Integrated Bluetooth® connects with iOS devices to transmit readings for remote viewing
- Works with free Apple app to display large easy-to-read values up to 30ft (10m) away
- Measures distance up to 229ft (70m) with a target plate
- Automatically calculates Area and Volume
- Indirect measurement using Pythagorean Theorem
- Continuous measurement function with Min/Max distance tracking updates every 5 seconds
- Displays Sum (+) / Difference (-) of multiple readings, Front or rear edge reference, Low battery indicator, and Auto power off
- Built-in bubble level provides easy visual guidance on determining if a surface is level
- Double molded housing (IP54)
- Tripod mount (tripod available)
- · Complete with carrying case and 2 AA batteries; 1 year warranty

SPECIFICATIONS			
Measurement Range	2" to 229' (0.05 to 70m) with a target plate 2" to 164' (0.05 to 50m) without a target plate		
Accuracy (up to 32'/10m)	±0.06" (±1.5mm)		
Resolution	0.0625" (0.001m)		
Length Add calculation	99'11" (99.99m)		
Area calculation	999.99 sq. ft. (999.99m2)		
Volume calculation	999.99 cu. ft. (999.99m3)		
Historical Storage	20 records (measured or calculated results)		
Laser Power Off/ Auto Power Off	after 30 seconds/ after 3 minutes		
Dimensions/ Weight	5.3x2.3x1.3" (135 x 58 x 33mm)/ 7.2oz (203g)		

ORDERING

Laser Distance Meter (229ft/70m) with Bluetooth®

Mac App Store logo, Apple, iPhone, and iPad are trademarks of Apple Inc.

DT300 Laser Distance Meter







Laser distance measurement function and Historical Storage feature (measured or calculated results)

- Measures up to 164ft (50m) with 0.06" accuracy
- Automatically calculates Area and Volume
- Indirect measurement using Pythagorean theorem
- Continuous measurement function with Min/Max distance tracking updates every 0.5 seconds
- Addition/Subtraction, Front or rear edge reference, Low battery indicator, and Auto power off features
- Double molded housing (IP54)
- Complete with carrying case and 2 AAA batteries; 1 year warranty

SPECIFICATIONS		
Measurement Range	2" to 164' (0.05 to 50m)	
Accuracy (up to 32'/10m)	±0.06" (±1.5mm)	
Resolution	0.001" (0.001m)	
Length Add calculation	99'11" (99.99m)	
Area calculation	999.99 sq. ft. (999.99m²)	
Volume calculation	999.99 cu. ft. (999.99m³)	
Historical Storage	Measured or calculated results - 20 records	
Laser Power Off / Auto Power Off	After 30 seconds / after 3 minutes	
Dimensions/ Weight	4.5 x 1.9 x 1.1" (115 x 48 x 28mm)/ 5.3oz (150g)	


ORDERING		
DT300	Laser Distance Meter (164ft/50m)	







14.39



- Autoranging ground resistance and True RMS AC Leakage current measurements
- Programmable datalogging with 116 readings
- Programmable Hi/Lo alarm
- 0.9" (23mm) Jaw size for large ground rods
- Simplifies ground resistance measurements on multiple point ground systems
- Auto power off
- Verification resistors confirm accuracy
- Automatic Self Calibration when powered on
- 9999 Count LCD display with Data Hold
- Electrical Noise Detection feature prevents inaccurate readings
- CAT III-300V, CAT II-600V
- 1 year warranty
- Complete with 9V battery, Resistance check plate, and durable metal storage case

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Ground Resistance	0.025 to 1500Ω	0.002Ω	±1.5%
AC Leakage Current (Trms)	1mA	0.001mA	±2.5%
AC Current (Trms)	0.3mA to 30.00A	0.01A	±2.0%
Resistance Test Frequency	3.333kHz		
Operating Temperature	32 to 122°F (0 to 50°C)		
Dimensions/Weight	10.2x4.4x1.9" (258x110	x47mm) / 1.5lbs (700g) (r	neter only)

382357 N Clamp-On Ground Resistance Tester

382252 Earth Ground Resistance Tester Kit

of cellular and communication tower

ground grids

Includes all hardware necessary to measure earth ground in 3 ranges from 20 to 2000 Ω

- Large dual display with backlight and double molded housing
- Test Hold function
- Automatic Zero adjustment
- AC/DC Voltage, Resistance, and Continuity
- Auto Power off, Over-range and low battery indication
- 1 year warranty
- Complete with test leads, two auxiliary earth bars, carrying case, and six 1.5V AA batteries

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Earth Ground Resistance ranges	20Ω/ 200Ω/2000Ω	$0.01\Omega / \ 0.1\Omega / 1\Omega$	±(2%rdg)
Test Current (Freq.)	<2.5mA (820Hz)	0.001mA	±2.5%
AC Earth Voltage (Freq.)	0 to 200VAC (50 to 400Hz)		±(3%rdg)
DC Voltage	0 to 1000V	0.1V	±(0.8%rdg)
Resistance	0 to 200k Ω		±(1%rdg)
Continuity	40Ω		
Category rating	CAT III-1000V		
Dimensions/ Weight	7.9x3.6x2" (200x92x50mm)/	1.5lbs (700g) (meter only	/)

ORDERING	
382252 N	Earth Ground Resistance Tester Kit
382253	Replacement Earth Bars (2pk)
382254	Replacement Set of Test Leads





GRT300/GT350 4-Wire Earth Ground Resistance/Resistivity Testers





Complete with color coded test leads and alligator clips, 4 auxiliary earth bars, hard carrying case, and eight 1.5V AA batteries; 1 year warranty

Includes all hardware necessary to measure earth ground in 4 ranges

- 4-wire, 3-wire, and 2-wire testing
- Large dual line LCD
- Autoranging
- Automatic I (current) spike check and Automatic P (potential) spike check
- Test Hold function for easy operation
- AC Earth Voltage
- Data Hold and Auto Power Off features
- Over-range and low battery indication

Model GRT300 Additional Feature

- Earth Ground Resistance in 4 ranges
- · Automatic Zero adjustment

Model GRT350 Additional Features

- Earth Ground Resistance in 3 ranges
- Earth resistivity (ρ) test
- Store/recall up to 200 test results

SPECIFICATIONS	GRT300	GRT350
Earth Ground Resistance	$2\Omega/20\Omega/200\Omega/2000\Omega$	$20\Omega/200\Omega/2000\Omega$
Basic Accuracy	±(2%rdg+3d)	\pm (2%rdg+3d)
Resolution	$0.01\Omega/0.1\Omega/1\Omega/0.01k\Omega$	$0.01\Omega/0.1\Omega/1\Omega$
Earth Resistivity (ρ)	_	0.06 to 6.28 k Ωm , 0.62 to 62.8 k Ωm , 6.28 to 628 k Ωm
Test Current / Frequency	<2mA/820Hz	<2mA/820Hz
AC Earth Voltage / Frequency	0 to 300VAC/40 to 500Hz	0 to 300VAC/40 to 500Hz
Dimensions/ Weight	9.8 x 7.8 x 4.3" (250 x 190	x 110mm)/ 3.15lbs (1.4kg) - batteries included
AC Earth Voltage / Frequency	0 to 300VAC/40 to 500Hz	0 to 300VAC/40 to 500Hz

ORDERING	
GRT300 N	4-Wire Earth Ground Resistance Tester Kit
GRT350 N	4-Wire Farth Ground Resistance/Resistivity Tester Kit

UM200 High Resolution Micro-Ohm Meter





Complete with 4-wire cables with Kelvin clip connectors, rechargeable Li-Polymer battery, AC adapter/charger, software and USB cable, and carrying case

Provides resolution down to $1\mu\Omega$ using 4-wire Kelvin clip test leads


- 6 ranges with 3 sub-ranges in each current range
- Measurement of resistive and inductive materials
- Auto or Manual ranging
- High resolution to $1\mu\Omega$
- 5-Digit backlit LCD
- Built-in comparator for Hi/Lo/Go resistance testing with 20 sets of pre-stored values
- Store/Recall up to 3000 measurements
- 10A maximum test current
- Cable length measurement (feet or meters)
- RS-232 interface
- 1 year warranty
- Complete with 4-wire cables with Kelvin clip connectors, rechargeable Li-Polymer battery, AC adapter/charger, software and USB cable, and carrying case

SPECIFICATIONS	RANGE	RESOLUTION	CURRENT	BASIC ACCURACY
Resistance	60mΩ	1μΩ	10A	±(0.25%)
	$600 m\Omega$	10μΩ	1A	±(0.25%)
	6Ω	100μΩ	100mA	±(0.25%)
	60Ω	$1m\Omega$	10mA	±(0.25%)
	600Ω	$10m\Omega$	1mA	±(0.25%)
	6kΩ	$100 m\Omega$	100μΑ	±(0.75%)
Power	Rechargeable Li-Poly	ymer Battery		
Dimensions/Weight	10.1 x 6.1 x 2.2" (257	7 x 155 x 57mm)/ 2.6lb (1	160a)	

ORDERING		
UM200 N	High Resolution Micro-Ohm Meter	





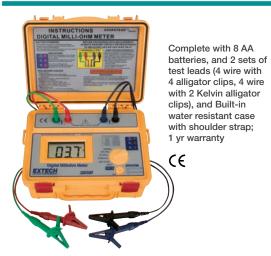

High accuracy, high resolution portable Milliohm Meter for field use

- Four terminal Kelvin measurements
- Over-temperature and over-voltage protection
- Auto-Hold and Auto power off
- Invalid test indicators prevent inaccurate measurements

SPECIFICATIONS	RANGE	RESOLUTION	CURRENT	BASIC ACCURACY
Resistance	200.0mΩ	$0.1 m\Omega$	100mA	±0.5%
	$2000 m\Omega$	$1 m\Omega$	100mA	±0.5%
	20.00Ω	0.01Ω	10mA	±0.5%
	200.0Ω	0.1Ω	10mA	±0.5%
	2000Ω	1Ω	1mA	±0.5%
Dimensions/ Weight	9.8x7.5x4.3" (25	50x190x110mm)/ 3.3lbs	(1.5kg)	
ORDERING				
380580 N	Battery Powered	d Milliohm Meter		

380560/380562 High Resolution Milliohm Meter



• Automatic zero; 5V test voltage

380565

• Built-in comparator for Hi/Lo/Go resistance testing or selection

Test Leads w/Kelvin clips for 380580

• Includes 4-wire cables with Kelvin clip connectors and power cord; 1 year warranty

SPECIFICATIONS	RANGE	RESOLUTION	CURRENT	BASIC ACCURACY
Resistance	20mΩ	$0.01 m\Omega$	1A	±0.2%
	$200 m\Omega$	$0.1 m\Omega$	1A	±0.2%
	2Ω	0.001Ω	100mA	±0.2%
	20Ω	0.01Ω	10mA	±0.2%
	200Ω	0.1Ω	1mA	±0.2%
	$2k\Omega$	$0.001 k\Omega$	100μΑ	±0.2%
	20kΩ	0.1kΩ	10μΑ	±0.2%
Power	110VAC, 60Hz or 220	OVAC 50Hz		
Dims/Wt	11x8.3x3.5" (280x210	0x90mm)/ 4.85lb (2.2kg	a)	

ORDERING	
380560 N	High Resolution Milliohm Meter, 110VAC
380562 N	High Resolution Milliohm Meter, 220VAC
380465	Spare Kelvin Clip Test Lead Set

380460/380462 Precision Milliohm Meter



Portable Milliohm meter provides resolution to $0.1 \text{m}\Omega$

- Manual zero display adjust; Over-range indication
- Compact, durable field service housing with protective cover

Spare Kelvin Clip Test Lead Set

• Includes 4-wire cables with Kelvin clip connectors and power cord; 1 year warranty

SPECIFICATIONS	RANGE	RESOLUTION	MAX VOLTAGE	BASIC ACCURACY
Resistance	200m $Ω$	$0.1 m\Omega$	4.4VDC	±0.75%
	2Ω	$1 m\Omega$	3.6VDC	±0.75%
	20Ω	$10 m\Omega$	3.6VDC	±0.75%
	200Ω	0.1Ω	3.5VDC	±0.75%
	2000Ω	1Ω	3.5VDC	±0.75%
Power	110VAC, 60Hz or 2	20VAC, 50Hz		
Dimensions/Weight	6.3x2.8x3.4" (160x	120x85mm)/ 1.5lb (680	g)	
ORDERING				
380460 N	Precision Milliohm I	Meter, 110VAC		
380462 N	Precision Milliohm I	Meter, 220VAC		



380320 Analog High Voltage Megohmmeter



Three Insulation Test Ranges with Live Circuit Warning

- Insulation Resistance ranges: 100MΩ, 200MΩ, and 400MΩ
- Basic accuracy ±5% of scale
- Three test voltages 250V, 500V, and 1000V
- Lock Power On feature for extended test times
- Fuse protected and automatic discharge circuit
- Measures continuity to 3Ω , Resistance to 500Ω , and AC Voltage to 600V
- 1.3mA short circuit current
- CAT III-1000V
- Dimensions: 7.9x3.6x2" (200x92x50mm); Weight: 1.2lbs (546g) includes batteries
- 1 year warranty
- Includes heavy duty test leads, alligator clip test lead, 6 x AA batteries, and hard case

ORDERING		
380320	Analog High Voltage Megohmmeter	

380360 Digital Megohmmeter



1000V digital tester with automatic 3 minute test

- Insulation Resistance ranges: $200M\Omega$ and $2000M\Omega$ with $0.1M\Omega$ max resolution and $\pm 3\%$ of reading basic accuracy
- Three test voltages of 250V, 500V and 1000V
- Safety Power Lock enables "hands free" operation for 3 minute test
- Automatic discharge when "Press to Test" button is released
- Auto power off and Data Hold
- 0.65" (17mm) LCD display
- Automatic zero adjustment
- Continuity measurements to 200Ω and Voltage to 600VAC
- CAT II-600V
- Dimensions: 6.3x3.8x2.3" (160x97x58mm); Weight: 13oz (369g)
- 1 year warranty
- Complete with 6 x AA batteries, heavy duty 2.5ft (0.8m) test leads, alligator clip, large probe, and case with neckstrap

ORDERING		
380360 N	Digital Megohmmeter	

380260 Handheld Megohmmeter




1000V digital tester with large dual backlit display

- Double molded housing for added durability
- Dual display of Insulation Resistance and Test Voltage
- Backlit super large display
- Insulation Resistance ranges: $200M\Omega$ and $2000M\Omega$ with $0.1M\Omega$ max resolution and $\pm 3\%$ of reading basic accuracy
- 250V, 500V, and 1000V test voltages
- Auto power off
- Lo Ω function for testing connections
- Lock Power On Function for hands-free operation
- Data Hold
- CAT III-1000V
- Dimensions: 7.8x3.6x1.9" (200x92x50mm); Weight: 24.6oz (700g)
- 1 year warranty
- Complete with heavy duty test leads, alligator clip test lead, hanging strap, carrying case, and 6 x AA batteries

URDERING	
380260 N	Handheld Megohmmeter

380465

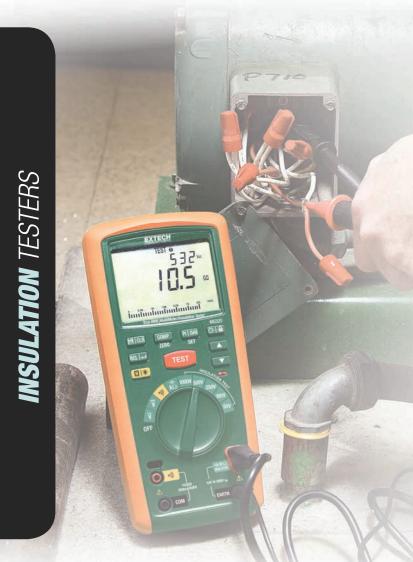

Restore Safety, Eliminate Downtime

Plant and electrical professionals rely on Extech's line of digital and analog insulation testers and megohmmeters for motor-related diagnostics including motor insulation resistance as high as 200G Ω of MCCs as well as transformers. With available capabilities such as continuity test and voltage measurement, Dielectric Absorption Ratio, Polarization Index and CAT-IV ratings, Extech's insulation resistance testers and megohmmeters deliver accurate diagnostic results without compromising safety.









MG325 CAT IV High Range Insulation Tester/TRMS MultiMeter

Autoranging insulation measurements to 200G Ω with 11 ranges

- Polarization Index (PI) and Dielectric Absorption
- Ratio measurements (DAR)
- Low Resistance function with Zero mode
- Comparison Mode allows user to set the Pass/Fail values for insulation measurements
- Step Voltage (10% steps at 50% to 120% of range)
- Auto-discharge of voltage test signal
- Lock Power On Function for hands-free operation
- Manually store/recall up to 99 readings
- Backlit display with analog bargraph
- High voltage and overload indication
- Data Hold and Auto Power Off
- · Complete with test leads, alligator clip, 6 x AA batteries, and soft case





MG300 CAT IV **Insulation Tester/ TRMS MultiMeter with** Wireless (915MHz) PC Interface

Autoranging insulation measurements to $4G\Omega$

- Wireless USB interface transmits measurement data to a PC
- Large backlit triple display
- Auto discharge

MG300 (915MHz) N

- Lock Power On Function for hands-free operation
- Data Hold, Min/Max and Relative mode
- Waterproof (IP67) rugged design
- Complete with remote receiver with USB cable, Windows® compatible software, heavy duty test leads, alligator clip test lead, Type K bead wire temperature probe, hard case, and 6 x AA batteries

See Special Value Kits on p. 19

Note: USA, Mexico, and Canada use 915MHz



MG302 CAT IV **Insulation Tester/ TRMS MultiMeter with** Wireless (433MHz) PC Interface

Autoranging insulation measurements to $4G\Omega$

- Wireless USB interface transmits measurement data to a PC
- Large backlit triple display
- Auto discharge
- Lock Power On Function for hands-free operation
- Data Hold, Min/Max and Relative mode
- Waterproof (IP67) rugged design
- Complete with remote receiver with USB cable, Windows® compatible software, heavy duty test leads, alligator clip test lead, Type K bead wire temperature probe, hard case, and 6 x AA batteries

See Special Value Kits on p. 19

Note: Most countries use 433MHz (not for USA, Mexico, and Canada)

4MΩ, 40MΩ, 400MΩ, 4000MΩ (0.001MΩ)

MG302 (433MHz) N



Q (P) 1856
MG300 & MG302 Kits available. See p. 19 for details.

SPECIFICATIONS	MG325 N
Insulation Resistance - Ω (max resolution)	50MΩ, 100MΩ, 200MΩ,500MΩ, 2000MΩ, 1GΩ, 10GΩ, 20GΩ, 50GΩ, 100GΩ, 200GΩ (0.001MΩ)
Basic Accuracy	±3%
Insulation Test Voltages	50V, 100V, 250V, 500V, 1000V
Low Resistance Test	0.01 to 100Ω
MultiMeter Functions	
AC/DC Voltage (max resolution)	600V (0.01V)
AC/DC Current (max resolution)	AC Leakage: 2000μA (10μA)
Resistance (max resolution)	10M Ω (0.01k Ω)
Frequency (max resolution)	_
Capacitance (max resolution)	500μF (0.1nF)
Duty Cycle (max resolution)	_
Temperature (max resolution)	-
4-20mA% (max resolution)	_
Continuity	Audible
CE, FCC	CE
Dimensions/Weight	8.9 x 4.1 x 2.3" (225 x 103 x 59mm)/ 1.5lbs (0.7kg)
Warranty	1 year

50MΩ, 100MΩ, 200MΩ,500MΩ, 2000MΩ, 1GΩ, 10GΩ, 20GΩ, 50GΩ, 100GΩ, 200GΩ (0.001MΩ)	4 Μ Ω , 4 0Μ Ω , 4 00Μ Ω , 4 000Μ Ω (0.001Μ Ω)
±3%	±3%
50V, 100V, 250V, 500V, 1000V	125V, 250V, 500V, 1000V
0.01 to 100 Ω	0 to 400Ω
600V (0.01V)	1000V (0.1mV AC/0.01mV DC)
AC Leakage: 2000μA (10μA)	10A (0.1μA AC/0.01μA DC)
10 Μ Ω $(0.01$ k $\Omega)$	40 Μ Ω (0.01 Ω)
_	100MHZ (0.001Hz)
500μF (0.1nF)	40mF (0.001nF)
_	0.1 to 99.9% (0.01%)
-	-58 to 1832°F /-50 to 1000°C (0.1°)
_	-25 to 125% (0.01%)
Audible	Audible
CE	CE, FCC
8.9 x 4.1 x 2.3" (225 x 103 x 59mm)/ 1.5lbs (0.7kg)	7.8 x 3.6 x 1.9" (200 x 92 x 50mm)/ 20.5oz
1 year	1 year

±3%
125V, 250V, 500V, 1000V
0 to 400Ω
1000V (0.1mV AC/0.01mV DC)
10A (0.1μA AC/0.01μA DC)
40 Μ Ω $(0.01$ $\Omega)$
100MHZ (0.001Hz)
40mF (0.001nF)
0.1 to 99.9% (0.01%)
-58 to 1832°F /-50 to 1000°C (0.1°)
-25 to 125% (0.01%)
Audible
CE, FCC
7.8 x 3.6 x 1.9" (200 x 92 x 50mm)/ 20.5oz (582g)
1 year

,,
±3%
125V, 250V, 500V, 1000V
0 to 400Ω
1000V (0.1mV AC/0.01mV DC)
10A (0.1μA AC/0.01μA DC)
40 Μ Ω $(0.01$ $\Omega)$
100MHZ (0.001Hz)
40mF (0.001nF)
0.1 to 99.9% (0.01%)
-58 to 1832°F /-50 to 1000°C (0.1°)
-25 to 125% (0.01%)
Audible
CE
7.8 x 3.6 x 1.9" (200 x 92 x 50mm)/ 20.5oz (582g)
1 year





Preventative Maintenance Works!

Extech's wide range of Insulation Testers measure up to $500G\Omega$ with high test voltages up to 10kV.





MG310 Compact Digital Insulation Tester

Measurements up to 1000V with Insulation Resistance to 5.5G Ω

- 250V, 500V, and 1000V test voltages
- AC Voltage measurement from 30 to 600V
- Large 2000 count dual display with backlight
- Polarization Index measurement (PI)
- Dielectric Absorption Ratio measurement (DAR)
- 10MΩ internal resistance test
- Low Resistance measurement with Zero function
- Continuity beeper
- High voltage and overload indication
- Auto-discharge and voltage output warning functions
- Low battery indication
- Complete with test leads, alligator clips, 6 x AA batteries, hard cover, and soft carrying case



380363 Digital Insulation Tester

Autoranging insulation measurements to $10G\Omega$ plus manual datalogging stores up to 9 data sets

- 250V, 500V and 1000V test voltages
- Large LCD display with analog bargraph
- Low Resistance function for testing connections
- Automatic discharge
- AC/DC voltage measurement up to 999V
- Auto power off
- Manual data record and read function (9 sets)
- Live circuit display warning and beeper
- Complete with carrying case, test leads, and 6 x AA batteries



380395/380396 Digital High Voltage Insulation Tester

High test Voltages up to 5kV with Insulation Resistance to 60G Ω

- Test Voltages of 500V, 1000V, 2500V, and 5000V
- Large 6000 count display with bargraph and backlight
- Polarization Index (PI) measurementDielectric Absorption Ratio measurement
- 1 to 15 minute Timer function for
- Insulation Resistance measurements
 AC/DC Voltage from 0 to 600V with MAX/Min, Peak and Relative functions
- Autoranging and timer function
- Indication of output voltage and discharge voltage
- Auto-discharge and voltage output warning function
- Auto Power off and battery check
- Complete with test leads, 8 x C batteries, and heavy duty carrying case;
 Model 380395 with 110V AC adaptor
 Model 380396 with 220V AC adaptor



MG500 Digital High Voltage Insulation Tester

High test Voltages up to 10kV with Insulation Resistance to 500G Ω

- Test Voltages of 500V to 10kV (adjustable in 500V steps)
- Polarization Index (PI) measurement
- Dielectric Absorption Ratio (DAR) measurement
- EnerSaveTM limits test duration to 10 seconds to save energy Auto-discharge and voltage output warning function
- CAT III-300V category rating
- Complete with built-in heavy duty carrying case with cover, test leads, alligator clips, and 8 x C batteries

SPECIFICATIONS	MG310 N	380363 🔃	■ 380395 N ▲ 380396 N	MG500 N
Insulation Resistance (max resolution)	0 to 99.9M Ω (0.01 Ω), 100M to 5.5G Ω (1M Ω)	4MΩ, 40MΩ, 400MΩ, 4000MΩ, 10GΩ (1kΩ)	6 Μ Ω , 6 0Μ Ω , 6 00Μ Ω , 6 G Ω , 6 0G Ω (1 k Ω)	800k Ω to 500G Ω (1k Ω) Autoranging
Basic Accuracy	±5% rdg	±3%	±2.5%	±5%
Insulation Test Voltages	250V, 500V, 1000V	250V, 500V, 1000V	500V, 1000V, 2500V, 5000V	500V to 10kV (adjustable in 500V steps)
AC Voltage Test	600V	999VAC	600VAC	-
Low Resistance Test	0 to 200Ω	0 to 40Ω	0 to 600Ω	_
CE, FCC	CE	CE	CE	CE
Dimensions/Weight	6 x 4 x 2.8" (150 x 100 x 71mm)/ 1.5lbs (0.7kg)	9.3x4.6x2.1" (235x116x54mm)/ 1.15lbs (520g)	7.8x5.8x3.4" (198x148x86mm)/ 3.2lbs (1438g)	13x10.2x6.3" (330x260x160mm)/ 7.9lbs (3.6kg)
Warranty	1 year	1 year	1 year	1 year



382100/PQ3470 3-Phase Power Quality Analyzer/Dataloggers





1200A Clamp Probes

(Patent Pending



Kits Available

Model PQ3470 with Harmonics; Clamp Probes not included unless ordered as a Kit.

Clamp Probes Choose from clamp probes ranging from 200A to 3000A and flexible vs traditional jaw.





(19mm) jaw opening



PQ34-12: 1200A Current Clamp Probes with 2' (50mm) jaw opening



PQ34-30: 3000A Flexible Current Clamp Probes (24"/600mm) for wrapping around busbars.

Choice of Numerical or Graphical display with Harmonics model

- Large, dot-matrix, sun readable, numerical, backlit LCD
- Captured measurements can be imported directly into Excel via the SD memory card
- Adjustable Current Transformer CT (1 to 600) and Potential Transformer PT (1 to 1000) ratio for high power distribution systems
- Log up to 30,000 reading on a removable SD memory card in Microsoft Excel® format
- Wide sampling rate range (2 seconds to 2 hours)
- Built-in Clock and Calendar and easy-to-use on-screen menu
- Banana style input jacks and easy-to-hold rugged over molded housing
- **Model 382100** Kit—includes three 1200A Clamp probes; **Model PQ3470** — clamp probes sold separately
- Complete with 4 voltage leads with alligator clips, 8 AA batteries, SD memory card, Universal AC adaptor (100 to 240V), and durable hard carrying case; 1 year warranty

Model PQ3470 Additional Features

- Optional 200A, 1200A Current Clamps or 3000A Flexible Current Probes
- On-screen Harmonics display (1 to 50th order)
- Simultaneous display of Harmonics and Waveform
- Simultaneous display of Voltage and Current waveforms
- Display of Waveform with peak values
- Analysis of Total Harmonic Distortion (THD)
- Graphic Phase diagram with 3-Phase system parameters
- 3-phase Voltage or Current Unbalanced Ratio (VUR, AUR) and unbalanced factor
- Capture Transient events (including dip, swell, outage) with programmable threshold (%)

SPECIFICATIONS	RANGE	BASIC ACCURACY
AC Voltage (True RMS)	600.0V	±(0.5%rdg)
AC Current	Model 382100: 1200A Model PQ3470: 6000A (dependent on Clamp Probe range used)	±(0.5%rdg)
Active Power (MW)	9.999MW	±(1.0%rdg)
Apparent Power (MVA)	9.999MVA	±(1.0%rdg)
Reactive Power (MVAR)	9.999MVAR	±(1.0%rdg)
Power Factor	0.00 to 1.00	±0.04
Frequency Range	45Hz to 65Hz	±0.1Hz
Phase	-180° to +180.0°	±1°
Harmonics (PQ3470)	1 to 50th	±2% (1 to 20); ±4% (21 to 31)
Crest Factor (PQ3470)	1.00 to 99.99	±(5%)
Current Clamp input	200mV, 300mV, 500mV; 1V, 2V, 3V; user-adjustable	±(0.5%rdg)
Active Power Energy (MWH)	0.0kWh to 9.999MWH	±(2.0%rdg)
Apparent Power Energy (MVAH)	0.0KVAh to 9.999MVAH	±(2.0%rdg)
Reactive Power Energy (MVARH)	0.0kVARh to 9.999MVARH	±(2.0%rdg)
Datalogging	30,000 data (2GB SD Card)	
Peak AC Voltage/Current Accuracy		±(5%) PQ3470 only
CE/CAT rating	CE/CAT III-600V	
Dimensions/ Weight	8.86 x 4.92 x 2.52" (225 x 125 x 64m	nm)/ 2.2lbs (1010g)

ORDERING	
382100	1200A 3-Phase Power Analyzer/Datalogger Kit (includes 1200A Clamp Probes)
PQ3470	3-Phase Graphical Power and Harmonics Analyzer/Datalogger (meter only)
PQ3470 Kits	
PQ3470-2	200A Power Analyzer Kit: PQ3470 with PQ34-2
PQ3470-12	1200A Power Analyzer Kit: PQ3470 with PQ34-12
PQ3470-30	3000A Power Analyzer Kit: PQ3470 with PQ34-30
PQ3470 Accesso	pries
PQ1000	Voltage Test Leads with Alligator and Plunger Clips (4 leads)
PQ34-2	200A Current Clamp Probes (Set of 3)
PQ34-12	1200A Current Clamp Probes (Set of 3)
PQ34-30	3000A, Flexible Current Probes (Set of 3)

PQ3350-1/PQ3350-3 3-Phase Power Quality & Harmonics Analyzers



 ϵ



Includes (3) flexible current clamps, (4) voltage leads with alligator clips and retractable plunger clips, 8 AA batteries, universal AC adaptor, software, USB interface cable, and case: 1 year

Power Measurements and Analysis + Datalogging of single and 3-phase/3-wire or 3-phase/4-wire systems; CAT III - 600V safety rating

- Model PQ3350-1 (1200A 12" flexible current clamp probes)
- Model PQ3350-3 (3000A 24" flexible current clamp probes)
- Large backlighting LCD displays up to 35 parameters in one screen
- Clamp-on True RMS power measurements with on-screen Harmonics display
- Simultaneous display of Voltage and Current waveforms
- Analysis of Total Harmonic Distortion (THD-F)
- Maximum Demand (MDkW, MW, kVA, MVA) with programmable period
- Adjustable CT ratio (1 to 600) and VT ratio (1 to 3000)
- 3-phase Voltage or Current Unbalanced Ratio (VUR, AUR) and unbalanced factor
- Calculated Unbalanced Current through Neutral Line (In)
- Capture 28 Transient events with programmable threshold (%)
- USB interface w/software to download Waveforms, Power Parameters & Harmonics

SPECIFICATIONS	RANGES	BASIC ACCURACY	
AC Voltage (True RMS)	600V	±0.5%rdg	
AC Current (True RMS)	100A, 1000A, 3000A*	±0.5%rdg	
Active Power (kW)	9.999MW	±1%rdg	
Apparent Power (kVA)	9999kVA	VA=Vrms x Arms	
Reactive Power (kVAR)	9999kVAR	VAR= sqr (VA2-W2)	
Power Factor	0.0 to +1.00	±1.5%rdg	
Frequency	45-65Hz	0.1Hz	
Phase	-180.0°~ 0°~ +180.0°	±1°	
Harmonics/ Crest Factor	1 to 99/ 1.00 to 99.99	±2% / ±5%	
Active Power Energy (kWh)	0mWh to 999,999kWh		
Reactive Power Energy (kVARh)	0.0kVARh to 1000MWh		
Datalogging	52428 records (1P2W)/17476 records (3P4	W)	
Dimensions/ Weight	Meter: 10.1 x 6.1 x 2.3" (257 x 155 x 57mm Clamp: 2.2" (55mm), 2.5" x 1.0" (64x24mm		
* Using PQ3220 Current Probe (included with PQ3350-3 kit)			

ORDERING

PQ3350-1 N	1200A 3-Phase Power Harmonics Analyzer Kit (includes PQ3210)
PQ3350-3 N	3000A 3-Phase Power Harmonics Analyzer Kit (includes PQ3220)
PQ1000	Voltage Test Leads with Alligator and Plunger Clips (4 leads)

PQ2071 True RMS 1000A AC 1-/3-Phase Power Clamp Meter



Includes test leads, USB cable, PC software, 9V battery, and carrying case; 1 year warranty.

Measures AC Current, Frequency, and Power; USB interface with software

- Dual backlit LCD display with bargraph
- Built-in non-contact Voltage Detector with LED alert
- Manually store/recall up to 99 data sets
- Data Hold, Max/Min, and Auto Power Off
- CAT IV-600V, CAT III 1000V safety rating

SPECIFICATIONS	RANGES
Jaw size/Cable size	2.2" (55mm); 1000MCM
True Power (max res.)	750kW (10W)
Basic Accuracy (ACA)	±3%rdg
Apparent Power/ Reactive Power	750kVA (10kVA)/ 750kVAR (10VAR)
Power Factor	Yes
Phase Angle ()	-180° to 180° (1°)
Active Power Energy	9999kWh (0.001kWh)
AC/DC Current (True RMS)	1000A AC (100mA)
AC/DC Voltage (True RMS)	750V AC (0.1V)
Frequency (max res.)	50Hz to 200Hz (1Hz)
Dimensions/Weight	11.5x3.75x1.5" (292x95x38mm)/18.4oz (522g)

ORD	ERING	

True RMS 1000A AC 1-/3-Phase Power Clamp Meter



EMF450 Multi-Field EMF Meter







Includes 3 AAA batteries and USB power supply cable; 1 year warranty

 ϵ

Convenient 3-in-1 EMF meter with easy-to-navigate menu and audible alarm

- Multi-Field measurements: Magnetic Field, Electric Field, Radio Frequency Strength
- Magnetic Field Triple Axis Sensor (X, Y, Z)
- 2.4" (240 x 320 pixels) color TFT display with adjustable screen brightness
- Store up to 20 RF historical records
- Data Hold and Auto Power Off with disable feature
- Five languages: English, Traditional/Simplified Chinese, Japanese, Spanish

SPECIFICATIONS	RANGE		
Magnetic Fields (50/60Hz)	20/200/2000mG	0.02/0.1/1mG	±(15%+100 digit)
	2/20/200µT	0.02/0.1/1µT	
Electric Fields (50/60Hz)	50V/m to 2000V/m		±(7% + 50dgt)
RF Strength (50MHz to 3.5GHz)	0.02uW/m ² to 554.6mW/m ²	0.02µW/m²	
	0.02uW/cm2 to 55.4uW/cm2	0.002µW/cm ²	
	36.1mV/m to14.46V/m	0.2mV/m	
	0.02mA/m to 38.35mA/m	0.2μA/m	
	-51dB to 16dBm	2dB	±2dB at 2.45GHz
Dimensions/ Weight	4.5 x 2.4 x 0.8" (115 x 60 x 21r	mm)/ 4.2oz (120g)	
ORDERING			
EMF450	Multi-Field EMF Meter		

480846 8GHz RF EMF Strength Meter



Includes 9V battery and carrying case: 1 year warranty

High frequency radiation measurement from 10MHz to 8GHz

- For electromagnetic field strength measurement including mobile phone base station antenna radiation, RF power measurement for transmitters, WAN detection/ installation, wireless communication applications and microwave leakage
- Non-directional (isotropic) measurement with 3-channel (triaxial) measurement probe
- Max Hold and Average functions; Audible alarm with user selectable threshold

SPECIFICATIONS	RANGE
Frequency range	10MHz to 8GHz
Directional Characteristic	Isotropic, 3-dimensional
Measurement Ranges	20mV/m to 108.0 V/m; 53μA/m to 286.4mA/m; 1μW/m² to 30.93 W/m²; 0μW/cm² to 3.093 mW/cm²
Memory	Manual save/recall of 99 sets
Dimensions/Weight	2.6x2.4x9.7" (67x60x247xmm)/ 8.8oz (250g)
ORDERING	
480846	RF EMF Strength Meter (8.0GHz)

480836 3.5GHz RF EMF Strength Meter



 ϵ Includes 9V battery and carrying case;

1 year warranty

480836 3.5GHz RF EMF Strength Meter

Radiation measurement in the 50MHz to 3.5GHz frequency range

- For electromagnetic field strength measurement of mobile phones. cell phone and base stations, microwave leakage
- Non-directional (isotropic) measurement with 3-channel (triaxial) measurement probe
- User selectable alarm threshold; Max Hold and Average functions

SPECIFICATIONS	RANGE
Frequency range	50MHz to 3.5GHz
Directional Characteristic	Isotropic, 3-dimensional
Measurement Ranges	20mV/m to 108 V/m; 53 μ A/m to 286mA/m; 1 μ W/m² to 30.93mW/m²·0 μ W/ cm² to 3.093mW/cm²
Memory	Manual save/recall of 99 sets
Dimensions/Weight	2.4x2.4x9.3" (60x60x237mm)/ 7.1oz (200g)
ORDERING	
480836	RF EMF Strength Meter (3.5GHz)

480823 EMF/ELF Meter



Includes 9V battery; 1 year warranty

Measure electromagnetic field radiation levels from fans, electrical appliances, wiring, and power lines

- ELF frequency bandwidth of 30 to 300Hz Single axis - sampling 2.5 times per second
- Large 1/2" LCD (1999 count) display of Electromagnetic Field (EMF) level in milliGauss or microTesla
- Accurate measurements to 4% over a measuring range of 0.1 to 199.9mGauss (0.01 to 19.99µTesla)
- Dims: 5.2x2.8x1" (132x71x25mm); Weight: 6oz (170g)

ORDERING		
480823	Electromagnetic Field Meter	
409992	Soft pouch carrying case	

Measure AC and DC Magnetic Field with Uniaxial Hall Effect sensor with ATC

MF100/SDL900 AC/DC Magnetic Field Meters

• N pole/S pole indicator

- Zero button for DC measurement
- Data Hold, Min/Max, and Auto Power Off with disable

SDL900 Additional Features

• Memory stores 99 readings manually and datalogging feature records readings with date and time stamp on an SD card (included) in Excel® format

SPECIFICATIONS	RANGE		
DC milli Tesla	300.00mT, 3000.0mT	0.01mT, 0.1mT	±(5% + 10d)
DC Gauss	3000.0G, 30,000G	0.1G, 1G	$\pm (5\% + 10d)$
AC milli Tesla	150.00mT, 1500.0mT	0.01mT, 0.1mT	±(5% + 20d)
AC Gauss	1500.0G, 15,000G	0.1G, 1G	±(5% + 20d)
AC Bandwidth	50Hz/60Hz		
Sampling Rate (SDL900)	1 to 3600 seconds (adjustable)		
Dimensions/ Weight	ML100: 7.8x2.7x1.2" (195x68x30) SDL900: 7.1x2.9x1.9" (182x73x48		

ORDERING		
MF100	AC/DC Magnetic Field Meter	
SDL900	AC/DC Magnetic Field Meter/Datalogger	

EMF300 Microwave Leakage Detector

Both meters include a uniaxial magnetic probe sensor with

cover and hard case; 1yr warranty. MF100 also includes

9V battery; SDL900 with SD memory card, Universal AC

Adaptor with plugs (US, EU, UK, AUS), and 6 AA batteries.



Designed to measure high frequency radiation levels emitted from household and commercial microwave ovens

- 0 to 1.999mW/cm² measurement range
- <2db accuracy (1mW/cm2 @ 2.45GHz ± 50MHz)
- Audible alarm if level is >1mW/cm²
- 2.45GHz calibration frequency
- EMF values from 30MHz to 3GHz can also be measured for reference only
- Peak Hold function captures highest value
- · Overrange indicator
- Dimensions: 6x2.7x1.4" (152x69x36.3mm); Weight: 7oz (202g)
- Complete with 9V battery; 1 year warranty

ORDERING		
EMF300	Microwave Leakage Detector	

 ϵ



Extech infrared thermometers provide non-contact, point-and-shoot temperature measurements ensuring safety and accuracy on the job.



IR201A 518°F (270°C), 6:1, Pocket Laser IR Thermometer

Handy troubleshooting thermometer with laser pointer

- Measures non-contact surface temperature up to 518°F (270°C)
- Adjustable high alarm
- Economical small pocket size design for convenience
- Built-in laser pointer identifies target area
- Data Hold and Min/Max Hold
- Lock mode for continuous scanning
- Auto power off
- Adjustable emissivity for better accuracy on different surfaces
- Complete with two AAA
 batteries and pouch case



IR400 630°F (332°C), 8:1, Compact Laser IR Thermometer

Compact thermometer with MIN/MAX readings

- MAX/MIN features display highest and lowest values
- Built-in laser pointer identifies target area
- Backlighting
- Automatic Data Hold when trigger released
- Fixed 0.95 emissivity covers 90% of surface applications
- Auto power off
- Complete with 9V battery and pouch case



IR260 752°F (400°C), 12:1, Compact Laser IR Thermometer

Compact thermometer with programmabel high/ low alarm set limits

- Programmable high/low alarm alerts user visually and audibly when temperature exceeds set limits (audible alarm can be muted)
- Adjustable emissivity for better accuracy on variety of surfaces
- Bright white backlighting
- MAX/MIN features display highest and lowest values
- Built-in laser pointer identifies target area
- Automatic Data Hold when trigger released
- Overrange and low battery indicators
- Auto power off
- Complete with two AA batteries



42510A 1200°F (650°C), 12:1, Compact Laser IR Thermometer

Compact thermometer with high accuracy

- Adjustable high/low visual and audible alarm
- Adjustable emissivity for better accuracy on different surfaces
- MAX/MIN features display highest and lowest values
 Built-in laser pointer
- identifies target area
- Backlighting
- Over-range indicator
- Automatic Data Hold when trigger released
- Auto power off
- Complete with 9V battery and pouch case



IR267 1112°F (600°C), 12:1, IR Thermometer with Type K Input

Displays Air Temperature and IR or Type K

- Wide temperature range for non-contact InfraRed and Type K thermocouple measurements
- Measures Ambient (Air) Temperature
- Adjustable emissivity for better accuracy on different surfaces
- Adjustable high/low visual and audible alarm
- MAX/MIN/AVG and DIF for differential temperature reading
- LCD display with backlight
- Built-in laser pointer
- Data Hold, Auto power off, and Low battery indication
- Includes 9V battery and general purpose type
 K bead wire probe

For a variety of Type K Thermocouple temperature probes see pages 41 and 70

SPECIFICATIONS	IR201A	IR400 N	IR260	42510A N	IR267	SPECIFICATIONS
IR Temperature (Non-contact)	-4 to 518°F (-20 to 270°C)	-4 to 630°F (-20 to 332°C)	-4 to 752°F (-20 to 400°C)	-58 to 1200°F (-50 to 650°C)	IR: -58 to 1112°F (-50 to 600°C); Type K: -58 to 2498°F (-50 to 1370°C)	IR Temperature (Non-contact)
Basic Accuracy	±(2.5%rdg±3.6°F/2°C)	±2% of reading +4°F/2°C	±2% of reading or ±3.6°F/2°C	±(1% of reading + 2°F/1°C)	IR: ±2%rdg or 4°F(2°C); Type K: ±1.5%rdg + 2°F/1°C	Basic Accuracy
Max. Resolution	0.1°F/°C	0.1°F/°C	0.1°F/°C	0.1°F/°C	0.1°F/°C	Max. Resolution
Emissivity	0.10 to 1.0 adjustable	0.95 fixed	0.1 to 1.00 Adjustable	0.1 to 1.00 Adjustable	0.1 to 1.00 Adjustable	Emissivity
Field of view (Distance to Target)	6:1	8:1	12:1	12:1	12:1	Field of view (Distance to Target)
CE approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions	3.7x2x1" (94x51x25mm)	3.2x1.6x6.3" (82x42x160mm)	3.8x1.8x6.8" (97x46x172mm)	3.2x1.6x6.3" (82x42x160mm)	4.7 x1.7x6.0" (120x42x153mm)	Dimensions
Weight	2.7oz (76g)	6.3oz (180g)	8oz (226g)	6.4oz (180g)	4.9oz (138g)	Weight
Warranty	1 year	1 year	3 years	3 years	3 years	Warranty



Fast responding, wide temperature ranges

Extech's Dual-laser IR temp gun accurately detects temperatures at far distances, and the 100-millisecond response time enables faster hot spot scanning.



42509 Dual Laser, 950°F (510°C), 12:1, IR Thermometer with Color Alert

Fast responding, programmable alarm with red or blue display and audible alarm

- Great for processes that require temperature control and monitoring
- Fast, accurate measurements at 12" where the two lasers converge with 12:1 field of view
- Blue backlit dual LCD display changes to Red when reading exceeds High or Low set points
- Fast 150 millisecond instantaneous response for capturing spikes in temperature
- Max Hold
- Lock function for continuous readings
- Adjustable emissivity
- Adjustable High/Low set points with audible alarm
- Double molded housing
- Complete with case and 9V battery



42512 Dual Laser, 1832°F (1000°C), 30:1, IR Thermometer

Fast response and accurate measurements

- Dual laser simplifies distance-to-target ratio no more calculations!
- Accurate measurements at 30" distance
- Fast 150 millisecond instantaneous response for capturing spikes in temperature
- Max mode captures and holds rapidly changing temperatures
- Lock function for continuous readings
- White backlit dual LCD display
- Adjustable emissivity increases measurement accuracy for different surfaces
- Double molded housing
- Adjustable High/Low set points with audible alarm alerts user when temperature exceeds the programmed set points
- Complete with carrying case and 9V battery



42540 1400°F (760°C), 16:1, with Alarm, IR Thermometer

16:1 distance to target ratio, rugged thermometer

- High Temperature range from -58° to 1400°F (-50 to 760°C)
- 16 to 1 distance to target ratio
- Adjustable high/low alarm alerts user visually and audibly when temperature exceeds programmed limits
- Adjustable emissivity for better accuracy on different surfaces
- MIN/MAX/AVG/DIF features display highest, lowest, average, and MAX minus MIN values
- Large backlit display
- Built-in laser pointer
- Automatic Data Hold
- Auto power off
- Complete with 9V battery and hard carrying case



42545 1832°F (1000°C), 50:1, with Alarm, IR Thermometer

50:1 distance to target ratio

- Highest 50 to 1 distance to target ratio measures smaller surface areas at greater distances
- Widest Temperature range from -58 to 1832°F (-50 to 1000°C)
- Adjustable high/low alarm alerts user visually and audibly when temperature exceeds programmed limits
- Adjustable emissivity for better accuracy on different surfaces
- MIN/MAX/AVG/DIF features display highest, lowest, average, and MAX minus MIN values
- Large backlit display
- Built-in laser pointer
- Automatic Data Hold
- Auto power off
- Complete with 9V battery and hard carrying case



42570 3992°F (2200°C), 50:1, Dual Laser, IR Thermometer

Fast response (100mS) with highest accuracy plus Type K input and USB interface

- High 50:1 distance to target ratio measures smaller surface areas at greater distances
- Dual Laser Targeting indicates ideal measuring distance when two laser points converge to 1" target spot
- Fast 0.10 second response time
- Tripod mounting feature and Lock function for continuous measurements
- Stores up to 100 readings
- White backlit LCD with bargraph
- MAX/MIN/AVG/DIF functions
- Adjustable emissivity
- Adjustable High/Low set points with audible alarm
- Complete with general purpose Type K bead wire probe, USB cable and PC software, tripod, 9V battery and case



SPECIFICATIONS	42509 N	42512 N	42540 N	42545 N	42570 N	SPECIFICATIONS
Range	-4 to 950°F (-20 to 510°C)	-58 to 1832°F (-50 to 1000°C)	-58 to 1400°F (-50 to 760°C)	-58 to 1832°F (-50 to 1000°C)	IR: -58 to 3992°F (-50 to 2200°C) Type K: -58 to 2498°F (-50 to 1370°C)	Range
Basic Accuracy	±(1% of rdg + 2°F/1°C)	±(1% of rdg + 2°F/1°C)	±2%rdg or 4°F (2°C) whichever is greater<932°F (500°C); ±(2.5%rdg + 5°)> 932°F (500°C)	2%rdg + 4°F/2°C<932°F (500°C); 3% + 9°F/4°C>932°F (500°C)	±(1%rdg + 2°F/1°C)	Basic Accuracy
Repeatability	±0.5% or 1.8°F/1°C	±0.5% or 1.8°F/1°C	±0.5% or ±1.8°F/1°C	±0.5% or ±1.8°F/1°C	±0.5% or ±1.8°F/1°C	Repeatability
Max. Resolution	0.1°F/C	0.1°F/°C	0.1°F/°C	0.1°F/°C	0.1°F/°C	Max. Resolution
Emissivity	0.10 to 1.00 Adjustable	0.10 to 1.00 Adjustable	0.1 to 1.00 Adjustable	0.1 to 1.00 Adjustable	0.1 to 1.00 Adjustable	Emissivity
Field of View (Distance to Target)	12:1	30:1	16:1	50:1	50:1	Field of View (Distance to Target)
CE approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions/ Weight	5.7x4x1.6" (146x104x43mm)/ 5.7oz (163g)	5.7x4x1.6" (146x104x43mm)/ 5.7oz (163g)	3.9x2.2x9" (100x56x230mm)/ 10.2oz (290g)	3.9x2.2x9" (100x56x230mm)/ 10.2oz (290g)	8x6.1x2" (204x155x52mm)/ 11.3oz (320g)	Dimensions/ Weight
Warranty	3 years	3 years	3 years	3 years	3 years	Warranty









2.2" Color TFT LCD and Built-in Camera with a microSD card for capturing images (JPEG) and video for viewing on your PC

- Dual laser indicates ideal measuring distance where the two laser points converge to a 1" target spot
- Fast 150 millisecond response time
- Color LED bargraph for viewing trends
- Type K Thermocouple input
- Air Temperature and Relative Humidity measurement
- Adjustable emissivity increases measurement accuracy for different surfaces
- Adjustable High/Low set points with audible alarm alerts user when temperature exceeds the programmed set points
- MAX/MIN/AVG/DIF functions
- Trigger lock function for continuous readings
- USB interface
- Auto power off

SPECIFICATIONS	
Laser Convergence Distance	50" (127cm)
IR Temperature Range	-58 to 3992°F (-50 to 2200°C)
Repeatability	±0.5% or 1.8°F/1°C
Basic Accuracy	\pm (1% of rdg + 2°F/1°C)
Max resolution	0.1°F/°C
Emissivity	0.10 to 1.00 Adjustable
Field of View (Distance to Target)	50:1
Temperature Range	Type K: -58 to 2498°F (-50 to 1370°C); Air: 32 to 122°F (0 to 50°C)
Relative Humidity	0 to 100%RH
Dimensions/ Weight	7.4x6.0x2.2" (189x152x57mm)/ 17.4oz (494g)

ORDERING

VIR50 N	Dual Laser Video IR Thermometer
BATT-37V	Rechargeable 3.7V battery

IRT600 Dual Laser IR Thermal Condensation Scanner



probability for mildew formation

Measures Temperature and Humidity then calculates Dew Point and warns when conditions for mold growth exist

- Great for processes that require surface temperature control and monitoring
- Green LED changes to Yellow and then to Red as the surface temperature reading gets closer to and then equals the calculated Dew Point reading
- Dual lasers indicate ideal measuring distance where the two lasers converge to a 1" target spot
- 12:1 Distance to Target ratio
- 150 millisecond IR Temperature response time
- Switchable backlight and laser
- Max hold
- Complete with case and 9V battery; 1 year warranty

SPECIFICATIONS	
IR Temperature Range	-22 to 662°F (-30 to 350°C)
Basic Accuracy	\pm (1% of rdg + 2.7°F/1.5°C)
Air Temperature	32 to 122°F (0 to 50°C)
Max resolution	0.1°F/°C
Distance to Target	12:1
Emissivity	0.95 fixed
Humidity	20 to 80%RH
RH accuracy	±3.5%RH
Dew Point	-22 to 212°F (-30 to 100°C)
Dimensions/ Weight	6.6x3.2x2.3" (168x82x58mm)/ 5.7oz (163g)
ORDERING	
IRT600 N Du	al Laser IR Thermal Condensation Scanner

IR300UV IR Thermometer with UV Leak Detector



4-in-1 Thermometer features a non-contact IR Thermometer, UV Leak Detector, bright Flashlight, and a unique coaxial Distance-to-Spot laser

- Non-contact IR Thermometer measures temperature up to 932°F (500°C)
- UV Leak Detector with 5 UV/Blue LEDs (460-470nm)
- Coaxial laser displays a circular representation of the target area
- Programmable High/Low Temperature set points with audible and visual alarm
- Adjustable emissivity for better accuracy on different surfaces
- MAX/MIN/AVG/DIF displays highest, lowest, average, and Max minus MIN values
- Bright flashlight with 5 white LEDs
- Automatic data hold when trigger is released
- Auto power off
- · Complete with three AA batteries

SPECIFICATIONS		
IR Temperature	-22 to 932°F (-30 to 500°C)	
Resolution	0.2°F, 0.1°C	
Accuracy	±1.5% rdg or ±3°F/±1.5°C whichever is greater	
Distance to Target ratio	12:1	
Emissivity	0.10 to 1.00 (adjustable)	
Repeatability	±0.8% rdg or ±2°F/±1°C whichever is greater	
Dimensions/ Weight	4.1 x 2.1 x 7.3" (104 x 54 x 185mm)/ 10.6oz (300g)	

ORDERING

R300UV IR Thermometer with Leak Detector



Unique Distance-to-Spot coaxial guidance laser



Distance-to-Spot coaxial guidance laser and UV detection of refrigerant leak







More Capabilities for Better Diagnostics

Our thermocouple thermometers deliver accurate temperature readings and easy, one-button Delta-T calculations and feature high/low alarms, dual and triple displays, data functions, and datalogging.

ACCESSORIES		
TP200	Type K Clamp Probe (-4 to 200°F)	
TP870	Type K Bead wire Probe (-40 to 482°F)	
TP882	Type K Penetration Probe (-50 to 1000°F)	
871515	Type K, 4" (100mm) General Probe (-32 to 1292°F/-200 to 700°C)	
881605	Type K, 8" (203mm) General Probe (-328 to 1292°F/-200 to 700°C)	
881603	Type K, 6" (150mm) Immersion Probe (-58 to 1292°F/-50 to 700°C)	
881602	Type K, 6" (100mm) Surface Probe (-58 to 1472°F/-50 to 800°C)	
872502	Type J Bead Wire Probe (-328 to 392°F)	
801515	Type J, 4" (100mm) General Probe (-328 to 842°F)	



TM100 Type J/K Single Input Thermometer

Side-mounted controls allow for convenient one-handed operation

- Large backlit LCD display
- Wide temperature range with 0.1°/1° resolution
- Readout in °F, °C, or K (Kelvin)
- Data Hold function freezes reading on display
- Max/Min/Avg readings with relative time stamp
- Offset key used for zero function to make relative measurements
- Auto Power off with disable feature
- Complete with general purpose Type K bead wire temperature probe and 9V battery.
 (Optional temperature probes available on left accessories chart and page 41)



TM300 Type J/K Dual Input Thermometer

Dual inputs allow for calculation of differential temperature readings

- Dual inputs and displays T1, T2, T1-T2 differential, plus Min, Max, Avg
- Side-mounted controls allow for convenient onehanded operation
- · Large backlit LCD display
- Wide temperature range with 0.1°/1° resolution
- Readout in °F, °C, or K (Kelvin)
- Data Hold function freezes reading on display
- Max/Min/Avg readings with relative time stamp
- Offset key used for zero function to make relative measurements
- Auto Power off with disable feature
- Complete with two Type K bead wire temperature probes, three AAA batteries, and case.
 (Optional temperature probes available on left accessories chart and page 41)



EA11A EasyView® Type K Single Input Thermometer

Large dual LCD display with 0.3% accuracy and memory

- Simultaneously displays current temperature and Max/Min/Avg or stored memory location
- Selectable units of °F and °C
- Manually store/recall up to 150 readings
- Data Hold and Auto power off
- Records MAX /MIN/AVG readings for later recall
- Complete with built-in stand, protective holster, general purpose Type K bead wire probe, and 6 AAA batteries.
 (Optional temperature probes available on pages 41 and 70)



EA10 EasyView® Type K Dual input Thermometer with Dual readings

Big backlit display with relative and elapsed time indication

- Displays [T1 and T2] or [T1-T2 and T1] or [T1-T2 and T2]
- Selectable units of °C/°F or Kelvin
- Timer function displays elapsed time plus the time when MAX/ MIN readings are taken
- OFFSET key used for zero function to make relative measurements
- Data hold and Auto power off
- Complete with built-in stand, protective holster, two general purpose Type K bead wire temperature probes, and 6 AAA batteries. (Optional temperature probes available on pages 41 and 70)



EA15 EasyView® 7 Thermocouple Datalogger

Internal memory stores up to 8800 data sets

- Seven Thermocouple type selections:
 K, J, T, E, R, S, N
- Large backlit display
- Stores Time. T1 and T2
- Manual push-button datalogging or automatic with programmable sample rate of 3 to 355 seconds per reading
- Manual record/recall of data
- Data Hold and Auto power off
- MAX/MIN/AVG or MAX/MIN with elapsed time
- Complete with two general purpose Type K bead wire temperature probes,
 Windows® compatible software,
 USB cable, protective holster,
 case, and 6 AAA batteries.
 (Optional temperature probes available on pages 41 and 70)



See desktop or Pocket style Temperature Indicators on p. 74-75

PECIFICATIONS	TM100 🔼	
ngle or Dual Input	Single	
pe K °F (°C)	-328 to 2501°F (-200 to 1372°C)	
pe J °F (°C)	-346 to 2012°F (-210 to 1100°C)	
asic Accuracy	±0.15% rdg	
esolution	0.1°/1°	
atalogging	_	
E approved	Yes	
mensions	8.7x2.5x1.1" (220x 63 x 28mm)	
eight	7oz (200g)	

	TM300 N
	Dual
72°C)	-328 to 2501°F (-200 to 1372°C)
00°C)	-346 to 2012°F (-210 to 1100°C)
	±0.15% rdg
	0.1°/1°
	_
	Yes
Bmm)	8.7x2.5x1.1" (220x 63 x 28mm)
	7oz (200g)
	1 year

EA11A N
Single
-58 to 1999°F (-50 to 1300°C)
_
±0.3% rdg
0.1°/1°
_
Yes
5.9x2.8x1.3" (150x72x35mm)
8.3oz (235g)
1 year

EA10 🕦
Dual
-200 to 1999°F (-200 to 1360°C)
_
±0.3% rdg
0.1°/1°
_
Yes
6x2.8x1.5" (152x72x37mm)
8.3oz (235g)

EA15 N	SPECIFICATIONS
Dual	Single or Dual Input
-200 to 1994°F (-150 to 1090°C)	Type K °F (°C)
-200 to 1999.9°F (-150 to 1370°C)	Type J °F (°C)
±0.05% rdg	Basic Accuracy
0.1°	Resolution
8800 readings	Datalogging
Yes	CE approved
5.91x2.83x1.38" (150x72x35mm)	Dimensions
8.3oz (235g)	Weight
1 1/00*	Marranti





Track Temperature Trouble with Extech

4-Channel Datalogger Thermometer records measurements on an SD Card and easily transfers readings to an Excel® spreadsheet for analysis

ACCESSO	RIES (See p. 41 and 70 for details and additional temperature probes)
TP200	Type K Clamp Probe (-4 to 200°F)
TP870	Type K Bead wire Probe (-40 to 482°F)
TP882	Type K Penetration Probe (-50 to 1000°F)
872502	Type J Bead Wire Probe (-328 to 392°F)
801515	Type J, 4" (100mm) General Purpose Temperature Probe (-328 to 842°F)
850185	RTD Temperature Probe for SDL200 (86 to 482°F)
409997	Soft Vinyl Carrying Case (for 421502)
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)



421502 Type J/K, Dual Input Thermometer with Alarms

Dual J or K input with dual display, relative and programmable High/ Low audible alarms

- · Widest range with highest 0.05% accuracy
- Rugged design for field use
- Large dual LCD displays T1, T2 or T1-T2, plus Elapsed Time
- Differential temperature between Type J, Type K, or both Type J and K
- MIN/MAX/AVG readings
- Data Hold and Relative functions
- Programmable Hi/Lo audible alarms
- Complete with two general purpose Type K bead wire temperature probes, protective holster with stand, and 9V battery



SD200 3-Channel **Temperature Datalogger**

Records data on an SD card in Excel® format for easy transfer to a PC for analysis

- Triple LCD simultaneously displays 3 Type-K Temperature channels
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- Selectable data sampling rate: 5, 10, 30, 60, 120, 300, 600 seconds or Auto
- · Complete with (6) AAA batteries, SD card. Univeral AC Adaptor. (3) Type-K bead temperature probes, and mounting bracket



SDL200 4-Channel **Datalogging Thermometer**

4-Channel datalogging with 6 Thermocouple types (J, K, E, T, R,S) and 2-Channel datalogging with $Pt100\Omega$ probes

- Displays [T1, T2, T3, T4] or [T1-T2]
- Datalogs using SD card (included)
- User programmable sampling rate from 1 to 3600 seconds
- Records readings with real date and time stamp
- Manual store/recall of up to 99 records
- Min/Max and Data Hold functions
- Offset adjustment used for zero function to make relative measurements
- Auto Power off with disable
- Includes four general purpose Type K bead wire temperature probes, SD card, hard case, and 6 AA batteries; Optional AC Adaptor UA100-240 and RTD probe (850185)



TM500 12-Channel **Datalogging Thermometer**

12-Channel datalogging with 6 Thermocouple types (J, K, E, T, R,S)

- Simultaneously displays CH1 to CH8 or CH9 to CH12
- Offset adjustment used for zero function or to make relative measurements
- Stores 99 readings manually and datalogs using SD card (included)
- · Records readings with date and time stamp
- User programmable sampling rate: 1 to 3600 seconds
- Min/Max and Data Hold functions
- · Auto power off with disable function
- · Built-in PC interface with optional software
- · Complete with 8 AA batteries, twelve general purpose Type K bead wire temperature probes. SD card, and hard carrying case



	SPEC
EXTECH LIBER	Num
And Name of Street, St	Туре
	Type
	Basi
	Max.
1	Data
See desktop or Pocket style	CE a
Temperature Indicators on p. 74-75	Dime

SPECIFICATIONS	421502 N
Number of Inputs	Dual
Type K °F (°C)	-328 to 2498
Type J °F (°C)	-328 to 1922
Basic Accuracy	±0.05% rdg
Max. Resolution	0.2°F/0.1°C
Datalogging	-
CE approved	Yes
Dimensions/Weight	7.63x3.6x2.
Warranty	1 year

PECIFICATIONS	421502 🕦
umber of Inputs	Dual
ype K °F (°C)	-328 to 2498°F (-200 to 1370°C)
ype J °F (°C)	-328 to 1922°F (-200 to 1050°C)
asic Accuracy	±0.05% rdg
lax. Resolution	0.2°F/0.1°C
atalogging	-
E approved	Yes
imensions/Weight	7.63x3.6x2.1" (192x91x53mm)/13oz (365g)
/arranty	1 year

SD200 ₪
Triple
-58 to 2372°F (-100 to 1300°C)
_
±(0.5% + 1°F/ 0.5°C)
0.1°
4GB SD memory card included for datalogging
Yes
5.2x 3.1x1.3" (132x80x32mm)/10oz (285g)
1 year

SDL200 №
Quad
-148 to 2372°F (-100 to 1300°C)
-148 to 2102°F (-100 to 1200°C)
±0.4% rdg
0.1°/1°
4GB SD memory card included for datalogging
Yes
7.2x2.9x1.9" (182X73X48mm)/ 17.6oz (500g)
3 years

TM500 🕦
Twelve
-148 to 2372°F (-100 to 1300°C)
-148 to 2102°F (-100 to 1150°C)
±0.4% rdg (+1.8°F/+1°C) Types J,K,E,T ±0.5% rdg (+2°F/+1°C) Types R,S
0.1°/1°
4GB SD memory card included for datalogging
Yes
8.9x4.9x2.5" (225x125x64mm)/ 2.1lbs (944g)
1 year



TM26 Waterproof Food Thermometer — NSF Certified







NSF certified for measuring in liquids, pastes, and semi-solid food. Ideal for use in food industry, agriculture, and laboratories. Built-in magnet for mounting on metal surfaces.

NSF certified Food Thermometer with long stainless steel penetration probe for measuring in liquids, pastes, and semi-solid food

- NSF certified for measuring food
- 4.1" (105mm) Stainless steel penetration probe with 5ft (1.5m) cable
- Measures Temperature from -40°F to 392°F (-40°C to 200°C)
- Audible and visual alarm alerts when temperature level is higher or lower than the user programmed High/Low set points
- LCD displays Temperature reading, alarm indicator and high or low alarm icons
- ±1.8°F/1°C basic accuracy with 0.1° max resolution
- Displays Min/Max reading with reset function
- Data Hold freezes current reading on display
- Low battery indication
- Unit has magnetic back and can be mounted on a metal surface, used on a desktop with included foot stand, or wall mounted
- Waterproof housing and sensor designed to meet IP65
- Dimensions: 3.4Lx2.2Hx1.2"D (86Lx57Hx30D mm) Weight: 3.2oz (90g)
- Complete with magentic back, foot stand, temperature sensor, and a CR2032 3V button battery; 1 year warranty

Waterproof Food Thermometer

TM55 Waterproof Pocket Fold-Up Food Thermometer — NSF Certified





Adjustable folding probe (0° to 180°) angle

Dishwasher safe construction (IP65) with folding stainless steel probe is NSF certified for measuring liquids, pastes, and semi-solid food

- Measures from -40 to 482°F (-40 to 250°C) with 2.4" (61mm) stainless steel probe
- Fast response time at < 5 seconds in moving liquid
- Large LCD display with 0.1° resolution
- Basic accuracy: ±1°F/0.5°C
- Auto power off (with disable) after 1 hour or when probe is placed in stored position
- Probe can be positioned from 0° (storage) to 180° angle
- Ultrasonically welded housing (waterproof IP65 rated) with anti-microbial additive
- Built-in magnetized strip attaches to refrigerator
- Dishwasher safe (top rack)
- Dimensions: 4.6x1.5x0.8" (116 x 38 x 20mm); Weight:1.5oz (41.2g)
- Complete with CR2032 battery; 1year warranty

ORDERING

Waterproof Pocket Fold-Up Food Thermometer



2.4" (61mm) folding stainless steel probe (NSF certified) for measuring in liquids, pastes, and semi-solid food. Ideal for use in food industry. agriculture, and laboratories

401014 Indoor/Outdoor **Thermometer**



Built-in memory stores Minimum and Maximum Temperature readings

- Large LCD displays 1" (25mm) digits for indoor/outdoor temperature
- Indoor Range: 14 to 140°F (-10 to 60°C) Outdoor Range: -58 to 158°F (-50 to 70°C) Basic accuracy: ±1.8°F/1°C Resolution: 0.1°F/°C
- Dimensions: 4.4x4x0.9" (112x102x22mm); Weight: 6.5oz (186g)
- 1 year warranty
- Complete with weatherproof temperature sensor with 9.6ft (3m) thin cable, stand, AAA battery, and wall mounting bracket

ORDERING

401014 Big Digit Indoor/Outdoor

39240 Waterproof **Thermometer**



Pocket-size with MAX/MIN recording

- 2.75" (70mm) Stainless steel stem
- Data Hold and Auto power off
- Range: -40 to 392°F (-40 to 200°C) Basic accuracy: ±2°F/1°C Resolution: 0.1°/1°
- Dimensions: 5.9x0.8x0.7" (150x20x18mm); Weight: 0.7oz (20g)
- 1 year warranty
- Complete with one LR44 button battery and protective cover

ORDERING

Waterproof Thermometer

TM20/TM25 Waterproof **Temperature Indicators**



Coice of model with stainless steel short probe or long penetration probe

- TM20: 0.78" (20mm) probe, 9.6ft (2.9m) cable; -40 to 158°F (-40 to 70°C)
- TM25: 4.1" (105mm) penetration probe, 5ft (1.5m) cable; -40 to 392°F (-40 to 200°C)
- Audible/visual alarm with High/Low set points
- ±1.8°F/1°C basic accuracy; 0.1° resolution
- Min/Max and Data Hold
- Magnetic back; Waterproof (IP65) housing
- Dimensions: 3.4x2.2x1.2" (86x57x30mm) Weight: 3.2oz (90g)
- Complete with magentic back, foot stand, probe, and one CR2032 3V button battery; 1 year warranty

ORDERING

Waterproof Temperature Indicator Waterproof Temperature Indicator with Penetration Probe

392050 Penetration Dial **Thermometer**



Sharp stainless steel probe measures temperature in air, liquids & semi-solids

- 5" (130mm) probe with 2" (54mm) dial
- Range: -58 to 302°F (-50 to 150°C) Basic accuracy: ±2°F/1°C Resolution: 0.1°/1°
- ON/OFF switch saves battery life
- · Auto Power off after 1 hour
- Weight: 1oz (29g)
- 1 year warranty
- Complete with 1.5V LR44 battery

ORDERING

Penetration Dial Thermometer

PD20 Thermo-Pedometer





3D Sensor design plus Temperature

- 3D motion sensor design allows for the meter to be fully functional regardless of its orientation
- · Uses an intelligent algorithm to filter out non-walking movements
- Functions:
- Number of Steps: 0 to 99,999 (adjustable step length)
- Temperature: 14 to 122°F (-10 to 50°C)
- Calorie consumption: 0 to 99,999kcal - Fat burned: 0 to 35.9oz (0 to 999.9g)
- Distance covered:
- 0 to 624.99mi (0 to 999.99 km)
- Time: 12/24 hour format
- Average speed: 0 to 6.25mph (0 to 10km/h)
- Coninuous Step mode records the number of steps users walked continuously through the day (records up to 7 days)
- Total Step mode displays the total accumulated steps user walked after 7-day storage
- · After midnight, readings are automatically stored
- Auto power saving mode when meter detects no movement for 10 minutes (will then only display time)
- Includes case with built-in clip to wear on your clothes and designed with lanyard insert hole (lanyard not included) to wear around your neck
- Complete with CR2032 battery and nylon case with window opening for display viewing and belt-clip; 1year warranty

ORDERING

PD20 Thermo-Pedometer





THD5 USB Single Use Temperature Datalogger



Portable, one-time use USB Temperature Datalogger (USB 2.0 connector)

- Convenient credit card-sized housing with USB 2.0 connector and NTC thermistor for one-time use in datalogging accurate temperature measurements
- Waterproof (IP65) when in sealed plastic bag
- User programmable settings: language, sample rate, start delay time, alarm delay time, high/low alarm range, and security feature
- Status Indication via Red and Green LEDs
- Start button begins datalogging until memory is full or when Stop button is pressed
- Bookmark 8 locations in a data recording log with a press of the Mark button
- Automatically generates a PDF report with data and trending graph when plugged into a PC after datalogging is completed (Adobe® Reader® software is required)
- Complete with 10 datalogging units; each with a CR2032 button battery (approx. 1 year life) and plastic bag; 1year warranty
 NOTE: Each datalogger is good for one-time use

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Temperature	-22 to 158°F (-30 to 70°C)	0.1°	±1.8°F (1°C)
Datalogging interval	30s, 5min, 10min, 30min, 60min, 90min, 120min		
Start/Alarm Delay Time	0, 5min, 30min, 45min, 60min, 90min, 120min		
Alarm Mode	Single Event, Cumulative, Disable		
Languages	English, German, French, Italian, and Spanish		
Memory Storage	8,192 readings		
Dimensions/Weight	3.2 x 1.7 x 0.1 (80 x 43 x 2.5mm)/ 0.4oz (10g)		

ORDERING

THD5 USB Temperature Datalogger (10 units/pack)



Includes 10 dataloggers

Perfect for monitoring temperature readings for food, pharmaceuticals, and other cold chain goods during shipment







A. Plug into a PC to adjust the settings (requires Adobe® Reader® software) B. Put the Datalogger back inside plastic bag and seal the opening, then place in an area where temperature is to be monitored and press START for the unit to start recording C. When datalogging duration is completed, plug back into a PC where it will automatically generate a PDF report.

TH10 Temperature USB Datalogger





USB plugs into a PC for data analysis with software



42299 — Replacement long lasting Lithium batteries

Datalogs up to 32,000 Temperature readings and has USB interface for easy data downloading of up to

- Selectable data sampling rate: 2 seconds to 24 hours
- User-programmable alarm thresholds
- Measures from -40 to 158°F (-40 to 70°C);
 Accuracy: ±1.8°F/1°C
- 1yr battery life; Dimensions: 5.1x1.1x0.9" (130x30x25mm)/Wt: 1oz (20g)
- Complete with 3.6V Lithium battery, protective USB cap, mounting bracket, and Windows[®] compatible software for analysis; 1year warranty

ORDERING	
TH10	Temperature USB Datalogger
42299	3.6V Lithium Battery (pk of 2)

445702 Hygro-Thermometer Clock



 ϵ

 ϵ

Combines three displays for Time, Temperature, and Humidity

- Clock display 12/24 hour time
- MAX/MIN with "reset" function
- Simultaneous display of Time, Temperature (14 to 140°F/-10 to 60°C) and Humidity (10 to 85% RH)
- Max resolution: 0.1°, 1%
- Basic Accuracy: ±1.8°F/1°C and ±6%RH
- Temperature is °C/°F switchable
- Programmable clock alarm
- Dimensions: 4.3x2.8x0.8" (109x71x20mm); Weight: 4oz (113g)
- 1 year warranty
- Complete with stand, wall mounting bracket, and one AAA battery

ORDERING		
145702	Hygro-Thermometer Clock	

445706 Wall Mount Radio Controlled Clock + Hygro-Thermometer



Large digital calendar clock is perfect for desk top or wall mount orientation

- Simultaneous display of Time, Date, Temperature (23 to 113°F/-5 to 45°C) and Humidity (20% to 90%RH)
- Max resolution: 1°, 1%
- Basic Accuracy: ±2°F/1°C and ±5%RH
- Calendar displays day, date and month
- Audible alarm clock with snooze function (recommended use only for desk top mount)
- MIN/MAX function
- Five languages to choose from: English, French, German, Spanish and Italian
- Dimensions: 11.8x8.7x1" (300x221x24mm); Weight: 21.4oz (608g)
- Complete with desktop stand and two AA batteries; 1 year warranty

ORDERING		
445706	Radio controlled Wall ClockHygro-Thermometer	

CTH10A Large Wall Mount Radio Controlled Clock/Calendar + Hygro-Thermometer



4.3" (109mm) digit time display receives Time Code from NIST Radio Station

- Receives Time Code from NIST Radio Station WWVB (North American region) to maintain accuracy within 1 second (North America region)
- Signal indicator displays signal strength in 3 levels to indicate successful synchronization
- LCD displays Time, Relative Humidity (20 to 99%RH), Temperature (32 to 122°F/0 to 50°C), Year, Month, Date, and Day
- Max resolution: 0.1°, 1%
- Basic Accuracy: ±2°F/1°C and ±6%RH
- Time can be displayed as 12 or 24 hour format
- Large 4.3" (109mm) digit clock display can be easily viewed from a distance
- Automatically adjusts for daylight savings time (DST)
- Programmable Alarm Clock with Snooze feature
- Built-in stand for desktop or wall-mount
- Dimensions: 16.8x11.5x1.3" (426x292x32mm);
 Weight: 21.4oz (608g)
- Complete with built-in stand and three C size batteries; 1 year warranty

ORDERING	
CTH10A	Radio Controlled Wall Clock + Hygro-Thermometer





445703/445715 Big Digit Hygro-Thermometers





445703

445715 with remote probe

Option of Tra

Optional 445715-NISTL includes certificate of Traceability to NIST at 75%. For Certificate of Traceability to NIST at 2 points (33% and 75%), order 445715-NIST (see p. 160 for ordering information)

1" Digits on large dual LCD display for easy viewing

- Large dual LCD simultaneously displays Temperature (14 to 140°F/-10 to 60°C) and Humidity (10 to 99% RH), plus MAX/MIN with reset function with Max resolution of 0.1°and 1%
- Model 445703 is designed with built-in Humidity and Temperature sensor with ±1.8°F/1°C and ±5%RH basic accuracy
- Model 445715 includes remote probe with 18" (457mm) cable and probe with ±1.8°F/1°C and ±4%RH basic accuray; probe clips on side of meter; certificate of calibration traceable to NIST available; Rear calibration adjustment pot
- Dims: 4.3x3.9x0.78" (109x99x20mm); Wt: 6oz (169g); 1 year warranty
- Complete with built-in stand, wall mount bracket, and AAA battery; Model 445715 also includes remote sensor. Optional calibration salt bottles (RH300-CAL)

ORDERING	
445703	Big Digit Hygro-Thermometer
445715 N	Big Digit Remote Probe Hygro-Thermometer
RH300-CAL	33% & 75% RH Calibration Kit (for 445715)

445814/445815 Humidity Alerts





445814

445815 with remote probe

 ϵ

These Humidity Alerts have audible and visual alarm that warn when conditions for mold growth exist (bad for health) or when low humidity conditions for static electricity exist.

Programmable Alarm warns when Humidity level is too high or too low

- %RH audible and visual alarm alerts when humidity is higher or lower than HI/LO set points, plus Max/Min with reset function
- Simultaneous display of Temperature (14 to 140°F/-10 to 60°C) and Humidity (10 to 99% RH)
- Max resolution: 0.1°, 1%; Basic Accuracy: ±1.8°F/1°C and ±4%RH
- Displays Dew Point temperature
- Rear calibration adjustment pot for Humidity and Temperature
- Warns when conditions for mold growth exist (bad for health) or air too dry (static)
- Dims: 4.3x3.9x0.78" (109x99x20mm); Wt: 6oz (169g); 1 year warranty
- Complete with built-in stand, wall mount bracket, sensor and one AAA battery; optional calibration salt bottles (RH300-CAL)
- Model 445814 is designed with built-in Humidity and Temperature sensor
- Model 445815 includes remote probe with 18" (457mm) cable and probe clip on side of meter and offers certificate of calibration traceable to NIST)

ORDERING	
445814	Humidity Alert
445815 N	Humidity Alert II
RH300-CAL	33% & 75% RH Calibration Kit (for 445815)

445713/445713-TP Big Digit Indoor/Outdoor Hygro-Thermometers



Monitor Indoor/Outdoor Humidity and Temperature

- Model 445713-TP with wider Temperature ranges and longer cable length
- External Temperature Probe:
 445713: 14 to 140°F (-10 to 60°C); 445713-TP: -58 to 158°F (-50 to 70°C)
- Internal Temperature Sensor: 445713: 14 to 140°F (-10 to 60°C); 445713-TP: 32 to 122°F (0 to 50°C)
- Internal Relative Humidity Range: 445713: 10 to 99% RH; 445703-TP: 20% to 99% RH
- Basic accuracy of ±1.8°F (±1.0°C), ± 5% RH
- Max/Min with "reset" function
- Dimensions: 4.3x3.9x0.78" (109x99x20mm); Weight: 6oz (169g)
- Complete with built-in stand, wall mounting bracket, and a 1.5V AAA battery 445713 includes outdoor sensor with 35" (89cm) cable 445713-TP includes outdoor sensor with 9.75ft (3m) cable

ORDERING		
445713	Big Digit Indoor/Outdoor Hygro-Thermometer with Remote Probe	
445713-TP	Indoor/Outdoor Hygro-Thermometer with Wide Range Remote Probe	

RHT3 EzSmart[™] Hygro-Thermometer



Make your iOS[®] & Android™ Smart Devices* even smarter with this EzSmart Hygro-Thermometer and free app from iTunes[®] and Google Play™ store

- Measures Humidity and Temperature simultaneously
- Calculates Wet Bulb and Dew Point Temperature
- Continuous graph plots Humidity and Temperature changes over time
- 5 user-settable high/low alarms for both Temperature and Humidity
- 4 records each contains 100 data points with Humidity, Temperature, Wet Bulb, and Dew Point, plus Time, Date and GPS coordinates
- Post images directly to social media (Facebook® and Twitter™)
- Complete with built-in sensor and protective connector cap with strap; 1yr warranty
 iOS/Android device not included (see compatible device on www.extech.com/RHT3)

RANGE	RESOLUTION	BASIC ACCURACY
20% to 95%RH	0.1%RH	±5% RH
-4 to 140°F (-20 to 60°C)	0.1°	±1.8°F (±1°C)
-4 to 140°F (-20 to 60°C)	0.1°	
-40 to 140°F (-40 to 60°C)	0.1°	
0.7 x 0.35 x 2.1" (18 x 9 x 54mm) / 0.25oz (7g)		
	20% to 95%RH -4 to 140°F (-20 to 60°C) -4 to 140°F (-20 to 60°C) -40 to 140°F (-40 to 60°C)	20% to 95%RH 0.1%RH -4 to 140°F (-20 to 60°C) 0.1° -4 to 140°F (-20 to 60°C) 0.1° -40 to 140°F (-40 to 60°C) 0.1°

ORDERING		
RHT3	EzSmart™ Hygro-Thermometer	

RH30/RH35 Humidity Alerts



Monitor Temperature and Humidity to gauge proper heat and moisture levels in an area and it also records high and low extremes during the day

- Measure Temperature/Dew Point & Humidity; basic accuracy of ±1.8°F/1°C, ±5%RH
- MAX/MIN with reset function
- Complete with stand and batteries; 1 year warranty

Model RH30 Additional Features

- Measures Temperature/DP (4 to 122°F/-10 to 50°C) and Humidity (10 to 99%RH)
- level exceeds user preset (50, 60, or 65%RH)
- Dimensions/Weight: 3.7x3.7x0.9" (94x94x23mm)/ 4.8oz (136g)

Model RH35 Additional Features

- Measures Temperature/DP (14 to 140°F/-10 to 60°C) and Humidity (10 to 99%RH)
- Innovative graphical display shows the measured humidity values of the last 24 hours like a radar screen
- Beeper sounds and bright LED flashes when humidity level exceeds 65%RH
- Facial icons indicate comfort zone (between 40 to 60%RH) and uncomfortable zone (too dry < 40%RH or too humid > 60%RH)
- Dimensions/Weight: 3.9x4.3x 2" (98x109x55mm)/ 3.1oz (87g)

ORDERING	
RH30	Humidity Alert
RH35	Desktop Radar Hygro-Thermometer Alert

RHM15 Mini Hygro-Thermometer Monitor



Mini-sized housing is ideal for monitoring Humidity/ Temperature levels in musical instrument cases, humidors, computer server rooms, labs, office areas, and wine cellers Monitor Temperature and Humidity to gauge proper heat and moisture levels in an area and it also records high and low extremes during the day

- Simultaneous display of Temperature (14 to 140°F) and Humidity (10 to 99% RH)
- Basic Accuracy: ±1.8°F/1°C and ±5%RH
- MAX/MIN with reset function
- Dims: 2x1.5x0.63" (51x38x16mm); Wt: 0.8oz (24g)
- Complete with stand and LR44 battery; 1 year warranty

ORDERING	
RHM15	Mini Hygro-Thermometer Monitor (%RH and °F only)



RHT50 Humidity/Temperature/Pressure Datalogger







Monitors Humidity, Temperature and Air Pressure levels in clean rooms, warehouses, storage rooms, freezers, shipping vans, and water damage restoration, USB connector easily plugs into a computer for data analysis

Records up to 10,000 readings of Humidity, Temperature and Pressure


- USB interface for easy set-up and data download
- Selectable data sampling rate from 1 minute to 18 hours
- User-programmable Min/Max alarm thresholds
- Manual and Programmable start modes
- Status Indication via Red/Yellow LED and Green LED
- Includes 3.6V Lithium battery, mounting bracket, and Windows® compatible analysis software; 1 year warranty


SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY
Temperature	-40 to 158°F (-40 to 70°C)	0.1°F/°C	±1.8°F/ ±1.0°C
Humidity	0 to 100%RH	0.1%RH	±3.5%RH
Air Pressure	13.7 to 15.2psi, 950 to 1050hPa, 95 to 105kPa, 0.9 to 1.0bar	0.1	±0.25% FS
Datalogging interval	1 second to 18 hours		
Memory	10,000 points		
Dimensions/Weight	5.1x1.1x0.98" (130x30x25mm)/ 1oz (20g)		

ORDERING	
RHT50	Humidity/Temperature/Pressure Datalogger
42299	3.6V Lithium Battery (pk of 2)

RHT10/TH10 Humidity and Temperature USB Dataloggers









42299 - Replacement long lasting Lithium

Two models to choose from, with USB interface for easy data download

- Model RHT10 datalogs 16,000 Temperature/ 16,000 RH readings; Dew point indication via Windows® compatible software; Optional RHT10-SW software for RHT10 to calculate Grains Per Pound (grams per kilogram) to 1120GPP (160g/kg) Model TH10 datalogs 32,000 Temperature readings
- Selectable data sampling rate: 2 seconds to 24 hours
- User-programmable alarm thresholds for RH and Temperature
- Humidity: 0 to 100%RH (Model RHT10 only), Accuracy: ±3%RH; Temperature: -40 to 158°F (-40 to 70°C), Accuracy: ±1.8°F/1°C
- 1yr battery life; Dimensions: 5.1x1.1x0.9" (130x30x25mm)/Wt: 1oz (20g)
- Includes 3.6V Lithium battery, protective USB cap, mounting bracket, and Windows® compatible software for analysis; 1 year warranty

ORDERING	
RHT10	Humidity and Temperature USB Datalogger
RHT10-SW	GPP (g/kg) Software for RHT10
TH10	Temperature USB Datalogger
42299	3 6V Lithium Battery (pk of 2)

RHT20 Humidity and Temperature Datalogger







USB connector easily plugs into a computer for data analysis.

Monitors Humidity & Temperature

levels in warehouse, storage rooms, freezers, shipping vans, and offices.

Datalogs 16,000 Humidity and 16,000 Temperature readings

- USB interface for easy setup and data download to a PC
- Dew point indication via Windows® compatible software (included)
- Selectable data sampling rate: 1 second to 24 hours
- User-programmable alarm thresholds for RH and Temperature
- LCD displays current readings, Min/Max, and alarm status Humidity: 0 to 100%RH, 0.1%RH resolution, Accuracy: ±3%RH; Temperature: -40 to 158°F (-40 to 70°C), 0.1°F/°C resolution, Accuracy: ±1.8°F/1°C
- 3 month battery life; Dimensions: 3.7x1.9x1.2" (94.4x48.9x31.2mm)/Wt: 3.2oz (90.7g)
- Complete with 3.6V Lithium battery, mounting bracket with combination lock, and Windows® compatible analysis software; 1 year warranty

ORDERING		
RHT20	Humidity and Temperature Datalogger	

RH520A Humidity and Temperature Chart Recorder





 ϵ



PC software included

Best value graphical datalogger in the market that's easy to set up & operate

- Simultaneous numerical & graphical display of Humidity (10.0 to 95.0%) and Temperature (-20.0 to 140.0°F /-28.0 to 60.0°C) readings, plus Time and Date
- Basic Accuracy: ±3% Relative Humidity; ±1.8°F (±1°C
- Includes LabView[™]-based software calculates and graphs Dew Point, Wet Bulb, and GPP (grains per pound))
- Large dual graphical LCD displays with adjustable vertical and horizontal resolution
- Internal memory records up to 49,000 data points and can be transferred to a PC
- · Audible and visual alarm with Hi/Low setpoints
- Output socket used with optional external alarm module
- Dimensions: 5x7.7x0.9" (129x195x22mm); Weight: 12.6oz (357g)
- Complete with built-in stand, detachable probe with 3ft (1m) cable, RS-232 cable, RS-232 to USB adaptor, PC software, 100-240VAC 50/60Hz adaptor, and 3 AA batteries; 1 year warranty

ORDERING	
RH520A N	Humidity+Temperature Chart Recorder (110V adaptor)
RH520A-220 N	Humidity+Temperature Chart Recorder (220V adaptor)
RH520A-240 N	Humidity+Temperature Chart Recorder (240V adaptor)
RH522	Replaceable Humidity/Temperature Probe
SL123	AC Alarm Relay Module 9ft (3m) cable
SL124	DC Alarm Relay Module 9ft (3m) cable

42280 Humidity and Temperature Datalogger



Records up to 16,000 readings with USB interface for downloading to a PC

- Programmable from keypad or PC, Selectable data sampling rate, and User programmable audible and visual alarms
- Measurement ranges: 0 to 100% RH and -4 to 144°F(-20 to 70°C); Resolution: 0.1%RH, 0.1°F/°C; Basic accuracy: ±3% RH, ±1°F /0.6°C
- Dimensions/Weight: 4.75x3.5x1.5" (120.7x88.9x38.1mm)/ 5.7oz (163g)
- Complete with Windows® compatible software. USB cable. 110V AC adaptor, and four AA batteries; 1 year warranty

ORDERING	
42280	Temperature and Humidity Datalogger
RH300-CAL	33% and 75%RH Calibration Kit

42275 Humidity and Temperature Datalogger Kit



 ϵ Kits Include Windows® XP, Win 7, and Win 8 compatible software and docking station

42275 - includes one 42270 datalogger

Compact, powerful and easy to use with USB interface

- Water resistant Humidity (0 to 100% RH) and Temperature (-40 to 185°F/ -40 to 85°C) Datalogger Kit records up to 16,000 readings (8,000 readings/parameter)
- Resolutions: 0.1%RH, 0.1°F/°C; Basic accuracy: ±3%RH, ±1°F (±0.6°C)
- Real time clock with date and time and Logs data for days, weeks or months
- Three start methods: Scheduled, immediate or magnetic
- Multiple Dataloggers (42270) can be programmed and data downloaded from one single docking station
- Programmable sampling rate from 1sec to 12hrs plus Hi/Lo limits with alarm indication
- 42275 4.9x3.8x2" (123.8x95.3x51mm); 9oz (254g)
- 1 vear warrantv

ORDERING	
42275	Humidity/Temperature Datalogger Kit with PC Interface
42270	Humidity/Temperature Datalogger for 42275
42299	Replacement 3.6V Lithium batteries (2pk)



OXTECHT 755 759 Washing Temperature Databagger

 ϵ

 ϵ



SD500 Humidity/Temperature Datalogger


Monitor and record temperature and humidity values in the calibration rooms, office, clean rooms, and storage facilities

Records data on an SD card in Excel® format for easy transfer to a PC

- Dual LCD simultaneously displays Relative Humidity and Temperature readings
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- Selectable data sampling rate
- Complete with 6 AAA batteries, SD memory card, Universal AC Adaptor, and mounting bracket; 1 year warranty

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY	
Temperature	32 to 122°F 0 to 50°C	0.1°F/°C	±1.5°F ±0.8°C	
Humidity	10 to 90%RH	0.1%RH	±4%RH	
Datalogging interval	5, 10, 30, 60, 120, 300, 6	5, 10, 30, 60, 120, 300, 600 seconds or Auto		
Memory	Datalogs using a 4GB SE	Datalogs using a 4GB SD card		
Dimensions	5.2 x 3.1 x 1.3" (132 x 80	5.2 x 3.1 x 1.3" (132 x 80 x 32mm)		
Weight	9.9oz (282g)			
ORDERING				
SD500	Humidity/Temperature Datalo	gger		

SD700 Barometric Pressure/Humidity/Temperature Datalogger



- Displays Barometric Pressure in 3 units of measure: hPa, mmHg, and inHg
- Triple LCD simultaneously displays Barometric Pressure, Temperature, and Relative Humidity
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- Selectable data sampling rate: 5, 10, 30, 60, 120, 300, 600 seconds
- Complete with (6) AAA batteries, SD card, Universal AC adaptor, and mounting bracket; 1 year warranty

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY	
Barometric Pressure	10 to 1100hPa; 7.5 to 825.0mmHg; 0.29 to 3248inHg	0.1hPa, 0.1mmHg, 0.01inHg	±2hPa ±1.5mmHg ±0.1inHg	
Temperature	32 to 122°F 0 to 50°C			
Humidity	10 to 90%RH	0.1%RH	±4%RH	
Datalogging interval	5, 10, 30, 60, 120, 300, 600 seconds or Auto			
Memory	Datalogs using a 4GB SD	Datalogs using a 4GB SD card		
Dimensions	5.2 x 3.1 x 1.3" (132 x 80	x 32mm)		
Weight	9.9oz (282g)			
ODDEDING				

Barometric Pressure/Humidity/Temperature Datalogge

RH300-CAL 33% and 75% RH Calibration Reference



Calibration kit for calibrating Humidity Indicators

- Optional Calibration kit for calibrating Humidity Indicators (RH300, 445715 and 445815)
- 33%RH and 75%RH bottles
- Bottle designed with small opening for snugged fit of the sensor
- Complete with 33%RH and 75%RH calibration bottles

ORDERING		
RH300-CAL	33% and 75%RH Calibration Reference Bottles	

OCALIBRATION ST



PWR5 Power Bank with Built-in Flashlight



External backup battery/charger for your portable USB-charging devices*

- Long-lasting high-capacity (2800mAh) internal battery
- Power capacity level indicator with 3 blue LED lights
- Simple one-button operation
- Built-in LED flashlight (two button presses to turn on preventing accidental power-on)
- Simply plug any portable USB-charging device* into this compact charger
- · Complete with micro USB cable
- Dimensions: 2.9x1.4x0.9" (73×35.5×22.7mm);
 Weight: 2.3oz (65g)

*Compatible Devices: Smart Phones, Tablets, MP3/MP4 Players, Digital Cameras, GPS, and other portable USB-charging devices

ORDERING		
PWR5	Power Bank	

42299 3.6V Lithium Batteries

Package of 2 (1/2 AA size bobbin cell), primary, non-rechargeable

- High voltage response, stable during most of the lifetime of the application
- Wide operating temperature range (-60°C/+85°C)
- Low self-discharge rate (less than 1 % per year of storage at +20°C)
- Easy integration into compact systems
- Superior resistance to atmospheric corrosion
- Stainless steel container and end caps (low magnetic signature)
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 60086-4 safety standard and IEC 60079-11 intrinsic safety standard (class T4 assignment)
- Underwriters Laboratories (UL) Component Recognition
- Non-restricted for transport/Non-assigned to Class 9 according to the UN Recommendations
- Complete with two 3.6V Lithium batteries

ORDERING		
42299	3.6V Lithium Battery (pk of 2)	

BATT-36V-C 3.6V Lithium Battery (C-Size)



Primary, C-size bobbin cell, non-rechargeable, UL recognized

- High and stable operating voltage
- Higher power and higher energy for the whole battery life
- Superior drain capability
- Higher power applications
- Low self-discharge rate (less than 1% after 1 year of storage at +20°C)
- Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
- Avoid leakage, key for a higher than 10 year battery life
- Non-flammable electrolyte
- Safer operation in case of abuse
- Complete with one 3.6V Lithium C-size battery


ORDERING	(AVAILABLE TO SHIP IN USA ONLY)	
BATT-36V-C	3.6V Lithium Battery, C-Size	



Must-Have Tools for IAQ

Regulating humidity and temperature is a critical part of ensuring indoor air quality (IAQ) in residential, commercial offices, manufacturing and healthcare. Extech psychrometers are a key tool for rapid diagnostics & IAQ problem solving.

NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol N next to product part numbers.





RH300/RH305 **Hygro-Thermometer Psychrometer**

Temperature Probe for differential measurements

- Simultaneous display of %RH. Temperature and Dew Point or Wet Bulb or Probe Temperature
- · Calculates T1-T2 differential (Air Temperature minus External Probe Temperature) using optional probe (TP890) and T2-Dew Point
- Data Hold and Auto power off
- MAX/MIN readings
- Optional TP890 probe for Differential Temperature
- Model RH300 includes 2 AAA batteries

 Model RH305 kit includes RH300. TP890 external temperature probe. RH300-CAL calibration bottles and carrying case



RH350 Dual **Input Hygro-Thermometer Psychrometer**

Two Type K External Probe inputs for Superheat plus memory

- Superheat differential measurements: T1-T2, Air-T1, and T1-Dew Point
- Backlit LCD displays 3 parameters: %RH and Temperature with either Dew Point. Wet Bulb or Type K
- RS232 interface 407752 software available for download at www.extech.com and optional cable 589250 sold separately
- Stores up to 99 data points
- MAX/MIN with time stamp+AVG
- Data Hold, Auto power off
- Complete with 2 general purpose Type K bead wire probes, 4 AAA batteries



RH390/RH490 **Precision Hygro-Thermometer Psychrometers**

Highest 2% RH accuracy with Fast 30 second **Response Time**

- · Dual backlit display
- · Simultaneous display of:
- Humidity/Temperature
- Humidity/Dew Point - Humidity/Wet Bulb
- Fast 30 second response time
- Slim design with rubberized sides for better grip and for one hand operation
- Model RH490 measures Grains Per Pound (grams per kilogram) to 1120GPP (160g/kg)
- Complete with carrying case and 9V battery



BUILT-IN

HD500 **Psychrometer** + 30:1 InfraRed **Thermometer**

Combination Humidity meter, Type K thermometer, and InfraRed Thermometer

- Built-in IR Thermometer for non-contact surface temperature measurements
- Type K Thermometer for contact temperature measurement
- Highest 2% RH accuracy
- Large triple LCD backlit display
- USB port includes PC software
- Auto power Off

• Complete with general purpose Type K bead wire probe, PC software, USB cable, built-in stand, case, and 9V battery



SDL500 Hygro-Thermometer/ **Datalogger**

Date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC

- Humidity, Temperature, Dew Point & Wet Bulb functions
- Selectable data sampling rate: 1 to 3600 seconds
- Manually store/recall up to 99 readings
- Large backlit dual LCD
- Record/Recall MIN, MAX readings

- Data Hold plus Auto power off with disable function
- Includes 6 x AA batteries. SD card, case and Humidity probe; Optional Universal AC Adaptor UA100-240, also see p. 41 and 70 for optional Type K and J Thermocouple probes

SPECIFICATIONS	■ RH300 🕦 🛦 RH305 ℕ	RH350 N	■ RH390 N ▲ RH490 N	HD500 N	SDL500 №	SPECIFICATIONS
Sensor Type	Capacitance	Capacitance	Capacitance	Capacitance	Capacitance	Sensor Type
Dew Point	-90.4 to 122°F (-68.0 to 49.9°C)	-90.4 to 122°F (-68.0 to 49.9°C)	-22 to 199°F (-30 to 100°C)	-90.4 to 140°F (-68 to 60°C)	-13.5 to 120.1°F (-25.3 to 48.9°C)	Dew Point
Wet Bulb	-6.9 to 122°F (-21.6 to 49.9°C)	-6.9 to 122°F (-21.6 to 49.9°C)	32 to 176°F (0 to 80°C)	-6.88 to 140°F (-21.6 to 60°C)	-6.9 to 122°F (-21.6 to 50°C)	Wet Bulb
Humidity (Basic Accuracy)	0 to 100%RH (±3%RH)	0 to 100%RH (±3%RH)	0 to 100%RH (±2%RH)	0 to 100% (±2%RH)	5% to 95% (±3%RH)	Humidity (Basic Accuracy)
Mixing Ratio	_	-	■ No ▲ 0 to 1120 GPP (grains per pound); 0 to 160 g/kg (grams per kilogram)	_	-	Mixing Ratio
Internal Temperature (Basic Accuracy)	-4 to 122°F /-20 to 50°C (±1.8°F/±1°C)	-4 to 122°F/-20 to 50°C (±1.8°F/±1°C)	-22 to 199°F/-30 to 100°C (±1.8°F/1°C)	-14 to 140°F/-10 to 60°C (±4°F/±2°C)	32 to 122°F/0 to 50°C (±1.8°F/±1°C)	Internal Temperature (Basic Accura
External Temperature (Basic Accuracy)	Thermistor: -4 to 158°F/-20 to 70°C (± 1.8 °F or ± 1 °C)	Type K: -328 to 2498°F/-200 to 1370°C (±0.3% or 1.8°F or ±1°C)	_	Type K: -148 to 2501°F/-100 to 1372°C (±3%)	Type K: -148 to 2372°F /-100 to 1300°C Type J: -148 to 2192°F/-100 to 1200°C ±(0.4% + 1.8°F/1°C)	External Temperature (Basic Accura
IR Temperature (Basic Accuracy)	-	_	_	-58 to 932°F/-50 to 500°C (±2% or ±4°F/±2°C)	_	IR Temperature (Basic Accuracy)
Emissivity	_	_	_	0.95 fixed	_	Emissivity
Field of View	_	-	_	30:1	_	Field of View
PC Interface	_	Optional software & cable (589250)	_	Yes	_	PC Interface
Memory/Datalogging	-	99 readings	-	-	Datalogs using 4GB SD memory card	Memory/Datalogging
CE Approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions/Weight	7x1.9x1" (178.5x48.4x24.7mm)/ 3.3oz (95g)	9x2.2x1.7" (230x57x44)/ 5.3oz (153g)	7.8x1.7x1.3" (200x45x33mm)/7oz (200g)	10x2.9x2" (255x75x50mm)/12.2oz (350g)	7.2x2.9x1.9" (182X73X48mm)/23oz (655g)	Dimensions/Weight
Warranty	1 year	1 year	1 year	3 years	3 years	Warranty



Improve Indoor Air Quality with Extech

Accurately diagnosing problems related to barometric pressure, humidity and temperature levels is essential to effective HVAC/mechanical repair. Extech makes it easy with durable, accurate, and easy-to-use environmental meters.



445580 Humidity/ Temperature Pen

Compact, Digital Hygro-Thermometer, ideal for field use

- Simultaneous display of Temperature (°C/°F) and Relative Humidity
- MAX/MIN and Data Hold
- Built-in self calibration utility allows for field calibrations using optional Relative Humidity calibration bottles (RH300-C)
- Complete with meter, pocket clip and 3V lithium battery



RH210 Compact Hygro-Thermometer

Economic handheld meter with large dual LCD displays Temperature and Humidity or Dew Point simultaneously

- Compact design features large dual display of Temperature and Humidity or Dew Point
- Uses precision capacitance sensor
- Min/Max function stores & recalls highest and lowest readings
- Data Hold function freezes reading on display
- Auto Power Off with disable feature
- · Low battery indication
- Complete with probe and 39" (1m) cable, 9V battery, and soft case



RH101 Hygro-Thermometer + IR

Humidity, Air Temperature plus IR for non-contact Temperature measurements

- · Large backlit LCD dual display
- Primary and Secondary displays: Primary display is user selectable for IR or Humidity; Secondary displays ambient temperature
- InfraRed thermometer has built-in laser pointer, 8:1 distance to target ratio, and fixed 0.95 emissivity
- Auto power off, MAX and Data Hold
- Remote humidity sensor with 39" (1m) coiled cable measures both humidity and ambient temperature
- Over-range indication
- Complete with built-in stand, holster, Humidity/ Temperature probe, 9V battery, and carrying case



EA20/EA25 EasyView® HygroThermometer and Datalogger

Stores up to 99 or 15,000 readings

- Dual display of Relative Humidity, Temperature, Dew Point and Wet Bulb
- Data Hold, Relative, & MAX/MIN
- Programmable power off timer
- Complete with stand, holster, probe with 39" (1m) cable,
 6 AAA batteries, and carrying case; Model EA25 includes Windows® compatible software and cable
- Model EA20 Stores up to 99 manual readings for display recall
- Model EA25 Stores up to 15,000 readings for PC download; Programmable Start/Stop datalogging time and sample rate of 1 to 86,000 seconds



SD500/SD700 Humidity/ Temperature Dataloggers plus Barometric Pressure

Records data on an SD card in Excel® format

- Model SD500 Dual LCD displays Relative Humidity and Temperature readings
- Model SD700 Triple LCD displays Barometric Pressure, Temperature, and Relative Humidity
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- Selectable data sampling rate:
 5 to 600 seconds or Auto
- Complete with 6 AAA batteries, SD card, Universal AC Adaptor, and mounting bracket

SPECIFICATIONS ■ EA20 N | ▲ EA25 N 445580 🕦 RH210 RH101 ■ SD500 | ▲ SD700 **SPECIFICATIONS** Sensor Type Capacitance Capacitance Capacitance Capacitance Capacitance Sensor Type Humidity 10 to 95% 10 to 95% 10 to 95% 10 to 90%RH Humidity 10 to 90% **Dew Point** -13.5 to 120.0°F (-25.3 to 48.9°C) -4 to 140°F (-20 to 60°C) Dew Point Temperature (Air) 14 to 122°F (-10 to 50°C) 32 to 122°F (0 to 50°C) -4 to 140°F (-20 to 60°C) -4 to 140°F (-20 to 60°C) 32 to 122°F (0 to 50°C) Temperature (Air) Temperature (IR) -58 to 932°F (-50 to 500°C) Temperature (IR) ■ No | ▲ 10 to 1100hPa; 7.5 to 825mmHg; Barometric Pressure Barometric Pressure ±3%RH; ±1.5°F/±0.8°C (Air); ±2.2°F/±1.2°C (Dew Point) ±3.5%RH; ±2% or ±4°F/2°C (IR); ±3°F/2°C (Air) ±3%RH, ±1.8°F (±1°C) ±4%RH, ±1.8°F (±0.8°C) Basic Accuracy ±5%, ±1.5° Basic Accuracy ▲ 0.1%, 0.1°, 0.1 hPa, 0.1mmHg, 0.01inHg Max. Resolution 0.1%, 0.8 0.1%, 0.1 0.1%, 0.19 0.1%, 0.19 Max. Resolution PC Interface ■ No | ▲ Yes PC Interface Datalogging 99 readings / 15,000 readings Datalogs using 4GB SD memory card Datalogging CE approved Yes CE approved Dimensions 5.7x1.2x1" (145x30x25mm)/ 2.3oz (65g) 5.3x2.4x1.3" (135x60x33mm)/ 9.3oz. (264g) 5.9x2.95x1.57" (150x75x40mm)/ 7oz (200g) 6x2.8x1.4" (152x72x35mm)/ 8.3oz (235g) 5.2x3.1x1.3" (132x80x32mm)/ 9.9oz (282g) Dimensions / Weight Warranty 1 year 1 year 1 year 1 year 1 year Warranty



33% & 75% RH

445580

Calibration Kit for

100-240V AC Adap-

tor with 4 plugs (US EU, UK, AU)

UA100-240

ACCESSORIES
RH300-CAL 33%



Redefining **Heat Index Meters**

Whether it's for the job site or for your athletes, heat stress is critical. Use Extech's Heat Index Meters to monitor safe conditions during hot and humid days.

SPECIFICATIONS



HW30 Heat Index Stopwatch

Digital UP/DOWN timer displays Temperature, **Humidity, and Heat Index**

- User programmable Heat Index alarm
- Stopwatch/chronograph mode with 1/100th second resolution
- Fastest/Slowest/ Average Lap recall
- 99 lap counter with 30 lap/split memory
- 10 hour countdown timer with audible beeper warning for the last 5 seconds
- Programmable alarm
- · Calendar mode displays day, month, and date
- 12 or 24 hour clock operation
- Complete with 39" (1m) lanyard and one 3V CR2032 battery
- HW30-NISTL Limited NIST available for time function only

HW30 N



RH25 Heat Index **Psychrometer**

Convenient pen style psychrometer monitors Heat Index during hot humid days

- Built-in multiparameter sensor measures Heat Index, WBGT, Humidity, Ambient Temperature, Temperature, Dew Point and Wet Bulb
- User Programmable Heat Index/WBGT alarm
- · Heat Index function measures how hot it feels when Humidity is combined with temperature, air movement, and radiant heat
- Wet Bulb Globe Temperature (WBGT) function considers the effects of temperature, humidity, and direct or radiant sunlight
- Min/Max/Average
- Data Hold; APO with disable
- · Complete with CR2032 battery



AN25 Heat Index **Anemometer**

Convenient pen style **Anemometer monitors** Airflow and Heat Index

- Built-in multiparameter sensors measure Air Velocity.Heat Index. WGBT. Humidity. Ambient Temperature. Dew Point, Wet Bulb. Temperature, and Windchill
- · Mini low friction vane meausures air velocity
- Heat Index function measures how hot it feels when Humidity is combined with temperature, air movement, and radiant heat
- Wet Bulb Globe Temperature (WBGT) function considers the effects of temperature, humidity, and direct or radiant sunlight
- Mln/Max/Average
- · Data Hold APO with disable
- · Complete with CR2032 battery



HT30 Heat Stress **WBGT Meter**

Wet Bulb Globe Temperature (WBGT) considers the effects of temperature, humidity and direct or radiant sunlight

- Heat Stress Index measures how hot it feels when humidity is combined with temperature, air movement, and radiant heat
- Black Globe Temperature (TG) monitors the effects of direct solar radiation on an exposed surface
- In/Out Function displays the WGBT value with or without direct sun exposure
- APO with disable

HT30 N

- Built-in RS-232 interface with optional PC software (407752)
- Complete with two AAA batteries



HT200 Heat Stress WBGT Meter

Accurately determine the **Heat Stress level**

- · Heat Stress Index measures how hot it feels when humidity is combined with temperature, air movement, and radiant heat
- Black Globe Temperature (TG) monitors the effects of direct solar radiation on an exposed surface
- In/Out function displays the WBGT value with or without direct sun exposure
- WBGT high/low alarm settings
- · Memory stores 50 readings
- Backlit LCD

HT200

- Min/Max, Data Hold, and APO with disable
- · Complete with 9V battery and hard case

SPECIFICATIONS

70 to 122°F (22 to 50°C) -50.8 to 401°F (-46 to 205°C) -31 to 401°F (-35 to 205°C) Heat Index Heat Index -4 to 122°F (-20 to 50°C) 5 to 122°F (-15 to 50°C) Black Globe: 32 to 176°F (0 to 80°C) TG-Black Globe: 32 to 176°F (0 to 80°C); TA-Air: 32 to 122°F (0 to 50°C) Temperature 14 to 122°F (-10 to 50°C) Temperature 1 to 99% 0 to 99 9%RH 5.0 to 95.0%RH 0 to 100% RH 1 to 99%RH Humidity Humidity Dew Point -108.4 to 122°F (-78 to 50°C) -103 to 122°F (-75 to 50°C) -31.5 to 120.1°F (-35.3 to 48.9°C) Dew Point Wet Bulb -4 to 122°F (-15 to 50°C) 5 to 122°F (-15 to 50°C) -6.9 to 122°F (-21.6 to 50°C) Wet Bulb w/o sunlight: 32 to 138°F (0 to 59°C); Wet Bulb Globe Temperature --20.2 to 130°F (-29 to 54.5°C) -20.2 to 130°F (-29 to 54.5°C) 32 to 122°F (0 to 50°C) Wet Bulb Globe Temperature w/ sunlight: 32 to 132°F (0 to 56°C) Air Velocity Air Velocity 80 to 4920ft/min (0.4 to 25m/s) ft/min (m/s) ft/min (m/s 0.9 to 55.9mph (1.4 to 90.0km/h) mph (km/h) mph (km/h) 0.8 to 48.6 knots knots knots 5 to 122°F (-15 to 50°C) Windchill Windchill Timing capacity 9hrs, 59mins, and 59secs Timing capacity Basic Accuracy ±5 seconds/day, ±5% RH, ±3°F (1.5°C) ±3%RH, ±1°F/0.6°C ±3%RH, ±2°F/1°C, ±3%FS ±3%RH, ±1.8°F/1.0°C (TA), ±4°F/2°C (TG) ±3%RH, ±1.8°F/1°C (WBGT w/o sun); Basic Accuracy ±2.7°F/1.5°C (w/sun) ±1.5°F/0.8°C (TA), ±1.1°F/0.6°C (TG) CE approved CE approved Dimensions/Weight 7.6x0.8x1.8" (192x30x45mm)/ 3.8oz (108g) 5.5x1.4x0.7" (140x35x18mm)/ 1.8oz (50g) 6x1.6x0.7" (152x40x18mm) / 2.1oz (60g) 10x1.9x1.1" (254x49x30mm)/4.8oz (136g) Meter: 11.8x2.8x2" (300x70x50mm) Dimensions/Weight Ball: 1.6" (40mm) dia, 1.4" (35mm) high Ball: 2" (50mm) diameter/ 7.8oz (220g) Warranty

AN25

Software and Cable for HT30

ACCESSORIES

Problems Fast

Extech offers moisture meters for a variety of industries. For wood and building trades, professionals use Extech pin and pin-less meters. For accurate soil testing as well as agricultural crop testing, trust Extech for specialized moisture meters.

ACCESSORIES	
MO50-PINS	Replacement pins for MO50 (10 pins)
MO200-PINS	Replacement pins for MO210 (50 pins)
MO220-PINS	Replacement pins for MO220 (50 pins)



M025 Moisture Pen

Easy-to-read dual color LED indication with 10 ranges of %WME moisture level

- Five dual color LEDs indicate
 10 moisture levels:
- Easy-to-use one button operation
- Data Hold freezes LED range
- Battery level check on power-up
- Auto power off conserves battery life
- Use on wall board, sheet rock, cardboard, plaster, concrete, mortar, paper, fabric, and more
- Complete with protective cap, built-in pocket clip, 2 pins (already assembled), and one AAA battery



M050 Compact Moisture Meter

Easy-to-operate with display icons that indicate the levels of moisture content plus audible alert feature

- Displays moisture level in wood and building materials such as wall board, sheet rock, cardboard, plaster, concrete, and mortar
- Audible Alert Tone rate beeps faster as the moisture level increases
- Icons display low, medium and high levels of moisture content
- Replaceable threaded measurement electrode pins
- Easy-to-use, compactsized design
- Data Hold freezes reading on display
- Built-in battery level check and measurement verification test
- Auto Power Off conserves battery power
- Complete with replacement pins, protective cap, and 9V battery



M0210 Pocket Size Moisture Detector

Large dual graphical LCD displays moisture in wood and other building materials

- 2-in-1 Digital LCD readout and analog bargraph
- Measures Wood Moisture and Building Material Moisture
- Use on wall board, sheet rock, cardboard, plaster, concrete, and mortar
- Self-contained, pocket sized meter with belt clip
- Replaceable threaded measurement electrode pins
- Impact proof housing
- Auto power off conserves battery energy
- Built-in battery check and measurement verification test
- Complete with protective cap, replacement pins, and three CR-2032 button batteries



M0220 Wood Moisture Detector

Specifically designed for monitoring moisture in wood

- Memory contains 8 wood groups with calibrations for approximately 170 species of wood
- Measurements can be taken using the integral pin electrodes or a heavy duty remote probe (included)
- Automatically temperature compensated (ATC) readings when used with the temperature probe (included)
- Built-in calibration check
- Replaceable measurement electrode pins
- User adjustable Auto power off (1 to 9 minutes) with disable
- Low battery indication
- Includes remote moisture probe, Temperature probe, protective cap, replacement pins, pouch case, and 2 AA batteries



M0257 Pinless Moisture Meter

Fast response pinless moisture readings on tiles, building materials and wood from depth of 0.78" to 1.6"

- Relative pinless moisture reading for non-invasive measurement
- Multifunction backlit triple LCD display
- Pinless measurement depth from 0.78" (20mm) to 1.6" (40mm) below the surface
- High frequency sensing technology
- Automatic Data Hold
- Two adjustable alarm levels with audible beeper and visual (flashing "RISK" or "WET") indicators
- Automatic calibration (in dry air) when meter is powered on
- Low battery indication
- Auto Power off
- Complete with 3 AA batteries and pouch case

SPECIFICATIONS	M025	M050	M0210	M0220	M0257	SPECIFICATIONS
Sensor Type	Contact Pins	Contact Pins	Contact Pins	Contact Pins	Pinless	Sensor Type
Moisture Content	Green LEDs: 5%, 7%, 9%, 11%, 12% Red LEDs: 14%, 16%, 20%, 30%, 40%	5 to 50% (Wood); 1.5 to 33% (Materials)	6 to 44% (Wood); 0.2 to 2.0% (Materials)	6 to 44% (Wood)	0.0 to 100.0	Moisture Content
Max. Resolution	_	0.1%	1% (Wood) / 0.1% (Materials)	±1% (Wood)	0.1	Max. Resolution
Temperature (Air)	_	_	_	-31 to 176°F (-35 to 80°C)	_	Temperature (Air)
CE approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions	5.4x1.0x0.8" (136x25x21mm);	6.7x2.6x1.2" (170x65x30mm)	5.1x1.6x1.0" (130x40x25mm)	7x1.9x1.2" (180x50x31mm)	9.25x2.5x1.1" (235x63x28mm)	Dimensions
Weight	1.2 oz (33g) without battery	4.2oz (120g) without battery	3.5oz (100g)	6.1oz (175g)	7.7oz (218g)	Weight
Warranty	1 year	1 year	1 year	1 year	1 year	Warranty



Measure Moisture And Much More



Extech's advanced moisture meters offer much more than moisture readings: Non-invasive, pin-less technology protects work surfaces. Environmental readings (RH, air and surface temperatures, dew point, GPP, vapor pressure, condensation levels) add extensive insight without extra meters. Remote specialty probes expand versatility. See a wide selection of moisture meters on p. 90-95.



M0280 Pinless **Moisture Meter**

Non-invasive moisture content of building materials and wood

- Quickly indicates the moisture content of materials
- Select from 10 wood types and measurement ranges
- LCD displays % moisture of wood or material being tested
- Measurement depth to 0.75"
 19mm) below the surface
- Automatic internal test and calibration
- Electro-magnetic testing technology
- Low battery indication
- Complete with 9V batt ery and case



M055 Combination Pin/ Pinless Moisture Meter

Easy-to-operate with display icons that indicate the levels of moisture content plus audible alert feature

- Displays moisture level in wood and building materials such as wall board, sheet rock, cardboard, plaster, concrete, and mortar
- Audible Alert Tone rate beeps faster as the moisture level increases
- Icons display low, medium and high levels of moisture content
- Replaceable threaded measurement electrode pins
- Easy-to-use, compact-sized design
- Data Hold freezes reading on display
- Low battery indicator
- Auto Power Off conserves battery power
- Complete with replacement pins, protective cap, and 9V battery



M0260 Combination Pin/Pinless Moisture Meter

Monitor moisture in wood and other building materials with virtually no surface damage

Tri-color LED

- %WME (wood moisture equivalent) pin moisture reading
- Relative pinless moisture reading for non-invasive measurement
- Digital LCD readout with backlighting feature and tri-color LED bargraph
- Quickly indicates the moisture content of materials
- Pinless measurement depth to 0.75" (22mm) below the surface
- Electro-magnetic sensing technology
- Built-in calibration check
- Replaceable pins
- Low battery indication
- Cap protects pins during storage and can be snapped on to the side of the housing during use
- Complete with 9V battery, replacement pins (MO200-PINS), protective cap, and case



M0265 Combination Pin/Pinless Moisture Meter with Remote Probe

Measure moisture in wood or other building materials with pinless or pin type technology

- Remote pin probe included to measure moisture in difficult to access areas
- %WME (wood moisture equivalent) pin moisture reading
- Relative pinless moisture reading for non-invasive measurement
- Digital LCD readout with backlighting feature and tri-color LED bargraph
- Quickly indicates the moisture content of materials
- Pinless measurement depth to 0.75" (22mm) below the surface
- · Electro-magnetic sensing technology
- · Built-in calibration check
- Low battery indication
- Storage cap protects pins
- Complete with 9V battery, replacement pins (MO200-PINS), protective cap, remote pin probe (MO-P1) and case

ACCESSORI	IES	
MO50-PINS	Replacement pins for MO55 (10 pins)	
MO200-PINS	50 Replacement pins	
MO-P1	Replacement Moisture pin probe with 30" (76.2cm) cable & RJ45 Connector (for MO265)	

SPECIFICATIONS	M0280	M055	M0260	M0265
Pinless Moisture	0 to 99% (limited by wood type) - relative	0 to 99%	0 to 99 (relative)	0 to 99 (relative)
Pin-type Moisture (remote probe)	_	5 to 50% (Wood); 1.5 to 33% (Materials)	6.0 to 94.8% WME	6.0 to 94.8% WME
Max Resolution	0.1%	0.1%	0.1/0.1%	0.1/0.1%
Memory	-	-	_	_
CE approved	Yes	Yes	Yes	Yes
Dimensions/Weight	7.6x0.8x1.8" (192x30x45mm)/ 3.8oz (108g)	6.7x2.6x1.2" (170x65x30mm) / 4.2oz (120g) w/o battery	8x2.3x1.7" (203x58.4x43.2mm)/ 7.2oz (204g)	8x2.3x1.7" (203x58.4x43.2mm)/ 7.2oz (204g)
Warranty	1 year	1 year	1 year	1 year



M0290/M0295 Pinless Moisture Psychrometer + IR Thermometer









IncludesMO290-P pin moisture probe (3ft/0.9m cable length). 9V battery and case; 1 year warranty

Multi-parameter Moisture meters with built-in IR Thermometer

- Measure moisture content of materials/wood types with Pinless technology without damaging the surface; Use remote Pin-type probe for contact moisture readings
- Simultaneously displays Moisture and Air Temperature, IR Temperature, or Humidity
- Pinless measurement depth to 0.75" (19mm) below the surface
- Non-contact IR Thermometer with 8:1 field of view and 0.95 fixed emissivity
- Programmable high/low Moisture and Humidity alarms
- Automatic calculation of differential Temperature (IR DP) for condensation point
- Min/Max, Data Hold, Auto power off and low battery indication

Model MO295 Additional Features

- Manually store/recall up to 20 labeled readings
- Fast Analog Bargraph

SPECIFICATIONS		
Moisture	Pinless: 6 to 99.9 (Relative); Pin-type with Probe: 0 to 99.9%	
Max Resolution	0.1, 0.1°F/°C	
Humidity	0 to 100%RH	
Temperature (Air)	Air: -20 to 170°F (-29 to 77°C); IR: -4 to 392°F (-20 to 200°C)	
Vapor Pressure	0 to 20.0kPA	
Dew Point	-22 to 199°F (-30 to 100°C)	
Mixing ratio	0 to 999GPP (0 to 160g/kg)	
Dimensions/Weight	6.5x2.8x1.5" (165x70x38)/ 7.4oz (210g)	


MO290	Pinless Moisture Psychrometer + IR Thermometer
MO295	Pinless Moisture Psychrometer + IR Thermometer with Memory

M0300 Moisture Hygro-Thermometer for Android™ •









Includes MO290-P pin moisture probe (3ft/0.9m cable length), 9V battery and case; 1 year warranty

View key environmental readings taken by the MO300 remotely on your Android device and datalog using the free Extech Android app.

- Integrated Bluetooth® connects with user's own Android devices to transmit readings for remote viewing
- Works with free Android App to display Moisture, Humidity, Temperature, Grains Per Pound, Dew Point, Vapor Pressure, and condensation point, up to 30' (10m) away
- Quickly indicates the moisture content of multiple wood types and other building materials with Pinless technology without damaging the surface; Remote Pin-type probe allows for contact moisture readings
- Manually store/recall up to 20 labeled readings or datalog up to 50K readings using the Android app
- Large dual display with automatic backlight feature and Fast Analog Bargraph
- Pinless moisture measurement depth to 0.75" (19mm) below the surface
- Programmable high/low Moisture/Humidity alarms
- Non-contact IR Thermometer with 8:1 field of view and 0.95 fixed emissivity
- Automatic calculation of differential Temperature (IR DP) for condensation point
- Min/Max, Data Hold, and Auto power off

SPECIFICATIONS		
Moisture (Non-Penetrating)	Pinless: 0 to 99.9 (Relative); Pin-type with Probe: 0 to 99.9%	
Max Resolution	0.1, 0.1°F/°C	
Humidity	0 to 100%RH	
Temperature (Air) / (InfraRed)	Air: -20 to 170°F (-29 to 77°C)/ IR: -4 to 392°F (-20 to 200°C)	
Vapor Pressure	0 to 20.0kPA	
Dew Point	-22 to 199°F (-30 to 100°C)	
Mixing ratio	0 to 999GPP (0 to 160g/kg)	
Dimensions/Weight	6.5x2.8x1.5" (165x70x38)/7.4oz (210g)	

ORDERING (SEE P. 95 FOR OPTIONAL SPECIALTY MOISTURE PROBES)

Moisture Hygro-Thermometer for Android

Android & Google Play are trademarks of Google Inc. The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License

Moisture Probes and Pins









Penetrating Moisture Probes for use with select Extech Moisture Meters

· Specialty Moisture probes with RJ45 connector compatible with Extech Moisture Meters MO290, MO295, and MO300

ORDERING (Below Probes for M0290, M0295, and M0300)			
MO290-P	Replacement Moisture pin probe with 30" (76.2cm) cable & RJ45 Connector		
MO290-BP	Moisture Baseboard Probe (Dual fixed flat pins with 4.1"/10.5cm pin length) with 30" (76.2cm) cable		
MO290-EP	Extension Probe with 30" (76.2cm) cable and 4 pins		
MO290-PINS-EP	12 Replacement pins (6) 3.5"/8.9cm & (6) 6.5"/16.5cm pin depth) and 2 lock nuts for MO290-EP probe		
MO290-EXT	11.8" (30cm) Extenders (set of 2) for MO290-EP probe		
MO290-HP	Hammer Probe includes 4 pins (1.6"/4cm pin depth)		
MO290-PINS-HP	20 Replacement pins (1.6"/4cm pin depth), 2 lock nuts for MO290-HP probe		

M0750 Soil Moisture Meter





steel moisture probe

Heavy duty 8" (20cm) stainless-steel moisture probe measures moisture content in soil

- Soil moisture content measurement from 0 to 50%
- Min/Max records minimum and maximum moisture readings
- Data hold to freeze reading on display
- Water resistant housing
- Replaceable Heavy Duty Moisture Probe (MO750-P)
- Dimensions: 14.7x1.6x1.6" (374x40x40mm) Weight: 9.4oz (267g)
- Complete with moisture probe, 4 x AAA batteries, and sensor cap

ORDERING	
MO750	Soil Moisture Meter
MO750-P	Replacement Moisture Probe

SDL550 Humidity Content Meter/Datalogger





cable, sensor cap, SD card, and 6 AA batteries; Optional Type J and K Thermocouple Probes (see p. 41 and 70)

23.7" (600mm) heavy duty stainless steel probe measures humidity content in grain, corn, rice, hay, and other materials

- Measures Humidity Content, Air Temperature, Dew Point and Temperature
- Replaceable Probe Tip with inner filter
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- Adjustable data sampling rate: 1 to 3600 seconds
- Stores 99 readings manually and automatic continuous datalogging via SD card
- Type K/J Thermocouple input for high temperature measurements
- Record/Recall MIN, MAX readings
- Data Hold plus Auto Power Off with disable function

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY
Humidity Content	10 to 95%RH	0.1%RH	3% of reading
Air Temperature	32 to 122°F (0 to 50°C)	0.1°	1.8°F/1°C
Dew Point	-13 to 120°F (-25 to 50°C)	0.1°	calculated
Type K Temperature	-148 to 2372°F (-100 to 1300°C)	0.1°	(0.2% + 1.8°F/1°C)
Type J Temperature	-148 to 2192°F (-100 to 1200°C)	0.1°	(0.2% + 1.8°F/1°C)
Dimensions	Meter: 7.2x2.9x1.9" (182x73x47.5mm); Probe: 23.8" (605mm) x 0.9" (22mm) dia Meter: 8.6oz (245g); Probe: 19.8oz (560g)		
Weight			

ORDERING		
SDL550	Humidity Content Meter/Datalogger	
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)	





Go Beyond Airflow Measurements

Extech's compact multi-function environmental meters couple all-in-one versatility with accurate diagnostics. Extech helps you get results with fewer tools.



45118/45158 **Mini Thermo-Anemometers**

3-in-1 or 5-in 1 meter

- Measure air velocity, temperature, and windchill
- Adjustable averaging function of 5, 10, or 13 second intervals
- Housing extends to 9" (229mm) • Tripod mount (optional TR100
- Tripod sold separately)
- Data Hold with Auto power off
- Replaceable low friction vane
- Water resistant housing floats • Complete with CR2032 lithium battery and 43" (1.09m) lanyard

45158 Additional Features

• Measures %RH and Dew Point



45168CP

Mini Thermo-Anemometer with Built-in Compass

7-in-1 meter

- Built-in Compass provides wind direction and 360° readings
- Delta T (Air Temperature DP)
- Max function
- Housing extends to 9" (229mm)
- Auto Power Off with disable
- · Water resistant housing floats and drop-tested to 6 feet
- Replaceable vane (45156)
- Tripod mount

45168CP

• Complete with CR2032 lithium battery and lanyard



EN100

EN100/EN150 **Environmental Meters with UV***

11-in-1 meters

- Replaceable low friction vane
- Barometric Pressure and Altitude functions
- Data Hold and Auto power off
- Complete with built-in sensors, wrist strap, and CR2032 battery. (Optional EN100-TP probe measures to 158°F/70°C)

EN100 Additional Features

· Measures light level with Auto-rotating display

■ EN100 | ▲ EN150

*EN150 Additional Features • Measures UV light level



45170/45170CM **Environmental** Meters

4-in-1 or 5-in-1 meter

- Auto-rotating display
- Low friction vane wheel
- Capacitance humidity sensor
- Type K input (Probe sold separately - see p. 41 and 70)
- Utilizes precision photo diode and correction filter
- MAX/MIN and Data hold • Complete with wrist
- strap and 9V battery

■ 45170 | ▲ 45170CM

• Model 45170CM also measures Air Flow (CFM/CMM)





EN300 Environmental Meter

5-in-1 Meter & PC interface

- Auto-rotating display
- Low friction vane wheel
- Capacitance humidity sensor
- Thermistor for ambient temperature and Type K input (Probe sold separately - see p. 41 and 70)
- Utilizes precision photo diode and correction filter
- Sound Level measurement meets IEC 61672 class 2
- MAX/MIN and Data hold
- Complete with 6 AAA batteries; Optional AC adaptor UA100-240 & software 407001

ACCESSORIES		
45116	Mini Impeller (2pk) for 45118	
45156	Mini Impeller (2pk) for 45158 and 45168CP	
EN100-TP	RTD Temperature probe 14 to 158°F/-10 to 70°C	
EN100-V	Mini impeller (2 pk) for EN100 and EN150	
TR100	Tripod	
CA895	Small Vinyl Pouch Case for 45118, 45158, 45168	
UA100-240	100-240V AC Adaptor w/ 4 plugs (US, EU, UK, AU)	





SPECIFICATIONS	■ 45118 ▲ 45158
ft/min (res.)	100 to 5500 (20)
m/s (res.)	0.5 to 28 (0.1)
km/h (res.)	1.8 to 100.6 (0.7)
MPH (res.)	1.1 to 62.5 (0.2)
knots (res.)	1.0 to 54.3 (0.3)
Beaufort Force (res.)	1 to 17 (1)
Air Volume CFM/CMM	_
Temperature	0 to 122°F/ -18 to 50°C (0.1°)
Relative Humidity (res.)	■ No ▲ 10% to 95% (1%)
Heat Index	_
Wet Bulb	_
Dew Point	■ No ▲ 32 to 122°F (0 to 50°C)
Light Level	_
UV Level	_
Sound Level (res.) - A weighting	_
Basic Accuracy	
Airflow	±3% of reading
Temperature/Relative Humidity	■ ±1.8°F, ±1°C ▲ ±1.8°F, ±1°C/±5%RH
Light/Sound	_
CE approved	Yes
Dimensions/Weight	5.25x2.75x0.75" (133x70x19mm)/ 3oz (95g)
	Vane: 1" (26mm)D
Warranty	1 year

10.1000.
60 to 3937 (2)
1.1 to 20 (0.1)
0.8 to 72.0 (0.1)
0.5 to 44.7 (0.1)
0.4 to 38.8 (0.1)
1 to 8 (1)
_
5 to 122°F/ -15 to 50°C (0.1°)
0.1% to 99.9% (0.1%)
23°F to 122°F (-5 to 50°C)
-4°F to 122°F (-20 to 50°C)
_
_
_
±3% FS
±1.8°F, ±1°C/ ±3%RH
_
Yes
5.51x1.77x0.98" (140x45x25mm) / 3oz (95g)
Vane: 1" (25.4mm)D
1 year


- 211100 1 - 211100
80 to 3940 (1)
0.4 to 20 (0.1)
1.4 to 72 (0.1)
0.9 to 45 (0.1)
0.8 to 38.8 (0.1)
-
0.847 to 1,271,300CFM/0.024 to 36,000CMM
32 to 122°F (0 to 50°C)/15 to 111°F (-9 to 44°C)
10 to 95% (0.1%)
32 to 212°F (0 to 100°C)
22.3 to 120.2°F (-5.4 to 49.0°C)
-13.5 to 120.2°F (-25.3 to 49.0°C)
■ 0 to 1860Fc (0 to 20,000Lux) ▲ No
■ No ▲ 0 to 1999µW/cm² (2 to 20mW/cm²)
_
±3% FS
±2.5°F, ±1.2°C/±4%RH
■ No ▲ Light: ±5% of reading
Yes
6.1x2.4x1.3" (156x60x33mm)/ 5oz (160g)
Vane: 1.2" (30.5mm)D

80 to 5910 (1)
0.4 to 30 (0.1)
1.4 to 108.0 (0.1)
0.9 to 67.0 (0.1)
0.8 to 58.3 (0.1)
-
0.01 to 1,908,400CFM/0.001 to 54,000CMM
Thermistor: 32 to 122°F/ 0 to 50°C (0.1°) Type K: -148°F to 2372°F/-100°C to 1300°C
10 to 95% (0.1%)
-
_
_
0 to 1860 (0.1Fc)/0 to 20,000 (1Lux)
_
_
±3% FS
±2.5°F, ±1.2°C/±4%RH
Light: ±5% of reading
Yes
6.1x2.4x1.3" (156x60x33mm)/ 5oz (160g)
Vane: 1.2" (30.5mm)D
1 year

EN300	SPECIFICATIONS
80 to 5910 (1)	ft/min (res.)
0.4 to 30 (0.1)	m/s (res.)
1.4 to 108.0 (0.1)	km/h (res.)
0.9 to 67.0 (0.1)	MPH (res.)
0.8 to 58.3 (0.1)	knots (res.)
_	Beaufort Force (res.)
-	Air Volume (CFM/CMM)
32 to 122°F/ 0 to 50°C (0.1°)	Temperature
10 to 95% (0.1%)	Relative Humidity (res.)
_	Heat Index
_	Wet Bulb
_	Dew Point
0 to 1860 (0.1Fc)/ 0 to 20,000 (1Lux)	Light Level
_	UV Level
35 to 130dB (0.1dB)	Sound Level (res) - A weig
	Basic Accuracy
±3% FS	Airflow
±2.5°F, ±1.2°C/±4%RH	Temperature/Relative Hur
Light: ±5% of reading/ Sound: ±1.4dB	Light/Sound
Yes	CE approved
6.1x2.4x1.3" (156x60x33mm)/ 5oz (160g)	Dimensions/Weight
Vane: 1.2" (30.5mm)D	
1 year	Warranty

1 year

midity

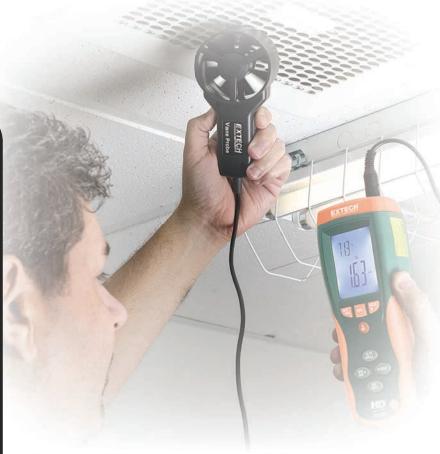

Versatile and Durable Tools For HVAC/R

Extech equips HVAC/R professionals with rugged, accurate tools for measuring airflow, air velocity and air/surface temperatures. Extech's thermo-anemometers are available with vane/propeller probes as well as telescoping, hot-wire probes for small openings or hard-to-reach areas.



AN100/AN200 CFM/CMM Thermo-Anemometers

Large backlit display of Airflow or Air Velocity plus model with built-in InfraRed Thermometer

- Simultaneous display of Ambient Temperature and Air Flow or Air Velocity
- Up to 8 easy to set Area dimensions stored in internal memory (ft² or m²)
- 20 point AVG for Air Flow
- Low friction 2.83"D (72mm) ball bearing vane wheel
- Data Hold, MIN/MAX, Auto off
- Complete with vane sensor on 3.9ft (120cm) cable, 9V battery, protective rubber holster, and case
- Model AN200 incorporates a builtin IR Thermometer for quick noncontact temperature measurements



HD300 CFM/CMM Thermo-Anemometer + IR Thermometer

Built-in IR Thermometer for quick troubleshooting of ceiling vents, duct work, and other remote surfaces

- IR Thermometer has 30:1 distance to target ratio and Laser pointer
- Simultaneous display of Air Flow in CFM/CMM or Air Velocity Plus Ambient Temperature
- Up to 8 easy to set Area dimensions stored in memory
- Large backlit LCD
- Air Flow displayed in 2 modes as an instantaneous value or up to 20 point average
- USB port includes PC software
- Includes PC software, cable, vane sensor on 3.9ft (120cm) cable, builtin stand, case, and 9V battery



407113 High Temperature CFM Metal Vane Anemometer

Withstands temperatures to 175°F (80°C) and airspeed to 6890ft/min

- Display Air Flow (CFM) or Air Velocity plus Temperature
- Air Flow displayed in 3 modes: Instantaneous value, Up to 20 point average, or 2/3 flow value
- Record and Recall MIN/MAX
- Data Hold plus Auto power off
- Built-in PC Interface
- Optional Data Acquisition software 407001 - see details on p. 114
- Includes metal vane sensor with 3.9ft (120cm) cable, 9V battery, holster with stand, and hard case; Optional 117V (156119) or 220V (156221) AC adaptors (see p. 136 for ordering).



407119 Hot Wire CFM/CMM Anemometer

Accurately measures Air Flow (CFM/ CMM) or Air velocity plus Temperature

- Air velocity measurements as low as 40ft/min
- Telescoping probe extends up to 3ft (940mm) long
- Measures air volume in CFM (ft³/ min) and CMM (m³/min) plus Temperature simultaneously
- Air Flow displayed in 2 modes as an instantaneous value or up to 20 point average
- Record and Recall MIN/MAX
- Data Hold plus Auto power off
- Optional Data Acquisition software 407001 - see details on p. 114
- Complete with telescoping probe with 5.5ft (167.6cm) cable, and four AA batteries



SPECIFICATIONS	■ AN100 🚺 🔺 AN200 🕦	HD300 N	407113 N	407119 🔃
Air Velocity (Max Res.)				
ft/min	80 to 5900 (1)	80 to 5900 (1)	100 to 6890 (1)	40 to 3346 (1)
m/sec	0.4 to 30.00 (0.01)	0.4 to 30.00 (0.01)	0.5 to 35 (0.1)	0.2 to 17 (0.1)
km/h	1.4 to 108.0 (0.1)	1.4 to 108.0 (0.1)	1.8 to 126.0 (0.1)	0.7 to 61.2 (0.1)
MPH	0.9 to 67.0 (0.1)	0.9 to 67 (0.1)	1.1 to 78.3 (0.1)	0.9 to 38.0 (0.1)
knots	0.8 to 58.0 (0.1)	0.8 to 58.0 (0.1)	1.0 to 68.0 (0.1)	0.4 to 33.0 (0.1)
Temperature (Max Res.)	14 to 140°F/ -10 to 60°C (0.1°)	14 to 140°F/-10 to 60°C (0.1°)	32 to 175°F (0.1°)/ 0 to 80°C (0.1°)	32 to 122°F (0.1°)/ 0 to 50°C (0.1°)
Temperature (IR)	■ No ▲ -58 to 500°F/ -50 to 260°C (0.1°/1°)	-58 to 932°F/-50 to 500°C (0.1°/1°)	-	_
Air Flow (CFM = ft ³ /min)	■ 0 to 9999CFM (1) ▲ 0 to 999,999CFM (0.1)	0 to 999,900CFM (0.001)	0 to 999,900CFM (0.001)	0 to 1,271,200CFM (0.001)
Air Flow (CMM = m³/min)	■ 0 to 9999CMM (1) ▲ 0 to 999,999CMM (0.1)	0 to 999,900CMM (0.001)	0 to 999,900CMM (0.001)	0 to 36,000CFM (0.001)
Basic Accuracy	±3%rdg; ±2°F (±1°C)	±3%rdg; ±4°F (2°C)	±2%rdg; ±1.5°F (±0.8°C)	±2%rdg; ±1.5°F (±0.8°C)
PC Interface	-	Yes	Optional 407001 Software (see p. 114)	Optional 407001 Software (see p. 114)
Datalogger	_	Directly to PC using software	_	_
CE approved	Yes	Yes	Yes	Yes
Dimensions/Weight	7x2.9x1.3" (178x74x33mm)/1.6lbs (700g)	8x3x1.9" (203x75x50mm)/12.2oz (350g)	7x2.9x1.3" (178x74x33mm)/1.35lbs (612g)	7x2.9x1.3" (178x74x32mm)/1.1lbs (482g)
Warranty	1 year	3 years	3 years	3 years



SDL300/SDL310/SDL350 Thermo-Anemometer/Dataloggers



Three models to choose from with different sensor size and design to either withstand high temperature environment or measure low level air velocity

- Datalogger date/time stamps and stores readings on an SD
- Selectable data sampling rate: 1 to 3600 seconds (1 hour)
- Manually store/recall up to 99 readings
- Type K/J Thermocouple input for high temperature measurements
- Large (9999 count) LCD displays Air Velocity and Temperature simultaneously
- Record/Recall MIN, MAX readings
- Data Hold plus Auto power off with disable function

card in Excel® format for easy transfer to a PC

• Complete with 6 x AA batteries, SD card, sensor with 3.9ft (120cm) cable, and hard carrying case; (See p. 41 and 70 for optional Type K and J Thermocouple probes); 3 year warranty

SDL300 Metal Vane Additional Functions

- 2% velocity accuracy via low friction ball bearing vane wheel on 39" (1m) cable
- Metal Vane withstands temperatures to 158°F (70°C) and air velocity to 6900ft/min

SDL310 Vane Additional Functions

- 2% velocity accuracy via low friction ball bearing vane wheel on 39" (1m) cable
- Measures Air Temperature to 122°F (50°C) and air velocity to 4930ft/min

SDL350 Hot Wire Additional Functions

- Air Velocity meter with telescoping probe designed to fit into HVAC ducts and other small openings and can read down to 40ft/min
- Probe extends up to 7.05ft (215cm) maximum length with cable

SPECIFICATIONS	SDL300	SDL310	SDL350
ft/min	60 to 6900ft/min	80 to 4930ft/min	40 to 3940ft/min
m/sec	0.3 to 35m/s	0.4 to 25m/s	0.2 to 25m/s
km/h	1.0 to 126.0km/h	1.4 to 90.0km/h	0.7 to 72km/h
MPH	0.7 to 78.2MPH	0.9 to 55.9MPH	0.5 to 45MPH
knots	0.6 to 68knots	0.8 to 48.6knots	1 to 31knots
Air Flow (CFM = ft3/min)	_	_	0 to 1,907,000CFM
Air Flow (CMM = m ³ /min)	_	_	0 to 54,000CMM
Basic Accuracy	2%rdg	2%rdg	5%rdg
Temperature (air)	32 to 158°F (0 to 70°C)	32 to 122°F (0 to 50°C)	32 to 122°F (0 to 50°C)
Common Features			
Temperature (Type J/K)	J: -148 to 2192°F (-100 to	1200°C)/K: -148 to 2372°F (-100 to 1300°C)
Datalogging	Store readings on SD mem	nory card (included)	
Dimensions/Weight	7.2x2.9x1.9" (182X73X48m	nm)/17.2oz (487g)	
3		,	

ORDERING	
SDL300 N	Metal Vane Thermo-Anemometer/Datalogger
SDL310 N	Vane Thermo-Anemometer/Datalogger
SDL350 N	Hot Wire CFM/CMM Thermo-Anemometer/Datalogger
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)

Vane Versus Hot Wire

All SDL models

memory card

have built-in SD slot and includes SD

Which sensor type should you choose? For many technicians, it is ultimately a matter of preference but there are some distinguishing factors to keep in mind. Vane anemometers are very useful for fast, accurate measurements of air velocity. The ultra compact size of a hot wire anemometer probe makes it easy to access small openings such as louvered vents. Telescoping hot wire probes are also useful for reaching high locations.





AN300/AN310/AN320 Large Vane CFM/CMM Thermo-Anemometers + CO₂*



AN320



- 4" (10cm) large vane allows for more precise readings on larger size ducts; choose models that also measure Air Volume, Humidity & Carbon Dioxide
- Fast responding sensors measure Air Velocity and Air Flow
- Built-in thermistor for air temperature
- Multipoint and timed average calculations
- Min/Max, Data Hold, and Auto power off
- Optional Air Flow Cone Kit (AN300-C) allows HVAC technicians to be freed from the hassle of calculating dimensions and allow for quick and easy airflow measurments for these common duct sizes; Adaptor size: Round 8.26" (210mm) and Square 13.6" (346mm)
- · Complete with four AAA batteries and hard case; 1 year warranty

AN310 Additional Functions:

- Measures Relative Humidity, Wet Bulb and Dew Point
- *AN320 Additional Functions:
- Measures Relative Humidity, Wet Bulb and Dew Point
- Carbon Dioxide (CO₂) measurement

SPECIFICATIONS	AN300	AN310	AN320
m/s	0.2 to 30m/s	0.2 to 30m/s	0.2 to 30m/s
ft/min	40 to 5900ft/min	40 to 5900ft/min	40 to 5900ft/min
Basic Accuracy	±1.5%	±1.5%	±1.5%
CFM/CMM	0 to 99999	0 to 99999	0 to 99999
Temperature	-4 to 140°F (-20 to 60°C)	-4 to 140°F (-20 to 60°C)	-4 to 140°F (-20 to 60°C)
Basic Accuracy	± (0.6°C)	± (0.6°C)	± (0.6°C)
Humidity	-	0.1 to 99.9%RH	0.1 to 99.9%RH
Basic Accuracy	_	±3%RH	±3%RH
Wet Bulb	_	-4 to 140°F (-20 to 60°C)	-4 to 140°F (-20 to 60°C)
Dew Point	_	23 to 140°F (-5 to 60°C)	23 to 140°F (-5 to 60°C)
Carbon Dioxide (CO ₂)	_	_	0 to 9999ppm
Dimensions/ Weight	10.6x4.2x2" (269x106x51mi	m) / 7oz (200g)	

ORDERING AN300 N Large Vane CFM/CMM Thermo-Anemometer AN310 N Large Vane CFM/CMM Anemometer/Psychrometer Large Vane CFM/CMM Anemometer /Psychrometer + CO AN320 N

Airflow Cone and Funnel Adapters

AN340 CMM/CFM Anemometer/ Psychrometer Datalogger



Telescoping probe with 18mm diameter mini vane sensor easily fits into air vents and can extend length of probe to 3.3ft (1m) long

- Measures Air Velocity, Air Flow, Air Temperature, Humidity, Dew Point and Wet Bulb with built-in Automatic Temperature Compensation (ATC)
- Manually store/recall up to 99 readings and automatically datalog up to 12000 readings (2000 readings for each parameter) with 12/24 hour time and date stamp
- Select data sampling rate from 1s to 4hr: 59 min: 59s
- Min/Max/Avg, Data hold, and Auto power off with disable
- Built-in PC interface

AN300-C

• Complete with external mini vane probe, Windows® compatible software, USB cable, 6 AAA batteries, and hard carrying case; 1 year warranty

m/s	0.5 to 20m/s	±3%	
ft/min	100 to 3940ft/min	±3%	
Temperature	-4 to 140°F (-20 to 60°C)	±1.1°F (0.6°C)	
Humidity	0.1 to 99.9%RH	±3%RH	
Wet Bulb	-4 to 158°F (-20 to 70°C)		
Dew Point	-4 to 140°F (-20 to 60°C)		
CFM/CMM	0 to 99999		

ORDERING	
AN340 N	Mini Vane CMM/CFM Anemometer/ Psychrometer Datalogger



SDL300



 ϵ

VPC300 Certified Video Particle Counter with built-in Camera




Unique built-in camera for capturing videos and photos that are stored onto internal memory or a microSD card (not included)

- Simultaneously measure and display 6 channels of particle sizes (down to 0.3 μm), Air Temperature, Humidity, Dew Point and Wet Bulb
- 2.8" TFT Color LCD display
- Built-in 320x240-pixel camera takes videos (3GP) and photo images (JPEG) and records them in internal 74MB memory
- Internal memory stores 5000 records (date, time, counts, humidity, temperature, sample volumes, and location label) and 20 minutes of video
- Selectable sample time, count data, and programmable delay
- Max, Min, DIF, AVG record, Date/time setup controls
- Auto Power Of
- Language selection: English, French, German, Spanish
- Meter is NIST calibrated
- Tripod mount for continuous recording
- Mini-USB port connection
- microSD card slot in battery compartment (memory card not included; max size 8GB)
- Complete with NIST-traceable calibration certificate, Universal AC Adapter/Charger with multiple plugs, USB cable, PC software, tripod, filter, 7.4V NiMH battery and hard case; 1 year warranty

0.3, 0.5, 1.0, 2.5, 5.0, 10µm
0.1ft3 (2.83L/min) controlled by internal pump
Cumulative, Differential, Concentration
50% @ 0.3µm; 100% for particles>0.45
5% @ 2,000,000 particles per ft3
-14 to 140°F (-25 to 60°C); Accuracy:±2°F/1°C
0 to 100%RH; Accuracy:±3%RH (40% to 60%RH)
32 to 122°F (0 to 50°C)
9.4 x 3 x 2.2" (240 x 75 x 57mm)/1.26lbs (570g)

ORDERING

VPC300 Video Particle Counter

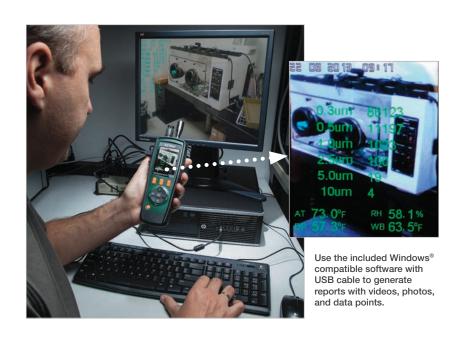

RD300 Refrigerant Leakage Detector



Ideal for detecting leakages from air-conditioning units and cooling systems that use all standard refrigerants

- Detects all standard refrigerants using a heated diode sensor
- LED light at probe tip (with on/off switch) for working in dimly lit areas
- LEDs display user-selectable High/Medium/Low levels with sensitivity of 0.25/0.50/0.99 oz per year
- Audible and Visual alert with mute button; Low battery indicator
- Field replaceable sensor (SD300-S) and LED light tip (RD300-L)
- Dimensions: 7.2x2.8x1.6" (184x70x40mm); Weight: 10oz (280g)
- Complete with sensor tip and LED light, leak test bottle,
 9V battery, and hard case; 1yr warranty

ORDERING	
RD300	Refrigerant Leakage Detector
RD300-S	Replacement Heated Diode Sensor Tip
RD300-L	Replacement LED Light Tip





EZ40 EzFlexTM Combustible Gas Detector



Quickly Identifies and Pinpoints gas leaks

- 16" (406mm) gooseneck for easy access into hard to reach locations
- High Sensitivity
- One hand operation with thumb controlled sensitivity adjustment, to eliminate background gas levels
- Visible and audible alarm at 10% (LEL) Lower Explosive Limit for methane
- Locate the smallest leaks
- Complete with 3 "C" batteries; 1 year warranty

SPECIFICATIONS	
Pump driven field calibration range	10ppm
Sensor type	Solid State
Alarm	Visible and Audible @ 10% LEL for Methane
Warm-up	Approx. 1 minute
Response Time	< 2 seconds (up to 40% LEL)
Duty Cycle	Intermittent
Battery life	8 hours continuous use typical
Dimensions/ Weight	8.7 x 2.83 x 1.8" (221 x 72 x 46mm)/ 18.4oz (520g)
ORDERING	

FG100 Combustible Gas Leak Detector



 ϵ

Fast response detection of flammable gas leakage

 Detects flammable gases: LNG - Liquefied Natural Gas (1000 to 6500ppm) and LPG - Liquefied Propane Gas (500 to 6500ppm)

ExFlex™ Combustible Gas Detecto

- Highly sensitive detection circuitry with audible and visual alarm
- LED indicators for gas leakage and static discharge
- Continuous operation up to 4 hours
- Dimensions/ Weight: 6.5 x 0.8" (164mm x 21mm)/0.9oz (25g)
- Complete with pocket clip and two AAA batteries; 1 year warranty

ORDERING		
FG100	Combustible Gas Leak Detector	



 ϵ



C010 Carbon Monoxide (C0) Meter





Includes 9V battery, protective holster, and case: 1 year warranty

Check CO level in all environments up to 1000ppm

- Auto Zero at start up
- Displays CO levels from 0 to 1000ppm
- 1ppm resolution with ±5% or ±10ppm basic accuracy (whichever is greater)
- Utilizes a stabilized electrochemical gas specific (CO) fast response sensor
- Audible alarm starts at 35ppm
- Memory stores 10 readings
- Ergonomic pocket size housing
- Max Hold, Data hold buttons, and Auto Power off features
- Dimensions/Weight: 6.3x2.2x1.57" (160x56x40mm)/6.35oz (180g)

ORDERING	
CO10	Carbon Monoxide Meter

CO30 Carbon Monoxide (CO) Monitor



Includes built-in stand, side cover, Universal AC Adaptor (multi-plugs US, EU, UK, and AU), and 4 AAA batteries; 1 year warranty

Programmable audible alarm, with high decibel beeper

- Wall mount or desktop monitor alternately displays Carbon Monoxide (CO) concentration, Air Temperature, and Relative Humidity readings
- Bright tri-colored LED indicator: Green <10ppm, Yellow = 10 to 29ppm, Red >30ppm
- LCD displays alarm icon, LED light turns red, and loud audible beeper sounds when indoor CO level exceeds set point (adjustable)
- Adjustable audible alarm sounds when reading exceeds one of the selected ranges
- "ZERO" Re-Calibration function
- Manual Temperature and Relative Humidity Compensation (adjustable)
- CO Calibration function in fresh air
- Four display error codes for troubleshooting and Low battery indicator
- · Recover to factory setting function

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Carbon Monoxide (CO)	0 to 999ppm	1ppm	±5% of rdg or ±10ppm
Temperature (Air)	32 to 122°F (0 to 50°C)	0.1°F/°C	±2°F/1°C
Relative Humidity	20 to 90%RH	1%RH	±5%RH @ 25°C
Dimensions/Wt	4.4x4.3x2.1" (113x108x53mm)/ 5.6oz (159g)		

ORDERING	
CO30	Carbon Monoxide CO Monitor

C050 Desktop Carbon Monoxide (C0) Monitor



1 vear warrantv

- Measures Carbon Monoxide (CO) concentration, Air Temperature & Humidity with extra loud beeping alarm (>85dB sound level at 3 meters away)
- Visibly bright LED (green & red) indicates indoor CO warning level
- Extra loud audible beeping alarm level meets UL2013 Standard (>85dB @ 3 meters); defaults alarm threshold at 30ppm CO level (user adjustable)
- Displays Date (Year, Month, Day) and time; Max function for CO readings
- Internal memory for manually storing up to 99 readings with easy recall function
- Complete with Universal AC adapter (UA100-240) and multiple plug types

Deskton Carbon Monoxide CO Monito

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Carbon Monoxide (CO)	0 to 999ppm	1ppm	±2ppm
Temperature (Air)	14 to 140°F (-10 to 60°C)	0.1°F/°C	±1.2°F/0.6°C
Relative Humidity	10 to 90%RH	0.1%RH	±5%RH @ 25°C
Dimensions/Wt	6.1 x 3.4 x 3.2" (155 x 87 x	81mm)/ 5.8oz (165g)	
Dimonololol VVC	0.1 x 0.4 x 0.2 (100 x 01 x	(100g)	
ORDERING			



CO100 Desktop Indoor Air Quality CO₂ Monitor



Measures Carbon Dioxide (CO2), Air Temperature and Humidity with useradjustable visual and audible alarm

- Checks for Carbon Dioxide (CO₂) concentrations (0 to 9,999ppm) and displays Temperature (14 to 140°F / -10 to 60°C) and Relative Humidity (0.1 to 99.9%) readings
- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Indoor Air Quality displayed in ppm with Good, Normal, Poor indication
- Visible and Audible CO₂ warning alarm
- Displays Year, Month, Date, and Time
- Max/Min CO2 value recall function
- Complete with Universal AC adaptor; 1 year warranty

ORDERING	
CO100	Desktop Indoor Air Quality CO ₂ Monitor

CO200/CO210 Desktop Indoor Air Quality CO₂ Monitor



Measures Carbon Dioxide (CO₂), Air Temperature and Humidity with user adjustable high/low alarms and choice of datalogging model

- Checks for Carbon Dioxide (CO₂) concentrations (0 to 9,999ppm) and displays Temperature (14 to 140°F / -10 to 60°C) and Relative Humidity (0.1 to 99.9%) readings
- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Indoor Air Quality displayed in ppm with Good, Normal, Poor indication
- · Displays Year, Month, Date, and Time
- Max/Min CO2 value recall function
- Auto Baseline Calibration (minimum CO₂ level over 7.5 days) or manual calibration in fresh air
- Dimensions/Weight: 4.6x4x4" (117x102x102mm)/ 7.2oz (204g)
- Complete with Universal AC adaptor; 1 year warranty
- Model CO200 Visible and Audible CO2 warning alarm with relay output for ventilation control


Model CO210 - Datalogs up to 5333 points for each parameter and can be downloaded to a PC using included Windows® compatible software and cable

ORDERING	
CO200	Desktop Indoor Air Quality CO ₂ Monitor
CO210	Desktop Indoor Air Quality CO ₂ Monitor/Datalogger

CO220 Desktop Indoor Air Quality CO₂ Monitor

(UA100-240) & multiple plug

types; 1 year warranty

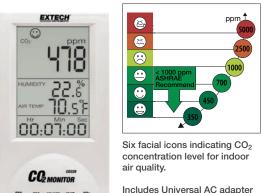

User-adjustable visual/audible alarm and calculates Dew Point and Wet Bulb

- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Audible CO₂ warning alarm when concentration level exceeds high/low user set point
- · Displays Year, Month, Date, and Time
- Min/Max CO₂ value recall function plus Manually store/recall 99 readings
- Calculates statistical weighted averages of TWA (8 hour Time Weighted Average) and STEL (15 minute Short Term Exposure Limit)
- lps% (Liters per second per person) and cfm/p (cubic feet per minute per person)
- Automatic Baseline Calibration function

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Carbon Monoxide (CO)	0 to 9,999ppm	1ppm	±(5%rdg + 50ppm)
Temperature (Air)	14 to 140°F (-10 to 60°C)	0.1°F/°C	±1.0°F (0.6°C)
Relative Humidity	0.1 to 99.9%RH	0.1%RH	±3%RH @ 25°C
Dimensions/Wt	6.1x3.4x3.2" (155x87x81mi	m)/ 5.8oz (165g)	

ORI	DER	ING	

Desktop Indoor Air Quality CO₂ Monito

 ϵ



CO230 Indoor Air Quality CO₂ Monitor



Automatic Baseline Calibration (ABC) with disable for use in areas with continuously elevated CO₂ levels (>400ppm)

- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Desktop or wall mount with triple LCD displays CO2, Temperature, and Humidity; Calculates Dew Point and Wet Bulb values
- Visible/Audible CO2 warning alarm when level exceeds high or low user set point
- Min/Max CO₂ value recall function
- Calculates statistical weighted averages of TWA (8 hour Time Weighted Average) and STEL (15 minute Short Term Exposure Limit)
- Alarm relay output for ventilation control
- Complete with Universal AC adaptor and multiple plug types (US, EU, UK, AUS); 1 year warranty

SPECIFICATIONS	RANGE	RESOLUTION	
Carbon Dioxide (CO ₂)	0 to 9,999ppm	1ppm	
Temperature (Air)	14 to 140°F (-10 to 60°C)	0.1°F/°C	
Relative Humidity	0.1 to 99.9%RH	0.1%RH	
Wet Bulb	Calculated		
Dew Point	Calculated		
Dimensions	5.1x3.4x2.4" (130x85x60mm)		
Weight	7.2oz (204g)		
ORDERING			
COSSU	Indoor Air Quality CO Manitor		

CO240 Handheld Indoor Air Quality CO₂ Meter



Dual display of CO₂ level and Humidity, Temperature, Dew Point, or Wet Bulb

- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Audible CO₂ warning alarm when concentration level exceeds high user set point
- Min/Max CO₂ value recall function
- Software for on-line (real-time) data streaming to a PC
- Automatic Baseline Calibration function
- Data hold, Low battery indicator, and Auto Power Off (with disable) function
- Tripod mount (tripod sold separately)

Indicates products that are available with optional calibration traceable to NIST. See page 160 for a complete listing.

• Complete with six AAA batteries, USB cable, PC software, Universal AC adaptor (with 4 plugs US, EU, UK, AUS), and soft case; 1 year warranty

Handheld Indoor Air Quality CO₂ Meter

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Carbon Dioxide (CO ₂)	0 to 9,999ppm	1ppm	±(5%rdg + 75ppm)
Temperature (Air)	14 to 122°F (-10 to 50°C)	0.1°F/°C	±2.0°F (1.0°C)
Relative Humidity	10 to 90%RH	0.1%RH	±5%RH @ 25°C
Dew Point	-99.2 to 118°F (-72.9 to 47°C)	0.1°F/°C	
Wet Bulb	12.2 to 118.8°F (-11 to 48.2°C)	0.1°F/°C	
Dimensions	8.3x2.4x1.6" (211x60x40mm)		
Weight	6.4oz (181.4g)		
ORDERING			





CO250 Portable Indoor Air Quality CO₂ Meter





Measure CO2 level in office buildings to ensure proper ventilation. Includes software and cable, 4 AA batteries, and case; 1 year warranty

Measures Carbon Dioxide (CO₂), Temperature, Humidity, Dew Point, and Wet Bulb and calculates statistical 8 hour and 15 minute time weighted averages

- Checks for Carbon Dioxide (CO₂) concentrations, measures Temperature and Relative Humidity, and displays calculated Dew Point and Wet Bulb
- Calculates statistical weighted averages of TWA (8 hour time weighted average) and STEL (15 minute short term exposure limit)
- Maintenance free NDIR (non-dispersive infrared) CO₂ sensor
- Backlit triple LCD display and user programmable audible alarm
- RS-232 interface, software and cable included to analyze data on a PC
- Optional 33% and 75% RH calibration bottles (RH300-CAL)

SPECIFICATIONS	RANGE	RESOLUTION
Carbon Dioxide (CO ₂)	0 to 5,000ppm	1ppm
Temperature	14 to 140°F (-10 to 60°C)	0.1°F/°C
Humidity	0.0 to 99.9%	0.1%
Dimensions/ Weight	7.9x2.7x2.3" (200x70x57mm)/ 6.7 oz. (190g)	

ORDERING	
CO250	Portable Indoor Air Quality CO ₂ Meter
RH300-CAL	33% and 75%RH Calibration Kit

EA80 Indoor Air Quality CO₂ Meter/Datalogger



Includes 6 AAA batteries, RS-232 cable, and Windows® compatible software; 1 year warranty

Measures CO₂ level, Temperature, Humidity, Dew Point and Wet Bulb

- Checks for Carbon Dioxide (CO₂) concentrations, measures Temperature and Relative Humidity, and displays calculated Dew Point and Wet Bulb
- Maintenance free dual wavelength NDIR (non-dispersive infrared) CO2 sensor
- Continuous (20,000 sets) or manual (99 sets) datalogging
- Data hold, Max/Min with Time stamp, Alarm, and Auto Power Off
- · Easy calibration in fresh air

SPECIFICATIONS	RANGE	RESOLUTION
Carbon Dioxide (CO ₂)	0 to 6,000ppm	1ppm
Temperature	-4 to 140°F (-20 to 60°C)	0.1°F/°C
Humidity	10 to 95%	0.1%
Dimensions/ Weight	5.3 x 2.8 x 1.2" (135 x 72 x 31mm)/ 8.2oz (235g)

ORDERING	
EA80	Indoor Air Quality CO₂ Meter/Datalogger

SD800 CO₂/Humidity/Temperature Datalogger



Includes 6 AAA batteries, SD memory card, Universal AC adaptor, and mounting bracket: 1 year warranty

Records data on an SD card in Excel® format to transfer to a PC for analysis

- Checks for Carbon Dioxide (CO₂) concentrations
- Maintenance free dual wavelength NDIR (non-dispersive infrared) CO2 sensor
- Triple LCD simultaneously displays CO₂, Temperature and Relative Humidity
- Selectable data sampling rate: 5, 10, 30, 60, 120, 300, 600 seconds or Auto

SPECIFICATIONS	RANGE	MAX. RESOLUTION	BASIC ACCURACY
Carbon Dioxide (CO ₂)	0 to 4,000ppm		±40ppm (<1000ppm); ±5% rdg (>1000ppm)
Temperature	32 to 122°F (0 to 50°C)	0.1°F/°C	±1.8°F/0.8°C
Humidity	10 to 90%	0.1%	±4%RH
Datalogging	Datalogs using 4GB SD memory card (included)		
Dimensions/ Weight	5.2 x 3.1 x 1.3" (132 x 80 x 32mm)	/ 9.9oz (282g)	

ORDERII	IG .
SD800	CO ₂ /Humidity/Temperature Datalogger









Includes built-in stand, side cover, Universal AC Adaptor (multi-plugs US, EU, UK, and AU), and 4 AAA batteries; 1 year warranty

Alternately displays Formaldehyde level, Temperature, and Humidity

- Bright tri-colored LED indicator: Green <0.08ppm, Yellow = 0.08 to 0.79ppm, and Red = 0.80ppm and above
- LCD displays alarm icon, LED light turns red, and loud audible beeper sounds when indoor CH₂O level exceeds set point
- "ZERO" Re-Calibration function
- Manual Temperature and Relative Humidity Compensation (adjustable)
- Designed with Electrochemical CH₂O sensor; CH₂O Calibration function in fresh air
- Four display error codes for troubleshooting; Recover to factory setting function

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Formaldehyde (HCHO & CH ₂ O)	0.00 to 5.00ppm (mg/m³)	0.01ppm (mg/m³)	±5% of rdg + 0.03ppm
Temperature	32 to 122°F (0 to 50°C)	0.1°F/°C	±2°F/1°C
Humidity	20 to 90%RH	1%RH	±5%RH
Dimensions/Wt	4.4x4.3x2.1" (113x108x5	3mm)/ 5.6oz (159g)	
ORDERING			

FM200 Handheld Formaldehyde (CH20 or HCH0) Meter



Includes built-in stand, side cover, Universal AC Adaptor

Displays Formaldehyde level, Air Temperature, and Relative Humidity

- Audible alarm default at 0.08ppm (adjustable)
- Designed with Electrochemical CH₂O sensor
- Sensor LED indicator shows where sensor is connected properly, power is on, and fan is in working condition

• Audible beeping alarm default at 0.08ppm (adjustable)

Average) and STEL (15-minute Short Term Exposure Limit)

RANGE

• Min/Max CH₂O value recall function

Indicates products that are available with optional calibration traceable to NIST. See page 160 for a complete listing.

- Built-in bumper that allows the fan inside the sensor to draw in gas quickly
- CH₂O Calibration function in fresh air
- Min/Max, Data Hold, Auto power off with disable, and Low battery indicator

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Formaldehyde (HCHO & CH ₂ O)	0.00 to 5.00ppm	0.01ppm	±5%
Temperature	32 to 122°F (0 to 50°C)	0.1°F/°C	±2°F/1°C
Humidity	10 to 90%RH	0.1%RH	±5%RH
Dimensions/Wt	6.1x3.4x3.2" (15 x87x81)	mm)/ 5.8oz (165g)	
ORDERING			
EM200	Handheld Formaldehyde	Meter	

Measures Formaldehyde (CH₂O or HCHO) concentration, Air Temperature & Humidity with date (Year, Month, Day) and time; User settable audible alarm

• Visibly bright LED (green & red) and three facial icons indicate CH₂O warning levels

• Calculates statistical weighted averages of TWA (8-hour Time Weighted

• Internal memory for manually storing up to 99 readings with recall function

FM300 Desktop Formaldehyde (CH20 or HCH0) Monitor

(multi-plugs US,

batteries; 1 year

EU, UK, and AU), and 4 AAA



>0.8ppm CH₂O >0.08ppm, <0.80ppm CH₂O <0.08ppm CH₂O

CH₂O concentration level for indoor air quality



 1 year warranty • Complete with Universal AC adapter (UA100-240) and multiple plug types SPECIFICATIONS

Three facial icons indicating

Formaldehyde (HCHO & CH₂O) 0.00 to 5.00ppm 0.01ppm ±5% ±2°F/1°C Temperature 32 to 122°F (0 to 50°C) 0.1°F/°C Humidity Dimensions/W 6.1 x 3.4 x 3.2" (155 x 87 x 81mm)/ 5.8oz (165g) ORDERING

RESOLUTION

BASIC ACCURACY

VFM200 VOC/Formaldehyde (CH2O or HCHO) Meter



Measures VOC (Volatile Organic Compound) and Formaldehyde concentrations in real-time

- Backlit LCD displays TVOC (Total Volatile Organic Compound) and HCHO (Formaldehyde) concentrations simultaneously in real-time
- · Built-in fast response, high accuracy fuel cell Formaldehyde sensor
- Adjustable audible and visible high/low alarms
- Auto Power Off
- 1 year warranty
- Complete with rechargeable battery and Universal AC Adaptor/ Charger (multi-plugs US, EU, UK, and AU)

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY	
TVOC	0.00 to 9.99ppm (mg/m³)	0.01ppm (mg/m³)	±5%FS	
Formaldehyde (CH ₂ O or HCHO)	0.00 to 5.00ppm (mg/m ³)	0.01ppm (mg/m³)	±5%FS	
Response Time	<2s			
Power Supply	Rechargeable battery and AC adaptor			
Charge Time	approx. 3 hours			
Dimensions	6.5x2.4x1" (165 x 60 x 25mm)/ 1.3lbs (584g)			
ORDERING				
VFM200	VOC/Formaldehyde Meter			

SD750 3-Channel Pressure Meter/Datalogger





Applications include pressure measurements from hydraulic, pneumatic, air compressor, and process gas systems, as well as other industrial applications.



Optional Universal Pressure Transducers available in three ranges (30psi, 150psi, and 300psi). Purchase the transducer with the range that best fits your application needs or call our tech support hotline if you need guidance.

Records data on an SD card in Excel® format for easy transfer to a PC for analysis plus the 3-Channel feature allows technicians to easily monitor and record pressure levels from three sources using one meter instead of three

- Triple LCD simultaneously displays 3 pressure channels
- Connect to installed transducers (up to 5000psi with 4-20mA output) or optional 30psi, 150psi or 300psi transducers listed below
- 4-20mA input with readout in 9 units of measure
- Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC
- User can select the data sampling rate: 5, 10, 30, 60, 120, 300, 600 seconds or Auto
- Complete with six AAA batteries, SD card, Universal AC Adaptor, three connectors, and mounting bracket
- Optional transducers sold separately (choose 30psi, 150psi or 300psi range)

30 PSI	150 PSI	300 PSI
0.002 to 2 bar	0.01 to 10 bar	0.02 to 20 bar
0.02 to 30 psi	0.2 to 150 psi	0.2 to 300 psi
0.002 to 2.040 kg/cm ²	0.01 to 10.19 kg/cm ²	0.02 to 20.40 kg/cm ²
2 to 1500 mmHg	10 to 7500 mmHg	20 to 15000 mmHg
0.05 to 59.05 inHg	0.2 to 295.2 inHg	0.5 to 590.5 inHg
0.02 to 20.40 mH ₂ O	0.1 to 101.9 mH ₂ O	0.2 to 204.0 mH ₂ O
1 to 802 inH ₂ O	5 to 4010 inH ₂ O	10 to 8020 inH ₂ O
0.002 to 1.974 atm	0.01 to 9.87 atm	0.02 to 19.74 atm
0.2 to 200.0 kPa	1 to 1000 kPa	2 to 2000 kPa
Datalogs using 4GB SD memory card		
5.2x3.1x1.3" (132x80x32mm)/7oz (199g)		
	0.002 to 2 bar 0.02 to 30 psi 0.002 to 2.040 kg/cm² 2 to 1500 mmHg 0.05 to 59.05 inHg 0.02 to 20.40 mH ₂ O 1 to 802 inH ₂ O 0.002 to 1.974 atm 0.2 to 200.0 kPa Datalogs using 4GB SD mei	0.002 to 2 bar 0.01 to 10 bar 0.02 to 30 psi 0.2 to 150 psi 0.002 to 2.040 kg/cm² 0.01 to 10.19 kg/cm² 2 to 1500 mmHg 10 to 7500 mmHg 0.05 to 59.05 inHg 0.2 to 295.2 inHg 0.02 to 20.40 mH₂O 0.1 to 101.9 mH₂O 1 to 802 inH₂O 5 to 4010 inH₂O 0.002 to 1.974 atm 0.01 to 9.87 atm 0.2 to 200.0 kPa 1 to 1000 kPa Datalogs using 4GB SD memory card

ORDERING	
SD750 N	3-Channel Pressure Datalogger
Accessories (Meter not inc	luded)
PT30-SD	Pressure Transducer for SD750 (30psi)
PT150-SD	Pressure Transducer for SD750 (150psi)
PT300-SD	Pressure Transducer for SD750 (300psi)





HD350 Pitot Tube Anemometer + Differential Manometer





Includes pitot tube with two 33.5" (85cm) connection hoses

 ϵ

Pitot Tube measures Air Velocity/Airflow in difficult-to-reach or tight locations where a vane anemometer won't fit

- Simultaneous display of Pressure, Air Velocity or Air Flow plus Temperature
- ±0.7252psi range
- 5 selectable units of pressure measurement
- Max/Min/Avg recording and Relative time stamp
- Data Hold and Auto power off functions
- Large LCD display with backlighting
- Zero function for offset correction or measurement
- Store/Recall up to 99 readings in each mode
- USB port includes software
- 3 vear warrantv
- Complete with Windows® compatible software with cable, 9V battery, pitot tube with two 33.5" (85cm) connection hoses, 100V-240V universal AC Adaptor with multiple plugs, and hard carrying case

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY
Pressure			
psi	0.7252psi	0.0001psi	±0.3%FS
mbar	50.00mbar	0.01mbar	±0.3%FS
inH ₂ O	20.07inH ₂ O	0.01inH ₂ O	±0.3%FS
mmH ₂ O	509.8mmH ₂ O	0.01mmH ₂ O	±0.3%FS
Pa	5000Pa	1Pa	±0.3%FS
Linearity/Hysteresis	±0.29FS		
Maximum Pressure	10psi		
Air Velocity/Flow			
ft/min	200 to 15733	1	±1% FS
m/s	1 to 80.00	0.01	±1% FS
km/h	3.5 to 288.0	0.1	±1% FS
MPH	2.25 to 178.66	0.01	±1% FS
knots	2.0 to 154.6	0.1	±1% FS
CFM/CMM	0 to 99,999	0.001	±1% FS
Temperature	32.0 to 122.0°F (0 to 50°C)	0.1°	±3°F/1.5°C
Dimensions/Weight	Meter: 8.2 x 2.9 x 1.9" (210 x Pitot Tube: 15.4 x 7.7" (390 x	x 75 x 50mm) / 12oz (340g); x 195mm); Diameter 0.32" (8n	nm) / 7.2oz (204g)

ORDERING	
	_

Pitot Tube Anemometer + Differential Manometer





HD700 Series Differential Pressure Manometers



HD700 - (2psi)

Low Range/High Resolution Gauge or Differential Pressure

- Three models to choose from: Model HD700 (±2psi range), Model HD750 (±5psi range), and Model HD755 (±0.5psi range)
- 11 selectable units of measure
- MAX/MIN recording and Relative time stamp
- Data Hold and Auto power off
- · Zero function for offset correction or measurement
- Large LCD display with backlighting
- USB port includes PC software
- Complete with 9V battery, Windows® compatible software with USB cable, 100-240V Universal AC adaptor, connection hose, built-in stand, and hard carrying case

SPECIFICATIONS	HD700	HD750	HD755
psi	2psi (0.001psi)	5psi (0.001psi)	0.5psi (0.001psi)
inH ₂ O	55.40inH ₂ O (0.01inH ₂ O)	138.3inH ₂ O (0.1inH ₂ O)	13.85inH ₂ O (0.01inH ₂ O)
mbar	137.8mbar (0.1mbar)	344.7mbar (0.1mbar)	34.47mbar (0.01mbar)
kPa	13.78kPa (0.01kPa)	34.47kPa (0.01kPa)	3.447kPa (0.001kPa)
inHg	4.072inHg (0.001inHg)	10.18inHg (0.01inHg)	1.018inHg (0.001inHg)
mmHg	103.4mmHg (0.1mmHg)	258.5mmHg (0.1mmHg)	25.85mmHg (0.01mmHg)
ozin²	32ozin² (0.01ozin²)	80ozin² (0.01ozin²)	8.00ozin² (0.01ozin²)
ftH ₂ O	4.616ftH ₂ O (0.001ftH ₂ O)	11.53ftH ₂ O (0.01ftH ₂ O)	1.154ftH ₂ O (0.001ftH ₂ O)
cmH ₂ O	140cmH ₂ O (0.1cmH ₂ O)	350.1cmH ₂ O (0.1cmH ₂ O)	2.59cmH ₂ O (0.01cmH ₂ O)
kgcm ²	0.140kgcm ² (0.001kgcm ²)	0.351kgcm ² (0.001kgcm ²)	0.035kgcm ² (0.001kgcm ²)
bar	0.137bar (0.001bar)	0.344bar (0.001bar)	0.034bar (0.001bar)
Basic Accuracy	±0.3%FS	±0.3%FS	±0.3%FS
Dimensions/Weight	Meter: 8.2x2.9x1.9" (210x75x	50mm)/ 9.8oz (280g)	

ORDERING	
HD700 N	Differential Pressure Manometer (2psi)
HD750 N	Differential Pressure Manometer (5psi)
HD755 N	Differential Pressure Manometer (0.5psi)

407910 Heavy Duty Differential Pressure Manometer

 ϵ

Wide range dual input with multiple units and RS-232 interface

- Dual differential inputs with internal sensors
- Wide (±802 inches of water) measurement range with high resolution to 0.5 inch
- Displays 8 types of pressure units
- Zero function for offset measurements
- Data Hold, Auto power off, and MAX/MIN
- Built-in RS-232 PC interface optional 407001 Data Acquisition software (see p. 114 for details)
- 3 year warranty
- Complete with 2 quick-disconnect fittings, 9V battery, protective holster with stand, and case

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
psi	±29psi	0.02psi	±1% FS
mbar	±2000mbar	1mbar	±2% FS
kg/cm ²	±2.040kg/cm ²	0.001kg/cm ²	±1% FS
mmHg	±1500mmHg	1mmHg	±1% FS
inHg	±59.05inHg	0.05inHg	±1% FS
mH_2O	±20.40mH ₂ O	0.01mH ₂ O	±1% FS
inH ₂ O	±802.0inH ₂ O	0.5inH ₂ O	±1% FS
Atmosphere	±1.974atm	0.001atm	±1% FS
Dimensions/Weight	Meter: 7x2.9x1.3" (178x74x3	3mm)/12oz (350g)	

ORDERING	
407910 N	Heavy Duty Differential Pressure Manometer
156119	117VAC Adaptor
409997	Soft Vinyl Carrying Case



SDL700 Pressure Meter/Datalogger





SD memory card



Optional Pressure Transducers available in: 30psi (PT30) 150psi (PT150) 300psi (PT300)



Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC

- Accepts interchangeable transducers with ranges of 30, 150, 300psi (Transducers sold separately)
- Meter automatically senses plug-in transducer's range and calibration
- Selectable data sampling rate: 1 to 3600 seconds
- Internal memory stores 99 readings manually; External data storage in Excel format on an SD card (included) for easy transfer to a PC
- Large backlit dual LCD
- MIN/MAX, Data Hold, and Auto power functions
- Complete with 6 x AA batteries, SD memory card, and hard carrying case; 3 year warranty. Optional AC adaptor.

SPECIFICATIONS	30psi	150psi	300psi	
bar	0.002 to 2	0.01 to 10	0.02 to 20	
psi	0.02 to 29	0.2 to 145	0.2 to 290	
kg/cm ²	0.002 to 2.040	0.01 to 10.19	0.02 to 20.40	
mmHg	2 to 1500	10 to 7500	20 to 15000	
inHg	0.05 to 59.05	0.2 to 295.2	0.5 to 590.5	
mH_2O	0.02 to 20.40	0.1 to 101.9	0.2 to 204.0	
inH ₂ O	1 to 802	5 to 4010	10 to 8020	
atm	0.002 to 1.974	0.01 to 9.87	0.02 to 19.74	
hPA	2 to 2000	10 to 10000	20 to 20000	
kPA	0.2 to 200.0	1 to 1000	2 to 2000	
Dimensions/Weight	Meter: 7.2x2.9x1.9" (18	32X73X48mm)/ 17.3oz (490g)		

ORDERING		
SDL700 N	Pressure Meter/Datalogger	
PT30	30psi Pressure Transducer	
PT150	150psi Pressure Transducer	
PT300	300psi Pressure Transducer	
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)	



Extech's SD series Dataloggers

Extech's SD series Dataloggers measure, display and record various industrial parameters, such as Pressure level for hydraulics, pneumatics, air compressors, and process gas systems to Environmental conditions such as Humidity, Temperature, Carbon Dioxide, and Barometric Pressure. Featuring date/time stamps and selectable data sampling rates, all SD series models record in Excel® format on included SD cards so users can transfer files to a PC for further analysis and reporting.







SD700 Barometric Pressure/ Humidity/Temperature Datalogger (p. 87)



SD200 3-Channel Temperature Datalogger (p. 73)



SD800 CO₂/Humidity/Temperature Datalogger (p. 107) SD500 Humidity/Temperature Datalogger (p. 87)

475055 High Capacity Force Gauge with PC Interface





Complete with tension and compression adaptors, six AA 1.5V batteries, and case; Optional AC Adaptors available 153117 or UA100-240, see below for ordering; 1 year warranty

220lbs (100kg), Tension, and Compression


- Tension or Compression, Peak hold and Zero functions
- Large LCD with back light feature and Positive/Reverse display for easy readability
- PC interface and optional software

SPECIFICATIONS	
Range	220 lbs, 100kg, 980 Newtons
Basic Accuracy (23°C)	±(0.5%rdg)
Resolution	0.05lbs, 0.05kg, 0.2 Newtons
Overload capacity	150kg
Update Rate	Fast mode 0.2 seconds; Slow mode 0.6 seconds
Full scale deflection	<1mm
Transducer type	Load cell
Dimensions/ Weight	Meter: 8.5 x 3.5 x 1.8" (215 x 90 x 45 mm)/ 1 lb (450g)

ORDERING	
475055 N	High Capacity Force Gauge with PC Interface
407001	Data Acquisition Software and Serial Cable
407001-USB	USB adaptor for 407001

475040/475044/-SD Digital Force Gauges

475044-SD



 Complete with hook adaptor for tension, compression adaptors (flat, cone and chisel head), 5" (127mm) extension rod, 6 AA batteries, and case; 475040-SD and 475044-SD also include SD memory card

Push/Pull measurements in kg, lbs, oz, and Newton units

SPECIFICATIONS	475040/475040-SD	475044/475044-SD (HIGH CAPACITY)
Datalogging	– / SD memory card for 475040-SD	- / SD memory card for 475044-SD
Range	176oz, 5000g, 49 Newtons	44lbs, 20kg, 196 Newtons
Basic Accuracy (23°C)	±(0.4%)	±(0.5%)
Resolution	0.05oz, 1g, 0.01 Newtons	0.01lbs, 0.01kg, 0.05 Newtons
Overload capacity	10kg	30kg
Update Rate	Fast mode 0.2secs; Slow mode 0.6sec	s
Full scale deflection	2.00mm	
Transducer type	Load cell	
Dimensions/ Weight	8.5x3.5x1.8" (215x90x45mm)/ 1.4 lbs (6	650g)

ORDERING	
475040 N	Digital Force Gauge
475040-SD N	Digital Force Gauge/Datalogger
475044 N	High Capacity Force Gauge
475044-SD N	High Capacity Force Gauge/Datalogger
479097	Accessory Kit (2ea hook, flat, cone, & chisel head adaptors)
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)



475040 475040-SD

 ϵ

475040-SD & 475044-SD include SD memory card to conveniently datalog readings



Reliable, Easy to Use, and Accurate

Check for proper indoor and outdoor light levels to comply with OSHA regulations

ACCESSORIES		
407001	Data Acquisition Software	
407001-USB	USB Adaptor	
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)	



401027 Pocket Foot Candle Light Meter

Measures up to 2,000Fc for basic lighting applications

- Easy to operate Foot candle light meter with 2 ranges
- Convenient pocket size design
- Over-range indication
- Complete with 9V battery, light sensor with protective cover and 45" (1.1m) cable, and built-in stand



401025 Foot Candle/Lux Meter

Includes analog output and fast/slow response feature

- · Accurately displays light level in terms of Fc or Lux over three ranges
- Select fast (1 second) or slow (2 seconds) response time
- Analog output of 1mV per count for capturing readings to a recorder
- · Complete with 9V battery, light sensor with protective cover and 47" (1.2m) cable, and built-in stand



LT300 Light Meter

Digital and Analog display of light in Fc or Lux

- Wide range to 40,000 Foot-Candles or 400,000 Lux with high resolution to 0.01 Fc/Lux
- Relative mode indicates change in light levels
- Peak mode captures highest reading
- Remote light sensor on 12" (305mm) coiled cable expandable to 24" (609mm)
- Utilizes precision photo diode and color correction filter
- Cosine and color corrected measurements
- MIN/MAX and Data Hold • Large LCD display with
- analog bargraph · Backlight for readings
- in low light levels · Complete with 9V battery, light sensor with protective cover, protective holster, and pouch



407026 Heavy **Duty Light Meter** with PC Interface

Enhance accuracy by selecting one of four lighting types plus PC interface

- % displays differential from reference point
- "ZERO" Re-Calibration
- Enhance accuracy by selecting lighting type Tungsten/Daylight, Fluorescent, Sodium, Mercury
- MAX/MIN/AVG, Data Hold, and Auto power off
- Built-in PC serial interface with optional 407001 Data Acquisition software (see p. 114 for details)
- · Complete with 9V battery, light sensor, and protective cover with 45" (1.1m) cable, and protective holster with stand. Optional 117V (156119) or 220V (156221) AC adaptors.



SDL400 Light **Meter/Datalogger**

Datalogger date/time stamps and stores readings on an SD card in Excel® format

- Wide range: 10,000Fc/100kLux
- Cosine and color-corrected measurements
- Utilizes precision photo diode and spectral response filter
- Selectable data sampling rate: 1 to 3600 seconds (1 hour)
- Internal memory stores 99 readings manually
- Large backlit LCD
- Type K/J Thermocouple input MIN/MAX and Data Hold
- "ZERO" Re-Calibration
- Auto power off with disable function
- Complete with 6 x AA batteries, SD card, hard case & light sensor with protective cover; Optional Universal AC Adaptor UA100-240 also see p. 41 and 70 for optional Type K and J Thermocouple probes

407001 Data Acquisition Software

- Enables users of specific Extech meters to capture, display and store readings on a PC • Sampling time: 1sec - 60 mins
- Import data into Excel
- Includes Windows® 95/98/2000/ NT/XP/7 compatible software and serial cable
- Optional USB Adaptor -407001-USB

SPECIFICATIONS	401027 N	401025 N	LT300 N	407026 🕦	SDL400 ₪	SPECIFICATIONS
Fc Range	200, 2000Fc	200, 2000, 5000Fc	40,000Fc	200, 2000, 5000Fc	200, 2000, 10kFc	Fc Range
Lux Range	_	2000, 20000, 50000Lux	400,000Lux	2000, 20000, 50000Lux	2000, 20k, 100kLux	Lux Range
Max. Resolution	0.1Fc	0.1Fc/1Lux	0.01Fc/Lux	0.1Fc/1Lux	0.1Fc/1Lux	Max. Resolution
Basic Accuracy	±5% FS	±5% FS	±5% rdg	±4%FS	±4%rdg	Basic Accuracy
Temperature (Type J/K)	_	_	_	-	J: -148 to 2192°F (-100 to 1200°C) K: -148 to 2372°F (-100 to 1300°C)	Temperature (Type J/K)
Cosine & Color Corrected	Yes	Yes	Yes	Yes	Yes	Cosine & Color Corrected
Analog output	_	Yes	_	_	_	Analog output
PC Interface	_	_	_	Optional 407001 Software (see p. 114)	SD Card	PC Interface
Datalogging	_	_	_	-	Manual: 99 readings Continuous: Datalogs with 4GB SD card	Datalogging
CE approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions/ Weight	5.2x2.8x1" (131x70x25mm)/ 6.9oz (195g)	6.4x2.8x1.2" (163x70x30mm)/ 8.3oz (220g)	5.9x2.95x1.57" (150x75x40mm/ 7oz (200g)	7x2.9x1.3" (178x74x33mm)/ 1.6lbs (726g)	7.2x2.9x1.9" (182X73X48mm)/16.8oz (475g)	Dimensions/ Weight
Warranty	1 year	1 year	1 year	3 years	3 years	Warranty



Bright Solutions from Extech

Extech light meters deliver accurate, repeatable readings and feature bigdigit displays, wide-range models, ruggedized designs, as well as memory and datalogging capabilities.







EA31 EasyView® Big Digit Light Meter

Measures light intensity up to 20,000Fc/Lux

- Compact and rugged design with large display and bargraph
- Data Hold and MIN/ MAX readings
- Auto power off
- · Complete with built-in stand, light sensor and protective cover with 39" (1m) coiled cable, protective holster, 6 AAA batteries, and carrying case



EA30 EasyView® **Big Digit, Wide** range Light Meter

Measures high intensity light up to 40,000Fc and 400,000Lux, is ideal for outdoor applications

- · Compact and rugged design with large display and bargraph
- · Relative function for zero or difference from reference value
- · Peak captures short light pulses to 100µSeconds
- Data Hold and MIN/ MAX readings
- Auto power off, Zero function
- Complete with built-in stand, light sensor and protective cover with 39" (1m) coiled cable, protective holster, 6 AAA batteries, and carrying case



EA33 EasyView® **Light Meter with** Memory

Advanced illuminance functions for taking measurements in direct sunlight

- Wide measurement range to 99,990Fc (999,900 Lux)
- Luminous intensity (candela) calculations
- Store and recall up to 50 measurements, includes relative or real time clock stamp
- Ripple function excludes the effect of stray light from the primary light source measurement
- Auto power off with disable
- Multiple point average function
- Timed-Hold. Relative in absolute value or % deviation, and Comparator function with high/low alarms
- Includes built-in stand. light sensor and protective cover with 36" (0.9m) coiled cable, protective holster, 6 AAA batteries, and case



HD400 Light Meter

Large backlit display with fast, 40-segment bar graph for capturing trends

- Wide range to 40,000Fc or 400,000Lux
- Cosine and color corrected measurements
- Utilizes precision silicon photo diode and spectral response filter
- Peak mode (10ms) captures highest reading
- Relative mode indicates change in light levels · Heavy duty, rugged double
- molded housing
- Built-in USB port
- · Includes light sensor and cover with 39" (1m) cable, Windows® compatible software with USB cable, built-in stand, hard carrying case, and 9V battery



HD450 Light Meter **Datalogger**

Automatically stores up to 16,000 readings or manually store/recall up to 99 readings

- · Records in a continuous mode up to 16,000 readings
- Wide range to 40,000Fc or 400,000Lux
- Cosine and color corrected measurements
- Utilizes precision silicon photo diode and spectral response filter
- Peak mode (10ms) captures highest reading
- Relative mode indicates change in light levels
- Heavy duty, rugged double molded housing
- Built-in USB port
- Includes light sensor and cover with 39" (1m) cable, Windows® compatible software, USB cable, built-in stand, case, and 9V battery

NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol N next to product part numbers.

SPECIFICATIONS	EA31 🕦	EA30 N
Display counts	2000 count LCD	4000 count LCD
Fc Range	20, 200, 2000, 20,000Fc	40, 400, 4000, 40,000Fc
Lux Range	20, 200, 2000, 20,000Lux	40, 400, 4000, 40,000, 400,000Lux
Max. Resolution	0.01Fc/Lux	0.01Fc/Lux
Basic Accuracy	±3%rdg + 0.5%FS	±3%rdg + 0.5%FS
Cosine & Color Corrected	Yes	Yes
PC Interface	_	_
Datalogging	_	_
CE approved	Yes	Yes
Dimensions	5.9x2.8x1.4" (150x72x33mm)	5.9x2.8x1.4" (150x72x33mm)
Weight	8.3oz (235g)	8.3oz (235g)
Warranty	1 year	1 year

EA33 N 999,999 count LCD 9.999, 99.99, 999.9, 99999, 99,990Fc 99.99, 999.9, 9999, 99,990, 999,900Lux 0.001Fc/0.01Lux ±3% Yes 5.9x2.8x1.4" (150x72x33mm) 11.29oz (320g) 1 year

HD400 🕦 4000 count backlit LCD 40, 400, 4000, 40kFc 400, 4000, 40k, 400kLux 0.01Fc/0.1Lux ±5% Yes USB with software included Directly to PC using software 6.7x 3.1x1.6" (170x80x40mm) 13.7oz (390g) 3 years

HD450 N SPECIFICATIONS 4000 count backlit LCD Display counts 40, 400, 4000, 40kFc Fc Range 400, 4000, 40k, 400kLux Lux Range 0.01Fc/0.1Lux Max. Resolution ±5% Basic Accuracy Cosine & Color Corrected USB with software included PC Interface 16,000 data (continuous)/ 99 data (manual) Datalogging CE approved 6.7x 3.1x1.6" (170x80x40mm) Dimensions 13.7oz (390g) Weight 3 years Warranty



LRK10/LRK15 Lighting Retrofit Kits



Applications:

- Lighting System Audits
- Post-retrofit Verification Testing
- · Construction Audits
- Project Installation

Designed for professionals who routinely audit existing and replacement lighting systems for energy efficiency and lighting performance

- Successful lighting retrofit contractors need tools to comprehensively assess lighting infrastructure: from light levels for a given space to energy usage. Older technology such as incandescent lights or aging ballasts can impact the bottom line with added energy costs. Insufficient or excessive lighting can impact productivity or worker health with eyestrain from dim lighting or glare. As you work with clients to evaluate newer, high efficiency fluorescent and LED lighting retrofits, get the tools that deliver accurate, actionable information.
- Both LRK10 and LRK15 kits include:
- Model LT300 Light Meter: Quickly measure lighting levels with this ergonomic, easy to use light meter (see p. 115)
- Model DT200 Compact Laser Distance Meter Quickly calculate area even in hard-to-measure spots
- LRK15 kit also includes:
- Model 380940 400A AC/DC Power Clamp Meter: Versatile electrical test tool with built-in wattage measurement

ORDERING	(VISIT WWW.EXTECH.COM FOR INDIVIDUAL PRODUCT INFORMATION)
LRK10	Lighting Retrofit Kit
LRK15	Lighting Retrofit Kit with Power Clamp Meter







easy to use light meter.

Quickly measure lighting
Laser distance meter with built-in
Versatile electrical test tool with levels with this ergonomic, tools to quickly calculate area even in hard-to-measure spots.

built-in wattage measurement.

SDL470 UVA/UVC Light Meter/Datalogger



Complete with built-in tilt stand, SD memory card. UVA light sensor with protective cover. UVC light sensor, hard case, Universal AC adaptor, and 6 x AA batteries; 1 year warranty Measures UVA (long wave) and UVC (short wave) light sources, plus date/ time stamps and stores files onto an SD memory card in Excel® format

- UVA probe captures long-wave 365nm UV irradiance measurements under a UVA (black light) source
- UVC probe captures short-wave 254nm UV irradiance measurements under a UVC light source
- Cosine correction filter and metal housing
- Internal memory stores 99 readings manually; External data storage in Excel format on an SD card (included) for easy transfer to a PC
- Offset adjustment used for zero function or to make relative measurements
- Adjustable data sampling rate: 1 to 3600 seconds
- Type K/J Thermocouple input for temperature measurements (probes sold separately)
- Large backlit LCD display
- Record/Recall MIN, MAX readings, Data Hold, and Auto power off functions

SPECIFICATIONS	RANGE	MAX RESOLUTION	BASIC ACCURACY
UVA Range	2mW/cm ² , 20mW/cm ²	0.001mW/cm ²	±4% FS
UVC Range	2mW/cm ² , 20mW/cm ²	0.001mW/cm ²	±4% FS
Frequency Bandwidth	365nm (UVA); 254nm (UVC)		
Type K Temperature	-148 to 2372°F (-100 to 1300°C)	0.1°F/°C	±(0.4%±1.8°F/1°C)
Type J Temperature	-148 to 2192°F (-100 to 1200°C)	0.1°F/°C	±(0.4%±1.8°F/1°C)
Memory	Manual: 99 data readings; Includ	es SD memory card for da	talogging
Dimensions/ Weight	7.2 x 2.9 x 1.9" (182 x 73 x 47.5n	nm)/ 16.2oz (475g)	

ORDERING	
SDL470 N	UVA/UVC Light Meter/Datalogger
TP875	Type K Thermocouple Bead Wire Temperature Probe -58 to 1000°F (-50 to 538°C)

LT40 LED Light Meter



LED Light meters are used for monitoring and optimizing environmental light levels in buildings, schools, and offices.

Measures the light intensity of white LED lights

LED Light Meter

- Measure white LED and Standard Lighting in Lux or Foot-Candle (Fc) units
- 4000 count display
- Min/Max Average
- Cosine and color corrected measurements
- Auto Power off

ORDERING

LT40 N

- 1 vear warrantv
- Complete with built-in sensor with protective cover, 2 AAA batteries, and pouch

SPECIFICATIONS	
Foot-candle (Fc) Range	40, 400 4000, 40000
Lux Range	400, 4000, 40000, 400000
LED Type	white
Basic Accuracy	±3%
Dimensions	5.2x1.9x1" (133x48x23mm)
Weight	8.80z (250g)

LT45 Color LED Light Meter



LED Light meters are used for monitoring and optimizing environmental light levels in buildings, schools, and offices

- Measure white, red, yellow, green, blue, and purple LED lights and Standard Lighting in Lux or Foot-Candle (Fc) units
- Manually store/recall up to 99 readings
- 4000 count display
- Min/Max Average
- Cosine and color corrected measurements
- Auto Power off
- 1 year warranty
- Complete with light sensor with protective cover and coiled cable expandable to 59" (1.5m), 9V battery, and hard case

Foot-candle (Fc) Range	40, 400 4000, 40000	
Lux Range	400, 4000, 40000, 400000	
LED Type	white, red, yellow, green, blue, purple	
Basic Accuracy	±3%	
Dimensions	5.1x2.2x1.5" (130x55x38mm)	
Weight	8.8oz (250g)	





Unrivaled Selection

No one offers a better selection of sound level meters than Extech. With models for every application, capabilities include Type 2 compliance, calibration traceable to N.I.S.T., PC connectivity, datalogging, octave band analyzer, ultra compact and wall-mounted designs, and personal dosimeters (See pages 120-125).

ACCESSOF	RIES
TR100	Tripod (for meters with Tripod mount feature)
40705X	AC/DC Recorder Output Cable
407744 N	94dB Sound Calibrator (0.5", 1" microphones)
407766 N	94/114dB Sound Calibrator (0.5", 1" microphones)



407730 Digital Sound Level Meter

Analog bargraph with 30dB range updates every 40ms

- ±2dB accuracy with 0.1dB resolution
- Analog AC output for connection to chart recorders and dataloggers
- Record MAX/MIN values over time
- Auto power off and MAX Hold functions
- Utilizes 0.5" (12.7mm) condenser microphone
- Tripod mount for field use (optional TR100 Tripod — sold separately)
- · Complete with microphone wind screen and four AAA batteries



407732 Type 2 Sound Meter

Two range meter with backlit LCD display

- High accuracy meets Type 2 standards (ANSI S1.4-1983, IEC 60651, EN 60651)
- High & Low measuring ranges
- Data Hold and MAX Hold functions
- · Backlit display to view in dimly lit area
- Complete with microphone wind screen and 9V battery
- Optional 407732-NISTL includes Certificate of Calibration Traceable to NIST at single point calibration to 94dB



407732-KIT Type 2 Sound Meter Kit

Digital sound level meter with 94dB sound calibrator and carrying case

KIT includes:

- Model 407732 with high accuracy meets ANSI, and IEC Type 2 standards (see product features on the left)
- Model 407722 Calibrator calibrates and verifies sound level meter operation
- Durable double molded housing
- Total Harmonic Distortion (THD) <2% at 94dB
- Complete with 407732 Sound Meter, 407722 Sound Calibrator, and protective hard carrying case (Optional NIST traceable certificate available for kit: 407732-KIT-NIST includes 407732-NISTL and 407722-NIST) - see p. 160 for ordering info



407736 Type 2 Sound Meter with Calibration Check

Two range meter with analog outputs

- High accuracy meets Type 2 standards (ANSI S1.4-1983, IEC 60651, EN 60651)
- High and Low measuring ranges
- MAX Hold with reset button
- Built-in calibration check (94dB)
- Analog AC/DC outputs for connection to an analyzer or recorder
- Tripod mount for field use (optional TR100 Tripod — sold separately)
- · Complete with microphone wind screen, 9V battery, and carrying case

Sound Level Calibrators

· Calibrate and verify Sound Meter operation

 1kHz sine wave at 94dB/114dB (407766) or 94dB (407744) is generated to an accuracy of ±5% (frequence ±0.5dB (94dB); ±0.8dB (114dB)

• For use with both 0.5" to 1.0" microphones

- For use with all Extech Sound Level Meters
- Includes screwdriver, batteries, and case

	F
	В
	٧
	F
a. () a.m.d	C
cy) and	А
5	C
3	
	V

SPECIFICATIONS	407730 N	
Range	40 to 130dB	
Basic Accuracy	±2dB	
Weighting (A&C)	Yes	
Response Time (Fast/Slow)	Yes	
Condenser Microphone	0.5" (12.7mm)	
Analog Output	AC	
CE approved	Yes	
Dimensions	9x2.2x1.7" (230x57x44mm)	
Weight	5.6oz (160g)	
Warranty	1 year	

SPECIFICATIONS	407730 N	407732 🕦	407732-KIT N	407736 🔃	
Range	40 to 130dB	Low: 35 to 100dB, High: 65 to 130dB	Low: 35 to 100dB, High: 65 to 130dB	Low: 35 to 90dB; High: 75 to 130dB	
Basic Accuracy	±2dB	±1.5dB (Type 2)	±1.5dB (Type 2)	±1.5dB (Type 2)	
Weighting (A&C)	Yes	Yes	Yes	Yes	
Response Time (Fast/Slow)	Yes	Yes	Yes	Yes	
Condenser Microphone	0.5" (12.7mm)	0.5" (12.7mm)	0.5" (12.7mm)	0.5" (12.7mm)	
Analog Output	AC	-	-	AC/DC	
CE approved	Yes	Yes	Yes	Yes	
Dimensions	9x2.2x1.7" (230x57x44mm)	8.2x2.1x1.25" (210x55x32mm)	Meter: 8.2x2.1x1.25" (210x55x32mm)	9.5x2.7x1" (241x69x25mm)	
Weight	5.6oz (160g)	8.1oz (230g)	Meter: 8.1oz (230g)	7.6oz (215g)	
Warranty	1 year	1 year	1 year	1 year	



Sound Investment

Monitor and analyze workplace and equipment sound levels to ensure OSHA compliance.

ACCESSORIE	S
407744 N	94dB Sound Calibrator (0.5", 1" microphones)
407766 N	94/114dB Sound Calibrator (0.5", 1" microphones)
TR100	Tripod (for meters with Tripod mount feature)
40705X	AC/DC Recorder Output Cable (3ft/0.9m)
407764-EXT	15ft (4.7m) Microphone Extension Cable (for 407780A)
USB100	RS-232 to USB adaptor
42299	3.6V Lithium Battery 9pk of 2)
AC Adaptors t	for 407780A and 407790A
144118	110V AC Adaptor
144220	220V AC adaptor
144240	240V AC adaptor
UA100-240	100-240V AC Adaptor w/4 plugs (US, EU, UK, AU)

SPECIFICATIONS



407750 Sound Level Meter with PC Interface

Big backlit display, PC interface & background sound absorber

- High accuracy meets Type 2 standards (ANSI S1.4-1983, IEC 60651, EN 60651)
- Background noise absorber for noise measurements with high ambient noise levels
- PC interface for capturing data to PC, optional Windows® compatible software (407752)
- Large backlit display with analog bargraph
- Auto/Manual ranging and MIN/MAX readings
- Analog AC/DC outputs for connection to a recorder
- Tripod mount (optional TR100 Tripod — sold separately) · Complete with microphone
- wind screen, 9V battery and case







407760 USB Sound Level Datalogger

High accuracy datalogging of up to 129,920 records

- Designed to meet ANSI and IEC 61672 Class 2 standards
- · USB interface for easy setup and data download
- Selectable data sampling rate
- · Records readings with real time clock
- Two start methods: programmed (from PC) or manual
- Tripod mount feature
- Complete with 3.6V Lithium battery (42299), Windows® com patible software, USB cover, tripod, and windscreen



HD600 20,000 Point Datalogging Sound Level Meter

Double Molded housing with USB port

- ±1.4dB accuracy
- Meets ANSI and IEC 61672-1 Type 2 standards
- Capture up to 10 readings/ sec when connected to a PC
- · Datalogging capability up to 20,000 records at speeds from 1/sec to 1/59sec
- · Records readings with real date and time stamp
- MIN/MAX and Data Hold
- USB port includes PC software
- Tripod included for convenient field use
- Auto power off with disable capability
- · Complete with AC Adaptor, Windows® compatible software with USB cable, wind screen, tripod, built-in stand, hard carrying case, and 9V battery



SDL600 Data **Logging Sound Level Meter with SD Card**

Datalogging capability using SD memory card

- ±1.4dB accuracy
- Meets ANSI and IEC 61672-1 Type 2 standards
- Auto or Manual ranging
- External data storage in Excel® format on an SD card (included) for easy transfer to a PC
- User programmable sampling rate from 1 to 3600 seconds
- · Records readings with date and time stamp
- · Internal memory stores 99 readings manually
- Min/Max, Peak Hold, and Data Hold functions
- Auto power off with disable capability
- · Complete with SD Card, wind screen, 6 AA batteries, and hard carrying case; Optional AC Adaptor UA100-240



407780A **Integrating Sound Level Datalogger**

Leg and SEL measurements with built-in datalogger and PC interface

• Meets Type 2 standards (ANSI S1.4-1983, IEC 60651, EN 60651)

with USB

Interface

- Datalogs up to 32,000 records
- Programmable integrating time; Real time calendar/clock
- · Linearity over wide range (100dB)
- Display modes: SPL, SPL MIN/MAX, SEL, and Leg
- Impulse/Fast/Slow response time
- Analog and alarm output can be used to connect with Frequency analyzers and chart recorders
- Tripod mount (optional TR100 Tripod — sold separately)
- Includes windscreen, adjustment screwdriver, USB cable, Windows® compatible software, battery, and case; (Optional AC Adaptor - see p. 122)

NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol N next to product part numbers.

Range	30 to 130dB	30 to 130dB	30 to 130dB
Basic Accuracy	±1.5dB (Type 2)	±1.4dB (Type 2)	±1.4dB
Weighting (A & C)	Yes	Yes	Yes
Response Time (Fast/Slow)	Yes	Yes	Yes
Condenser Microphone	0.5" (12.7mm)	0.5" (12.7mm)	0.5" (12.7mm)
Analog Output	AC/DC	-	AC/DC
PC Interface	Yes	Yes	Yes
Datalogging	-	129,920 Records	20,000 Record
CE approved	Yes	Yes	Yes
Dimensions/Weight	10x3.1x1.5" (256x80x38mm)/8.5oz (240g)	5.1x1.1x0.9" (130x30x25mm)/1oz (20g)	10.9x3x2" (27
Warranty	1 year	1 year	3 years

407760 N

HD600 №	SDL600 N
30 to 130dB	30 to 130dB (3 ranges)
±1.4dB	±1.4dB
Yes	Yes
Yes	Yes
0.5" (12.7mm)	0.5" (12.7mm)
AC/DC	AC
Yes	Yes
20,000 Records	Datalogging using SD c
Yes	Yes
10.9x3x2" (278x76x50mm)/12.3oz (350g)	9.8x2.9x1.9" (250X73X48
3 years	3 years

±1.4dB
Yes
Yes
0.5" (12.7mm)
AC
Yes
Datalogging using SD card
Yes
9.8x2.9x1.9" (250X73X48mm)/18.3oz (520g)
3 years

_		
	407780A 🕦	SPECIFICATIONS
	30 to 130dB	Range
	±1.5dB	Basic Accuracy
	Yes	Weighting (A & C)
	Yes	Response Time (Fast/Slow)
	Detachable 0.5" (12.7mm)	Condenser Microphone
	AC/DC	Analog Output
	Yes	PC Interface
	32,000 Records	Datalogging
	Yes	CE approved
	10.4x2.8x0.8" (265x72x21mm)/10.9oz (310g)	Dimensions/Weight
	1 year	Warranty

407750 N



2.25

4 NUN CLOCK >

407355/SL355 Personal Noise Dosimeter Dataloggers and Kits

Measure total sound exposure over an 8-hour period

- Perform OSHA and IEC Noise accumulation surveys (meet ANSI and IEC *standards)
- Adjustable Criterion Level, Exchange Rate, and Threshold
- Includes Windows® compatible software to control setup and retrieve stored events or analyze real time measurements
- Dosimeter mode: data includes Start/Stop Time, %Dose, TWA, and Peak flags Model 407355 Additional Features
- RS-232 interface (compatible with USB100 adaptor)
- Datalogs up to 4500 readings when used as a sound level meter
- 407355-KIT-5 available (see left caption for details)
- Model SL355 Additional Features
- USB interface
- SL355-KIT-3 available includes three SL355, 407766 calibrator, and case

SPECIFICATIONS	
Sound Level Range/Resolution	407355: 70 to 140dBA / 0.1dB SL355: 60 - 130 dB / 70 to 140dB (A/C Weighting); 60 to 130dB / 93 to 133dB (C or Z (Linear) Peak); 70 to 140dB / 103 to 143dB (C or Z (Linear) Peak)
Digital Display	LCD 0.01-9999%
Criterion/Threshold Level	80, 84, 85 or 90dB/ 70-90 (1db steps)
Response Rate/Exchange Rate	Fast or Slow/ 3, 4, 5 or 6 dB
High Level Detector/Peak Flag	115dB / 140dB (also 130db for SL355)
Battery Life	approx 34 hrs
Event Storage	407355: 5 surveys; SL355: 20 surveys
Dimensions/Weight	407355: 4.2x2.5x1.3" (106x64x34mm)/ 8oz (227g) incl. batteries SL355: 3.8x2x1.4" (97x51x35mm) 4.2oz. (120g) incl.batteries
* Visit the product page at www.extech.	com for a list of ANSI and IEC standards

ORDERING				
407355 N	Noise Dosimeter/Datalogger			
407355-KIT-5	Noise Dosimeter/Datalogger Kit			
SL355 N	Noise Dosimeter/Datalogger			
SL355-KIT-3	Noise Dosimeter/Datalogger			
USB100	RS-232 to USB Adaptor			

SL400 Personal Noise Dosimeter/Datalogger

SL355

Value Kit

407355-KIT-5

Each meter includes a belt clip, clip-on 0.5" microphone with 2.6ft (0.8m) cable, software. mini screwdriver, batteries, and case; 1 year warranty.

407355 also includes 9 pin to 25 pin adaptor, and

also includes USB cable.

407355-KIT-5 Dosimeter Kit includes five 407355

RS-232 cable: **SL355**

Dosimeters, 407766

Sound level calibrator (see p. 120), and case

Measure total sound exposure over an 8-hour period

- Measures frequency weighted noise exposure and peak (C, Z) sound level
- Datalogs up to 999,999 readings when used as a sound level meter with sampling times between 1 second and 24 hours
- Sound level mode: displays sound level, min/max, time-averaged sound level (Leq), peak, and sound exposure level (SEL)
- Adjustable Criterion Level, Exchange Rate, & Threshold
- One user-defined measurement setup
- Optional 94dB calibrator to perform "before" and "after" calibration checks per ANSI standards
- USB interface with Windows® compatible software to control setup and retrieve stored events or analyze real-time measurements

SPECIFICATIONS	
Ranges (A, C, Z)	30 to 90 dB, 50 to 110dB; C, Z Peak: 70 to 140dB / C and Z Peak: 90 to 143dB
Response Rate/Exchange Rate	Fast, Slow, Impulse/ 3, 4, 5 or 6 dB
Bandwidth	20Hz to 8kHz
Memory	Dose: 10,000 points/SLM: 999,999 points
Criterion Level / Threshold Level	30 to 140dB in 0.1dB steps / 30 to 140dB in 0.1dB steps
Measurement Modes	%Dose, Lxmax, Lxyp, Lxmin, Lxeq, SEL (LAE), PeakMAX, LAVG, TWA, LEP, LN% SPL, Lxmax, Lxyp, Lxmin, Lxeq, SEL (LAE) PeakMAX
Dimensions/Weight	$4.2\times2.6\times1.3"$ (107 x 65 x 33mm) - exclude connector on top/ 7oz. (198g) include batteries and microphone cable
ORDERING	
SL400 N	Noise Dosimeter/Datalogger

Includes belt clip, clip-on 0.5" (12.7mm)microphone with 32" (81.3cm) cable and windscreen, 9V battery, software, USB cable, and carrying case; 1 year warranty



SL130G Sound Level Alert with Alarm



Continuous monitoring of Sound Level - Built-in LEDs alert user when sound level is too high or too low

- Bright LEDs (red flashing or green) alert user when sound level is too high or too low - LEDs can be read from 30m (100ft)
- Ideal for hospital, auditoriums, schools and other areas where there is a need for being alerted when sound level reaches set point
- Meets ANSI Type 2 and EN IEC 60651 standards compliant with OSHA
- Wall, desk or tripod mount (optional TR100 tripod sold separately)
- Adjustable high/low limit indication with output to drive user's external relay module
- Microphone rotates 180° for desired placement. Optional 15ft (5m) microphone extension cable (SL125) for remote monitoring
- 1 vear warrantv
- · Complete with universal AC adaptor and microphone wind screen

SPECIFICATIONS	
Display	4.6 x 3.125" (117x79mm) multifunction LCD
Frequency bandwidth	31.5 Hz to 8 kHz
Microphone	0.5" Electret Condenser Microphone (detachable)
Measurement ranges	30 to 80dB, 60 to 110dB, 80 to 130dB
Frequency weighting	'A' and 'C'
Response time	Fast: 125ms / Slow: 1s
Resolution	0.1dB
Alarm output	3.5mm Mono Phone Plug, Maximum: 3.4mA @ 5 VDC
Minimum Output	Voltage: 2.5 VDC
Power	AC/DC Adaptor for full functions; 8xAA batteries for monitoring function only without LED alert
Dimensions/Weight	8.75x7.1x1.25" / 0.63 lbs. (22x18x3.2cm / 285g)

ORDERING SL130G N Sound Level Alert SI 125 Remote Microphone cable 15' (5m) TR100 407766 N Sound Level Calibrator, 94/114dB

407790A Real Time 1/3 Octave Band Analyzer

Includes Windows® compatible software, USB cable, 4 x C

batteries, microphone wind screen, mini screwdriver, 120V

AC adaptor, and case. See


p. 122 for 220-240V Adaptor;

1yr warranty; Optional 94/114dB

calibrator (see 407766 on p. 120)

0

 ϵ



- · Real time clock with Year, Month, Day, Hour, Minute, and Second display · Maintain noise level statistics for internal and external audits
- SPECIFICATIONS Applicable standards ANSI S1.4 Type 2, EN IEC 60651, EN IEC 60804, and EN IEC 1260-1995 +1.5dB (ref.94dB @ 1kHz) Accuracy Measurement range/function 30dB to 130dB / La, Lc, Lp, Leq, LE, Lmax, Lmin 25Hz ~ 10kHz Frequency range Sound level meter display Integrating SLM: Digital, 4 Digits with Bargraph Real Time Analyzer display Graphical, Bargraph with cursor 1/1- 1/3 Analyzer level range 1/1 Octave & 1/3 Octave 1/1 Octave band center frequencies: (9 bands); 1/3 Octave band center AC output: 2 Vrms (at full scale): DC output: 10mVDC/dB Signal output Dimensions/Weight 13.6x3.9x2.4" (345x100x60mm)/ 33.5oz (950g)

ORDERING	
407790A N	Octave Band Sound Analyzer
407764-EXT	15ft (4.7m) Microphone Extension Cable







Rev Up Your Diagnostics

Measure RPM, surface speed, and revolution counts with Extech tachometers (see pages 126-129). Models include contact, noncontact and combination, as well as compact, stroboscopes and panel-mount versions.







461891 Contact Tachometer

Fast and accurate RPM and surface speed measurements

- Make contact measurements of rotating objects
- Measure linear surface speeds in ft/min or m/min using three accessory wheels provided
- Recalls Last/MAX/MIN values
- Complete with cone tip, flat tip and spare wheel for surface speed measurements, four 1.5V AA batteries, and carrying case



461893 Non**contact Photo Tachometer**

Non-contact RPM measurements using visible light

- · Make non-contact rpm measurements of rotating objects
- · Use reflective tape on object to be measured and point the integral light beam
- Integral light beam has an ideal measurement range up to 6" (152mm) distance
- · Readings updated every second
- Recalls Last/MAX/MIN values
- Complete with 23" (0.6m) reflective tape, four 1.5V AA batteries, and carrying case



461895 **Combination Contact/Photo Tachometer**

Combines both contact and non-contact models for use in all applications

- Characters on display reverse direction depending on contact or photo mode
- Uses visible light to read up to 6" (150mm) from target
- Memory/readings button holds last reading for 5 min and recalls min/max readings
- · Complete with wheels for linear surface speed or rpm measurements, four 1.5V AA batteries, 23" (0.6m) reflective tape, and carrying case



461995 **Combination Contact/Laser Photo Tachometer**

Combines both contact and non-contact models for use in all applications

- Characters on display reverse direction depending on contact or photo mode
- Laser guided for greater distance non-contact measurements up to 6.5ft (2m)
- Memory/readings button holds last reading for 5 min and recalls MAX/MIN readings
- · Complete with wheels for linear surface speed or rpm measurements, four 1.5V AA batteries, 23" (0.6m) reflective tape, and carrying case



RPM₁₀ **Combination Laser Tachometer** + IR Thermometer

Photo/Contact Tachometer includes a non-contact IR Thermometer for surface temperature measurements

- Built-in IR thermometer with laser measures remote surface temperature on motors and rotating parts
- Fixed 0.95 emissivity, 6:1 distance to target ratio
- Non-contact Photo tachometer uses a Laser for greater measuring distance up to 6.5ft (2m)
- · Contact tachometer for RPM and surface speed measurements
- Recalls Last/MAX/MIN values
- · Characters on display reverse direction depending on mode
- · Complete with tips/wheel, four 1.5V AA batteries, reflective tape, and carrying case

ACCESSORIES

Reflective Tape -Ten 461937 reflective tape strips 23x0.25" (584x6mm) ea. strip

Contact Wheels - 2 sets of cone tip, flat

NIST traceable certificate data is available when you orde meter with Certificate Traceable Look for this symbol N next to pr part numbers.

with	
r your	
to NIST.	
; to Mio i.	

	rpm
	ft/mi
	m/m
	Basi
	Max
	Lase
vith	Temp
your to NIST.	CE a
roduct	Dime
	Weig
	Warr

SPECIFICATIONS	461891 N	461893 N	461895 N	461995 N	RPM10 ₪	SPECIFICATIONS
rpm	0.5 to 20,000	5 to 99,999	Photo: 5 to 99,999 / Contact: 0.5 to 19,999	Photo: 10 to 99,999 / Contact: 0.5 to 19,999	Photo: 10 to 99,999 / Contact: 0.5 to 20,000	rpm
ft/min	0.2 to 6560	-	0.2 to 6560	0.2 to 6560	0.2 to 6560	ft/min
m/min	0.05 to 1999.9	_	0.05 to 1999.9	0.05 to 1999.9	0.05 to 1999.9	m/min
Basic Accuracy	±0.05%rdg	±0.05%rdg	±0.05%rdg	±0.05%rdg	±0.05%rdg	Basic Accuracy
Max rpm Resolution	0.1rpm	0.1rpm	0.1rpm	0.1rpm	0.1rpm	Max. rpm Resolution
Laser	_	-	-	Yes	Yes	Laser
Temperature (IR)	_	_	_	_	-4 to 600°F (-20 to 315°C)	Temperature (IR)
CE approved	Yes	Yes	Yes	Yes	Yes	CE approved
Dimensions	6.7x2.8x1.5" (170x27x37mm)	6.7x2.8x1.5" (170x27x37mm)	8.5x2.6x1.5" (216x66x38mm)	8.5x2.6x1.5" (216x66x38mm)	8.5x2.6x1.5" (216x66x38mm)	Dimensions
Weight	9.2oz (260g)	8.8oz (250g)	10.6oz (300g)	10.6oz (300g)	10.6oz (300g)	Weight
Warranty	1 year	1 year	1 year	1 year	1 year	Warranty

461920 Mini Laser Photo Tachometer Counter







Measures the speed (RPM) of rotating objects and counts (revolution) of moving objects.

Non-contact RPM and Revolution count measurements to 99,999 rev

- Measure non-contact RPM readings of rotating objects by pointing the integral laser at the reflective tape placed on the object to be measured
- Large 5 digit LCD display with backlighting
- Rugged double molded housing with memory button for Last/MAX/MIN readings
- · Complete with 9V battery and reflective tape

SPECIFICATIONS	
RPM range	2 to 99,999 rpm
Count range	1 to 99,999 rev (revolution)
Target Distance	1.6ft (500mm)
Basic Accuracy	±0.05%
Resolution	0.1rpm, 1 count
Dimensions/Weight	6.2x2.3x1.6" (160x60x42mm)/5.3oz (151g)

ORDERING		
461920 N	Mini Laser Photo Tachometer Counter	
461937	Spare reflective tape (23" each strip), 10pk	

RPM33/RPM40 Mini Combination Contact/Laser Photo Tachometers









Quickly measure RPM, surface speed and length with one tool. Use the contact wheel for up-close readings or laser mode for non-contact readings.

- Large 5 digit backlit LCD display
- Microprocessor based with quartz crystal oscillator to maintain high accuracy
- Provides wide RPM (photo and contact) and Linear Surface Speed/Length (contact) measurements
- Includes contact wheel, batteries, and reflective tape; 1 year warranty; RPM33 also includes case; RPM40 also includes cone tip

Model RPM33 Additional Features

- Store/recall 10 data sets in memory with 4 parameters (measurement/max/min/avg)
- Laser guided for greater distance non-contact measurements up to 1.6ft (500mm)

Model RPM40 Additional Features

• Long distance Laser guided measurements up to 4.9ft (1.5m)

SPECIFICATIONS	RPM33	RPM40
Range (rpm)	Photo: 2 to 99,999rpm Contact: 2 to 20,000rpm	Photo: 5 to 99,999rpm Contact: 0.5 to 19,999rpm
Surface Speed	0 to 78,720 inches/min	2.0 to 78,740 inches/min
	0 to 6560 ft/min	0.2 to 6560 ft/min
	0 to 2186 yards/min	_
	0 to 2000 m/min	0.05 to 1999.9 m/min
Length	3.9 to 39370 inches	_
	0.3 to 3280 feet	_
	0.1 to 1093 yards	_
	0.1 to 1000 meters	-
Frequency (Hz)	333 Hz	_
Accuracy	0.05% rdg +1 digit	±(0.1% rdg +1 digit)
Sampling Time	0.5 Sec > 120rpm	1 Sec > 6rpm
Resolution	0.1rpm (<10,000 rpm); 1rpm (>10,000 rpm)	0.1rpm (<1000 rpm); 1rpm (>1000 rpm)
Dimensions / Weight	6.2x2.3x .6"(160x60x42mm) / 5.3oz (151g)	6.2x2.0x1.3" (160x50x33mm) / 6.4oz (182g)
ORDERING		
RPM33 N	Combination Contact/Laser Photo Tachom	eter
RPM40 N	Combination Contact/Laser Photo Tachom	eter

Spare reflective tape (23" each strip), 10pk

461825 Combination Photo Tachometer/Stroboscope



Stroboscope to analyze rotating objects and Tachometer to measure rpms

- Course and fine flash rate adjustments to freeze and analyze rotating objects
- Unique display characters that reverse direction depending on function mode
- Large 0.4" (10mm) 5 digit LCD display and memory stores Last/MAX/MIN readings
- Complete with four 1.5V AA batteries, reflective tape, and case; 1 year warranty

SPECIFICATIONS	PHOTO TACHOMETER (RPM)	STROBOSCOPE (FPM/RPM)
Range	5 to 99,999	100 to 100,000
Accuracy	±0.1%rdg	±0.1%rdg
Sampling Time	1 Sec ≥ 60rpm;	1 Sec ≥ 60rpm;
Resolution	0.1rpm (<1,000rpm), 1rpm (≥1,000rpm)	0.1fpm (<1,000fpm), 1fpm (≥1,000fpm)
Dimensions/Weight	8.5x2.6x1.5" (215x65x38mm) / 10.6oz (300g)	±0.1%rdg
Ordering		
161825 N Combination Photo Tachometer/Stroboscope		

461830/461831 Digital StroboTach



Freeze motion and analyze rotating objects without contact

Spare reflective tape (23" each strip), 10pk

- Checks and analyzes motion and speed by simply aiming and synchronizing its flash rate (fpm) with a rotating object
- rpms on 4 digit LED display
- Flash/Speed Rate of 100 to 10,000fpm/rpm; Basic accuracy of ±0.05% rdg
- Duty Cycle of 5 to 30mins

461937

- Tripod mount for stationary use
- Dimensions/Weight: 8.3x4.8x4.8" (211x122x122mm)/2.2lbs (1kg)
- Complete with 6ft (1.9m) power cord and handle; 1 year warranty

ORDERING	
461830 N	Digital StroboTach 115VAC, 60Hz
461831 N	Digital StroboTach 220VAC, 50Hz
461834	Spare Xenon Lamp (est life 300hrs), 2pk

461950 1/8 DIN Panel Tachometer







Photoelectric Proximity



Continuous & accurate readings from 5 to 99,990rpm

- Large LED display updates 1/sec (rpm<60)
- Unique design permits rpm measurements of a one hole gear or disk eliminating the need for special gears
- A pulse is measured when a ferrous object (stud) passes by a proximity sensor
- Choice of two sensor pickup types (both include 6ft/1.8m cable): Proximity sensor: 0.1" (3mm) target distance, range up to 36,000rpm (600Hz); Photoelectric sensor: 0.4" (10mm) target distance, range up to 6000rpm (100Hz)
- 1 year warranty

rpm	5 to 99,990rpm
Basic accuracy	±0.05%
Resolution	0.1rpm (5 to 1000rpm), 1rpm (1000 to 9999rpm), 10rpm (10,000rpm to 99,990rpm)
Power	115V or 230V AC; 50/60Hz
Dimensions/Weight	Bezel 3.8x1.9x2.4" (96x48x60mm); Panel cutout 3.6x1.8" (92x45mm) Meter 3.6x3.5x1.7" (92x90x42mm)/ 14oz (397g)
Sampling Time	1sec>60rpm, >1sec>10 to 60rpm
Dimensions/ Weight	4.9x2x1.3" (124x50x33mm)/ 4oz (114g)

ORDERING		
	461950 N	1/8 DIN Panel Mount Tachometer
	461955	Proximity Sensor, max. 36,000rpm
	461957	Photoelectric Sensor, max. 6000rpm



461937




HDV600 Series High Definition VideoScope Inspection Cameras



Narrow diameter cameras with 5.7" High Definition Color LCD Monitor deliver high image and video resolution on large color display

- The HDV600 Series VideoScope has various camera probes to fit your application needs. Choose from a range of sizes with articulating or wireless features.
- 5.7" color LCD TFT high definition 640x480 pixels resolution
- Waterproof (IP67) meter and camera head (IP57) with cable
- Bright white LED lamps with dimmer to illuminate viewed object
- Glare-free close-up field of view and 6" (15.2cm) minimum focus distance
- 2G SD memory card included to store >14,600 images
- Video recording (up to 4 hours) with Voice annotation
- Video and images can be transferred via the SD card, USB output or AV out
- An optional wireless transmitter (HDV-WTX) connects to your camera cable and allows you to transmit video up to 100ft (30m)
- 1 year warranty
- Complete with SD memory card, 3.7V rechargeable Li-Polymer battery, AC adaptor, USB and AV cables, camera with cable, and case







HDV-WTX Wireless Transmitter allows measurements up to

100ft (30m) away

Model HDV610

• VideoScope with 5.5mm diameter camera head (1m flexible cable)

• VideoScope with 5.8mm diameter camera head (1m semi-rigid cable retains configured shape)

Model HDV640 & HDV640W

- VideoScope with 6mm diameter camera head (1m semi-rigid cable retains configured shape)
- Easy knob control of the articulating camera tip facilitates viewing in obstructed areas where standard camera tips cannot access.
- 240° camera probe rotation (from straight position, 120° left and 120° right) **MODEL HDV640W**



• Built-in wireless transmitter in camera cable controller allows you to transmit video up to 100ft (30m) from the measurement point to your monitor

HDV650 Series — High Definition Plumbing VideoScope Inspection Cameras

Plumbing VideoScope Kits utilized the HDV600 color LCD monitor. From drains to pipe runs, these kits reveal problems with its large, waterproof, rugged, high definition color display and a 10m or 30m snake with 25mm diameter camera head. Built-in bright lights help illuminate the problem area deep within the pipe runs. The camera probe is rugged enough to dislodge small clogs. Ideal for inspecting P-traps, 90s, drains, pipe runs, sewers, vent stacks and more. Available in a wireless kit that allows you to transmit video up to 100ft (30m) from the measurement point to your monitor.

HDV650 Kits:

- HDV650-10G includes HDV600 and 10m fiberglass cable spool assembly
- HDV650W-10G includes HDV600, 10m fiberglass cable spool assembly and wireless transmitter
- HDV650-30G includes HDV600 and 30m fiberglass cable spool assembly
- HDV650W-30G includes HDV600, 30m fiberglass cable spool assembly and wireless transmitter



Articulating (6mm diameter) camera tip adjusts up to 240° viewing angle.



Drop-proof and Waterproof housing meets IP67 standards.



BRD10 - Optional Wireless USB Video Receiver allows user to stream live video to a PC and it can also be remotely viewed via VOIP connection.





Macro (Short Focal Length) Lenses permit you to examine features and attributes that are up-close to the optical camera tip as illustrated above. Long Focus Lenses permit you to see further in confined areas.



Unlimited Inspection Uses:

Home: Mold, insect infestation, electrical wire or plumbing

HVAC: Ducts, motors, compressors, air movers, and chillers

Automotive: Engines, transmissions, motors, electronics

Government: Safety and security Industrial: Welding, process equipment, gears, molding machines Aerospace: Aircraft, debris, cracks or other damages And more...

ORDERING

HDV-WTX2

HDV-WTX2I

HDV-WTX

ADPTR-HDV

HDV-4CAM-5FM

ORDERING		
Video Inspection	Camera Kits	
HDV610	High Definition VideoScope (5.5mm diameter camera/1m flexible cable)	
HDV620	High Definition VideoScope (5.8mm diameter camera/1m semi-rigid cable)	
HDV640	High Definition Articulating VideoScope (6mm diameter camera/1m semi-rigid cable)	
HDV640W	High Definition Wireless Articulating VideoScope (6mm diameter camera /1m semi-rigid cable)	
Plumbing Inspec	ction Camera Kits	
HDV650-10G	Plumbing VideoScope Kit (25mm camera head w/10m Fiberglass Cable)	
HDV650W-10G	Wireless Plumbing VideoScope Kit (25mm camera head w/10m Fiberglass Cable)	
HDV650-30G	Plumbing VideoScope Kit (25mm camera head w/30m Fiberglass Cable)	
HDV650W-30G	Wireless Plumbing VideoScope Kit (25mm camera head w/30m Fiberglass Cable)	
Video Inspection	Monitor (order camera head separately from accessories list below)	
HDV600	High Definition VideoScope (meter only)	
Optional Camera	a Heads	Т
HDV-TX1	6mm Articulating VideoScope Camera Head with Macro lens and 1m Semi-Rigid Cable	
HDV-TX1L	6mm Articulating VideoScope Camera Head with Long Focus lens and 1m Semi-Rigid Cable	
HDV-WTX1	6mm Wireless Articulating VideoScope Camera Head w/Macro lens and 1m Semi-Rigid Cable	
HDV-WTX1L	6mm Wireless Articulating VideoScope Camera Head w/Long Focus lens and 1m Semi-Rigid Cable	
HDV-TX2	6mm Articulating VideoScope Camera Head w/Macro lens and 2m Semi-Rigid Cable	
HDV-TX2L	6mm Articulating VideoScope Camera Head w/Long Focus lens and 2m Semi-Rigid Cable	

6mm Wireless Articulating VideoScope Camera Head w/Macro lens and 2m Semi-Rigid Cable

4mm VideoScope Camera Head with Macro lens and 5m Flexible Cable

HDV-5CAM-1FM 5.5mm VideoScope Camera Head with Macro lens and 1m Flexible Cable

HDV-5CAM-3FM 5.5mm VideoScope Camera Head with Macro lens and 3m Flexible Cable

HDV-5CAM-30FM 5.5mm VideoScope Camera Head with Macro lens and 30m Flexible Cable

Wireless Transmitter

Replacement AC Adaptor

Spare Patch Cable for HDV Series

HDV-5CAM-3F 5.5mm VideoScope Camera Head with long depth of field and 3m Flexible Cable


HDV-5CAM-10F 5.5mm VideoScope Camera Head with long depth of field and 10m Flexible Cable

HDV-25CAM-10G 25mm VideoScope Camera Head with long depth of field and 10m Fiberglass Cable

HDV-25CAM-30G 25mm VideoScope Camera Head with long depth of field and 30m Fiberglass Cable

6mm Wireless Articulating VideoScope Camera Head w/Long Focus lens and 2m Semi-Rigid Cable

HDV540 High Definition Articulating VideoScope Kit

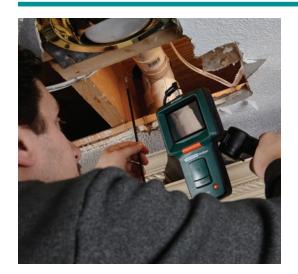

Articulating (240°) camera tip facilitates viewing in obstructed areas where standard camera tips cannot access

- Includes wired handset with non-detachable 6mm flexible probe (1m) with macro lens
- Articulating probe tip adjusts up to 240° viewing angle
- 3.5" (89mm) color LCD TFT with high definition 320 x 240 pixel resolution
- Compact, high-resolution water-proof (IP67) camera probe
- Camera head with four built-in bright LED lamps and dimmer to illuminate viewed object
- Glare-free close-up field of view
- Store more than 20,000 images on 4GB SD card
- AV output for viewing images/video on a monitor
- Video and images can be transferred to a PC via the SD card or USB output
- Record voice-over audio in video recording mode
- Includes HDV500 videoscope, handset with 6mm Articulating VideoScope Camera Head, SD card, 3.7V rechargeable Li-Polymer battery, 100/240V Universal AC adaptor and multiple plug types (US, EU, UK, AUS), USB and AV cables, and hard carrying case





Wired handset and camera probe with easy one-hand operation of the articulating tip for best viewing angle. Tip rotates to 120° to the left and to the right. Images/videos are viewed on the color display or external monitors and can be stored in SD card or a USB flash drive.



Camera	
Focus distance	0.8 to 2.36" (2 to 6cm)
Field of View	57°
Shaft diameter	0.24" (6mm)
Working length	39" (1m)
Camera Tip bend radius	240° (120° left, 120° right)
Borescope	
LCD Color TFT Display/ Pixels	3.5" (8.9cm) size/ 320 x 240 pixel resolution
Frame Rate	30 fps frame rate (NTSC & PAL)
SD Card	4GB SD memory card included (supports up to 32GB SD storage)
Operating	up to 6 hours AVI video
Dimensions/Weight	Meter w/battery: 8.3x4.3x1.6" (21cmx11cmx4cm)/ 14.1oz (400g)

ORDERING	
HDV540	High Definition Articulating VideoScope Kit
HDV5-6CAM-1AFM	6mm Articulating VideoScope Camera Head with Macro lens and 1m Flexible Cable

BR200/BR250 Video Borescope/Wireless Inspection Cameras



3.5" Color Detachable Wireless LCD Monitor can be viewed from a remote location up to 32ft (10m) from measurement point

- Captured video with date/time stamp can be played back on the wireless monitor or on any monitor with a video input jack
- Video and images can be transferred to a PC via microSD card or USB cable and viewed using Windows® Multimedia Player
- Waterproof (IP67) flexible gooseneck retains configured shape
- NTSC operation with menus in 10 languages
- Close-up field of view; 1 year warranty
- Includes 4 AA batteries, rechargeable display battery, memory card with adaptor, USB cable, extension tools (mirror, hook, magnet) video interconnect cable, AC adaptor, magnetic base stand, and hard case
- Model BR200 -17mm diameter camera head with built-in two bright LED lamps with dimmer and 39" (1m) flexible gooseneck cable
- Model BR250 9mm diameter camera head with built-in four bright LED lamps with dimmer and 36" (0.9m) flexible gooseneck cable





BRD10 Wireless USB Video Receiver Optional Wireless USB Video Receiver allows user to stream live video from vour Video Borescope to a PC and it can also be viewed remotely via VOIP



Detachable wireless 3.5" color display can be viewed remotely from up to 32ft (10m). Camera features built-in LED lights.



SPECIFICATIONS Camera Pixels BR200: 712x486 (NTSC) / BR250: 640 x 480 (NTSC) Transmission Frequency/ Range 2468MHz/32ft (10m) unobstructed view BR200: Viewing Angle 50° / BR250: Viewing Angle 45° Camera Viewing direction Camera Viewing distance 5.9 to 9.8" (15 to 25cm) LCD Screen Type/ Pixels 3.5" TFT/ 320 x 240 Monitor Video Output Level 0.9 to 1.3V@75Ω 960 x 240 (AVI format)/640 x 480 (JPEG format) Monitor Video/Image Resolution Operating/Charge Time 1.5hrs/3hrs Camera: 7.3x5.7x1.6" (186x145x41mm)/18.7oz (530g) Monitor: 3.9x2.7x1" (100x70x25mm)/4.9oz (140g)

ORDERING		
BR200	Flexible Video Borescope (17mm diameter/1m cable)	
BR250	Flexible Video Borescope (9mm diameter/1m cable)	
BRD10	Wireless USB Video Receiver	
BR200-EXT	Borescope Extension Cable (19mm diameter/0.9m cable)	
BR-4CAM	4.5mm Borescope Camera Head with 1m Cable	
BR-5CAM	5.8mm Borescope Camera Head with 1m Cable	
BR-9CAM	9mm Borescope Camera Head with 1m Cable	
BR-9CAM-2M	9mm Borescope Camera Head with 2m Cable	
BR-9CAM-5M	9mm Borescope Camera Head with 5m Cable	
BR-17CAM	17mm Borescope Camera Head with 1m Cable	
BR-17CAM-2M	17mm Borescope Camera Head with 2m Cable	
BR-17CAM-5M	17mm Borescope Camera Head with 5m Cable	
UA100-BR	Universal AC Adaptor	
Note: Recommended up to two BR200-FXT connected to a Borescope to maintain resolution)		

Note: Recommended up to two BR200-EXT connected to a Borescope to maintain re



BR100/BR150 Video Borescope Inspection Cameras





9mm or 17mm camera diameter and 2.4" Color TFT LCD Monitor with video output for viewing on any monitor with a video input jack

- 39" (1m) flexible gooseneck cable retains configured shape
- Mini water-proof (IP67) camera head for high resolution viewing
- Display detaches for easy storage
- 1 year warranty
- Complete with camera head with cable, 4 AA batteries, extension tools (mirror, hook, magnet), video output jack, and hard case
- Optional BR200-EXT extension cable & accessories available

Model BR100 Additional Features

• 17mm camera diameter with 2 bright LED lamps and dimmer feature Model BR150 Additional Features

• 9mm camera diameter with 4 bright LED lamps with and dimmer feature

SPECIFICATIONS		
Camera		
Viewing direction	BR100: Viewing Angle 50°; BR150: Viewing Angle 45°	
Focus distance from object	5.9" to 9.8" (15 to 25cm)	
Minimum bend radius	2.36" (60mm)	
Dimensions/Weight	7.3 x 5.7 x 1.6" (186 x 145 x 41mm)/18.7oz (530g)	
Monitor		
LCD Screen Type	2.4" TFT	
Pixels	480 x 234	
Operating	1.5 hours	
Dimensions/ Weight	3.9 x 2.7 x 1.8" (100 x 70 x 30mm)/ 4.9oz (140g)	

ORDERING (SEE P. 133 FOR CAMERA HEADS WITH LONGER CABLE LENGTHS)		
BR100	Flexible Video Borescope (17mm diameter/1m cable)	
BR150	Flexible Video Borescope (9mm diameter/1m cable)	
BR-5CAM	5.8mm Borescope Camera Head with Cable	
BR-9CAM	9mm Borescope Camera Head with Cable	
BR-17CAM	17mm Borescope Camera Head with Cable	
BR200-EXT	Borescope Extension Cable (19mm diameter/0.9m cable)	
(Note: Recommend	(Note: Recommended up to two BR200-EXT connected to a Borescope to maintain resolution)	

BR80 Video Borescope Inspection Camera



17mm camera diameter with 39" (1m) flexible gooseneck cable retains configured shape and 2.4" Color TFT LCD Monitor

- Water-proof (IP67) camera head and cable with lightweight, handheld design housing to easily find, diagnose, and solve problems
- Four bright LED lamps with dimmer to illuminate viewed object
- · Glare-free close-up field of view
- Vivid 2.4" color LCD monitor for detailed images plus 180° image rotation feature
- Optional BRC-EXT extension cable available for increasing viewing depth; 19mm diameter connector and 37.5" (0.95m) cable length (including connectors); maximum 2 extension cables can be connected to the borescope
- Complete with 17mm camera probe with cable, 4 AA batteries, and extension tools (mirror, hook, and magnet); 1 year warranty

ORDERING	
BR80	Video Borescope Inspection Camera
BRC-17CAM	17mm Borescope Camera Head with Cable
BRC-EXT	Borescope Extension Cable (19mm diameter/0.9m cable)
(Note: Recommended	d up to two BRC-EXT connected to a Borescope to maintain resolution)

RF Series Portable Brix Refractometers



Scale view through eyepiece

Measure the concentration of Sugar, Salt or industrial cutting/cooling lubricants

- Accurate, easy to operate refractometers with simple to read scales
- Automatic Temperature Compensation (RF11, RF12, RF15 and RF20 models)
- Requires only 2 or 3 drops of solution
- The prism and lens with a simple focus adjustment provide repeatable results
- Complete with case, calibration screwdriver, and calibration solution; 1 yr warranty Sucrose (RF10, RF11, RF15, RF16, and RF18)
- Measure the concentration of sugar in fruit juice and industrial fluids Brix (RF12 and RF18)
- Maintain proper lubricant cooling concentration to extend equipment life Salinity (RF20)
- Measures the concentration of dissolved salt in water General Purpose Brix (RF30)
- Triple Range: 0 to 42% Brix, 42 to 71% Brix, 71 to 90% Brix

SPECIFICATIONS	TYPE	RANGES	RESOLUTION	ACCURACY
RF10	Sucrose	0 to 32% Brix	0.2	±0.2%
RF11	Sucrose (ATC)	0 to 10% (10 to 30°C)	0.1	±0.1%
RF12	Lubricants/Cutting fluids (ATC)	0 to 18% Brix (10 to 30°C)	0.2	±0.2%
RF15	Sucrose (ATC)	0 to 32% Brix (10 to 30°C)	0.2	±0.2%
RF16	Sucrose	0 to 10% Brix	0.1	±0.1%
RF18	Brix (Lubricants)	0 to 18% Brix	0.1%	±0.2%
RF20	Salt (ATC)	0 to 100ppt (10 to 30°C) 1.000 to 1.070 Specific Gravity	1ppt 0.001	±0.1‰ ±0.001
RF30	Triple Range General Service	0 to 42% Brix, 42 to 71% Brix, 71 to 90% Brix	0.2	±0.2%

ORDER	ORDERING		
RF10	0 to 32% Brix Refractometer - Dims/Wt: 6.6x1.3x1.3" (168x32x32mm)/ 3.2oz (91g)		
RF11	0 to 10% Brix Refractometer with ATC - Dims/Wt: 7.5x1.6x1.2" (190x40x30mm)/ 6.5oz (185g)		
RF12	0 to 18% Brix Refractometer with ATC - Dims/Wt: 6.7x1.6x1.2" (170x41x31mm)/ 3.2oz (91g)		
RF15	0 to 32% Brix Refractometer with ATC - Dims/Wt: 6.3x1.4x1.4" (159x35x35mm)/7oz (200g)		
RF16	0 to 10% Brix Refractometer - Dims/Wt: 7.5x1.6x1.2" (190x40x30mm)/ 6.5oz (185g)		
RF18	0 to 18% Brix Refractometer - Dims/Wt: 6.7x1.6x1.2" (170x41x31mm)/ 3.2oz (91g)		
RF20	Salinity Refractometer with ATC - Dims/Wt: 7.6x1.5x1.5" (194x38x38mm)/ 8oz (227g)		
RF30	Triple Range General Service (0 to 90% Brix) Refractometer - Dims/Wt: 7.9x1.5x1.1" (200x38x28mm)/ 21.86oz (620g)		

RF40/RF41 Battery Coolant/ Glycol Refractometer



Measure the % of Ethylene Glycol and Propylene Glycol

- Measures the freezing point of automotive coolants plus battery charge condition
- Provide accurate and repeatable measurements of % Ethylene Glycol and Propylene Glycol and °F on easy to read scale
- Automatic Temperature Compensation
- Requires only 2 or 3 drops of solution
- Complete with case, calibration screwdriver, and calibration solution; 1 yr warranty

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY
Propylene Glycol freeze point	RF40: -60°F (63%) to 32°F (12%) RF41: -50°C to 0°C	2°F (1%) 1°C	±5°F (2%)
Ethylene Glycol freeze point	RF40: -60°F (59%) to 25°F (16%) -51 to 0°C (-60 to 32°F) RF41: -50°C to 0°C	2°F (1%) 1°C/2°F 1°C	±5°F (2%)
Specific Gravity of Battery Acid	RF40/RF41: 1.15 to 1.30	0.01	
Dimensions/Weight	6.5x1.5x1.5" (165x38x38mm)/ 7oz	(200g)	

RF40 Battery Coolant/Glycol Refractometer w/ATC (°F)

RF41 Battery Coolant/Glycol Refractometer w/ATC (°C)



SDL800/VB500 Vibration Meter/Dataloggers



Includes remote vibration sensor(s) with magnetic adapter, batteries, SD card, and hard case: SDL800 has 3yr warranty and optional AC Adaptor. VB500 has 1yr warranty and also includes 4 vibration sensors and 100-240V Universal AC Adaptor.

Datalogs readings with date/time stamps via SD card in Excel® format for easy transfer to a PC

- Wide frequency range of 10Hz to 1kHz
- RMS, Peak Value measurement modes
- Min/Max, Zero function, Max Hold, Data Hold and Auto Power Off
- Adjustable data sampling rate: 1 to 3600 seconds

Model SDL800

• Single Channel input; includes one vibration sensor

Model VB500

• Four Channel input; includes 4 vibration sensors and Universal AC Adaptor

SPECIFICATIONS	
Acceleration (max res)	656ft/s² (1ft/s²), 200m/s² (0.1m/s²), 20.39g (0.01g)
Velocity (max res)	7.87in/s (0.01in/s), 200mm/s (0.1mm/s), 19.99cm/s (0.01cm/s)
Displacement (max res)	0.078in (0.001in), 2mm (0.001mm)
Basic accuracy	±5%
Dimensions/ Weight	SDL800: Meter: 7.2x2.9x1.9" (182X73X48mm)/Meter: 1.3lbs (599g) VB500: Meter: 8 x 3 x 1.5" (203 x 76 x 38mm)/ Meter: 1.13lbs (515g)

ORDERING	
SDL800	Vibration Meter/Datalogger
VB500 N	4-Channel Vibration Meter/Datalogger
UA100-240	100-240V AC Adaptor with 3 plugs (US, EU, UK, AU)

407860 Heavy Duty Vibration Meter



Measure Velocity, Acceleration and Displacement

- Frequency range: 10Hz to 1kHz
- RMS or Peak Value measurement modes
- Auto/Manual store/recall up to 500 readings
- Max/Min, Data Hold and Auto Power off functions

SPECIFICATIONS		
Acceleration (max res)	656ft/s² (2ft/s²) or 200m/s² (0.5m/s²)	
Velocity (max res)	7.87in/s (0.02in/s) or 200mm/s (0.5mm/s)	
Displacement (max res)	0.078in (0.001in) or 1.999mm (0.001mm)	
Basic accuracy	±5%	
Dimensions/ Weight	Meter: 7.1x2.9x1.3" (180x72x32mm)/Meter: 0.87lbs (395g)	

ORDERING	
407860	Vibration Meter/Datalogger
156119	117VAC Adapter
156221	220VAC Adapter

VB450 Vibration Meter



Wide 10Hz to 1500Hz frequency range

- Frequency range: 10Hz to 1kHz
- Velocity (RMS), Acceleration (Peak), and Displacement (Peak-to-Peak) modes
- Auto Power Off and Low battery indicator

SPECIFICATIONS	
Acceleration (max res)	0.1 to 199.9 m/s² (0.1m/s²)
Velocity (max res)	0.1 to 199.9mm/s (0.1mm/s)
Displacement (max res)	1 to 1999µm (1µm)
Basic accuracy	±5%
Dimensions/ Weight	7.3x2.7x1.2" (185x68x30mm)/ 8.1oz (230g)
ORDERING	
VB450 Vibra	ation Meter

461880 Vibration Meter + Laser Combination Tachometer



Measures Acceleration, Velocity, Displacement, RPM and Surface Speed

- Unique large LCD displays characters on reverse direction depending on function
- Windows® XP compatible software (included) to analyze data on your PC
- Basic accuracy: Tachometer: ±(0.05% rdg), Vibration: ±(5% rdg)
- Dimensions/Weight with Probe: 7.4x3x1.8" (188x75.5x46.8mm)/ 1.12lbs (507g)
- Include vibration sensor with 39" (1m) cable, magnetic mount, wheels (cone & flat tips), reflective tape, 4 AA batteries, software with cable, and hard case; 1yr warranty

Vibration Meter Functions and Features:

- Velocity (max res.): 7.87in/s (0.01in/s), 200mm/s (0.1mm/s), 19.99cm/s (0.01cm/s); Acceleration (max res.): 656ft/s² (1ft/s²), 200m/s² (0.1m/s²), 20.39g (0.01g) Displacement: 0.078in (0.001in), 2mm (0.001mm); Frequency: 10Hz to 1kHz
- RMS or Peak Value measurement modes
- Manual/Auto store/recall up to 1000 readings, Data Hold and Auto power off features

Tachometer Functions and Features:

- RPM ranges Photo: 10 to 99,999rpm / Contact: 0.5 to 19,999rpm; Surface Speed: 0.2 to 6,560ft/min (0.05 to 1,999.9m/min)
- Uses a laser for greater distance non-contact measurements up to 4.9ft (1.5m)
- Stores Last, Max, and Min readings

ORDERING		
461880 N	Vibration Meter + Laser Combination Tachometer	

VB400 Pen Vibration Meter



Measures RMS Acceleration and Velocity with metric and imperial units

- Ranges Acceleration (RMS): 656ft/s², 20.39g, 200m/s²; Velocity (RMS): 7.87in/s, 2.00cm/s, 200mm/s; Frequency: 10Hz to 1kHz
- Resolution to 1ft/s²; 0.01g; 0.1m/s² and 0.02in/s; 0.01cm/s; 0.1mm/s
- Basic accuracy of ±5%
- · Zero adjustment, Data Hold, and Low battery indicator
- Water and dust resistant to IP65
- Dimensions: Meter: 6.9 x 1.6 x 1.3" (175 x 40 x 32mm); Weight: 0.53lbs (240g) Sensing Head: 0.4" dia x 1.9" (9mm dia x 30mm)
- 1 year warranty
- Complete with test pin tip, magnetic base, 4 x AAA batteries, and case

ORDERING	
VB400	Pen Vibration Meter

VB300 3-Axis G-Force Datalogger



 ϵ



Magnetized/Bolt-on Mounting Base



USB connector easily plugs into a computer for data analysis

Built-in 3-axis accelerometers record the shock and time when it occurs

- Measure and compute real-time spectral data using FFT
- Acceleration Sampling Rate: 200Hz, Range: ±18g, Resolution: 0.00625g, Accuracy: ±0.5g; Bandwidth: 0 to 60Hz
- Record storage, transport or operational data over time
- · Record and time 3-axis shock and peaks
- Datalogs 168,042 normal recording records or 112,028 motion detection records per axis
- Choose X-, Y-, Z-axis or any combination (via software)
- Programmable data sampling rate: 50mSec to 24 hours
- Manual/Programmable start modes and user-programmable alarm threshold
- Dimensions/ Weight: 3.7 x 1.1 x 0.8" (95 x 28 x 21mm)/ 1oz (20g)
- Complete with Magnetized/Bolt-on Mounting Base, 3.6V Lithium battery and Windows® compatible analysis software; 1 year warranty

UKDEKING	
VB300	3-Axis G-Force Datalogger
42299	3.6V Lithium Battery (pk of 2)



PRC30 Multifunction Process Calibrator



NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol N next to product part numbers.

Precision source and measure for thermocouples, mA, mV, and V devices

- Palm-sized double molded housing and large dot-matrix backlit LCD
- Measures DC process signals
- High accuracy calibration function simulates precision thermocouple outputs for use in calibrating thermometers, transmitters, controllers or recorders
- Up to five user adjustable calibration presets
- Displays output in terms of millivolts or temperature based on thermocouple tables
- 24V Loop Power
- Zero adjustment, auto zero when power on and change mode
- Standard banana I/O ports and mini thermocouple inputs
- · Large battery bank for extended work cycle
- External power adapter for continuous work cycle
- 1 year warranty
- Complete with test leads, alligator clips, Thermocouple calibration cable with subminiature connector, universal calibration cable with subminiature terminal, 100V-240V AC Universal Adaptor with 4 plugs, six 1.5V AA batteries, and hard carrying case

SPECIFICATIONS	DC SOURCE	DC MEASURE	BASIC ACCURACY
Current	0 to 24mA, -25% to +125%	0 to 50mA, -25% to +230%	±(0.01%+1d)
Voltage	0 to 2000mV, 0 to 20V	0 to 1999mV, 2 to 20V	±(0.01%+1d)
Type J	-58 to 1830°F (-50 to 1000°C)	-58 to 1830°F (-50 to 1000°C)	±(0.05%+1.8°F/1°C)
Type K	-58 to 2498°F (-50 to 1370°C)	-58 to 2498°F (-50 to 1370°C)	±(0.05%+1.8°F/1°C)
Type T	-184 to 752°F (-120 to 400°C)	-184 to 752°F (-120 to 400°C)	±(0.05%+1.8°F/1°C)
Loop Power	24V		$\pm(10\mu V \pm 1d)$
Max. Load	1000Ω @ 24mA		
Dimensions/Wt	6.3x3.2x1.7" (159x80x44mm)/ 8	3.4oz (236g) - not including batte	ry weight
ORDERING			
PRC30 N	C30 N Multifunction Process Calibrator		

PRC20 Multi-Type Calibrator Thermometer



Source and measure 8 thermocouple type devices J, K, T, E, C, R, S, and N

- Palm-sized double molded housing and large dot-matrix digital backlit LCD with thermocouple type indication
- High accuracy calibration function simulates precision thermocouple outputs for use in calibrating thermometers, transmitters, controllers or recorders
- Displays output in terms of millivolts or temperature based on thermocouple tables
- Standard mini-thermocouple input
- Large battery bank for extended work cycle
- Up to five user adjustable calibration presets

Calibrator Thermometer

- External power adapter for continuous work cycle
- 1 year warranty
- Complete with Thermocouple calibration cable with subminiature connectors. standard calibration cable with subminiature connectors, 100V-240V AC Universal Adaptor with 4 plugs, 6 x 1.5V AA batteries, and hard carrying case

SPECIFICATIONS	RANGE	BASIC ACCURACY
Type J	-58 to 1830°F (-50 to 1000°C)	±0.05% rdg ±1°
Type K	-58 to 2498°F (-50 to 1370°C)	±0.05% rdg ±1°
Type T	-184 to 752°F (-270 to 400°C)	±0.05% rdg ±1°
Type E	-58 to 1382°F (-50 to 750°C)	±0.05% rdg ±1°
Type C	32 to 3182°F (0 to 1750°C)	±0.05% rdg ±1°
Type R/S	32 to 3182°F (0 to 1750°C)	±0.05% rdg ±1°
Type N	-58 to 2372°F (-50 to 1300°C)	±0.05% rdg ±1°
Voltage	-10.00mV to +60.00mV	10μV ±1d
Dimensions/Wt	6.3x 3.2x1.7" (159x80x44mm)/ 8oz (22	5g) - not including battery weight
ORDERING		

PRC10/PRC15 Current & Voltage Calibrators/Meters



PRC15



"Source" for calibrating process devices and measuring DC process signals

- Palm-sized double molded housing and large dot-matrix digital backlit LCD
- Measures DC process signals
- Standard banana I/O ports
- Large battery bank for extended work cycle
- Up to five user adjustable calibration presets
- External power adapter for continuous work cycle
- 1 year warranty
- Each meter includes test leads, alligator clips, 100V-240V AC Universal Adaptor with 4 plugs, six 1.5V AA batteries, and hard carrying case

PRC10 Additional Features

- 0 to 24mA (-25 to 125%)
- 24V DC power source for 2-wire current loop

PRC15 Additional Features

- 0 to 24mA (-25 to 125%)
- 0 to 20V DC calibration source

SPECIFICATIONS		
Source	Output 0 to 24mA current for loads up to 1000 ohms; Output 0 to 20V (PRC15 only)	
Measure	0 to 50mA current signal; 0 to 19.99V (PRC15 only)	
Power/Measure	Provides power (24VDC) to loop & measures current (PRC10 or	nly)
Input/Output	Ranges and Display Resolution	
	-25.0 to 125.0% (representing 0 to 24mA)	0.1%
	0 to 19.99mA	0.01mA
	0 to 24.0mA	0.1mA
	0 to 1999mV	1mV
	0 to 20.00V	10mV
Accuracy	± 0.01% ±1 digit	
Dimensions/Weight 6.3x3.2x1.7" (159x80x44mm)/ 8.2oz (232g) - not including battery weight		ery weight

ORDERING		
PRC10 N	Current Calibrator/Meter	
PRC15 N	Current & Voltage Calibrator/Meter	

412440-S Calibration Source Checker



Easy to use pocket checker for simulating Current Loops

- Pocket Checkers are easy to use and provide a guick and easy way for checking calibration of meters or controllers
- Instantly determine if your device needs calibration or if sensor needs to be replaced
- Sources three discrete current levels: 4mA, 12mA and 20mA
- Bright red LEDs indicate simulation output or battery status
- Accurate to 0.1mA
- Overload indication when load exceeds 240Ω
- Compact case features push button output selector switch
- Ideal for checking calibration and as a current source for setting up engineering units on a process indicator or controller
- Dimensions/ Weight: 3.5x2.3x1" (89x58.4x25.4mm)/ 10oz (283.5g)
- 1 year warranty

ORD	ERING		
4124	40-S N	Calibration Source Checker	





Perfect Timing

Stopwatches ensure consistent timing of critical industrial/lab processes and provide split/lap times at sporting events



HW30 Humidity/ Thermometer Stopwatch

Digital UP/DOWN timer displays Temperature, Humidity, and Heat

- User programmable Heat Index alarm
- Stopwatch/chronograph mode with 1/100th second resolution
- Fastest/Slowest/Average Lap recall
- 99 lap counter with 30 lap/split memory
- 10 hour countdown timer with audible beeper warning for the last 5 seconds
- Programmable alarm
- Calendar mode displays day, month, and date
- 12 or 24 hour clock operation
- Complete with 39" (1m) lanyard and one 3V CR2032 battery



365510 Stopwatch/ Clock

Digital Stopwatch plus Calendar and Alarm

- Stopwatch/Chronograph mode with 1/100th second resolution
- 12 or 24 hour clock operation
- Programmable alarm with an hourly chime
- Split time and two competitor timer
- Calendar displays day, month, and date
- Water resistant housing is complete with LR44 battery and 39" (1m) neckstrap



365515 Stopwatch/ Clock with Backlit display

Large backlit display feature perfect for viewing in dimly lit area

- 1/100th second resolution for 30mins
- 1 second resolution up to 24 hours
- 12 or 24 hour clock format
- Calendar displays day, month and date
- Programmable alarm and hourly chime setting
- Water resistant housing is complete with LR44 battery and 39" (1m) neckstrap



365535 Decimal Stopwatch/Clock

User-selectable resolution of 1/100th of a second, 1/1000th of a minute and 1/100,000th of an hour Large triple display with adjustable contrast

- 1/100th second precision
- 500 memory records of Split and Lap times
- · Calendar displays day, month and date
- Time of day with daily alarm
- 12 or 24 hour clock format
- 3 Mode Countdown timer: count down stop, count down repeat, count down then count up
- Stroke measurement
- Pacer from 5 to 240 beeps per minute
- Water resistant housing
- Complete with CR2032 lithium battery and 39" (1m) neckstrap

NIST traceable certificate with data is available when you order your meter with Certificate Traceable to NIST. Look for this symbol N next to product part numbers.

SPECIFICATIONS	HW30 🔼	365510 N	365515 🕦	365535 N
Timing capacity	9hrs, 59mins, and 59secs	23hrs, 59mins and 59.99secs	23hrs, 59mins and 59.99secs	19hrs, 59mins and 59.99
Accuracy	±5 seconds/day	±3 seconds/day	±3 seconds/day	±5 seconds/day
Alarm	Yes	Yes	Yes	Yes
Countdown Timer	Yes	-	-	3 Modes
Lap Memory	30 laps	_	_	500 laps
Heat Index	70 to 122°F (22 to 50°C)	-	-	-
Temperature	14 to 122°F (-10 to 50°C)	_	_	_
Humidity	1 to 99%	-	_	_
CE approved	Yes	Yes	Yes	Yes
Dimensions	3.1x2.6x0.8" (79x66x21mm)	2.3x2.8x0.5" (57x70x15mm)	2.3x2.8x0.5" (57x70x15mm)	2.5x3.2x0.8" (64x81x20r
Weight	3oz (85g)	2oz (50g)	2oz (50g)	2.7oz (77g)
Warranty	1 year	1 year	1 year	1 year







 ϵ





Smart display rotates 180° for easy viewing angle and Automatic recognition for ferrous and non-ferrous substrates

- Conforms to GB/T 4956, 1985, GB/T 4957-1985, JB/T 8393-1996, JJG 889-95, and JJG 818-93
- 180° reversible LCD display with LED backlight
- Magnetic induction for ferrous substrates; Eddy current for non-ferrous substrates
- Memory stores 255 readings
- User adjustable high/low alarms, Min/Max/Average,
- Substrate Zeroing and two-point calibration function
- · Auto-Hold, Auto Power Off, and low battery indicator
- Includes two AAA batteries, calibration standards (one ferrous plate, one non-ferrous plate, and one standard coating plate film), wrist strap, and pouch; 1yr warranty

SPECIFICATIONS	FERROUS PROBE (MAGNETIC INDUCTION)	NON-FERROUS PROBE (EDDY CURRENT)
Range (max res)	0 to 2000µm (1µm); 0 to 80.0mils (0.1mils)	0 to 1000µm (1µm); 0 to 40.0mils (0.1mils)
Basic Accuracy	±3%	±3%
Minimum Thickness	0 to 80mils (0 to 2000µm)	0 to 40mils (0 to 1020µm)
Dimensions/Weight	4.1x2.2x1.1" (105x55x27mm)/ 2.82oz (80g)	

ORDERING	
CG104	Coating Thickness Tester
CG104-REF	Calibration References (one ferrous plate, one non-ferrous plate, & one film)

CG204 Coating Thickness Tester





Automatic recognition for ferrous and non-ferrous substrates with USB interface with software for further anyalysis of reads on a PC

- Conforms to GB/T 4956-1985, GB/T 4957-1985, JB/T 8393-1996, JJG-889-95, and JJG 818-93
- · Magnetic induction for ferrous substrates
- Eddy current measurement for non-ferrous substrates
- Two measuring modes (Single and Continuous) and Working modes (Direct & Group)
- Memory stores 400 readings: 80 Direct and 320 Group
- User adjustable high/low alarms, Min/Max/Average, One or two point calibration
- USB interface includes software
- Complete with two AAA batteries, USB cable, software, Calibration Iron, Calibration Aluminum, Reference Films, and carrying case; 1 year warranty

SPECIFICATIONS	FERROUS PROBE (MAGNETIC INDUCTION)	NON-FERROUS PROBE (EDDY CURRENT)
Range (max res)	0 to 1250µm (0.1µm); 0 to 49mils (0.004mils)	0 to 1250µm (0.1µm); 0 to 49mils (0.004mils)
Basic Accuracy	±3%	±3%
Min. Curvature Radius	1.5mm (59.06mils)	3mm (118.1mils)
Minimum Diameter	7mm (275.6mils)	5mm (196.9mils)
Minimum Thickness	0.5mm (19.69mils)	0.3mm (11.81mils)
Dimensions/Weight	4.7x2.4x1.25" (120x6 x32mm)/ 6.17oz (175g)

ORDERING		
CG204	Coating Thickness Tester	
CG204-REF Replacement Calibration Reference Films		

CG206 Coating Thickness Tester







Automatic recognition for ferrous and non-ferrous substrates with 1500 data storage and USB interface for further data analysis on a PC

- · Magnetic induction for ferrous substrates
- Eddy current measurement for non-ferrous substrates
- Easy-to use menu system
- Dot matrix LCD display with 8 level adjustable backlight
- Two working modes: Direct and Group
- Memory stores 1500 readings (30 Group readings)
- One or two point calibration
- USB interface includes software
- Low battery indicator
- Complete with two AAA batteries, USB cable, software, Calibration Iron, Calibration Aluminum, Precision Standards, and pouch

SPECIFICATIONS	FERROUS PROBE	NON-FERROUS PROBE
Measuring Range	0 to 1350µm (0 to 53mils)	0 to 1350µm (0 to 53mils)
Resolution	0.1µm (0.004mils)	0.1µm (0.004mils)
Accuracy	±2.5%	±2.5%
Minimum Curvature Radius	1.5mm (59.06mils)	3mm (118.1mils)
Minimum Diameter	7mm (275.6mils)	5mm (196.9mils)
Minimum Thickness	0.5mm (19.69mils)	0.3mm (11.81mils)
Dimensions/Weight	/eight 4.5x2.1x1.1" (113.5x54x27mm)/ 3.9oz (110g)	

ORDERING		
CG206	Coating Thickness Tester	
CG204-REF	Replacement Calibration Reference	

CG304 Coating Thickness Tester with Bluetooth®









Bluetooth® interface feature wirelessly transmits data to your PC

- Provides automatic recognition of ferrous and non-ferrous substrates
- · Magnetic induction for ferrous substrates
- Eddy current measurement for non-ferrous substrates
- Easy-to use menu system
- · Dot matrix LCD display with backlight and contrast
- Memory stores 2500 readings in 50 groups with 50 readings in each group
- Zero-point calibration function
- Complete with two AAA batteries, software, hard case, Steel and Aluminum substrates, and standard films for calibration; 1 year warranty

SPECIFICATIONS	FERROUS PROBE	NON-FERROUS PROBE	
Working Principle	Magnetic Induction	Eddy Current	
Measuring Range	0 to 2000µm; 0 to 78.7mils	0 to 2000µm; 0 to 78.7mils	
Accuracy	±(2%+2μm); ±3.5% (1000 to 2000μm)	±(2%+2μm); ±3.5% (1000 to 2000μm)	
Resolution	0.1µm (0.01mils)	0.1µm (0.01mils)	
Minimum Curvature Radius	1.5mm (59.06mils)	3mm (118.1mils)	
Minimum Diameter	7mm (275.6mils)	5mm (196.9mils)	
Minimum Thickness	0.5mm (19.69mils)	0.3mm (11.81mils)	
Dimensions /Weight	4.7x2.4x1.25" (120x62x32mm)/6.17oz (175g)		

	ORDERING			
	CG304	Coating Thickness Tester with Bluetooth		
	CG304-REF	Replacement Calibration Reference		



SC600 Electronic Counting Scale/Balance



Measure batches of electronic components.

 ϵ

Wide capacity measuring single small electronic component weighing 0.005oz (0.1g) or batches up to 21.164oz (600g)

- ±0.05% accuracy with 0.01g and 0.0005oz resolution
- LCD display with 0.8" (20.9mm) easy-to-read digits
- Built-in self-calibration system using traceable weights
- High precision counting function with preset counting sampling number selection of 10pcs, 20pcs, 50pcs, or 100pcs
- TARE function to set the scale to zero
- Built-in bubble level with adjustable rubber pads
- RS-232 interface (optional 407001 software with cable)
- Dimensions: 9.8x7.5x2.8" (250x190x70mm); Platform Diameter: 4.7" (120mm); Weight: 2.2lbs (1kg)
- · Complete with 6 AA batteries, metal platform, and Universal AC adaptor; 1 year warranty

ORDERING	
SC600	Electronic Counting Scale/Balance
407001	Data Acquisition Software with Cable
407001-USB	USB adaptor for 407001

SC50 Electronic Digital Scale



- 1.6" color LCD with 0.5" digits provides
- Weight and Tare indication
- 110lbs/50kg with 0.01lb (0.01kg) resolution
- Simple touchscreen Zero and Tare programming
- Automatic 30 seconds Data Hold
- Auto Power Off in 30 seconds
- Overload indicator
- Complete with CR2032 battery, 9.4" (238mm) strap, and metal hook; 1 year warranty

ORDERING

Electronic Digital Scale





A. Verifying the level of refrigerant inside the tank as well as checking the remaining level when used before the next job. B. Conveniently weigh your luggage to ensure you meet the proper guidlines before checking your bag in at the airport.

CL500 Free and Total Chlorine Meter





Complete with all the accessories to conveniently take measurements of both Free and Total Chlorine up to 3.50ppm with 0.01ppm resolution

- The method used is adapted from USEPA Method 330.5 for waste water and Standard Method 4500-CI-G for drinking water
- Advanced optical system uses a narrow band LED lamp that provides accurate and repeatable readings
- Requires only a 10mL sample size
- Independent 2-point calibration for Free and Total Chlorine
- Splash-proof front panel
- · Battery operated for field and on-site testing
- Data Hold and Min/Max record/recall
- · Auto power off
- Complete with 1.0ppm Free Chlorine standard solution, 1.0 Total Chlorine standard solution, Zero Chlorine standard solution, (2) test bottles and covers, Free Chlorine DPD powder (10pcs), Total Chlorine DPD powder (10pcs), cleaning cloth, six AAA batteries, and hard carrying case; 1 year warranty

SPECIFICATIONS	
Range (ppm)	0.01 to 3.50ppm
Resolution	0.01ppm
Accuracy	±0.02ppm @ 1ppm
Light source	LED, 525nm
Method	Adaptation of USEPA Method 330.5 for waste water and Standard Method 4500-CI-G for drinking water
Response Time	<10 seconds
Dimensions	6.1 x 3.0 x 2.4" (155 x 76 x 62mm)
Weight	11.3oz (320g)

Contact Extech or your local lab supply for refills on the standard solutions and reagents

ORDERING		
CL500	Free and Total Chlorine Meter	

TB400 Portable Turbidity Meter



Complete with all the accessories to conveniently test the turbidity of municipal water, food and beverage water, and other aqueous solutions where fluid clarity is important


- Microprocessor-based circuitry assures high accuracy and repeatable readings
- Requires only a 10mL sample size
- 2-point calibration
- Splash-proof front panel
- Battery operated for field and on-site testing
- Data Hold and Min/Max record/recall
- · Auto power off
- Complete with 0 NTU standard solution test bottle, 100 NTU standard solution test bottle, cleaning solution (distilled water), (2) test bottles and covers, cleaning cloth, six AAA batteries, and hard carrying case; 1 year warranty

SPECIFICATIONS	
Range (NTU)	0.00 to 50.00 NTU, 50 to 1000 NTU (Nephelometric Turbidity Unit)
Resolution	0.01 NTU
Accuracy	±5% FS or ±0.5 NTU, whichever is greater
Light source	LED, 850nm
Standard	Designed to meet ISO 7027
Response Time	<10 seconds
Dimensions	6.1 x 3.0 x 2.4" (155 x 76 x 62mm)
Weight	11.3oz (320g)

Contact Extech or your local lab supply for refills on the standard solutions and reagents

ORDERING		
TB400	Turbidity Meter	



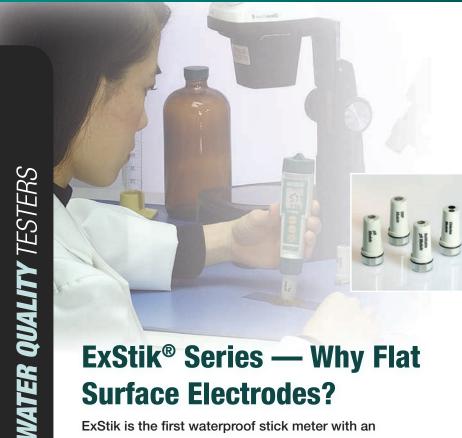

ExStik® Series — Why Flat **Surface Electrodes?**

ExStik is the first waterproof stick meter with an interchangeable flat surface electrode. It measures pH, Chlorine, ORP, and Temperature and features built-in memory. The electrodes measure solids and semi-solids on flat surfaces, and in liquids.

ACCESSORIES	3
PH105	pH ExStik® Electrode Module
PH115	Spare Refillable pH ExStik® Electrode Module
PH113	Reference Refill Solution Kit for PH110
RE305	ORP ExStik® Electrode Module
CL205	Spare Chlorine electrode
PH103	Tripak Buffer pouches
PH4-P	pH 4 Buffer Solution (2 bottles - 1 pint each)
PH7-P	pH 7 Buffer Solution (2 bottles - 1 pint each)
PH10-P	pH 10 Buffer Solution (2 bottles - 1 pint each)
CA895	Small vinyl carrying case with belt loop
CA904	Large hard case for meter and accessories



PH100/PH110 **Waterproof ExStik®** pH Meters

Choose flat surface gel-filled or refillable pH electrode

- "RENEW" feature alerts user when electrode needs replacement
- "CAL" indicator alerts user to recalibrate
- Analog bargraph originates at neutral point (pH 7.00) to conveniently view trends in acidity or alkalinity
- 1, 2 or 3 point buffer calibration; ATC
- Records 15 labeled readings
- Waterproof housing (meets IP57)
- Interchangeable flat surface electrode; Optional RE305 electrode to measure ORP and CL205 to measure Total Chlorine
- · Complete with protective sensor cap, sample cup with cap, four 3V button batteries, and 48" (1.2m) neckstrap; requires pH buffers sold separately
- Model PH100 meter includes gel filled pH flat surface electrode
- Model PH110 meter includes refillable flat surface pH electrode; PH113 KCI reference kit sold separately



RE300 Waterproof **ExStik® ORP Meter**

High resolution of 1mV

- Measures ORP/Redox from -999 to 999mV
- Automatic electronic self calibration
- · Simulated analog bargraph displays change in ORP reading
- Memory stores 15 labeled data
- Waterproof to IP57 protects meter from wet environment
- Complete with flat surface ORP electrode, protective sensor cap, sample cup with cap, four 3V button batteries and 48" (1.2m) neckstrap



CL200 Waterproof **ExStik® Chlorine Meter**

Direct reading of Total chlorine down to 0.01ppm and is unaffected by color or Turbidity of the sample

- Wide dynamic range to 10ppm and low detection limit down to 0.01ppm
- · Unaffected by sample color or turbidity
- Automatic electronic calibration
- Memory stores 15 labeled readings
- Unique flat surface chlorine electrode eliminates any concerns for clogged junctions or glass breakage
- Waterproof to IP57 protects meter from wet environment
- Large LCD simultaneously displays ppm of Total Chlorine. Temperature and analog bargraph indicator
- Complete with flat surface Chlorine electrode, ExTab™ reagent tablets (50 tests), protective sensor cap, sample cup with cap, four 3V button batteries, and 48" (1.2m) neckstrap



EX900 Waterproof ExStik® 4-in-1 Kit

Complete kit allows you to measure Chlorine, pH, ORP, and Temperature with all the necessary accessories

- One meter with three interchangeable flat surface electrodes to measure Chlorine, pH or ORP
- Measure in liquids, semi-solids and solids
- Memory stores and recalls 15 readings and saves last calibrated value
- Automatic electronic self calibration for Chlorine and ORP; 1, 2 or 3 point buffer calibration for pH
- Waterproof to IP57 protects meter from wet environment
- Direct reading of Total Chlorine from low detection limit; Unaffected by sample color or turbidity
- See PH100. RE300, and CL200 for complete features and specification
- Complete with CL200 Chlorine ExStik® meter, flat surface pH electrode, flat surface ORP electrode, ExTab™ reagent tablets (50 tests), pH 4, 7 & 10 buffer solutions (20mL) and rinse solution, weighted base with 6 sample plastic cups with caps, four 3V CR2032 button batteries, 48" (1.2m) neckstrap, and case

SPECIFICATIONS	■ PH100 ▲ PH110	RE300	CL200	EX900
рН	0.00 to 14.00pH	_	_	0.00 to 14.00pH
ORP (mV)	-	-999 to 999mV	_	-999 to 999mV
Chlorine (ppm)	_	_	0.01 to 10.00ppm	0.01 to 10.00ppm
Temperature	23° to 194°F (-5 to 90°C)	_	23° to 194°F (-5 to 90°C)	23° to 194°F (-5 to 90°C)
Max Resolution	0.01pH, 0.1°	1mV	0.01ppm; 0.1°F/°C;	0.01pH, 1mV, 0.01ppm, 0.1°
Basic Accuracy	±0.01pH, ±1.8°F/1°C	±4mV	±10% of reading ±0.01ppm; ±1.8°F/±1°C	± 0.01 pH, ± 4 mV, $\pm 10\%$ of reading ± 0.01 ppm; $\pm 1.8^{\circ}$ F/ $\pm 1^{\circ}$ C
Memory	15 readings	15 readings	15 readings	15 readings
Dimensions/ Weight	1.4x6.8x1.6" (35.6x172.7x40.6mm)/3.8oz (110g)	1.4x6.8x1.6" (35.6x172.7x40.6mm)/ 3.8oz (110g)	1.4x6.8x1.6" (35.6x172.7x40.6mm)/ 3.85oz (110g)	Meter: 1.4x6.8x1.6" (35.6x172.7x40.6mm)/ 3.85oz (110g)
Warranty	1yr (meter)/6mo conditional warranty (electrode)			



Save Time and Money

Value Kits allow you to measure multiple water quality parameters and provide all of the necessary accessories including calibration solutions, buffers, sample cups, batteries and a carrying case to store everything.

ACCESSO	RIES
PH95	pH Electrode Module for PH90
EC405*	ExStik® II Conductivity Cell Module for EC400
EC505*	ExStik® II pH/Conductivity Cell Module for EC500
EC-84-P	84µS Conductivity Standard (2 bottles/1 pint ea)
EC-1413-P	1413µS Conductivity Standard (2 bottles/1 pint ea)
EC-12880-P	12880µS Conductivity Standard (2 bottles/1 pint ea)
PH103	Tripak pH Calibration Buffer pouches
EX010	3ft (1m) Extension Cable w/Probe Guard/Weight
EX050	16ft (5m) Extension Cable w/Probe Guard/Weight
CA895	Small vinyl carrying case with belt loop
CA904	Large hard case for meter and accessories



PH90 Waterproof pH Meter

Flat Surface Electrode for measuring pH in liquids, semi-solids, and solids

- Rugged replaceable flat surface pH electrode for quick onthe-spot pH measurements
- Simultaneous display of pH and Temperature
- 2 or 3 point calibration automatically recognizes buffer solutions (pH buffers required - sold separately)
- PTS (percent of slope) tells you when it's time to replace your electrode (below 70% or above 130%)
- Automatic Temperature Compensation
- Data Hold, Min/Max, Auto Power Off, and low battery indication
- Waterproof design (IP57) floats in water and protects the meter in wet environment
- Complete with flat surface pH electrode, protective sensor cap, and two 3V CR-2032 button batteries



EC400 Waterproof ExStik® II* **Conductivity** Meter

4-in-1 multi-range sensor for measuring Conductivity, **TDS, Salinity & Temperature**

- Analog bargraph indicates trends
- Adjustable Conductivity to TDS ratio from 0.4 to 1.0
- 0.5 fixed Salinity ratio
- Data Hold, Auto power off, Low battery indicator
- Memory stores 25 labeled data
- Waterproof to IP57 protects meter from wet environment
- Complete with Conductivity/ TDS electrode, sensor cap, sample cup with cap, four 3V CR2032 batteries, and 48" (1.2m) neckstrap. Order Conductivity standards separately (see Accessories chart on the left).



EC500 Waterproof ExStik® II* pH/ **Conductivity** Meter

5-in-1 multi-range sensor for measuring pH, Conductivity, TDS, Salinity and Temperature

- RENEW feature tells user to replace electrode
- Analog bargraph indicates trends
- Adjustable Conductivity to TDS ratio from 0.4 to 1.0
- 0.5 fixed Salinity ratio
- Data Hold, Auto power off, Low battery indicator
- Memory stores 25 labeled data
- Waterproof to IP57 protects meter from wet environment
- Complete with combination pH/ Conductivity/TDS electrode, sensor cap, sample cup with cap, four 3V CR2032 batteries, and 48" (1.2m) neckstrap. Order Conductivity standards and pH Calibration buffers separately (see Accessories chart on the left).



EC410 ExStik® II* **Conductivity Kit**

Highly accurate multiranging sensor that measures Conductivity, TDS, Salinity, and Temperature

- EC400 ExStik® II Conductivity/ TDS/Salinity/Temperature meter with sensor, protective cap, 84µS, 1413µS and 12880µS standards (30mL bottle each), weighted base, 3 sample plastic cups with caps, four 3V CR2032 button batteries, 48" (1.2m) neckstrap, and carrying case
- See p. 148 for more specifications on the EC400 meter




EC510 ExStik® II* DO/pH/EC Kit

Measures pH, Conductivity, TDS, Salinity, and Temperature using a combination electrode

- EC500 ExStik II pH/ Conductivity/TDS/Salinity/ Temperature meter with combination electrode module, 84μS, 1413μS, 12880μS calibration standards, pH buffer pouches (1 each of 4, 7, 10pH plus rinse solution), weighted base, three sample cups with caps, four 3V CR2032 batteries, neckstrap, and case
- See EC500 on the left for more details on the meter

*ExStik® II electrode modules are not interchangeable with ExStik® pH/ORP/Chlorine



SPECIFICATIONS	PH90	EC400	EC500	EC410	EC510	SPECIFICATIONS
pH	0.00 to 14.00pH	_	0.00 to 14.00pH	_	0.00 to 14.00pH	рН
ORP (mV)	_	-	_	_	_	ORP
Conductivity	_	0 to 199.9μS, 200 to 1999μS, 2.00 to 19.99mS	0 to 199.9 μ S, 200 to 1999 μ S, 2.00 to 19.99 m S	0 to 199.9 μ S, 200 to 1999 μ S, 2.00 to 19.99 m S	0 to 199.9 μ S, 200 to 1999 μ S, 2.00 to 19.99 m S	Conductivity
TDS/Salinity/Fluoride	-	TDS/Salinity: 0 to 99.9ppm (mg/L), 100 to 999ppm (mg/L), 1.00 to 9.99ppt (g/L)	TDS/Salinity: 0 to 99.9ppm (mg/L), 100 to 999ppm (mg/L), 1.00 to 9.99ppt (g/L)	TDS/Salinity: 0 to 99.9ppm (mg/L), 100 to 999ppm (mg/L), 1.00 to 9.99ppt (g/L)	TDS/Salinity: 0 to 99.9ppm (mg/L), 100 to 999ppm (mg/L), 1.00 to 9.99ppt (g/L)	TDS/Salinity/Fluoride
DO saturation/concentration	_	_	_	_	_	DO saturation/concentration
Temperature	32° to 194°F (0 to 90°C)	32° to 149°F (0 to 65°C)	23° to 194°F (-5 to 90°C)	32° to 149°F (0 to 65°C)	23° to 194°F (-5 to 90°C)	Temperature
Max. Resolution	0.01pH, 0.1°	0.1μS, 0.1ppm (mg/L), 0.01pH, 0.1°F/°C	0.1μS, 0.1ppm (mg/L), 0.01pH, 0.1°F/°C	0.1μS, 0.1ppm (mg/L), 0.01pH, 0.1°F/°C	0.1µS, 0.1ppm (mg/L), 0.01pH, 0.1°F/°C	Max. Resolution
Basic Accuracy	±0.01pH, ±1.8°F/1°C	±2%FS, ±0.01pH, ±1.8°F/1°C	±2%FS, ±0.01pH, ±1.8°F/1°C	±2%FS, ±0.01pH, ±1.8°F/1°C	±2%FS, ±0.01pH, ±1.8°F/1°C	Basic Accuracy
Dimensions	1.4x6.7x1.4" (36x170x36mm)	1.4x6.8x1.6" (35.6x172.7x40.6mm)	1.4x6.8x1.6" (35.6x172.7x40.6mm)	1.4x6.8x1.6" (35.6x172.7x40.6mm)	1.4x6.8x1.6" (35.6x172.7x40.6mm)	Dimensions
Weight	3oz (85g)	3.8oz (110g)	3.8oz (110g)	3.8oz (110g)	3.8oz (110g)	Weight
Warranty	1yr (meter)/6mo conditional warranty (electrode)	1yr (meter)/6mo conditional warranty (electrode)	1yr (meter)/6mo conditional warranty (electrode)	1yr (meter)/6mo conditional warranty (electrode)	1yr (meter)/6mo conditional warranty (electrode)	Warranty







Direct reading of Total chlorine down to 0.01ppm and is unaffected by color or Turbidity of the sample

- Direct reading of Total Chlorine provides fast and easy measurements
- Wide dynamic range to 10ppm and low detection limit down to 0.01ppm
- Unaffected by sample color or turbidity
- Automatic electronic calibration
- Memory stores 15 labeled readings
- Unique flat surface chlorine electrode eliminates any concerns for clogged junctions or glass breakage
- Waterproof to IP57
- Large LCD simultaneously displays ppm of Total Chlorine, Temperature and analog bargraph indicator
- 1 year warranty (meter)/ 6 months conditional warranty (electrode)
- Complete with meter and flat surface Chlorine electrode, ExTab™ reagent tablets (50 tests), protective sensor cap, sample cup with cap, four 3V button batteries, and 48" (1.2m) neckstrap

SPECIFICATIONS	
ppm	0.01 to 10.00ppm
Temperature	23° to 194°F (-5 to 90°C)
Resolution	0.01ppm; 0.1°F/°C;
Basic accuracy	±10% of reading ±0.01ppm; ±1.8°F/±1°C
Dimensions/ Weight	1.4x6.8x1.6" (35.6x172.7x40.6mm)/ 3.85oz (110g)

ORDERING	
CL200	ExStik® Chlorine Meter
CA895	Small vinyl carrying case with belt loop
CL205	Spare Chlorine electrode
CL207	Chlorine Standard (1ppm) - 3 ampules (20mL ea.)

EX006/EX007 Accessories







Weighted Base & Solution Cups

- Recommended for ExStik® Chlorine
- Complete with weighted base and 5 solution cups with caps to hold meter and solution when taking a measurement to obtain a stable reading

CL203/CL204 ExTab™ Chlorine Reagent tablets

- No messy powder reagents
- 1 tablet per test
- Foil packaging provides very stable environment with long shelf life
- No dosing equipment required
- No messy powder reagents
- Available in 10pk (100 tests) or Value pack 100pk (1000 tests)

CL207 Chlorine Standard

- 1ppm standard for chlorine meter calibration
- Complete with 3 ampules (20mL each) 1ppm calibration standards

ORDERIN	IG .	
EX006	Weighted base with 5 solution cups	
EX007	Spare sample solution cups (24pk)	
CL203	ExTab™ Reagent tablets (10pk - 100 tests)	
CL204	ExTab™ Reagent tablets (100pk - 1000 tests)	
CL207	Chlorine Standard (1ppm) - 3 ampules (20mL ea.)	

FL700 ExStik® II* Fluoride Meter





Includes flat surface electrode, cap, TISAB reagent tablets, four 3V button batteries, and 48" (1.2m) neckstrap: 1 year warrantv



Direct reading of Fluoride from 0.1ppm to 10ppm with ATC; Waterproof IP57

- First Fluoride meter with built-in Automatic Temperature Compensation
- Fastest response Fluoride meter (<1min)
- Measures Temperature from 32 to 140°F (0 to 60°C)
- 0.1ppm, 0.1 max resolution and ±3.0% basic accuracy
- Small sample/TISAB volume required for testing (10mL)
- In compliance with EPA Method 340.2. (Potentiometric Ion Selective Electrode)
- Automatic electronic 1 or 2 point calibration with offset adjustment
- Memory stores 25 labeled data
- Dims: 1.4x6.8x1.6" (35.6x172.7x40.6mm); Wt: 3.8oz (110g)
- Contact Extech or your local lab supply for Fluoride calibration standards

ORDERING	
FL700	ExStik® II Fluoride Meter
FL705	ExStik® II Fluoride Module for FL700
FL704	TISAB reagent tablets for FL700 (100 tablets)

D0600 ExStik® II* Dissolved Oxygen Meter





DO600-K Kit available shown above. Includes DO600 meter, DO603 membrane kit, 16ft (5m) extension cable, weighted probe guard, and carrying case



Easy to replace screw-on membrane cap with optional extension cables

- Displays Oxygen level Saturation (0 to 200.0%) or Concentration (0 to 20.00mg/L [ppm]) and Temperature 32 to 122°F (0 to 50°C)
- Max resolution: 0.1%, 0.01ppm, 0.1°;
- Basic accuracy: ±2.0%FS, ±0.4ppm (mg/L), ±1.8°F/1°C
- Adjustable Altitude Compensation (0 to 20,000ft) in 1,000ft increments
- Adjustable Salinity Compensation from 0 to 50ppt
- Analog bargraph display; Self calibration on power up
- Memory stores 25 labeled data; Waterproof to IP57
- Model DO600 meter includes DO electrode, sensor cap, spare membrane cap, electrolyte, four 3V CR2032 batteries, and 48" (1.2m) neckstrap
- Model DO600-K Kit shown on the left

ORDERING	
DO600	ExStik® II Dissolved Oxygen Meter
DO600-K	ExStik® II Dissolved Oxygen Kit
DO605	ExStik® II Dissolved Oxygen Module for DO600
DO603	Membrane Kit for DO600/DO605
EX010	3ft (1m) Extension Cable w/Probe Guard/Weight
EX050	16ft (5m) Extension Cable w/Probe Guard/Weight

D0610 ExStik® II* D0/pH/EC Kit



Measures Dissolved Oxygen, pH, Conductivity, TDS, Salinity, and **Temperature**

- EC500 pH/Conductivity ExStik® II meter with combination high accuracy multi-ranging Conductivity sensor for Conductivity, TDS, Salinity, pH and Temperature measurements
- DO600 Dissolved Oxygen ExStik® II meter with electrode, replacement membrane cap, electrolyte, and polishing paper Accessories included:
- Sample pH Buffers Single use pouches for pH4, pH7, pH10, and rinse solution
- Weighted base with 2 cups and caps, four 3V CR2032 batteries and neckstrap with each meter, and case
- See p. 149 for more details on the EC500 and above for DO600 meter

ORDERING	
DO610	ExStik® II DO/pH/Conductivity Kit

*ExStik® II electrode modules are not interchangeable with ExStik® pH/ORP/Chlorine meters







72.3°

EC150 (Conductivity/TDS)

Easy-to-use, low cost waterproof pH pens

- Model PH50 Measures pH
- Model PH60 Measures pH and Temperature Automatic Temperature Compensation Waterproof housing
- Easy to calibrate single CAL key with automatic pH buffer recognition (4, 7, and 10pH calibration buffers sold separately)
- Data hold, Low battery indicator, and Auto power off with disable feature
- Complete with built in electrode, sensor cap, inner pH electrode protection cap, and four LR44 button batteries; 1 year warranty

SPECIFICATIONS		
pH	2.0 to 12.0pH	0.0 to 14.0pH
Temperature	_	32 to 122°F (0 to 50°C)
Resolution	0.1pH, 0.1°	0.1pH, 0.1°
Accuracy	±0.3pH	±0.2pH; ±1°F/±0.5°C
Dimensions/Wt	6x1.5x0.9" (152x37x24mm)/ 2.3oz (65g)	

ORDERING	
PH50	Waterproof pH Pen
PH60	Waterproof pH Meter with Temperature
PH103	Tripak buffers (6ea - 4,7,10pH+2 Rinse solutions)

EC100/EC150/EC170 Conductivity/TDS/Salinity Meters

72.3°

EC170

(Salinity)



- Units of measure (model dependent) include µS/cm, mS/cm, ppm, ppt, °F, and °C
- Large 3-1/2 digit (2000 count) LCD display
- Data Hold, Low battery indication, and Auto Power off with disable
- Adjustable Automatic Temperature Compensation
- Waterproof design to withstand wet environment meets IP65 standard

Model EC100 Additional Features

- Measures Conductivity and Temperature with simultaneous readout display
- Two ranges for Conductivity with one point calibration per range

Model EC150 Additional Features

- Measures Conductivity, TDS and Temperature
- Adjustable Conductivity to TDS ratio factor from 0.4 to 1.0 (calculates the TDS value)
- Two ranges for Conductivity and TDS with one point calibration per range

Model EC170 Additional Features

- Measure Salinity in aquaculture, environmental studies, ground water, Koi ponds, irrigation, drinking water, and other applications
- Autoranging meter offers 2 ranges of measurement
- Built-in NaCl Conductivity to TDS conversion factor
- Fixed Temperature Coefficient and Normalization Temperature
- One calibration point per range

0 to 1999µS/cm (0 to 19.99mS/cm)	1μS/cm (0.01mS/cm)	±1% FS
0 to 1999ppm (0 to 19.99ppt)	1ppm (0.01ppt)	±1% FS
0 to 10.00ppt (10.1 to 70.0ppt)	0.01ppt (0.1ppt)	±2% FS
32° to 122°F (0 to 50°C)	0.1°F/°C	±0.9°F/0.5°C
6.5 x 1.4 x 1.3" (165 x 35 x 32mm)/	3.8oz (110g)	
	0 to 1999ppm (0 to 19.99ppt) 0 to 10.00ppt (10.1 to 70.0ppt) 32° to 122°F (0 to 50°C)	0 to 1999ppm (0 to 19.99ppt) 1ppm (0.01ppt) 0 to 10.00ppt (10.1 to 70.0ppt) 0.01ppt (0.1ppt)

Complete with sensor with cap and four LR44 ORDERING button batteries; 1 year warranty. Order Conductivity EC100 Conductivity Meter standards separately (required for calibration) EC150 Conductivity/TDS Meter EC170 Salinity Meter Weighted base with 5 solution cups EX007 Spare sample solution cups (24pk) EC-1413-P 1413uS Conductivity Standard (2 bottles - 1 pint each) 12880µS Conductivity Standard (2 bottles - 1 pint each) EC-12880-F Small vinyl carrying case with belt loop

pH Electrodes



Choice of Standard or Specialized electrodes with Ag/AgCl gel filled (fast response: 95% in 5sec)

Models 60120B and 601500 — General purpose pH/Ref electrodes

• Rugged, polycarbonate construction features glass pH sensing bulb surrounded by protective teeth. pH range (0 to 14pH), operating temperature (0 to 80°C). Choice of Mini or Standard size.

Model 601100 — Flat surface electrode (Easy to clean)

• PVC bodied electrode, ideal for pH of solid products with minimal moisture like cheese, soils or electrophoretic/agar gels. pH range (0 to 14pH), operating temperature (5 to 80°C).

ORDERING	
60120B	Mini pH Electrode (10 x 120mm)
601500	Standard pH Electrode (12 x 160mm)
601100	Flat Surface pH Electrode (15 x 106mm)

ExStik® Replacement pH, ORP, and Chlorine Electrode Modules



Flat surface pH, Chlorine, and ORP electrode modules

Reference Refilling Solution Kit for PH115 Refillable pH electrode module

Filling Solution

Interchangeable pH, ORP, and Chlorine sensor modules for ExStik® series meters featured on (p. 144 and 146)

- ATC via built-in Pt-100Ω sensor (PH105, PH115 & CL205)
- Refillable pH electrode (PH115) provides an economical way to refill your electrode, eliminates the problem of limited electrode shelf life, contamination, and usage life in aggressive applications
- Note: The PH105, CL205 and RE305 replacement modules are not interchangeable with ExStik® II meters shown on p. 145
- 6 month conditional warranty

ORDERING	
PH105	pH ExStik® Electrode Module
PH115	Refillable pH ExStik® Electrode Module
PH113	Reference Refilling Solution Kit for PH115
CL205	Chlorine ExStik® Electrode Module
RE305	ORP ExStik® Electrode Module

pH Buffers





Convenient calibration solutions for your pH meter

- Easy to use, already made fresh pH buffers for calibration
- Helpful table shows what the pH value should be vs. the temperature of the buffer solution measured
- Rinsing solution used for cleaning off the pH electrode before and after taking the next measurement from a different solution to prevent contamination
- Convenient pouch eliminates the need for a cup to store buffer or rinsing solution
- PH103 contains 6 pouches of each buffer (pH 4.00, 7.00, and 10.00), plus 2 Rinsing solutions
- Pint size pH buffer solutions available (PH4-P, PH7-P, and PH10-P)

ORDERING	
PH4-P	pH 4 Buffer Calibration Solution (2 bottles - 1 pint each)
PH7-P	pH 7 Buffer Calibration Solution (2 bottles - 1 pint each)
PH10-P	pH 10 Buffer Calibration Solution (2 bottles - 1 pint each)
PH103	Tripak Buffer pouches (6ea: 4, 7, 10pH, 2 Rinse solutions)



EC100

(Conductivity)

 ϵ



For Rugged, **Accurate Results**

Extech field-tested lab instruments are fast-responding tools designed to deliver accurate and repeatable readings with waterproof and datalogging models available.

ACCESSORIES	
60120B	Mini pH Electrode (10 x 120mm)
601500	Standard pH Electrode (12 x 160mm)
601100	Flat Surface pH Electrode (15 x 106mm)
67500B	ORP Electrode (13 x 154mm)
6015WC	Waterproof pH Electrode with cable for PH220
6012WS	Waterproof Stick Type pH Electrode for PH220
PH305	Spare pH Electrode for PH300
PH4-P	pH 4 Buffer Solution (2 bottles - 1 pint each)
PH7-P	pH 7 Buffer Solution (2 bottles - 1 pint each)
PH10-P	pH 10 Buffer Solution (2 bottles - 1 pint each)
PH103	Tripak Buffer pouches (see photo above)
850185	RTD Stainless Steel Temp. Probe for the Oyster
850188	Temperature probe, stainless steel for PH210
UA100-240	100-240V AC Adaptor w/ 4 plugs (US, EU, UK, AU)



PH210 Compact pH/ORP/Temp Meter

Displays pH or mV and Temperature simultaneously

- BNC input accepts standard pH or ORP electrodes (sold separately)
- Manual or Automatic Temperature Compensation (via optional Temperature Probe)
- Automatic 3-point calibration (4, 7, and 10pH)
- Data Hold and Min/Max
- Auto Power Off with disable feature
- Complete with 9V battery and soft case (pH, ORP, Temperature Probes, and pH buffers sold separately - see Accessories on the left)



PH220 Waterproof Palm pH/Temp Meter

Large LCD display in rugged housing with choice of stick or cabled pH Electrode

- Displays pH and Temperature simultaneously
- Automatic Buffer recognition
- Automatic Temperature Compensation via Pt-100 sensor built into electrode
- · Low Battery indicator and Auto Power off
- Waterproof housing (meets IP57)
- Rugged design for handheld or wall mount (magnetic back)
- · Complete with waterproof meter, pH electrode, protective holster, pH 4 & 7 buffers (1 pouch ea.), and 9V battery
- Model PH220-C Kit includes ATC pH polycarbonate electrode (12mm diameter) with 39" (1m) cable
- Model PH220-S Kit includes ATC pH stick type polycarbonate electrode (12mm diameter) for direct connection to meter



PH300 Waterproof pH/Temperature Kit

Measures pH, mV, and Temperature

- Automatic calibration (4, 7, and 10pH)
- Choice of 3 point calibration for better accuracy
- Automatic Temperature Compensation
- Memory stores up to 200 labeled readings
- Waterproof housing (meets IP57)
- Large blue backlit dual LCD displays both pH and Temperature readings
- Auto power off with disable function
- Complete with pH/mV/ Temperature electrode, pH calibration solutions (4, 7, and 10pH), 2 AA batteries, and hard carrying case



Oyster™ Series pH/ORP/Temp Kits

Exclusive Oyster™ Design can be used in the lab or in the field

- Large LCD built into adjustable "flip-up" cover displays pH or mV and Temperature simultaneously
- · Convenient neckstrap holds meter while you take measurements
- Records 25 labeled readings
- Min/Max mode; Auto or Manual Temperature compensation (ATC/MTC)
- · Self diagnostics display codes
- Auto Power off
- 5 point buffer recognition with adjustable buffer values
- Optional ORP electrode (67500B) and Universal AC Adaptor (UA100-240)
- Model OYSTER-15 Kit includes Oyster-10 meter, neckstrap, 9V battery, 60120B mini pH electrode, sample buffers (4 and 7pH), and carrying case
- Model OYSTER-16 Kit includes Oyster-15 plus RTD Temperature probe



SDL100 pH/ORP/ **Temperature Datalogger**

Datalogger date/time stamps and stores 20M readings on a 2G SD card in Excel® format for easy transfer to a PC

- ATC or manual Temperature compensation
- 3 point calibration ensures the best linearity and accuracy
- Selectable data sampling rate: 1 second to 8hrs:59min:59sec
- Manually store/recall up to 99 readings
- Large backlit dual LCD
- Record/Recall MIN, MAX readings
- Data Hold plus Auto power off with disable function
- Built-in PC interface
- Complete with 6 x AA batteries, SD card, sample buffers, mini pH electrode (60120B), temperature probe (850188), and hard carrying case; Optional Universal AC Adaptor UA100-240

o 14pH pH
o 14pH pH
99mV to 1999mV mV
to 149°F (0 to 65°C) Temperature
1pH, 1mV, 0.1° Max Resolution
02pH, ±0.5% mV, ±1.8°F/1°C) Basic Accuracy
VI readings on 2G SD card Memory
x2.9x1.9" (182X73X48mm)/16oz (455g) Dimensions/ Weight
(meter)/6mo conditional warranty (electrode) Warranty
M readings on 2G SD card Memor x2.9x1.9" (182X73X48mm)/16oz (455g) Dimens

← All models are CE approved.



NOTE: It is recommended that you calibrate your conductivity meter to conductivity standards before use.



Ensuring Water Quality

Extech offers water quality testing tools. Find Extech on the job in wastewater treatment facilities, water treatment, industrial systems (boiler water systems, cooling towers, cooling systems, closed loops), alternative farming (hydro-/ aeroponics), fish farming, lab testing, pool maintenance, R&D, and more.



EC210 Compact Conductivity/TDS Meter

Adjustable Temperature compensation factor to maintain accuracy

- Simultaneous display of Conductivity or TDS with Temperature
- Automatic Temperature Compensation
- Temperature compensation factor adjustable between 0 to 5.0% per °C
- Min/Max and Data Hold functions
- Auto Power Off with disable feature
- Use optional 1413µS Conductivity Standard (EC-1413-P) for calibration
- Complete with Conductivity cell and 39" (1m) cable, 9V battery, and soft case



EC600 Waterproof pH/ **ORP/Conductivity/ TDS Kit**

Measures Conductivity, TDS, Salinity, Resistivity, pH, mV and **Temperature**

- Waterproof housing (meets IP57)
- Choice of 3 point pH calibration
- One point Conductivity calibration - automatically recognizes 8 calibration solutions
- Automatic Temperature Compensation (non-linear compensation for purified water <10µS/cm to improve measuring accuracy)
- Memory stores up to 300 labeled readings
- Large blue backlit dual LCD display
- Auto power off with disable function
- Complete with pH/mV/Temperature electrode, polymer Conductivity cell, pH calibration solutions (4, 7, and 10pH), Conductivity calibration solution (1413µS), 2 AA batteries, and hard carrying case



341350A-P pH/ **Conductivity/TDS/ ORP/Salinity Meter**

Exclusive Oyster™ Design can be used in the lab or in the field

- Large dual LCD built into adjustable "flip-up" cover
- · Microprocessor based with splashproof housing and front panel tactile touch pad to slope and calibrate
- Rugged design for handheld or benchtop use
- · Convenient neckstrap holds meter while you take measurements
- Stores 25 labeled readings
- ATC for Conductivity/TDS
- Manual Temperature Compensation: pH (0 to 100°C)
- Includes mini pH electrode, thermistor probe (850190), sample buffers, polymer conductivity cell, 9V battery, neckstrap & case; Optional Universal AC adaptor (UA100-240) and ORP electrode (67500B)

ACCESSORIES	
EC-84-P	84μS Conductivity Standard (2 bottles - 1 pint each)
EC-1413-P	1413µS Conductivity Standard (2 bottles - 1 pint each)
EC-12880-P	12880µS Conductivity Standard (2 bottles - 1 pint each)
EC210-P	Replacement Conductivity/TDS Cell for EC210
EC605	Spare Polymer Conductivity Cell for EC600
804010A	Polymer Conductivity Cell for 341350A-P
PH305	Spare pH Electrode for EC600
60120B	Spare Mini pH Electrode for 341350A-P
67500B	ORP Electrode (13 x 154mm)
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)
850190	Thermistor Probe (32 to 194°F/0 to 90°C) for 341350A-P

SPECIFICATIONS	EC210	EC600	341350A-P 🔃		
Conductivity	2000µS/cm, 20mS/cm, 100mS/cm	0.00 to 199.9mS	10 to 19,990μS/cm		
TDS/Salinity	1200ppm, 12,000ppm, 66,000ppm	0 to 100g/L	TDS range: 10 to 19,990ppm (mg/L)		
рН	_	-2 to 19pH	0.01 to 14.00pH		
mV	_	-1999mV to + 1999	-		
Temperature	32 to 122°F (0 to 50°C)	pH/mV: 32 to 212°F (0 to 100°C); Other: 32 to 122°F (0 to 50°C)	Thermistor probe: 32 to 194°F (0 to 90.0°C)		
Max. Resolution	1μS/cm, 0.01mS/cm, 0.1mS/cm, 1ppm 10ppm, 100ppm, 0.1°F/°C	0.01pH, 1mV, 0.01μS, 0.01mg/L, 0.01ppt, 0.1°F/°C	0.1mS; 0.01pH		
Basic Accuracy	±2% FS, ±1.5°F/0.8°C	±0.02pH, ±0.15mV, ±1.5%FS, ±1°F/0.5°C	±2%, ±0.02pH		
CE Approved	Yes	Yes	Yes		
Dimensions	Meter: $5.3 \times 2.4 \times 1.3$ " (135 x 60 x 33mm)/ 10.4oz (295g) includes probe and battery	4.7x2.6x1.2" (120x65x31mm)/6.3oz (180g)	3.7x4.2x2" (96x108x45mm)/ 12oz (340g)		
Warranty	1 year (6 months electrode)	1 year (6 months electrode)	1 year (6 months electrode)		
	NOTE: It is recommended that you calibrate your conductivity meter to conductivity standards before use.				

SDL150 Dissolved Oxygen Meter/Datalogger



Datalogger date/time stamps and stores readings on an SD card in Excel® format for easy transfer to a PC

- Dual display of Oxygen Concentration and Temperature
- Measures dissolved oxygen from 0 to 20.0mg/L and 0 to 100.0% oxygen plus temperature from 32 to 122°F (0 to 50°C)
- Automatic Temperature Compensation from 0 to 50°C via temperature sensor built into polarographic type oxygen probe
- Selectable data sampling rate: 1 second to 8hrs:59min:59sec
- Manually store/recall up to 99 readings
- Large backlit dual LCD
- Record/Recall MIN, MAX readings
- Data Hold plus Auto power off with disable function
- 3 year warranty (meter)/ 6 months conditional warranty (electrode)
- Complete with 6 x AA batteries, SD card, probe, spare probe head with diaphragm, electrolyte, and hard carrying case; Optional Universal AC adaptor

SPECIFICATIONS	DISSOLVED OXYGEN	OXYGEN	TEMPERATURE	
Range	0 to 20.0 mg/L	0 to 100.0%	32 to 122°F (0 to 50°C)	
Accuracy	±0.4 mg/L	±0.7%	±0.8°C/1.5°F	
Probe Compensation & Adjustment	Salt: 0 to 50%	Altitude: 0 to 8910m	Temp: 0 to 50°C	
Datalogging	99 data (manual)/20M data (4G SD card)		
Dimensions/Weight	Meter: 7.2x2.9x1.9" (182x73x48mm)/ 25.6oz(725g) Probe: Probe: 0.8Dx4.9"L			

ORDERING	
SDL150	Dissolved Oxygen Meter/Datalogger
407510-P	Dissolved Oxygen probe with 13ft (4m) cable
780417A	Replacement Membranes (10/pack)
780418	DO Internal Fill Solution (2pks - 50mL each)
UA100-240	100-240V AC Adaptor with 4 plugs (US, EU, UK, AU)

407510 Heavy Duty Dissolved Oxygen Meter





Complete with 0.8" (20mm) probe on 13ft (4m) cable, membranes, protective holster with stand, 9V battery, and carrying case

Dual display of Oxygen concentration in solutions and Temperature — plus **RS-232 PC interface**

- Measures dissolved oxygen, oxygen, plus temperature
- Min/Max/Avg, Data Hold and Auto power off
- Automatic Temperature Compensation
- Large 1.4" (36mm) LCD display
- Built-in PC interface with optional Data Acquisition Software 407001 (see p. 114)
- 3 year warranty (meter)/ 6 months conditional warranty (electrode)

SPECIFICATIONS	DISSOLVED OXYGEN	OXYGEN	TEMPERATURE
Range	0 to 19.9mg/L	0 to 100.0%	32 to 122°F (0 to 50°C)
Accuracy	±0.4mg/L	±0.7%	±1.5°F/ ±0.8°C
Probe Compensation & Adjustment	Salt: 0 to 39%	Altitude 0 to 3900m	Temp: 0 to 50°C
Dimensions/ Weight	Meter: 7x3x1.3" (178x74x	33mm); Probe: 0.8Dx4.	9"L
Weight	17oz (482g)		

ORDERING	
407510	Heavy Duty Dissolved Oxygen Kit
407510-P	Dissolved Oxygen probe with 13ft (4m) cable
780417A	Replacement Membranes (10/pack)
780418	DO Internal Fill Solution (2pks - 50mL each)

D0700 Waterproof Series Dissolved Oxygen Kit



8-in-1 Meter - Measures DO concentration/saturation, pH, mV, Conductivity, TDS, Salinity, Resistivity and Temperature

- Automatic salinity compensation and manual barometric pressure compensation for DO measurements
- Waterproof housing (meets IP57) design and large blue backlit dual LCD display
- Choice of 3 point pH calibration for better accuracy; **Automatic Temperature Compensation**
- One point Conductivity calibration automatically recognizes 8 calibration solutions
- Memory stores up to 400 labeled readings
- Auto power off with disable function
- 1 year warranty (meter)/ 6 months conditional warranty (electrode)
- Complete with Dissolved Oxygen probe with 3 membrane caps and DO internal fill solution (30mL), pH/mV/Temperature electrode, polymer Conductivity cell, pH calibration solutions (4, 7, and 10pH), Conductivity calibration solution (1413µS), 2 AA batteries, and hard carrying case

SPECIFICATIONS	RANGE	RESOLUTION	BASIC ACCURACY	
Dissolved Oxygen (Concentration)	0 to 40.00mg/L	0.01mg/L	±1.5%FS	
Dissolved Oxygen (Saturation)	0 to 200.0%	0.1%	±1.5%FS	
рН	-2.00 to 19.99pH	0.01pH	±0.02pH	
mV	-1999 to + 1999mV	1mV	±0.15mV	
Conductivity	0.00 to 199.9mS	0.01µS	±1.5%FS	
TDS	0 to 100g/L	0.01mg/L	±1.5%FS	
Salinity	0 to 100ppt	0.01ppt	±1.5%FS	
Resistivity	0 to 100M cm	0.1	±1.5%FS	
Temperature (for pH & mV)	32 to 212°F (0 to 100°C)	0.1°	±1°F/±0.5°C	
Temperature (other)	32 to 122°F (0 to 50°C)	0.1°	±1°F/±0.5°C	
Dimensions/Weight	4.7x2.6x1.2" (120x65x31mm)/ 6.3oz (180g)		

ORDERING	
DO700	Waterproof Series Dissolved Oxygen Kit
DO705	Dissolved Oxygen Electrode
DO703	Replacement Membrane Caps (3 caps)
PH305	Spare pH/mV/Temperature Electrode
EC605	Spare Polymer Conductivity Cell

D0210 Compact Dissolved Oxygen Meter

FUNCTION . Complete with DO probe with membrane and 13ft (4m) cable, two spare replacement membranes, electrolyte, 9V battery, and

soft case

Take quick measurements of Dissolved Oxygen or % Oxygen

- Measures Dissolved Oxygen and % Oxygen plus Temperature
- Automatic Temperature Compensation via temperature probe sensor built into polarographic type oxygen probe
- Adjustable Altitude and Salinity Compensation
- Min/Max and Data Hold functions
- Auto Power Off with disable feature
- 1 year warranty (meter)/ 6 months conditional warranty (electrode)

SPECIFICATIONS	DISSOLVED OXYGEN	OXYGEN	TEMPERATURE
Range	0 to 20.0 mg/L	0 to 100.0%	32 to 122°F (0 to 50°C)
Basic Accuracy	±0.4 mg/L	±0.7%	± 1.5°F (±0.8°C)
Automatic Temperature Compensation (ATC)	32 to 122°F (0 to 50°C)		
Probe Compensation & Adjustment	Salt: 0 to 39% Altitude: 0	to 3900m	
Dimensions	Meter: 5.3 x 2.4 x 1.3" (13 Probe: 28mm(1.1")D x 190		
Weigh	15.7oz (446g) includes pro	bbe and battery	

ORDERING	
DO210	Dissolved Oxygen Meter
407510-P	Dissolved Oxygen Probe with 13ft (4m) cable
780417A	Replacement Membranes (10/pack)
780418	DO internal Fill Solution (2pks - 50mL each)



PART NO.	PAGE NO.	PRICE PART NO.	PAGE NO.	PRICE	PART NO.	PAGE NO.	PRICE
144118	122	380942-NIST	30		407730	120	
144220	122	380947	29		407730-NIST N	120	
144240	122	380947-NIST	29		407732	121	
153117	46	380950	31		407732-NIST №	121	
153220	46	381676A	17		407732-KIT	121	
156119	46, 111, 136	382100	60		407732-KIT-NIST №	121	
156221	136	382200	48		407736	121	
341350A-P	157	382202	48		407736-NIST N	121	
341350A-P-NIST N	157	382213	48		407744	120, 122	
365510	141	382213-NIST	48		407744-NIST N	120, 122	
365510-NIST N	141	382252	52		407750	122	
365515	141	382252-NIST	52		407750-NIST N	122	
365515-NIST N	141	382253	52		407752	88	
365535	141	382254	52		407760	122	
365535-NIST №	141	382260	49		407760-NISTL* №	122	
380193	46	382270	49		407764-EXT	122, 125	
380260	55	382275	50		407766	120, 122	
380260-NIST N	55	382276	50		407766-NIST N	120, 122	
380320	55	382280	49		407780A	123, 125	
380360	55	382357	52		407780A-NIST №	123	
380360-NIST N	55	382357-NIST	52		407790A	125	
380363	59	392050	75		407790A-NIST №	125	
380363-NIST N	58	39240	75		407860	136	
380395	59	401014	75		407910	111	
380395-NIST N	59	401025	114		407910-NIST N	111	
380396	59	401025-NIST	114		409992	41	
380396-NIST N	59	401027	114		409996	41	
380460	54	401027-NIST	114		409997	41	
380460-NIST N	54	40130	38		412440-S	139	
380462	54	40180	44		412440-S-NIST N	139	
380462-NIST N	54	407001	113, 114, 144		421502	72	
380465	54	407001-USB	113, 114, 144		421502-NIST N	72	
380560	54	407026	115		42270	81	
380560-NIST N	54	407026-NIST	115		42275	81	
380562	54	40705X	120, 122		42280	81	
380562-NIST N	54	407113	99		42299	83	
380565	54	407113-NIST	99		42509	66	
380580	54	407119	99		42509-NIST N	66	
380580-NIST N	54	407119-NIST	99		42510A	65	
380926	32	407355	124		42510A-NIST N	65	
380926-NIST N	32	407355-NIST	124		42512	66	
380941	29	407355-KIT-5	124		42512-NIST N	66	
380941-NIST N	29	407510	158		42515	65	
380942	30	407510-P	158, 159		42515-NIST N	65	

^{*407760-}NISTL: Limited NIST for Certificate of Traceability calibrated at 94.0 dB/1KHz



PART NO.	PAGE NO. PRICE	PART NO.	PAGE NO.	PRICE	PART NO.	PAGE NO.	PRICE
42515-T	65	461920-NIST N	128		881605	70	
42515-T-NISTL* N	65	461937	126,128,129		ADPTR-HDV	131	
42540	67	461950	129		AN100	98	
42540-NIST N	67	461950-NIST N	129		AN100-NIST N	98	
42545	67	461955	127		AN200	98	
42545-NIST N	67	461957	129		AN200-NIST N	98	
42570	67	461990	126		AN25	89	
42570-NISTL** N	67	461995	127		AN300	101	
445580	86	461995-NIST N	127		AN300-NIST N	101	
445580-NIST 🕦	86	475040	113		AN300-C	101	
445702	77	475040-NIST 🕦	113		AN310	101	
445703	78	475040-SD	113		AN310-NIST N	101	
445706	77	475040-SD-NIST N	113		AN320	101	
445713	78	475044	113		AN320-NISTL**** N	101	
445713-TP	78	475044-NIST N	113		AN340	101	
445715	78	475044-SD	113		AN340-NIST N	101	
445715-NIST N	78	475044-SD-NIST N	113		BATT-36V-C	83	
445715-NISTL*** N	78	475055	113		BATT-37V	68	
445814	78	475055-NIST N	113		BR100	134	
445815	78	479097	113		BR150	134	
445815-NIST N	78	480172	25		BR-17CAM	133, 134	
45116	96	480400	34		BR-17CAM-2M	133	
45118	96	480403	34		BR-17CAM-5M	133	
45156	96	480823	63		BR200	133	
45158	96	480836	62		BR200-EXT	133, 134	
45168CP	96	480846	62		BR250	133	
45170	97	589250	84		BR-4CAM	133	
45170CM	97	601100	153		BR-5CAM	133, 134	
461825	129	60120B	153		BR80	134	
461825-NIST N	129	6012WS	154		BR-9CAM	133, 134	
461830	129	6015WC	154		BR-9CAM-2M	133	
461830-NIST N	129	601500	153		BR-9CAM-5M	133	
461831	129	67500B	154		BRC-17CAM	134	
461831-NIST 🕦	129	780417A	158, 159		BRC-EXT	134	
461834	129	780418	158, 159		BRD10	131, 133	
461880	137	801515	70, 72		BT100	45	
461880-NIST N	137	804010A	156		BT102	45	
461891	126	850185	72, 154		CA250	40	
461891-NIST N	126	850188	154		CA3010	33, 40	
461893	126	850190	156		CA3018	33, 40	
461893-NIST N	126	871515	70		CA500	41	
461895	127	872502	70, 72		CA895	96, 146,148	
461895-NIST N	127	881602	70		CA899	41	
461920	128	881603	70		CA900	41	

^{*42515-}T-NISTL: Limited NIST for Certificate of Traceability for 42515 meter only **42570-NISTL: Limited NIST for Certificate of Traceability from -4 to 1500°F (-20 to 815°C)

^{****}AN320-NISTL: Limited NIST for Certificate of Traceability calibrated to wind velocity, %RH, and Air Temperature

PAGE NO.

PRICE PART NO.



PART NO.	PAGE NO.	PRICE PART NO.	PAGE NO. PRIC	CE PART NO.	PAGE NO.	PRICE
CA904	146, 148	D0605	151	EC600	157	
CA-EXTECHTB	41	D0610	151	EC605	156, 159	
CB10	43	D0700	159	EMF300	63	
CB10-KIT	43	D0703	159	EMF450	62	
CB20	43	D0705	159	EN100	97	
CG104	142	DT300	51	EN100-TP	96	
CG104-REF	142	DT500	51	EN100-V	96	
CG204	142	DV23	38	EN150	97	
CG204-REF	142	DV25	38	EN300	97	
CG206	143	DV26	38	ET10	39	
CG304	143	DV30	38	ET15	39	
CG304-REF	143	DV40	38	ET20	40	
CL200	147, 150	DVA30	39	ET25	40	
CL203	150	EA10	71	ET30A	40	
CL204	150	EA10-NIST IN	71	ET40	40	
CL205	146, 150, 153	EA11A	71	ETK30	20	
CL207	150	EA11A-NIST N	71	ETK35	20	
CL500	145	EA15	71	EX006	150, 152	
C010	104	EA15-NIST N	71	EX007	150, 152	
C0100	105	EA20	87	EX010	148, 151	
C0200	105	EA20-NIST N	87	EX050	148, 151	
C0210	105	EA25	87	EX310	10	
C0220	105	EA25-NIST N	87	EX310-NIST N	10	
C0230	106	EA30	116	EX320	10	
C0240	106	EA30-NIST N	116	EX320-NIST N	10	
C0250	107	EA31	116	EX330	10	
C030	104	EA31-NIST 🔃	116	EX330-NIST N	10	
C050	104	EA33	117	EX350	11	
CT20	44	EA33-NIST 🕦	117	EX350-NIST N	11	
CT40	44	EA80	107	EX355	11	
CT70	42	EC100	152	EX355-NIST N	11	
CT70-AC	42	EC-12880-P	148,152,156	EX360	12	
CT80	42	EC-1413-P	148,152,156	EX360-NIST N	12	
CTH10A	77	EC-84-P	148, 156	EX363	12	
DCP60	50	EC150	152	EX363-NIST N	12	
DCP60-220	50	EC170	152	EX365	12	
DL150	35	EC210	157	EX365-NIST 🕦	12	
DL160	35	EC210-P	156	EX410	13	
DM110	17	EC400	148	EX410-NIST N	13	
DM220	17	EC405	148	EX430	13	
D0210	159	EC410	149	EX430-NIST N	13	
D0600	151	EC500	149	EX470	13	
D0600-K	151	EC505	148	EX470-NIST N	13	
D0603	151	EC510	149	EX470-NISTL* N	13	
DM110 DM220 D0210 D0600 D0600-K	17 17 159 151 151	EC400 EC405 EC410 EC500 EC505	148 148 149 149 148	EX410-NIST N EX430 EX430-NIST N EX470 EX470-NIST N	13 13 13 13 13	

*NISTL: Limited NIST for Certificate of Traceability to all functions except IR Thermometer

EX505	14	HD400	117	HT200	89
EX505-NIST N	14	HD400-NIST N	117	HT30	89
EX505-K	21	HD450	117	HT30-NISTL** ■	89
EX520	14	HD450-NIST ■	117	HW30	88, 140
EX520-NIST N	14	HD500	85	HW30-NISTL*** ■	88, 140
EX530	14	HD500-NIST ■	85	IR201A	64
EX530-NIST N	14	HD600	123	IR260	65
EX540	15	HD600-NIST N	123	IR267	65
EX540-NIST N	15	HD700	111	IR300UV	69
EX542	15	HD700-NIST ■	111	IR400	64
EX542-NIST N	15	HD750	111	IR400-NIST N	64
EX570	15	HD750-NIST ■	111	IRT600	68
EX570-NISTL* N	15	HD755	111	IRT600-NISTL**** ■	68
EX613	25	HD755-NIST ■	111	LCR200	46
EX613-NIST N	25	HDV-25CAM-10G	131	LCR203	46
EX623	25	HDV-25CAM-30G	131	LCR205	46
EX623-NISTL* N	25	HDV-4CAM-5FM	131	LRK10	118
EX650	24	HDV540	132	LRK15	118
EX650-NIST N	24	HDV5-6CAM-1AFM	132	LT300	115
EX655	24	HDV-5CAM-3FM	131	LT300-NIST N	115
EX655-NIST N	24	HDV-5CAM-10F	131	LT40	119
EX820	23	HDV-5CAM-1FM	131	LT40-NIST N	119
EX820-NIST N	23	HDV-5CAM-30FM	131	LT45	119
EX830	23	HDV-5CAM-3F	131	LT45-NIST N	119
EX830-NIST N	23	HDV600	131	MA120	28
EX840	23	HDV610	131	MA120-NIST N	28
EX840-NISTL* N	23	HDV620	131	MA140	27
EX850	23	HDV640	131	MA140-NIST N	27
EX900	147	HDV640W	131	MA145	27
EZ40	103	HDV650-10G	131	MA145-NIST N	27
FG100	103	HDV650-30G	131	MA1500	32
FL700	151	HDV650W-10G	131	MA1500-NIST N	32
FL704	151	HDV650W-30G	131	MA160	27
FL705	151	HDV-PC	131	MA160-NIST N	27
FM100	108	HDV-TX1	131	MA200	26
FM200	108	HDV-TX1L	131	MA200-NIST N	26
FM300	108	HDV-TX2	131	MA220	26
GRT300	53	HDV-TX2L	131	MA220-NIST N	26
GRT300-NIST 🕦	53	HDV-WTX	131	MA250	29
GRT350	53	HDV-WTX1	131	MA250-NIST N	29
GRT350-NIST 🔼	53	HDV-WTX1L	131	MA260	27
HD300	99	HDV-WTX2	131	MA3010	33
HD300-NIST 🕦	99	HDV-WTX2L	131	MA3010-NIST N	33
HD350	110	HG500	13, 14	MA3018	33

PAGE NO.

*NISTL: Limited NIST for Certificate of Traceability to all functions except IR Thermometer
**HT30-NISTL: Limited NIST for Certificate of Traceability to 33 and 75%RH and 21.0°C only

PAGE NO.

PRICE PART NO.

PART NO.

***HW30-NISTL: Limited NIST for Certificate of Traceability to stopwatch functions only
****IRT600-NISTL: Limited NIST for Certificate of Traceability to IR Temperature function only





PART NO.	PAGE NO.	PRICE	PART NO.	PAGE NO.	PRICE	PART NO.	PAGE NO.	PRICE
MA3018-NIST N	33		M0290-EXT	95		PQ34-2	60	
MA443	26		M0290-HP	95		PQ34-30	60	
MA443-NIST N	26		M0290-P	95		PQ3470	60	
MA445	26		M0290-PINS-EP	95		PQ3470-12	60	
MA445-NIST N	26		M0290-PINS-HP	95		PQ3470-2	60	
MA61	31		M0295	94		PQ3470-30	60	
MA61-NIST N	31		M0300	94		PQ500	37	
MA620-K	21		M0300-NISTL* N	94		PRC10	139	
MA63	31		M050	90		PRC10-NIST N	139	
MA63-NIST N	31		M050-PINS	90, 92		PRC15	139	
MA640-K	21		M055	93		PRC15-NIST N	139	
MD10	45		M0750	95		PRC20	138	
MF100	63		M0750-P	95		PRC20-NIST N	138	
MG300	18, 57		MO-P1	92		PRC30	138	
MG300-NIST N	18, 57		MS420	47		PRC30-NIST N	138	
MG300-ETK	19		OYSTER-15	155		PRT200	34	
MG300-MTK	19		OYSTER-16	155		PT150	112	
MG302	18, 57		PD20	75		PT150-SD	109	
MG302-NIST N	18, 57		PH100	146		PT30	112	
MG302-ETK	19		PH103	153		PT300	112	
MG302-MTK	19		PH105	146, 153		PT300-SD	109	
MG310	58		PH10-P	153		PT30-SD	109	
MG310-NIST N	58		PH110	146		PWR5	83	
MG325	18, 57		PH113	153		PWRCORD-MS420	47	
MG325-NIST N	18, 57		PH115	153		RD300	103	
MG500	59		PH210	154		RD300-L	103	
MG500-NIST N	59		PH220-C	154		RD300-S	103	
MN15A	16		PH220-S	154		RE300	147	
MN16A	16		PH300	155		RE305	146,153	
MN35	16		PH305	154, 156, 159		RF10	135	
MN36	16		PH4-P	146, 153,154		RF11	135	
MN62-K	19		PH50	152		RF12	135	
M0200-PINS	90, 92		PH60	152		RF15	135	
M0210	91		PH7-P	146,153,154		RF16	135	
M0220	91		PH90	148		RF18	135	
M0220-PINS	90		PH95	148		RF20	135	
M025	90		PQ1000	37,60,61		RF30	135	
M0257	91		PQ2071	33, 61		RF40	135	
M0260	93		PQ2071-NIST N	33, 61		RF41	135	
M0265	93		PQ3350-1	61		RH101	87	
M0280	92		PQ3350-1-NIST №	61		RH210	86	
M0290	94		PQ3350-3	61		RH25	88	
M0290-BP	95		PQ3350-3-NIST N	61		RH30	79	
			PQ34-12	60		RH300	84	

*MO300-NISTL: Limited NIST for Certificate of Traceability to %RH, Air temp & IR temperature

PART NO.	PAGE NO. PRICE	PART NO.	PAGE NO. PR	ICE PART NO.	PAGE NO. PRICE
RH300-CAL	82	SDL100-NIST N	155	TL748	37
RH300-NIST N	84	SDL150	158	TL803	36
RH305	84	SDL200	73	TL805	36
RH35	79	SDL200-NIST N	73	TL806	37
RH350	79	SDL300	100	TL807C	37
RH350-CAL	84	SDL300-NIST N	100	TL808-KIT	36
RH350-NIST N	79	SDL310	100	TL809	36
RH390	85	SDL310-NIST N	100	TL810	36
RH390-NIST N	85	SDL350	100	TL900	36
RH490	85	SDL350-NIST N	100	TM100	70
RH490-NIST N	85	SDL400	115	TM100-NIST N	70
RH520A	81	SDL400-NIST N	115	TM20	75
RH520A-NIST N	81	SDL470	118	TM25	75
RH520A-220	81	SDL470-NISTL* N	118	TM26	74
RH520A-220-NIST N	81	SDL500	85	TM300	70
RH520A-240	81	SDL500-NIST N	85	TM300-NIST N	70
RH520A-240-NIST N	81	SDL550	95	TM500	73
RH522	81	SDL600	123	TM500-NIST N	73
RHM15	79	SDL600-NIST N	123	TM55	74
RHT10	80	SDL700	112	TP200	41
RHT10-SW	80	SDL700-NIST N	112	TP870	41
RHT20	80	SDL800	136	TP873	41
RHT3	79	SDL900	63	TP873-5M	41
RHT50	80	SL123	81	TP875	41
RPM10	127	SL124	81	TP882	70, 72
RPM10-NIST N	127	SL125	125	TP890	84
RPM33	128	SL130G	125	TR100	96, 120, 122
RPM33-NIST N	128	SL130G-NIST 🕦	125	UA100-240	72, 84, 86, 96
RPM40	128	SL355	124	UA100-BR	133
RPM40-NIST N	128	SL355-NIST N	124	UM200	53
RT30	42	SL355-KIT-3	124	UM200-NIST N	53
SC50	144	SL400	124	USB100	84, 122, 124
SC600	144	SL400-NIST N	124	VB300	137
SD200	73	TB400	145	VB400	137
SD200-NIST N	73	TG20	45	VB450	136
SD500	82, 87	TH10	76, 80	VB500	136
SD700	82, 87	THD5	76	VB500-NIST ■	136
SD750	109	TK430	20	VFM200	109
SD750-NIST N	109	TK430-IR	20	VIR50	68
SD800	107	TL708	37	VIR50-NISTL** N	68
SD900	35	TL709	37	VPC300	102
SD910	35	TL726	37	VT30	39
SDL100	155	TL740	37		

*SDL470-NISTL: Limited NIST for Certificate of Traceability to a single point in UVA and a single point in UVC modes
**VIR50-NISTL - Limited NIST for Certificate of Traceability to Type K and max IR Temperature of 1500°F (815°C)

All specifications and prices are subject to change without notice.







Calibration Traceable to NIST

WHEN YOUR JOB DEMANDS IT, EXTECH GOES THE DISTANCE TO DELIVER CERTIFIED ACCURACY FOR YOUR TEST & MEASUREMENT EQUIPMENT.

Calibrate your Expectations

Extech is one of the few suppliers that offers a broad range of measurement instrumentation complete with a Certificate of calibration that is traceable to NIST (The National Institute of Standards and Technology), an agency of the U.S. Department of Commerce. This Certification ensures that, since traceable standards are used and maintained. Extech products will perform optimally and will meet or exceed published specifications in all of their functions.



Calibration Adds Value

Our in-house calibration lab accommodates a wide range of calibrations and services and was built specifically with our customers' requirements in mind. Our Calibration Lab complies with all pertinent industry guidelines ensuring that high quality standards are maintained. NIST traceable Calibrations are performed by skilled technicians under strict ISO-9001 guidelines and procedures. Our Calibration equipment is state-of-the-art, regularly tested for peak performance, and continually upgraded.







Extech for Makers

WITH EXTECH, DON'T JUST BUILD, MAKE. DON'T JUST PROGRAM, HACK. DON'T JUST DESIGN, FABRICATE.



Turn to Extech for all your maker/ hacker test equipment needs:

Multimeters, LCR Meters Oscilloscopes, Infrared Thermometers, Voltage/ Current Calibrators. Power Supplies, DC Clamp meters, Wiring testers, Borescopes and much, more!



The Choice for Makers & Hackers

Around the world, a new generation of makers and hackers is exploring innovative ideas in electronic hardware, programming and 3-D printed fabrication. And it's happening at home, at school, and also in HackerSpaces, MakerSpaces, TechShops and FabLabs. Inventive minds are solving small and large challenges by building electronics with simple yet sophisticated platforms like Arduino and Raspberry Pi. Extech is proud to be play a prominent role in Maker/Hacker culture. See how:









Hacker Training

Leading hacker and security expert, Joe Grand uses Extech EX410 digital multimeters as part of the standard equipment in his popular "Hands-On Hardware Hacking and Reverse Engineering" course given at major events around the world.



EEV Blog

Extech multimeters have been featured on the influential maker/hacker site. EEV Blog. The EX330 won the \$50 multimeter shootout against 4 other comparable meters and the EX505 survived an extreme canyon trip.



Make

Extech meters, benchtop power supplies and borescopes have been featured on Make: in Product Reviews as well as in gift guides for the holidays and Father's Day. Extech's EX330 even received a "Best of Make:" honor.



The New York Times

The New York Times explored the idea of "home labs" and touted the Extech's EX210 multimeter for its built-in infrared thermometer.





FLIR Systems, Inc. 9 Townsend West Nashua, NH 03063 Ph: 1-877-894-7440

Category Index

- Catogory IIIaox			
Air Velocity/Anemometers	96-101, 110	Magnet Detector	
Air Quality Meters		Manometers (Pressure Meters)	
Batteries/Power Bank	83	Megohmmeters (Insulation Testers)	18-19, 55-59
Battery Tester	45	Milliohm/Micro-ohm Meters	53-54
Barometric Meters		Moisture Meters	90-95
Borescopes/Video Inspection Cameras	130-134	MultiMeters	
Cable Testers		MultiMeter Accessories	33, 36-37, 40
Calibrators-Current, Voltage, T/C, Process, pH	138-139	MultiMeter Adaptors	33, 40
Carbon Dioxide (CO ₂) Meters	.101, 105-107	MultiMeter Test Kits	19-21
Carbon Monoxide (CO) Meters	104	ORP Meters/Accessories	
Chlorine Meters, Kits, and Accessories	145, 147, 150	Oscilloscopes, Graphical MultiMeters	47
Circuit Breaker Finder and AC Circuit Analyzers	42-43	Phase & Motor Rotation Testers	17, 19, 34
Clamp Meter Kits		pH/mV/Temp Meters/Accessories14	46-149, 151-157, 159
Clamp-on Meters	22-33, 61	Pitot Tube (Air Flow Meter)	110
Clocks/Timers	77, 140-141	Particle Counter	102
Component Tester	46	Plumbing VideoScope Kits	130-131
Conductivity Meters, Kits 148-149, 151-152,	, 156-157, 159	Power Meters/Dataloggers/ Analyzers	33, 60, 61
Continuity Tester and Cable Identifier	43-45	Power Supplies	48-50
Dataloggers, Recorders - Voltage/Current	35	Pressure Meters (Manometers)	109-112
Dataloggers, Recorders - Temperature/Humidity.	76, 79-82	Psychrometers, Dew Point/Wet Bulb	78-81, 84-89
Dew Point/Web Bulb	. 78-81, 84-89	Refractometers: Sucrose, Salinity, Battery Coo	olant 135
Dissolved Oxygen Meters149	, 151, 158-159	Salinity Meters148-149	, 151-152, 157, 159
Distance Meters	51	Scales/Balance	
Dosimeters, Noise	124	Sound Level Alert/Monitors	125
Electrical Testers	. 38-40, 42-43	Sound Level Meters, Calibrators, Datalogger.	97, 120-125
Electrical Test Kits		Stopwatches	
EMF/ELF, Gauss Meter	62-63	Stroboscope Tachometers	129
Environmental Meters		Tachometers - Contact, Photo, & Strobotach.	
Flex Clamp Meters/Adaptors	33, 40	TDS Meters (Total Dissolved Solids)148-149, ⁻	151-152, 156-157, 159
Fluoride Meter		Temperature Indicators	74-78
Force Gauge Meters	113	Temperature Probes (Thermocouple and RTD)	41, 70, 72
Formaldehyde Monitors	108-109	Test Leads and Accessories	36-37, 40
Gas Detectors (Combustible, CO, CO ₂ , CH ₂ O, VO	OC)103-109	Thermo-Anemometers	96-101
Ground Resistance/Earth Resistance Testers	52-53	Thermometers: IR	
Harmonics Analyzers	60-61	Thermometers: Thermocouple, RTD	
Heat Index Meters	88-89, 140	Thickness Testers (Coating)	
Heat Stress WBGT Meter	89	Tone Generators and Wire Tracers	44-45
Humidity and Temperature Graphical Recorder		Turbidity Meter	
Humidity Meters, Hygro-Thermometers	. 77-82, 84-87	UV Light Meters	97, 118
Humidity Indicators	77-79	Vibration Meters	136-137
Insulation Testers (Megohmmeters)	18-19, 55-59	Video Inspection Cameras	
LCR Meter		Volatile Organic Compounds (VOC) Meters	
Leakage Detectors (Refrigerant and Gas)	69, 103	Voltage and Current Dataloggers	
Light Meters, LED, UV, and Dataloggers		Voltage and Current Detectors	
Lighting Retrofit Kits		Water Quality Meters, Kits, Accessories	

All specifications and prices are subject to change without notice.