


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2451320220](#)
Status: **Active**
Overview: [Micro-Fit Connector System](#)
Description: Micro-fit 3.0-to-Micro-Fit 3.0 Off-the-Shelf (OTS) Overmolded Cable Assembly, Dual Row, 2.0m Length, 2 Circuits, Black

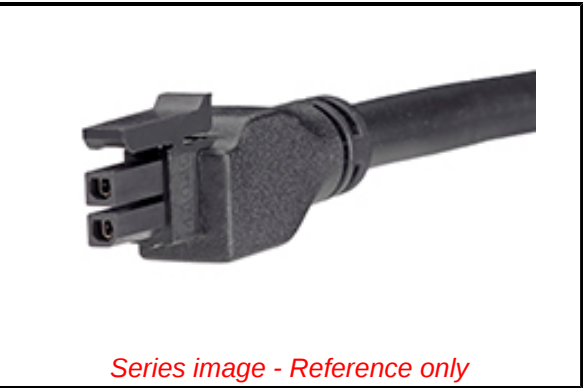

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification 2014400109-PK \(PDF\)](#) [Product Literature \(PDF\)](#)

General
Product Family Cable Assemblies
Series [245132](#)
Application Power, Wire-to-Board, Wire-to-Wire
Assembly Configuration Dual Ended Connectors
Connector to Connector Micro-Fit 3.0 Both Ends
Overmolded Yes
Overview [Micro-Fit Connector System](#)
Product Literature Order No 987651-4661
Product Name Micro-Fit 3.0
Type Overmolded Assembly
UPC 889056853880

Physical
Cable Length 2.0m
Circuits (Loaded) 2
Color - Resin Black
Gender Female-Female
Lock to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 94.356/g
Number of Rows 2
Packaging Type Bag
Pitch - Mating Interface 3.00mm
Plating min - Mating 1.016µm
Plating min - Termination 1.016µm
Single Ended No
Termination Interface: Style Crimp or Compression
Wire Insulation Diameter 5.50mm
Wire Size AWG 20
Wire/Cable Type UL 2464

Electrical
Current - Maximum per Contact 5.5A
Voltage - Maximum 300V AC

Material Info

Reference - Drawing Numbers
Packaging Specification 2014400109-PK
Sales Drawing 2014400085-000

EU ELV
Not Relevant

EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/71/2019 (16 July 2019)	
Halogen-Free Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
[245132](#) Series

Mates With
Micro-Fit 3.0 Plug Housings [43020](#)

Micro-Fit 3.0 Headers [43045](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION