

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0190130030](#)
Status: **Active**
Overview: [Standard Quick-Disconnect Terminals](#)
Description: InsulKrimp™ Fully Insulated Piggyback Quick Disconnect, Tab 6.35 x 0.81mm, 14-16 AWG, Expanded Blue Insulator, Tape

Documents:

[3D Model](#) [Product Specification PS-19902-011-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-19902-008-001 \(PDF\)](#)

Agency Certification

CSA LR18689
UL E79133

General

Product Family Quick Disconnects
Series [19013](#)
Crimp Quality Equipment Yes
Insulated Fully
Overview [Standard Quick-Disconnect Terminals](#)
Product Name InsulKrimp™
Type Quick Disconnect
UPC 822350963268

Physical

Barrel Type Closed - Brazed
Color - Resin Blue
Flammability 94V-2
Gender Female
Glow-Wire Compliant No
Insulation Nylon (PA)
Lock to Mating Part No
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 1.256/g
Orientation Straight
Packaging Type Adhesive Tape on Reel
Polarized to Mating Part Yes
Tab Thickness 0.81mm
Tab Width 6.35mm
Temperature Range - Operating 105°C
Wire Insulation Diameter 4.04mm max.
Wire Size AWG 14, 16
Wire Size mm² 1.30-2.00

Electrical

Voltage - Maximum 600V AC


Solder Process Data

Lead-freeProcess Capability N/A

Material Info

Engineering Number BB-2318T

Reference - Drawing Numbers

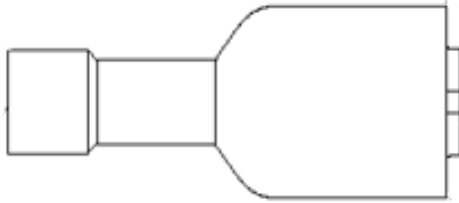

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[19013 Series](#)

This document was generated on 08/03/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION