MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING
13AT475-T2

MILITARY P/N
M8805/26-014

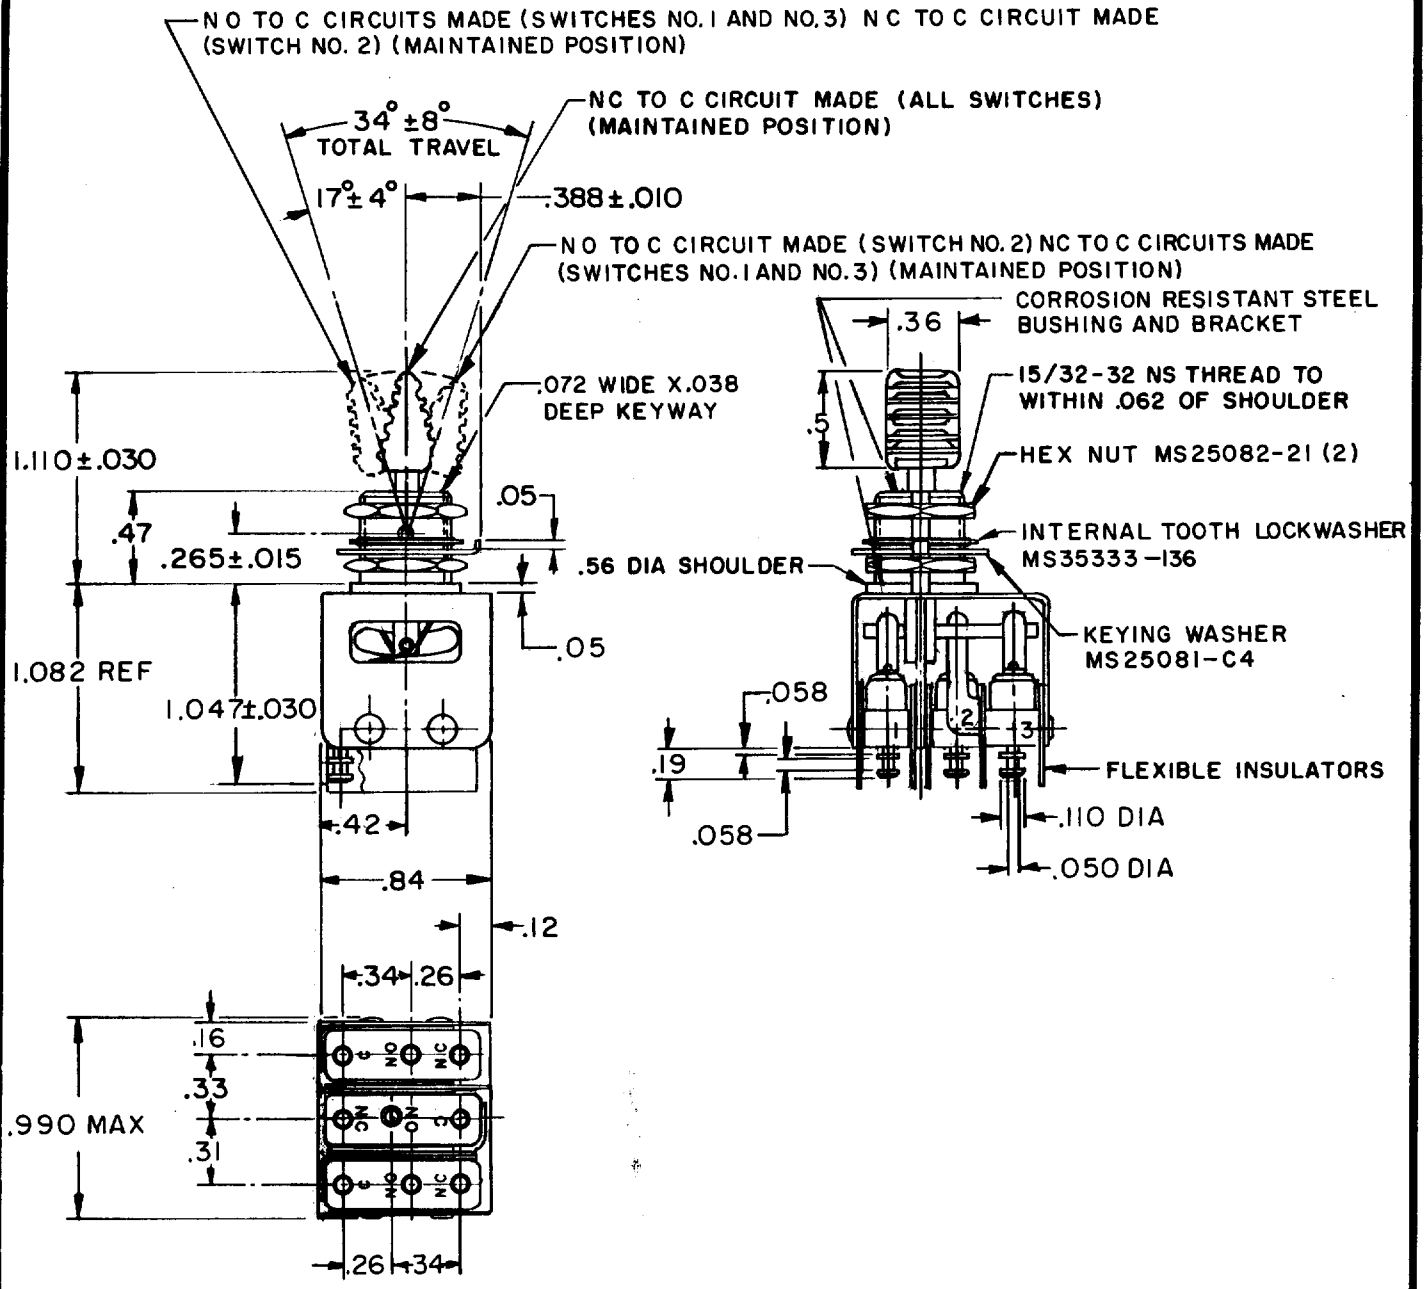

NOTE-
1- UNIT INCLUDES CAT. LIST. 21SM284-T2 (MS25085-2) BASIC SWITCH (3)
2- TERMINALS ARE PLATED FOR SOLDERING
3- OPERATING POSITION SIMULTANEITY OF SWITCHES 1 AND 3 MUST BE WITHIN 10° OF LEVER TRAVEL

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (3)

	SEA LEVEL		50,000 Ft.
Load	28 VDC	115 VAC	28 VDC
Resistive	5	5	5
Inductive	3	5	2.5
Lamp	2.4	1.5	2.4

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .090 LB MAX

DRAWN	M B S	8 JUNE 70
CHECK		
LSD		12 JUN 70
CHECK		
MRA		12 Jun 70
CHECK		

REVISIONS

A	C027739	M B S 17 AUG 70
B	C028683	S R H 16 MAR 71
C	C050567	J A P 30 DEC 81
D	OBS C050888	S M A 29 APR 82
E	RE INST PR16140	K A G 11 JAN 88
F	C066089	D A W 25 FEB 91

ISSUE 7

DRAWING NUMBER M 13AT475-T2

RELEASE NO. PR-1271

REPLACES

FO-50378-1A