

HONEYWELL

1CH25

See full Datasheet below...

onlinecomponents.com

THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUY NOW







BUY NOW

masterelectronics.com & onlinecomponents.com
are **authorized** e-commerce distributors
of electronic components.

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH — ENCLOSED

CATALOG LISTING
1CH25

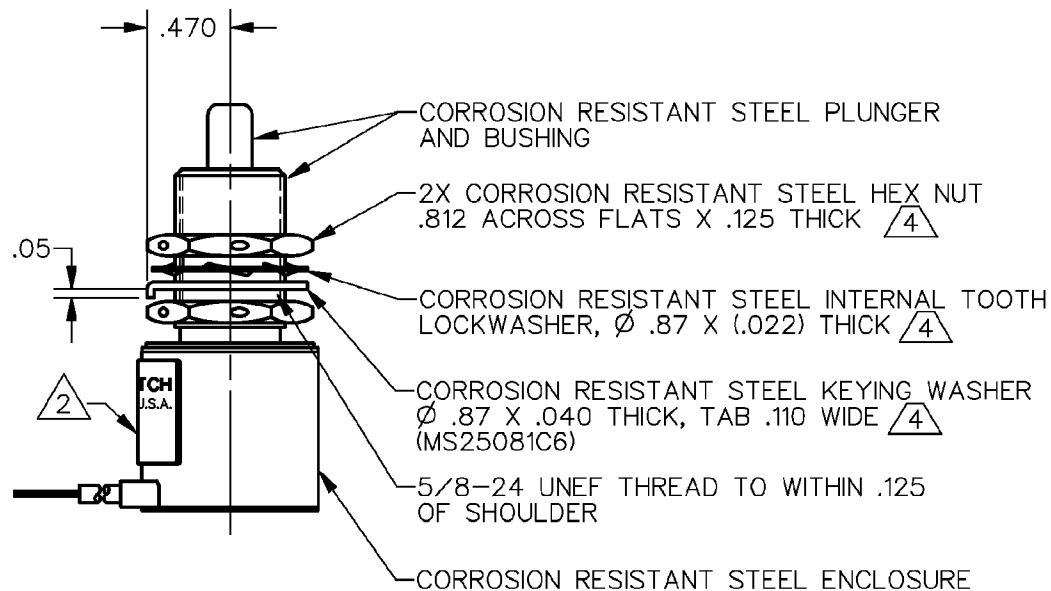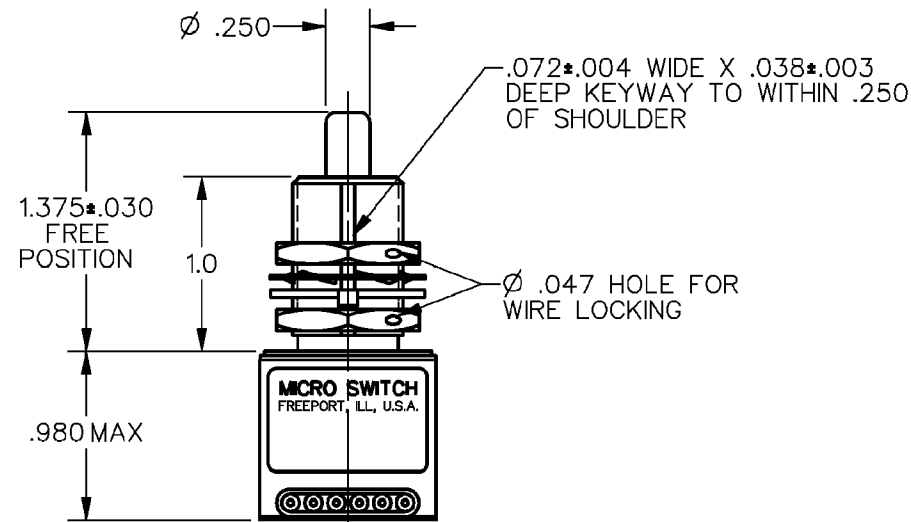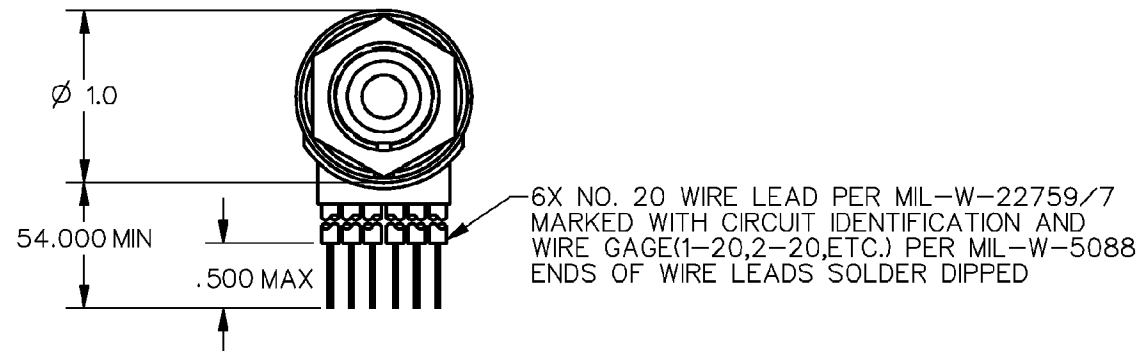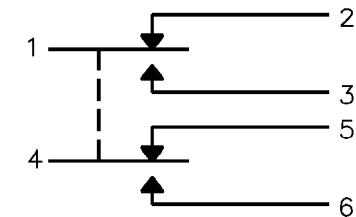

REVISIONS	
A	CO-77504-A S A V 12 MAR 94
B	CO-84035 LJK 3 JUL 97
C	0003692 AS 2 MAR 04
D	0006564 CYS 23 JUL 04

CATALOG LISTING	1CH25		REPLACES	
	M		23 JUL 04	
	21		AK	
	21		CHECK	
DDM/CAD	SAV		12 MAR 94	
	DRAWN		29 MAR 94	
	D A W		29 MAR 94	
	CHECK		29 MAR 94	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	
OPERATING FORCE — — — —	6-12 LB
FULL OVERTRAVEL FORCE — — —	30 LB MAX
RELEASE FORCE — — — — —	4 LB MIN
PRETRAVEL — — — — —	.040 MAX
DIFFERENTIAL TRAVEL — — —	.020 MAX
OVERTRAVEL — — — — —	.250 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT 2X S P D T		
LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	4	4
IND	2	2
MOTOR	4	

THIRD ANGLE PROJECTION

SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	8.0 OZ MAX

NOTES

- 1 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 3
- 2 - MICRO IDENTIFICATION, CATALOG LISTING, CIRCUIT DIAGRAM AND DATE CODE ARE SHOWN ON NAMEPLATE
- 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 4 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

ANSI Y14.5M-1982 APPLIES