




Order Product and Get Support

- U.S. Authorized Distributors
- Global Sales & Service
- N. American Sales Reps
- Distributor Inventory
- Technical Assistance
- White Papers
- Literature Request
- Test and Measurement Catalog
- RoHS Product List
- Customer Feedback

1TL62-5

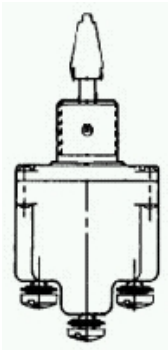

TL Series Toggle Switch, 1 pole, 3 position, Screw terminal, Tab Lever

Actual product appearance may vary.

Features

Environmentproof sealing
1,2, and 4 pole circuitry
Standard and pull-to-unlock levers
2 and 3 position, maintained and momentary toggle action
Temperature range: -85° F to +160° F
Completely sealed switching chamber
Step-design case provides added space between terminals to help prevent shorting
UL recognized, CSA certified
CE approved

Potential Applications

Industrial machinery and equipment
Military and commercial aviation
Construction equipment
Test instruments
Agricultural machinery
Process control
Medical instrumentation

Description

MICRO SWITCH™TL Series toggle switches have high strength, temperature resistant, non-tracking case material and silver cadmium oxide contacts. Pull-to-Unlock toggle levers prevent accidental operation; the lever must be pulled approx. 2,3 mm (0.09 inches) to change positions.

Supporting Documentation

- [Accessory: Lever Sleeve](#)
- [Accessory: Seals](#)
- [Accessory: Nuts](#)
- [Engineering Drawing](#)

Product Specifications			
Circuitry/Operating action	Keyway Momentary Position Center Position Opposite Keyway Position		
Product Type	MICRO SWITCH™ Toggle Switch		
Ampere/Voltage Range (Resistive Load)	0.75 A at 115 Vdc,0.5 A at 250 Vdc,0.5 A to 15 A at 0.5 Vdc to 28 Vdc,0.5 A to 10 A at 0.5 Vac to 7 Vac		
Circuitry	SPDT		
Action	3 position		
Mounting	Bushing 15/32 in		
Termination	Screw		
Lever Type	Tab		
Comment	Aluminum tab lever		
Availability	Global		
UNSPSC Code	30211908		
UNSPSC Commodity	30211908 Toggle switches		
Series Name	TL		

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search