



Home> Products > MICRO SWITCH™ Toggle Switches> NT> Product Page

632NT91-6



Actual product appearance may vary.

NT Series Toggle Switch, Panel stand - off feature, 2 pole flat base, 2 position, Quick Connect terminal, Standard Lever

Features

Completely sealed switching chamber
NEMA 3, 3R, 4, and 13
UL recognized, File E12252, Vol. 1, Section 44
CSA certified, File LR4442
CE approved

Potential Applications

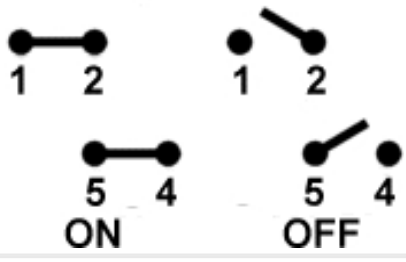
Aerial lifts, scissor lifts, truck mounted tele-handlers, and cranes
Construction equipment
Agriculture equipment
Material-handling equipment
Factory-floor control units
Machine tool equipment manufacturers

Description

MICRO SWITCH™ NT Series toggle switches meet the need for a rugged, cost effective toggle switch. Quality construction features include a seal between the toggle lever and bushing, and between the cover and case. These switches can be used where panels are subject to splashes, hosedowns, or outdoor environments. The "Easy-Start" threaded bushing enables quick alignment of mounting nut to decrease the chance of cross threading. The panel stand-off with O-ring feature available on some listings, eliminates the need for behind-the-panel hardware, provides uniform panel height, and provides a panel to cover seal.

Supporting Documentation

-  [Accessory: Lever Sleeve](#)
-  [Terminal Identification](#)
-  [Accessory: Seals](#)
-  [Terminal Dimensions](#)
-  [Accessory: Nuts](#)
-  [Panel Cutout](#)

Product Specifications	
Circuitry/Operating action	Keyway Momentary Position Opposite Keyway Position 
Product Type	MICRO SWITCH™ Toggle Switch
Ampere/Voltage Range (Resistive Load)	0.5 A to 18 A at 0.5 Vdc to 28 Vdc,0.5 A to 10 A at 0.5 Vac to 277 Vac,0.5 A at 250 Vdc,0.75 A at 115 Vdc
Circuitry	DPST
Action	2 position
Mounting	Bushing 15/32 in
Termination	Quick Connect
Lever Type	Standard
UL/CSA Rating Code	L192: 10 A - 125, 250, 277 Vac; 1/4 Hp - 125 Vac; 1/2 Hp - 250, 277 Vac; 3 A - 125 Vac "L"
Comment	Panel stand - off feature, Switches are capable of withstanding a temperature of 160 °F continuously at full rated load
Availability	Global
UNSPSC Code	30211908
UNSPSC Commodity	30211908 Toggle switches
Series Name	NT

My Links

- Login to iCOM
- Login as Rep/AD
- Login as Guest
- Login to Digital University

Keyword Search

Search for product and support information.

All Sensing and Control

Product Search

Part number search:

Use (*) to expand search

Specification Search