

## Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB connector, nominal current: 12 A, number of positions: 8, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, color: black, contact surface: Gold

The figure shows a 10-position version of the product

### Your advantages

- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 017918 261764 |
| GTIN                                 | 4017918261764                                                                                           |
| Weight per Piece (excluding packing) | 17.330 g                                                                                                |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 17.7 mm  |
| Width [ w ]  | 40.64 mm |
| Height [ h ] | 26 mm    |
| Pitch        | 5.08 mm  |
| Dimension a  | 35.56 mm |

# Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

## Technical data

### General

|                                        |                                                           |
|----------------------------------------|-----------------------------------------------------------|
| Range of articles                      | MVSTBR 2,5/...-ST                                         |
| Number of positions                    | 8                                                         |
| Connection method                      | Screw connection with tension sleeve                      |
| Insulating material group              | I                                                         |
| Rated surge voltage (III/3)            | 4 kV                                                      |
| Rated surge voltage (III/2)            | 4 kV                                                      |
| Rated surge voltage (II/2)             | 4 kV                                                      |
| Rated voltage (III/3)                  | 250 V                                                     |
| Rated voltage (III/2)                  | 320 V                                                     |
| Rated voltage (II/2)                   | 630 V                                                     |
| Connection in acc. with standard       | EN-VDE                                                    |
| Nominal current $I_N$                  | 12 A                                                      |
| Nominal cross section                  | 2.5 mm <sup>2</sup>                                       |
| Maximum load current                   | 12 A (with a 2.5 mm <sup>2</sup> conductor cross section) |
| Insulating material                    | PA                                                        |
| Flammability rating according to UL 94 | V0                                                        |
| Internal cylindrical gage              | A3                                                        |
| Stripping length                       | 7 mm                                                      |
| Screw thread                           | M3                                                        |
| Tightening torque, min                 | 0.5 Nm                                                    |
| Tightening torque max                  | 0.6 Nm                                                    |

### Connection data

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                         | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.                                         | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.                                      | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 2.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.    | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                                           | 24                   |
| Conductor cross section AWG max.                                           | 12                   |
| 2 conductors with same cross section, solid min.                           | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid max.                           | 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded min.                        | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max.                        | 1.5 mm <sup>2</sup>  |

## Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

### Technical data

#### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 1 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm <sup>2</sup>  |
| Minimum AWG according to UL/CUL                                                         | 30                   |
| Maximum AWG according to UL/CUL                                                         | 12                   |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |


#### Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
|            | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

### Drawings

## Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

Diagram

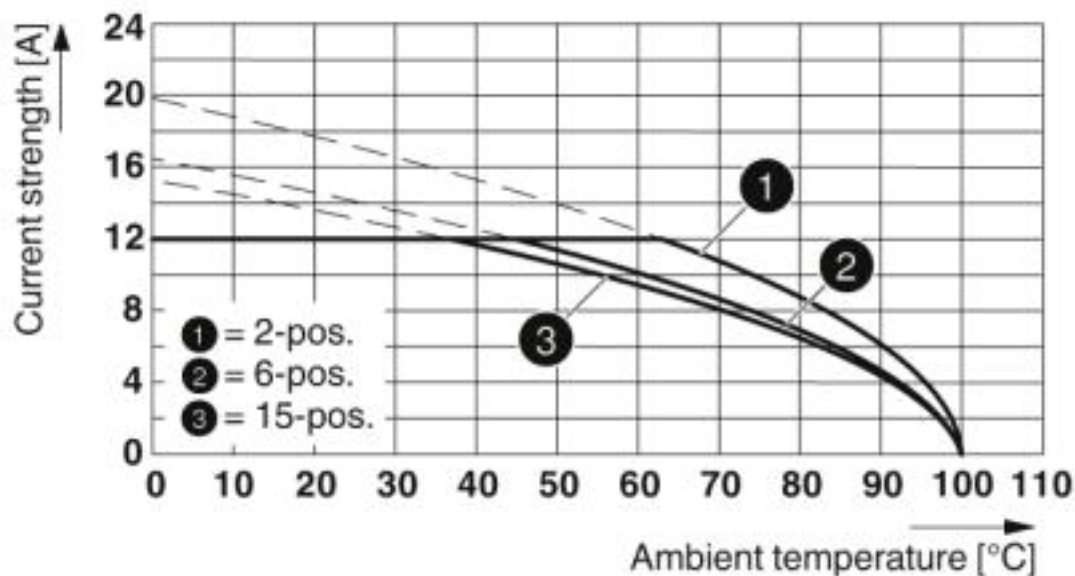

Type: MVSTBR 2,5/...-ST-5,08 AU with MSTBA 2,5/...-G-5,08 AU

### Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27260700 |
| eCl@ss 4.1 | 27260700 |
| eCl@ss 5.0 | 27260700 |
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440309 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |
| ETIM 6.0 | EC002638 |
| ETIM 7.0 | EC002638 |

UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 6.01 | 30211810 |
|-------------|----------|

# Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

## Approvals

### Approvals

#### Approvals

IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                    |                                                                                     |                                                           |                |
|--------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60988-B1B2 |
| Nominal voltage UN | 250 V                                                                               |                                                           |                |
| Nominal current IN | 12 A                                                                                |                                                           |                |
| mm²/AWG/kcmil      | 0.2-2.5                                                                             |                                                           |                |

|                                            |                                                                                     |                                                                                                                                                                                                                |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40004701 |
| Nominal voltage UN                         | 250 V                                                                               |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 12 A                                                                                |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-2.5                                                                             |                                                                                                                                                                                                                |          |

|     |                                                                                     |         |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-------------------------------------------------------------------------------------|---------|

## Printed-circuit board connector - MVSTBR 2,5/ 8-ST-5,08 BK AU - 1826623

### Approvals

|                                                                                                                                                                                                                                                                          |       |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| cULus Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E60425-19931011 |       |       |
|                                                                                                                                                                                                                                                                          | B     | D     |
| Nominal voltage UN                                                                                                                                                                                                                                                       | 300 V | 300 V |
| Nominal current IN                                                                                                                                                                                                                                                       | 15 A  | 10 A  |
| mm²/AWG/kcmil                                                                                                                                                                                                                                                            | 30-12 | 30-12 |