

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and high density D-SUB miniature pin strip, for mounting on NS 35 rails, no. of pos.: 62, width: 180 mm

The illustration shows a 44-position version

Why buy this product

- Screw connection
- 1:1 connection



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 451697

Technical data

Dimensions

Width	113.5 mm
Height	69 mm
Depth	62 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	125 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	62
Status display	No
Mounting position	any
Standards/regulations	EN 50178

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Technical data

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12
Number of positions	62

Connection data for connection 2

Connection name	Controller level
Connection method	High density D-SUB pin strip
Number of connections	1
Number of positions	62

Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	EN 50178

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Classifications

UNSPSC

UNSPSC 13.2	39121421
-------------	----------

Approvals

Approvals

Approvals

cUL Recognized / UL Recognized / EAC / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

cUL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

UL Recognized 	
mm²/AWG/kcmil	30-12
Nominal current I _N	1 A
Nominal voltage U _N	125 V

EAC

EAC



EAC

Interface module - VIP-3/SC/HD62SUB/M - 2322391

Approvals

cULus Recognized 

Drawings

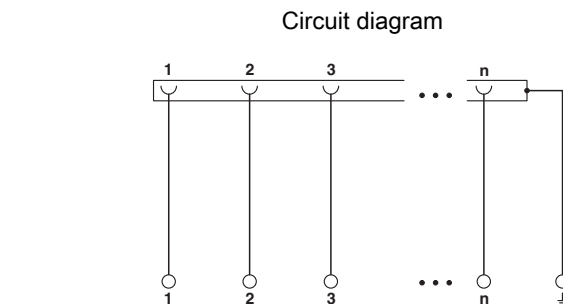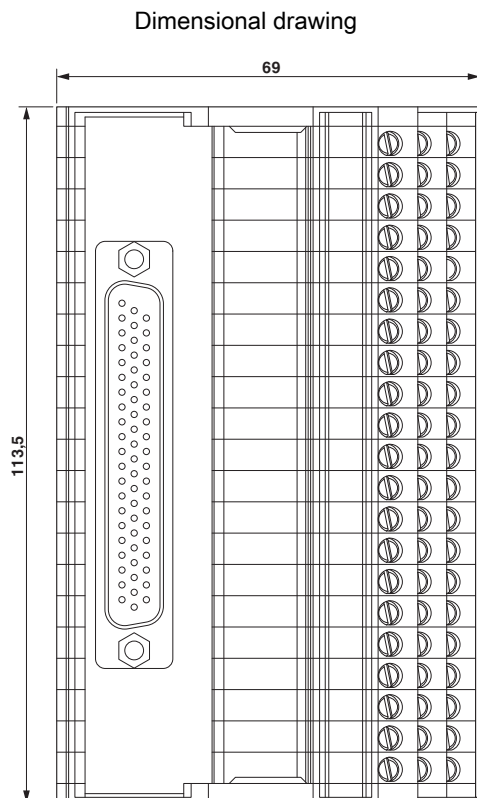

Universal circuit diagram

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>