



Terminal blocks

to **Type 382** and **Type 190**

- ASP044** page 45
- ASP064** page 45
- Type 113** page 88
- Type 114** page 88
- Type 369** page 87

Accessories

for **Type 382** and **Type 190**
Coding set
 720293 page 204

Note for Type 190

Packaging for automated processing is available on demand. Please do not hesitate to contact us.


Type 382

Header, centerline 3.81 mm / 0.150 inches, horizontal mounting, square contact pins 0.8 mm / 0.031 inches, closed ends, codable

Technical Data

V / A	300 / 8		
	130 V / 2.5 kV / 11 A		
Insulation co-ordination according to EN 60664-1	Clearance and creepage distances min. 3.01 mm		
Insulating material class	CTI 600		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200	500	500
Rated test voltage	2.5	4	2.5
Protection category according to IEC 529	IP00		
Solder pin dimension	0.8 x 0.8 mm		
Recommended pc board hole dia.	Ø 1.3 mm		
Solder pin length	3.5 mm		
Pole size	2 - 24		
Color	black		

Dimensions in mm 1 mm = 0.0394 in.

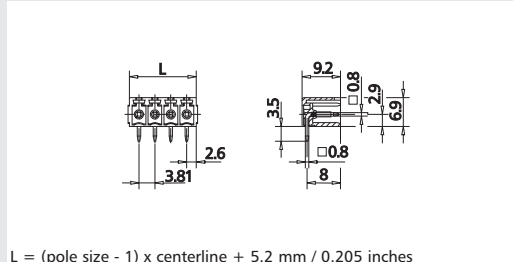

$L = (\text{pole size} - 1) \times \text{centerline} + 5.2 \text{ mm} / 0.205 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 382

centerline 3.81 mm / 0.150 inches

P/N 313821

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24


Type 190

Header, centerline 3.81 mm / 0.150 inches, horizontal mounting, designed for THR, optional Tape on Reel packaging for automated processing, square contact pins 0.8 mm / 0.031 inches, closed ends, codable

Technical Data

V / A	300 / 8		
	130 V / 2.5 kV / 10 A		
Insulation co-ordination according to EN 60664-1	Clearance and creepage distances min. 3.01 mm		
Insulating material class	CTI 600		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200	500	500
Rated test voltage	2.5	4	2.5
Protection category according to IEC 529	IP00		
Solder pin dimension	0.8 x 0.8 mm		
Recommended pc board hole dia.	Ø 1.3 mm		
Solder pin length	3.5 mm		
Pole size	2 - 12		
Color	black		

Dimensions in mm 1 mm = 0.0394 in.

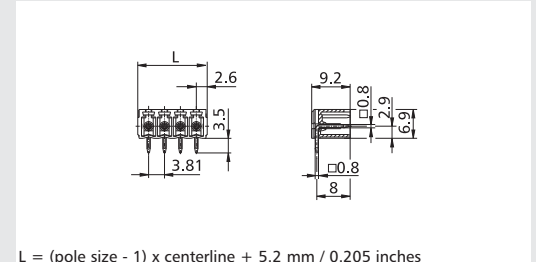

$L = (\text{pole size} - 1) \times \text{centerline} + 5.2 \text{ mm} / 0.205 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 190

centerline 3.81 mm / 0.150 inches

P/N 311901

	02	03	04	05	06	07	08
09	10	11	12				

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes
 Available on demand. Minimum order quantity 5000 pieces per item.